

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-171-20023-00-00
Spot: SWNE Sec/Twnshp/Rge: 26-19S-33W
1980 feet from N Section Line, 1980 feet from E Section Line
Lease Name: SMITH Well #: 10
County: SCOTT Total Vertical Depth: 4800 feet

Operator License No.: 31714
Op Name: NOVY OIL & GAS, INC.
Address: 125 N. MARKET STE. 1230
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4090		
PROD	4.5	4228	0	WITH 300 SX CMT \$156.00
SURF	8.625	357		WITH 270 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/07/2006 1:00 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: AL Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3975' WITH 4 SX CMT. PLUG AT 1300' WITH 15 SX GEL - 80 SX CMT. PLUG AT 700' WITH 50 SX CMT. PLUG AT 390' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/07/2006 6:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

1ST PLUG TUBING WAS STUCK IN HOLE AT 4050'. PUMPED 50 SX CMT TO BOTTOM. SHUT IN AT 350#. 2ND PLUG CUT OFF TUBING AT 1400'. PULLED TO 1270'. RAN STRIP CHARGE THROUGH 2 3/8" TUBING & PERFORATED 4 1/2" CASING WITH HOLES AT 1300'. PUMP 100 SX CMT THROUGH 2 3/8". NO CIRCULATION. 3RD PLUG AT PUMP 100 SX CMT DOWN 4 1/2" X 8 5/8" ANNULUS. SHUT IN PRESSURE 500#. 4TH PLUG FILLED 4 1/2" CASING WITH 50 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4100	4114		
4064	4072		
4026	4032		

INVOICED
DATE 1-8-07
INV. NO. 2007061085

Remarks: USED 60/40 POZMIX 6% GEL

Plugged through: TBG

District: 01

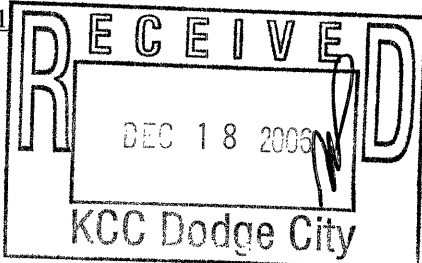

Signed

(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION Form 6-2005

DEC 26 2006

CONSERVATION DIVISION
WICHITA, KS