COMPENSATED DENSITY/NEUTRON LOG

Company PALOMINO PETROLEUM
Well LIVE AND LET DIE #1
Field UNNAMED
County NESS State KANSAS

Location: API # : 15-135-26124-0000
2384' FSL & 380' FWL
SEC 22 TWP 17S RGE 25W

Other Services
DIL
ML

Permanent Datum GROUND LEVEL Elevation 2458
Log Measured From KELLY BUSHING 11' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 2469
D.F. 2467
G.L. 2458

Company PALOMINO PETROLEUM
Well LIVE AND LET DIE #1
Field UNNAMED
County NESS
State KANSAS

Date	10/12/21		
Run Number	ONE		
Depth Driller	4574		
Depth Logger	4574		
Bottom Logged Interval	4554		
Top Log Interval	3500		
Casing Driller	8 5/8" @ 250		
Casing Logger	250		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.6/51		
pH / Fluid Loss	10.0/10.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.85@ 70F		
Rmf @ Meas. Temp	.64@ 70F		
Rmc @ Meas. Temp	1.02 @ 70F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.49@ 121F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	121F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	RYAN SEIB		

<<< Fold Here >>>

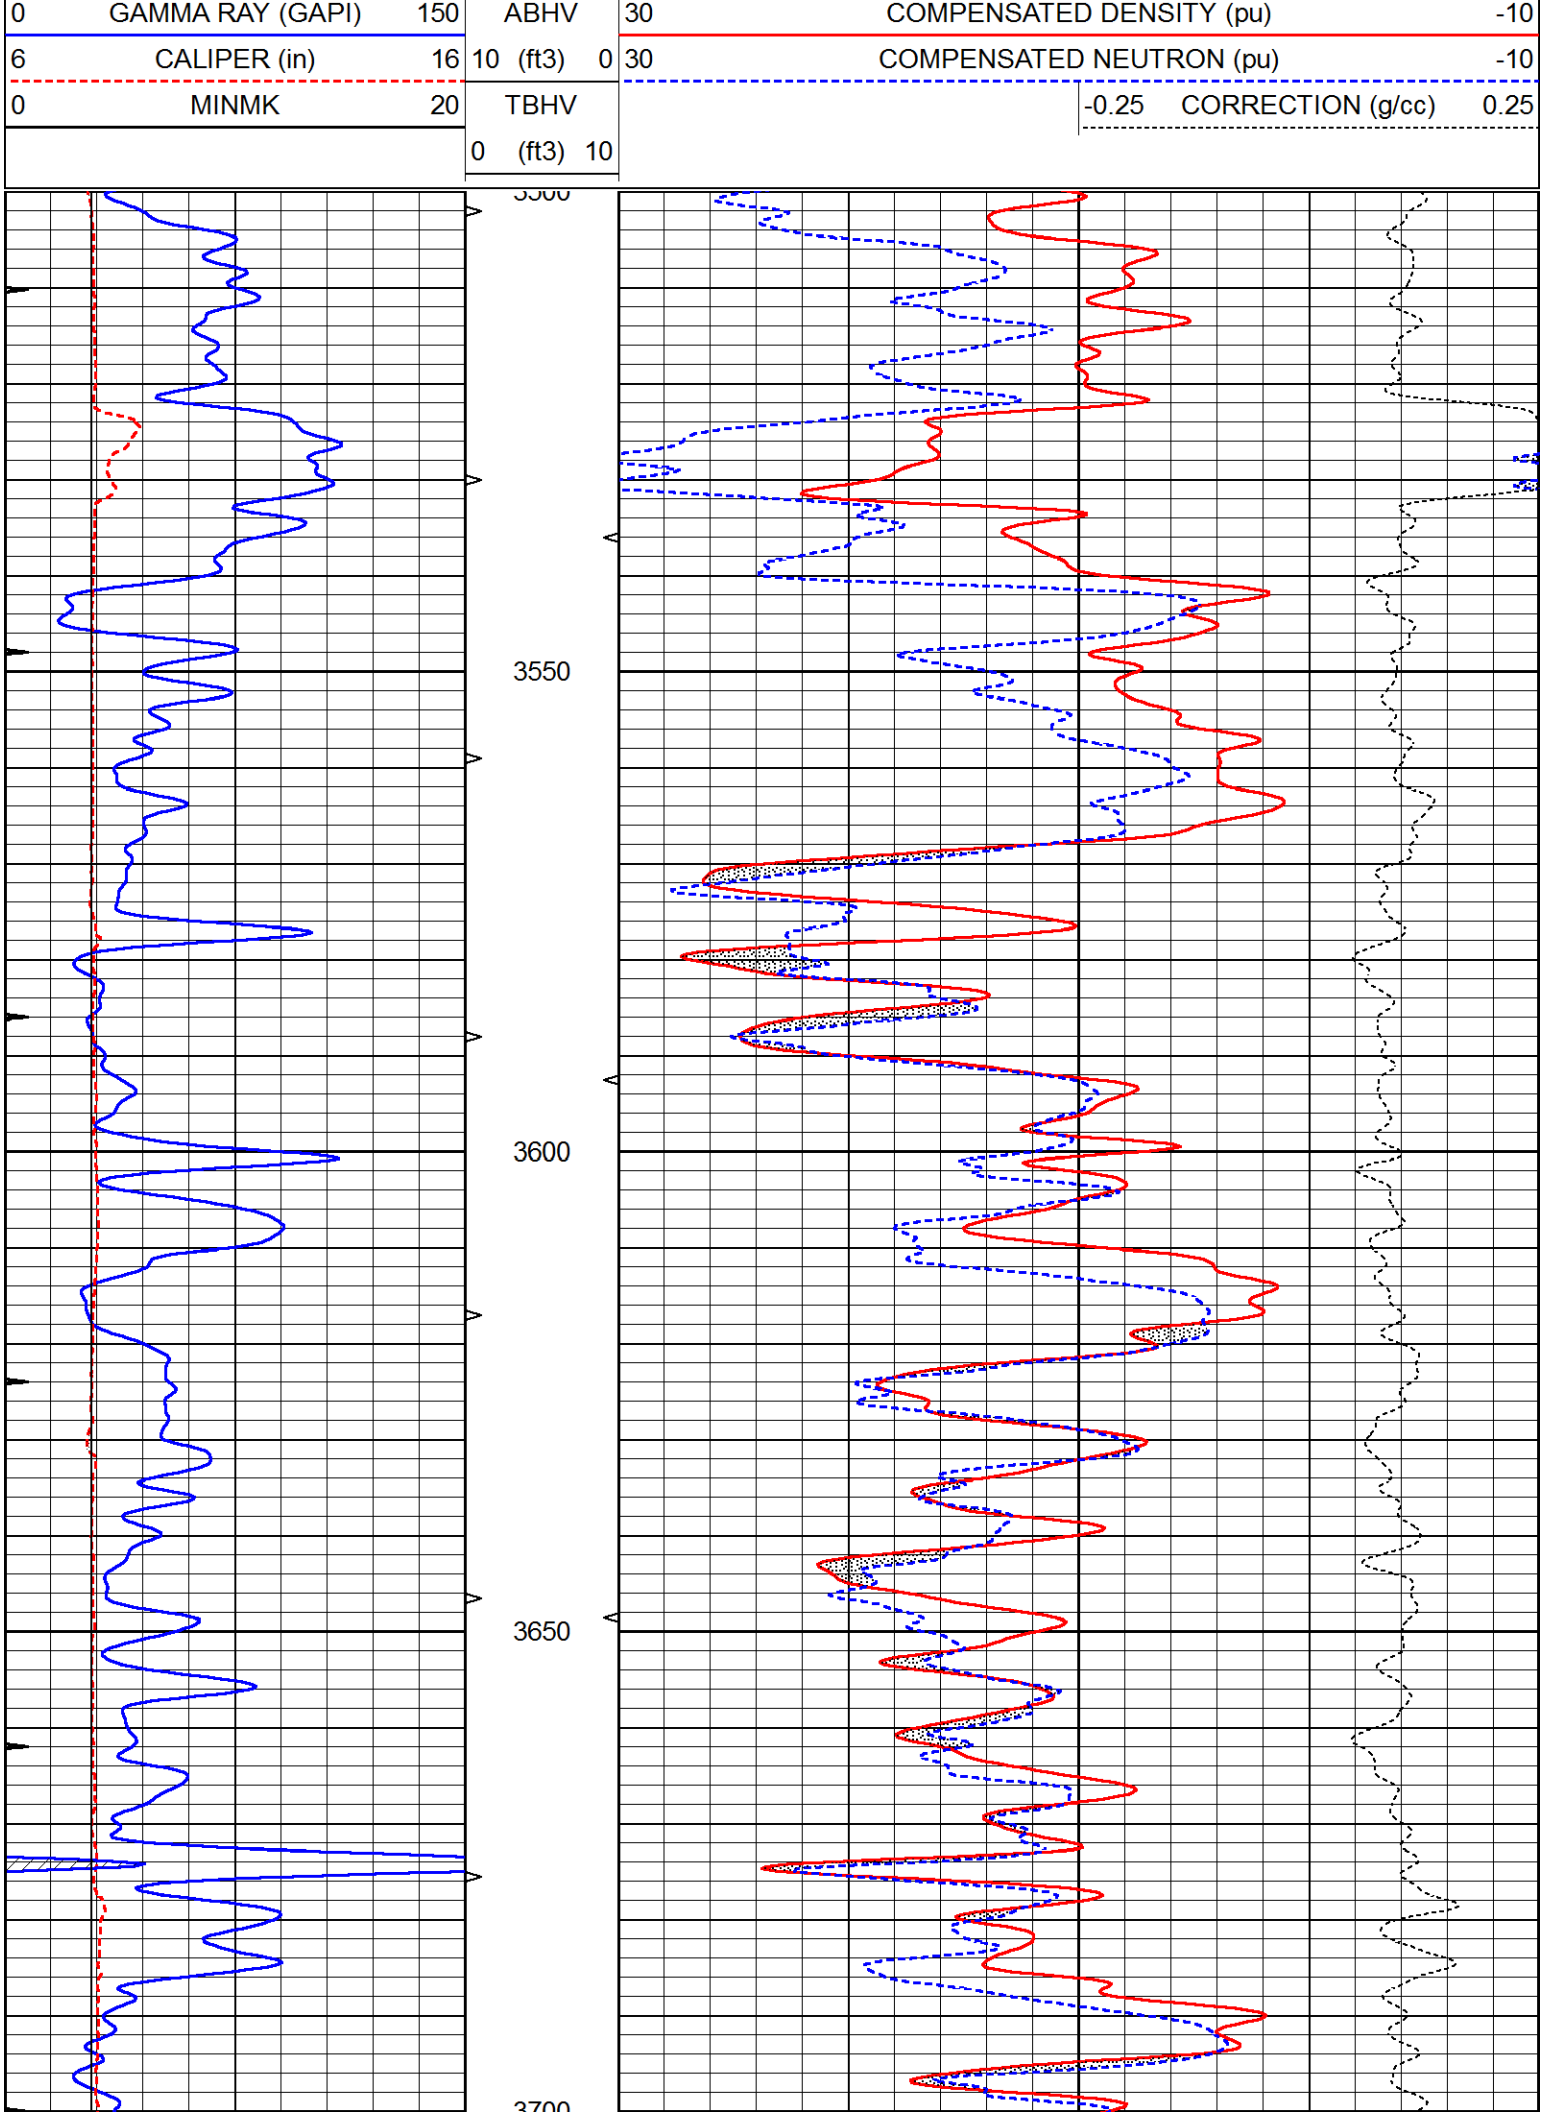
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

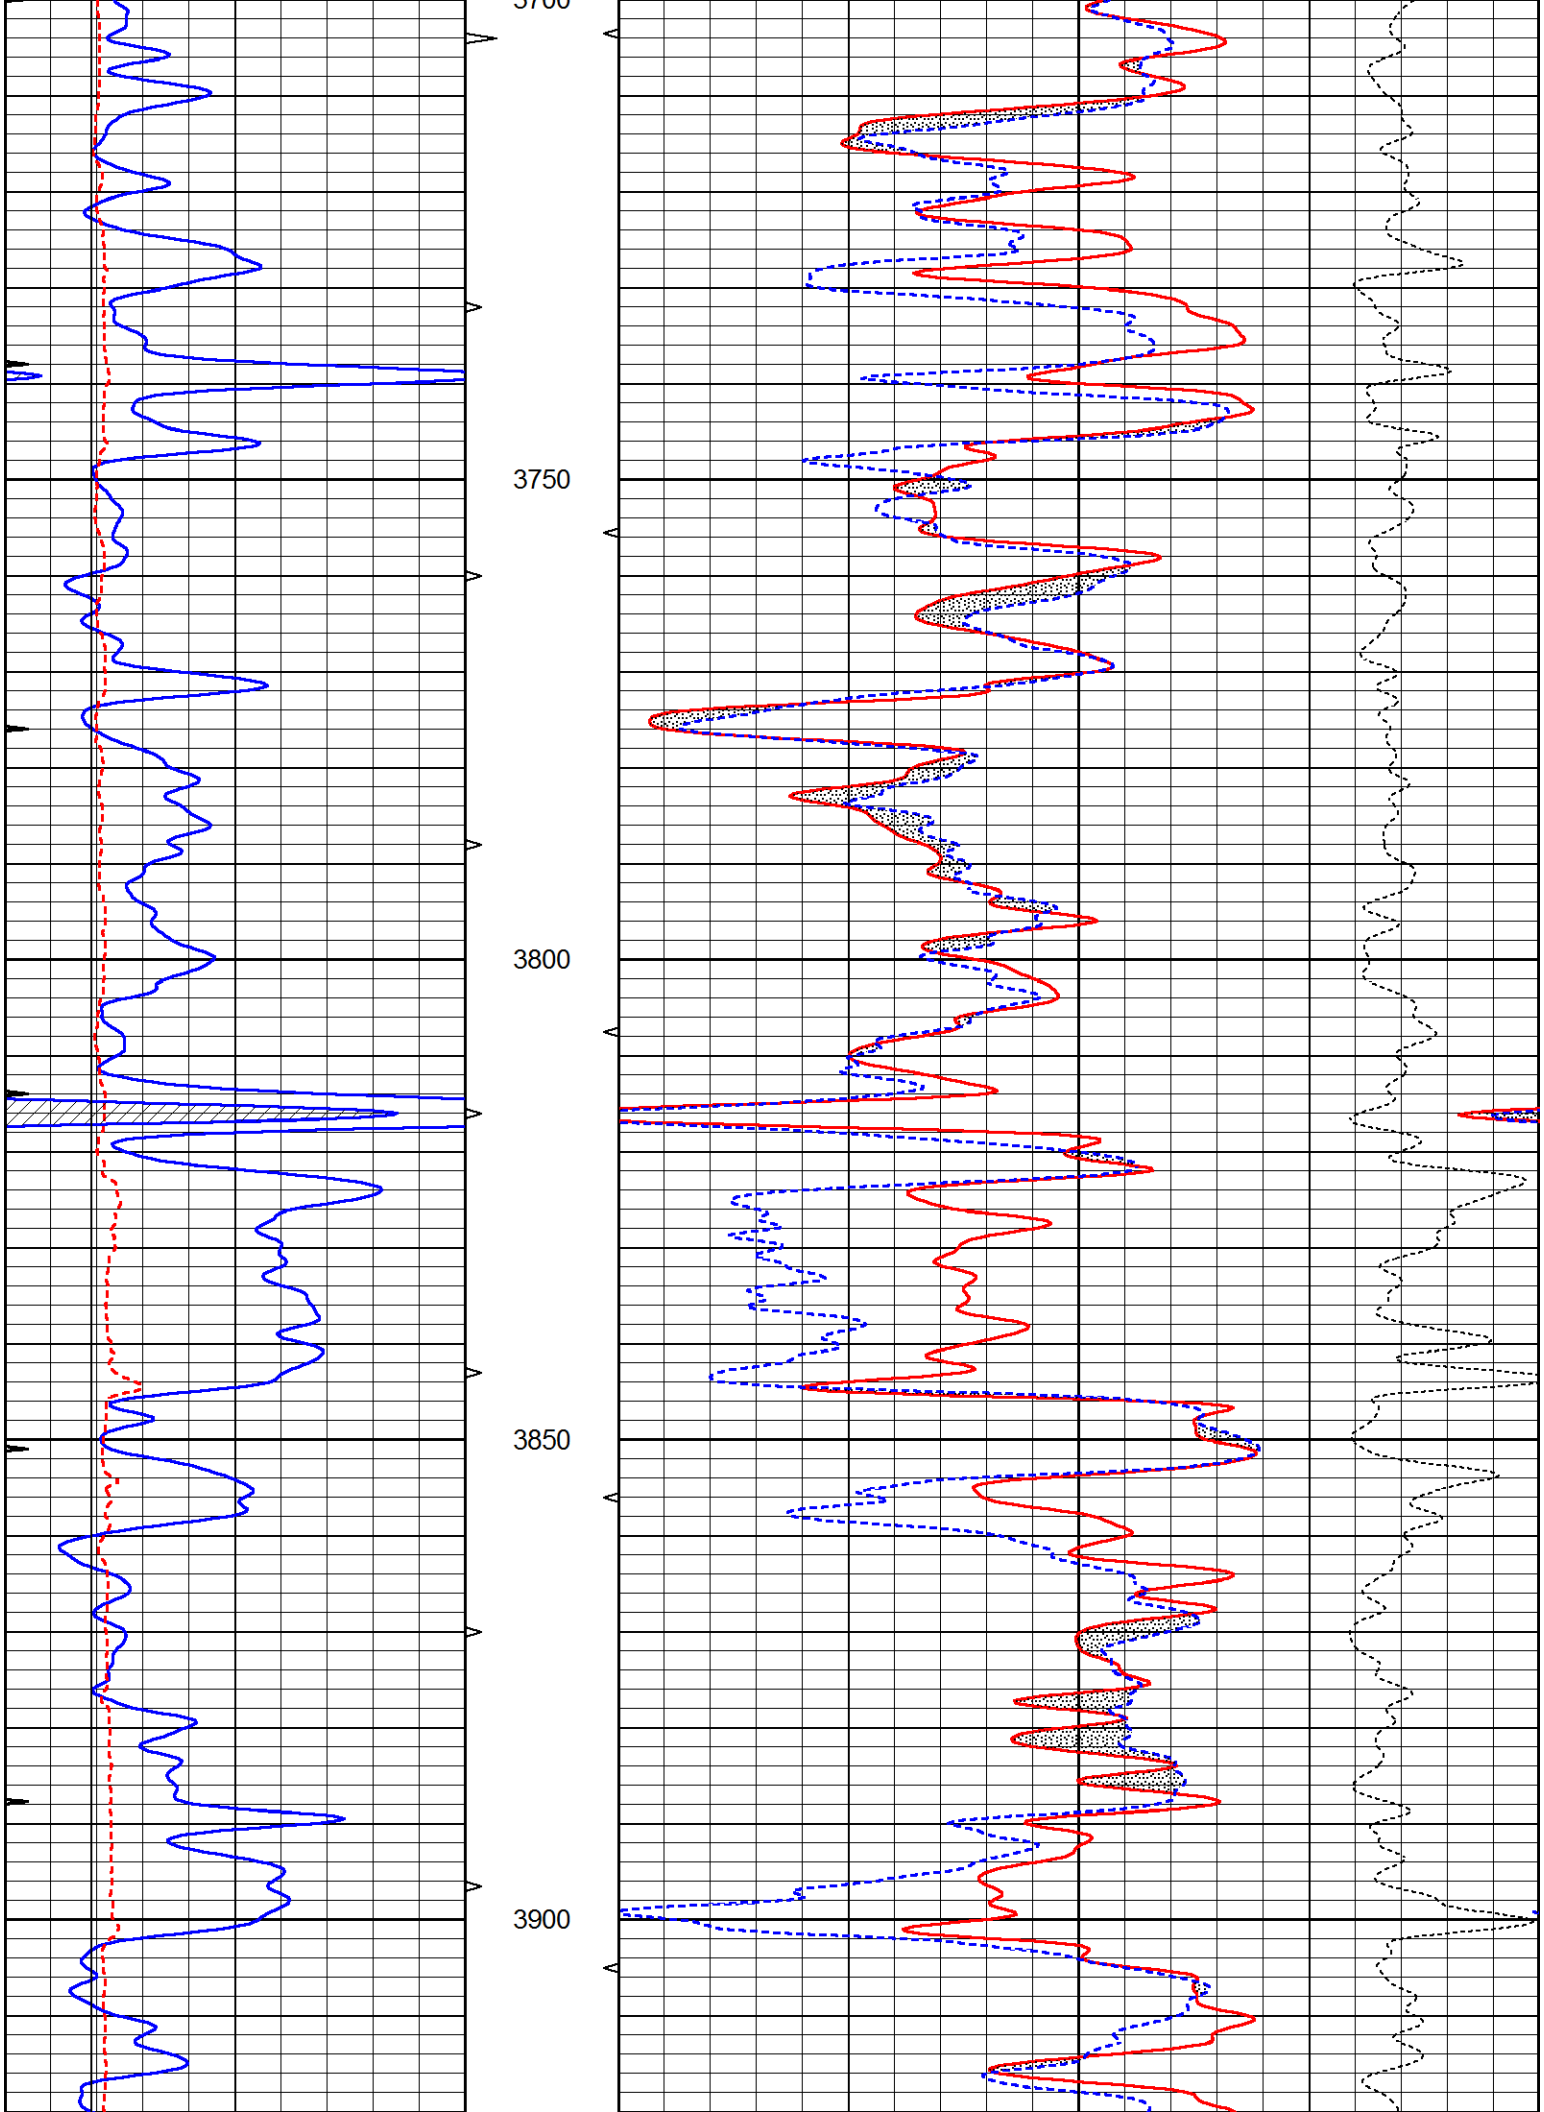
Comments

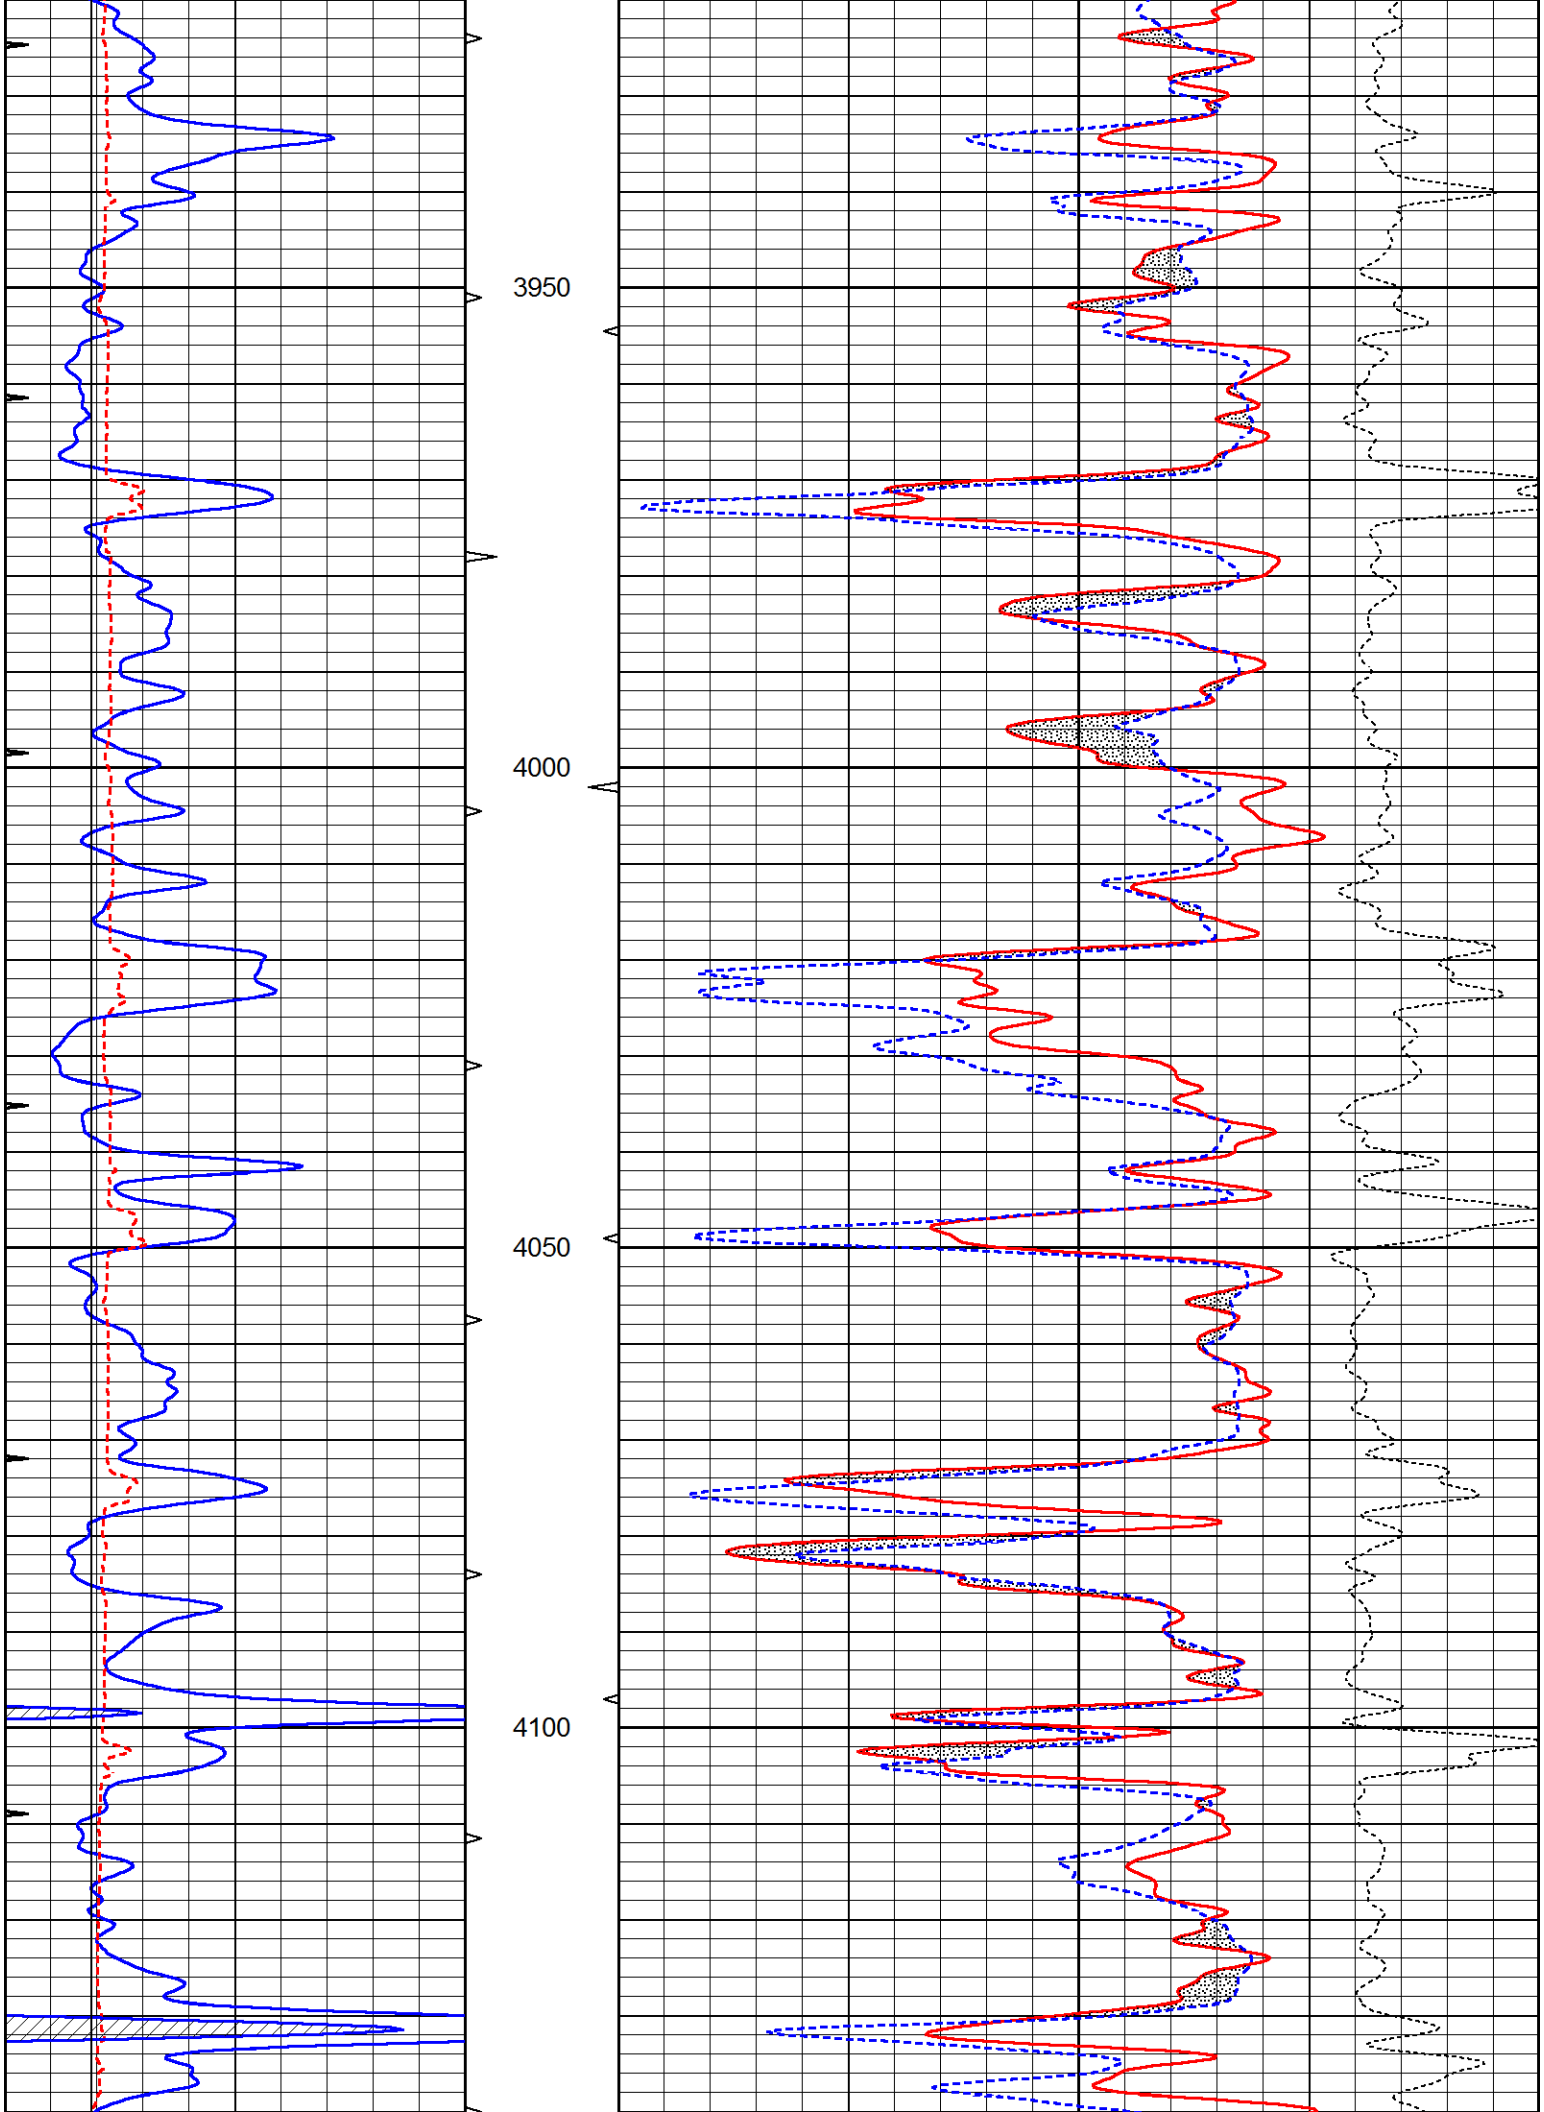
THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

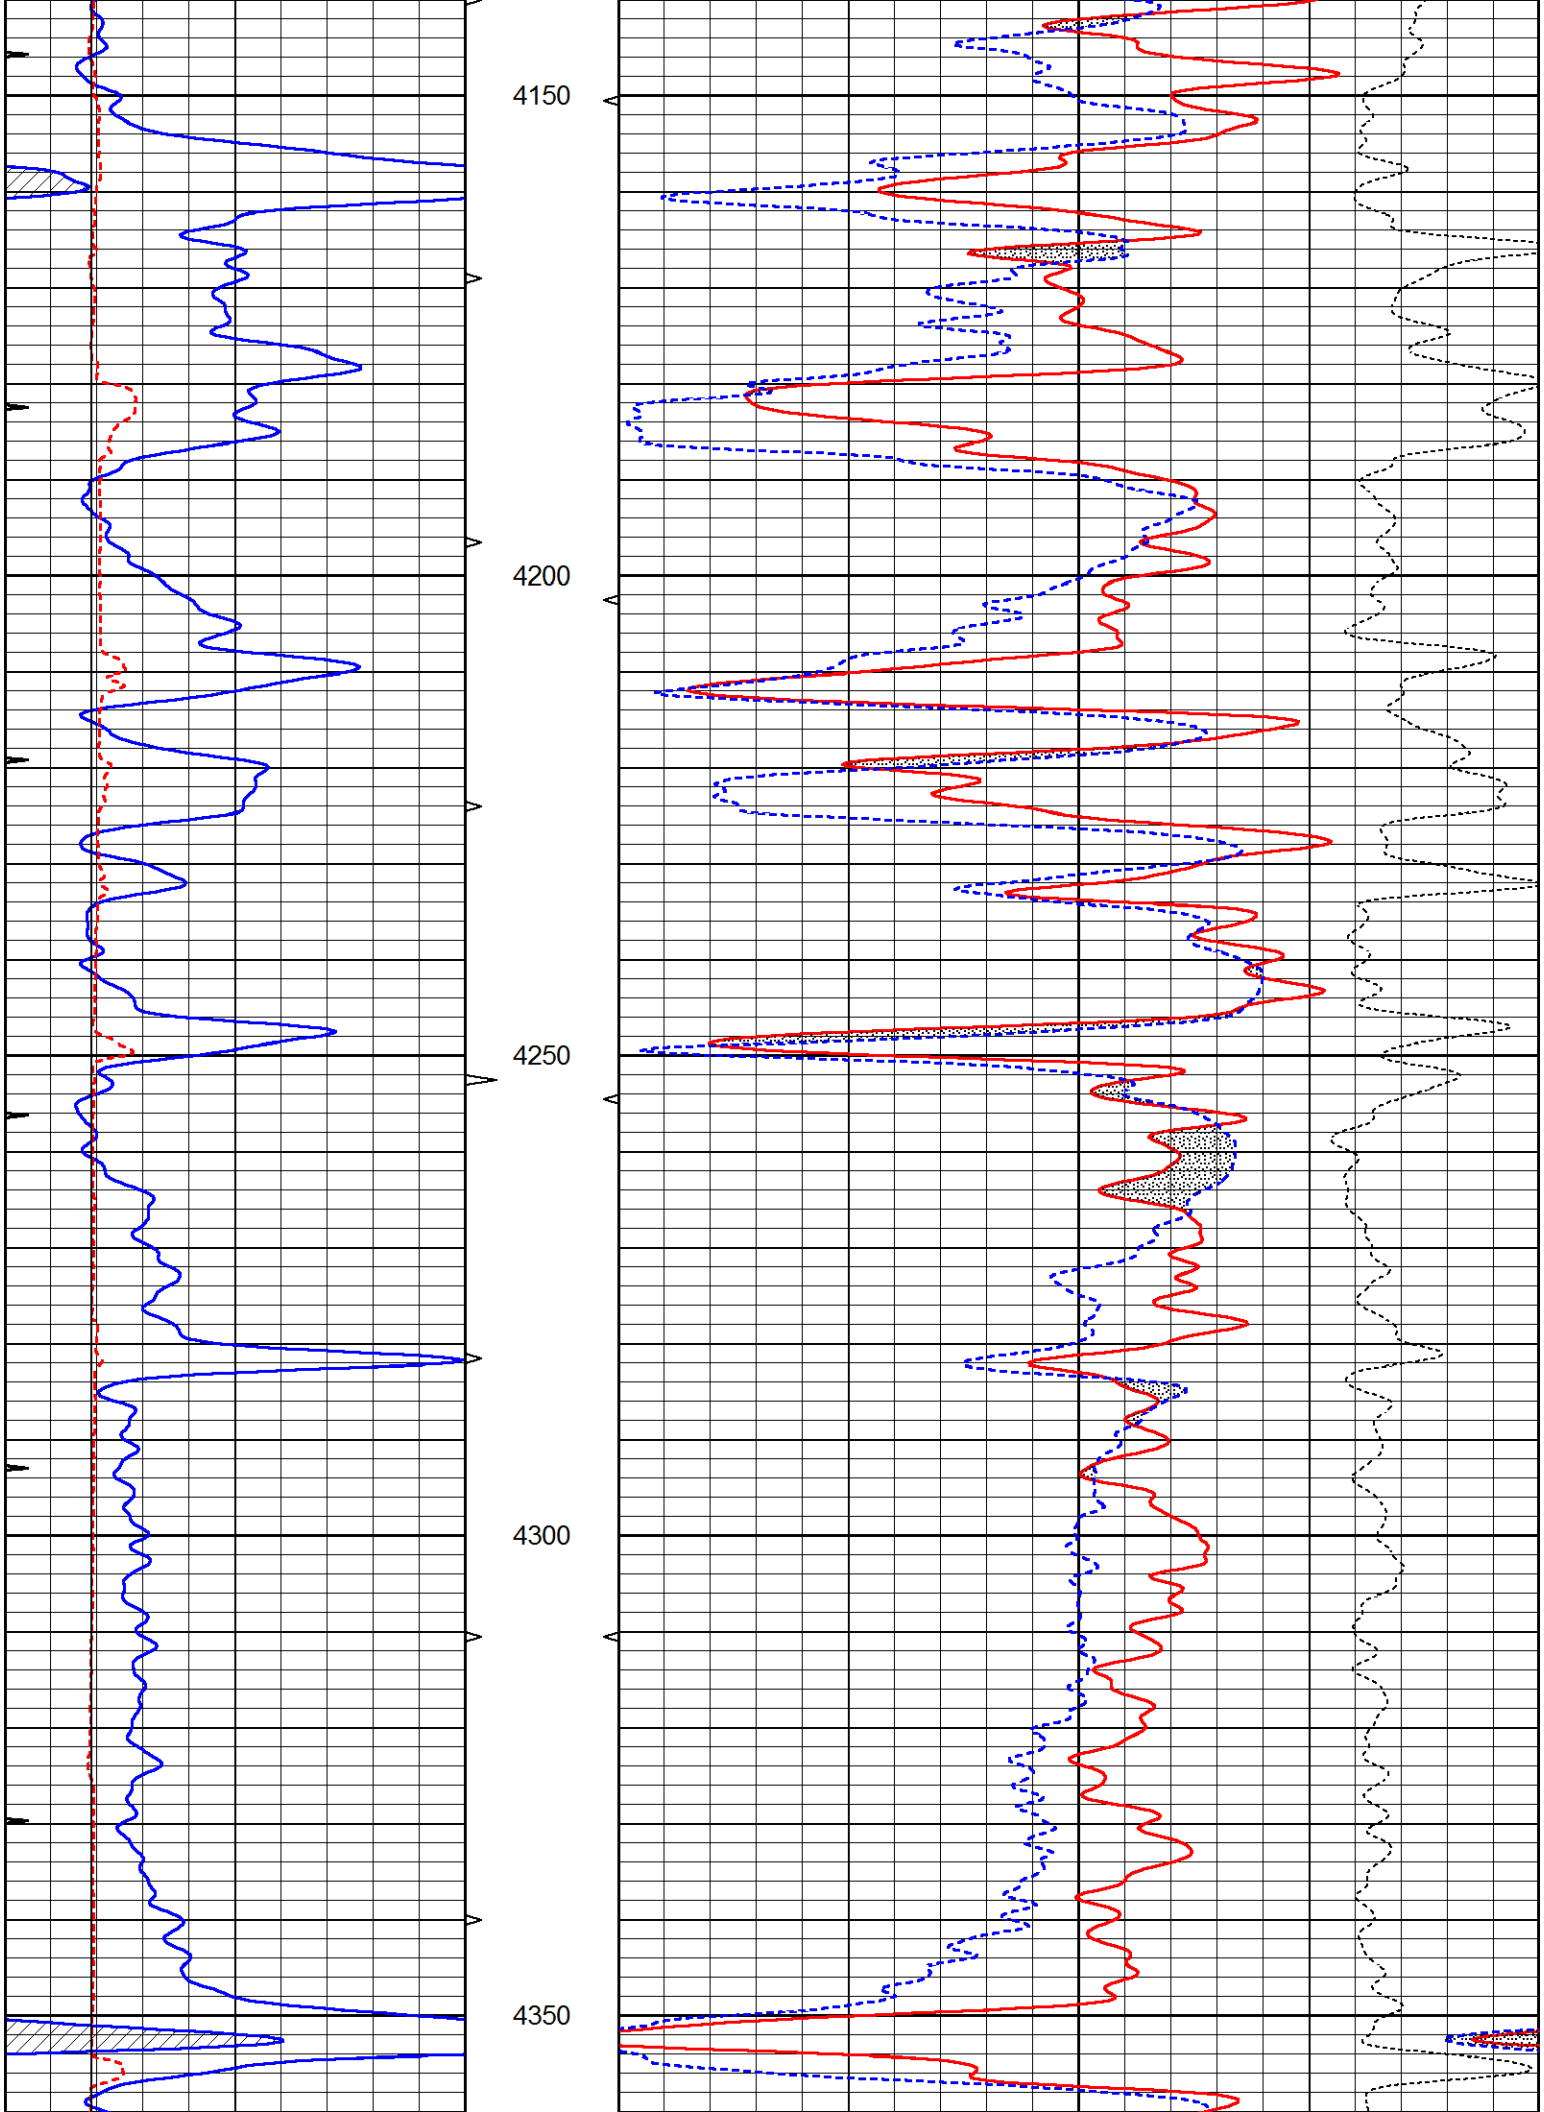
DIRECTIONS:NESS CITY WEST H RD., NORTH 6.5 MILES,
EAST INTO.

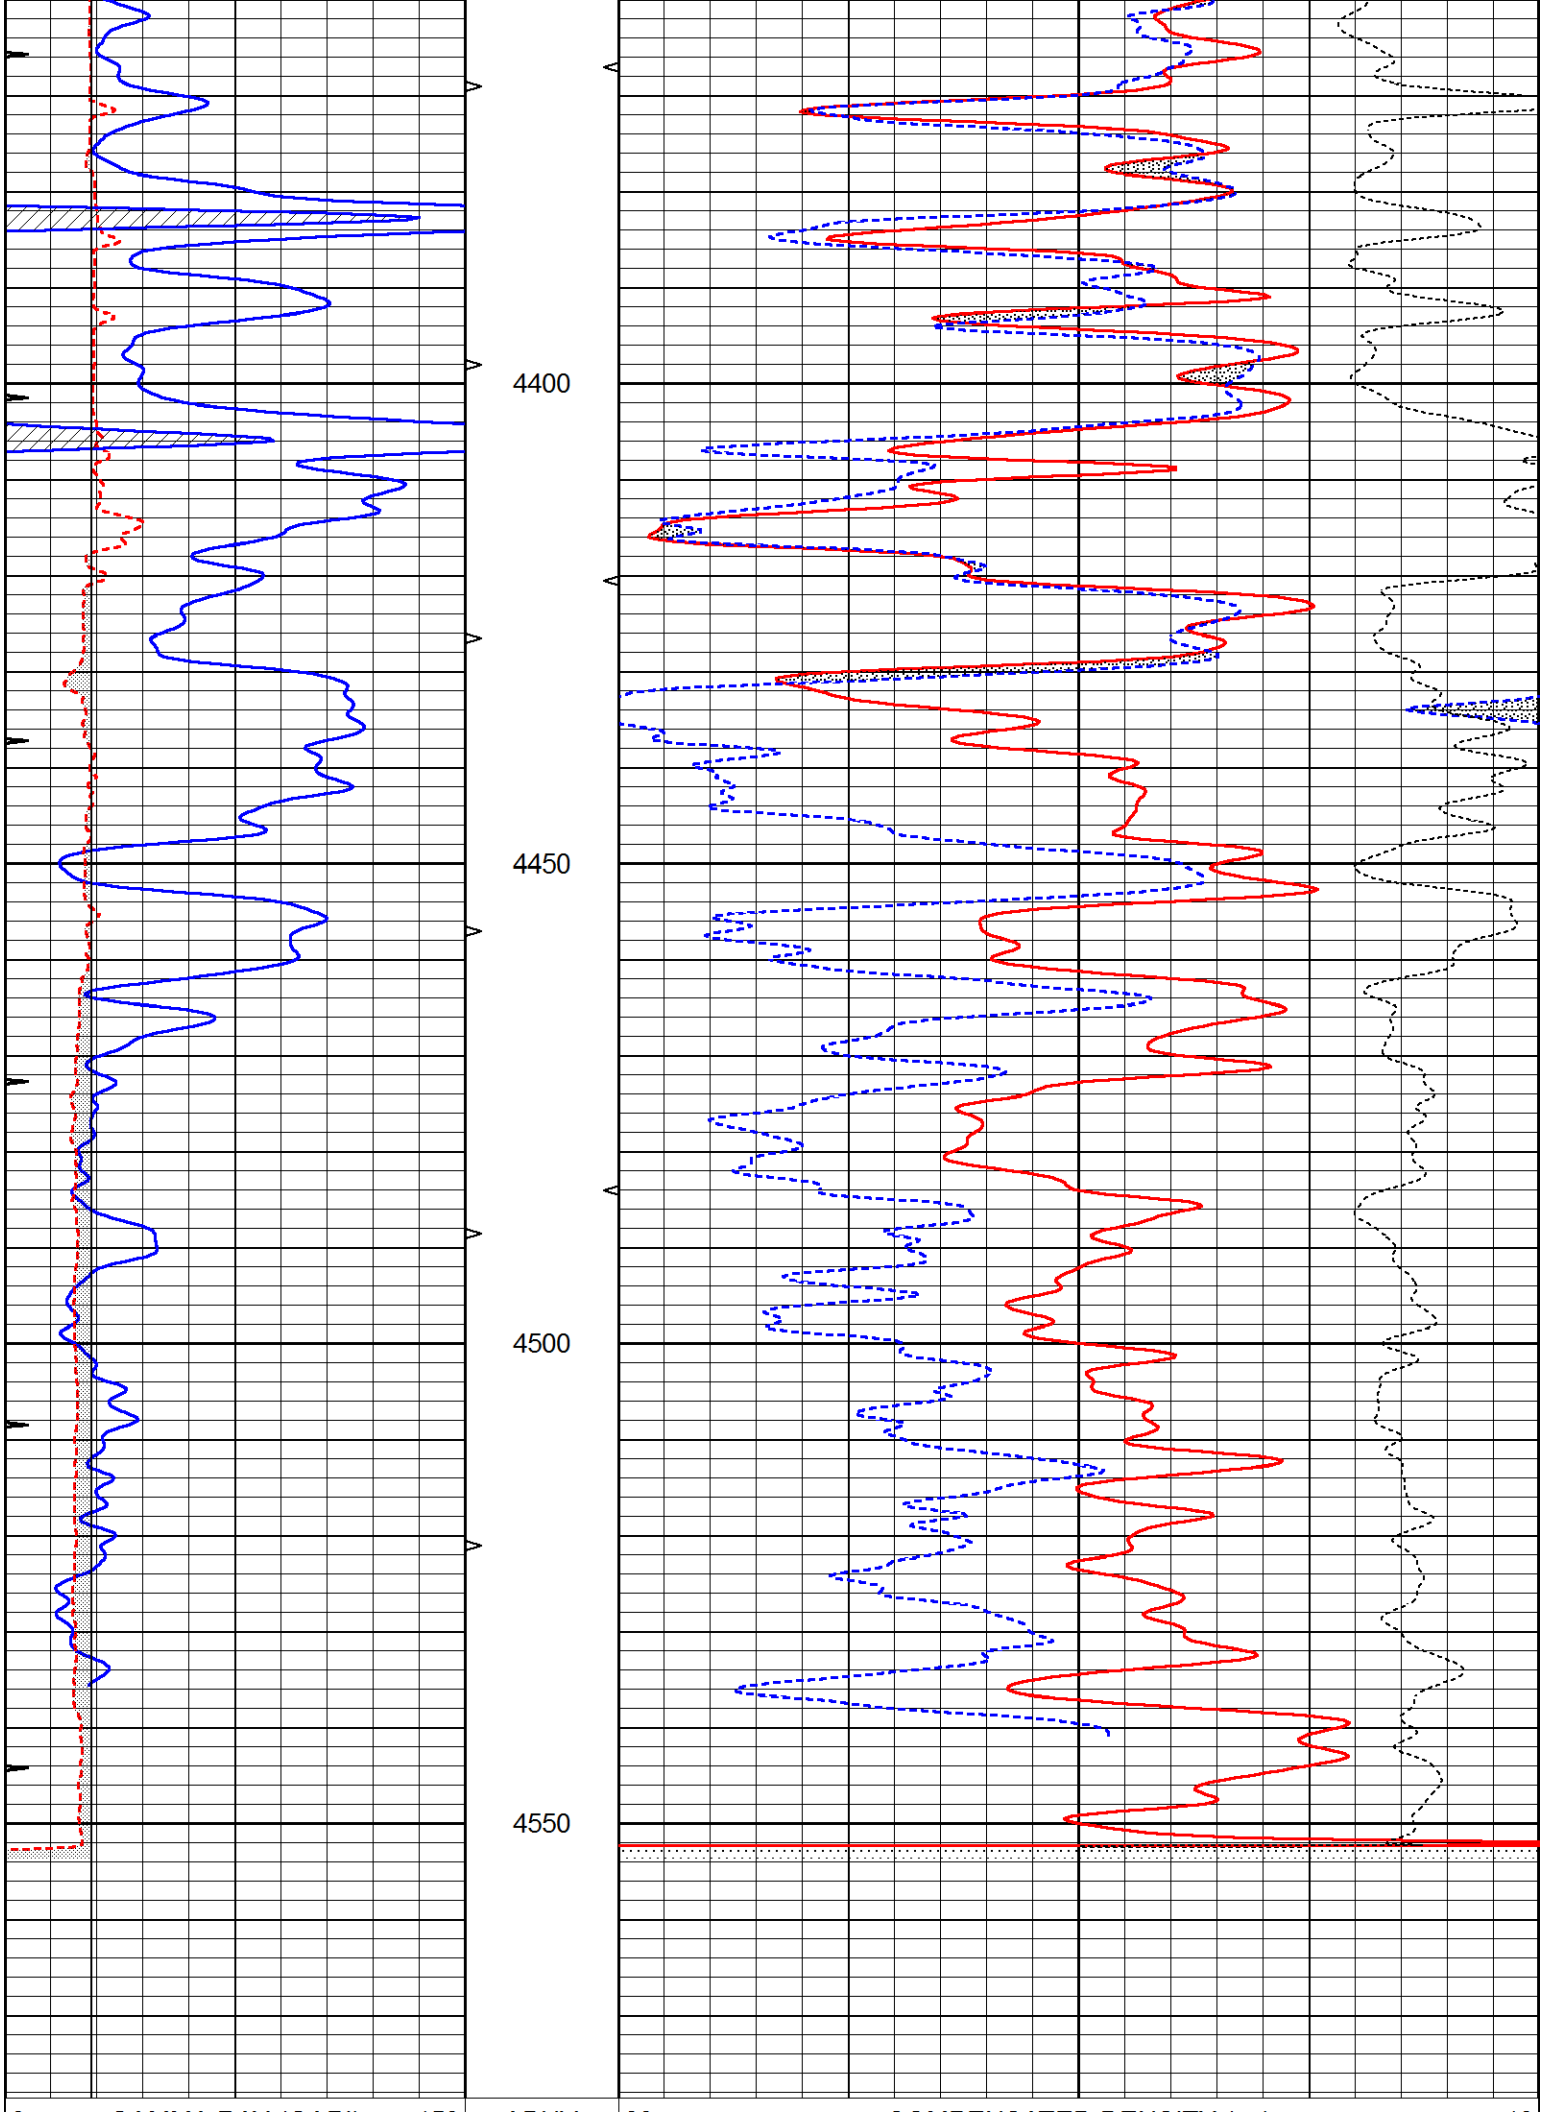
Database File	5884ddn.db
Dataset Pathname	pass3.1
Presentation Format	den_neu
Dataset Creation	Tue Oct 12 08:19:54 2021
Charted by	Depth in Feet scaled 1:240


0 GAMMA RAY (GAPI) 150
6 CALIPER (in) 16
0 MINMK 20
ABHV
10 (ft3) 0
TBHV
0 (ft3) 10
30 COMPENSATED DENSITY (pu) -10
30 COMPENSATED NEUTRON (pu) -10
-0.25 CORRECTION (g/cc) 0.25
3550
3600
3650
3700


3700
3750
3800
3850
3900


3950
4000
4050
4100


4150
4200
4250
4300
4350

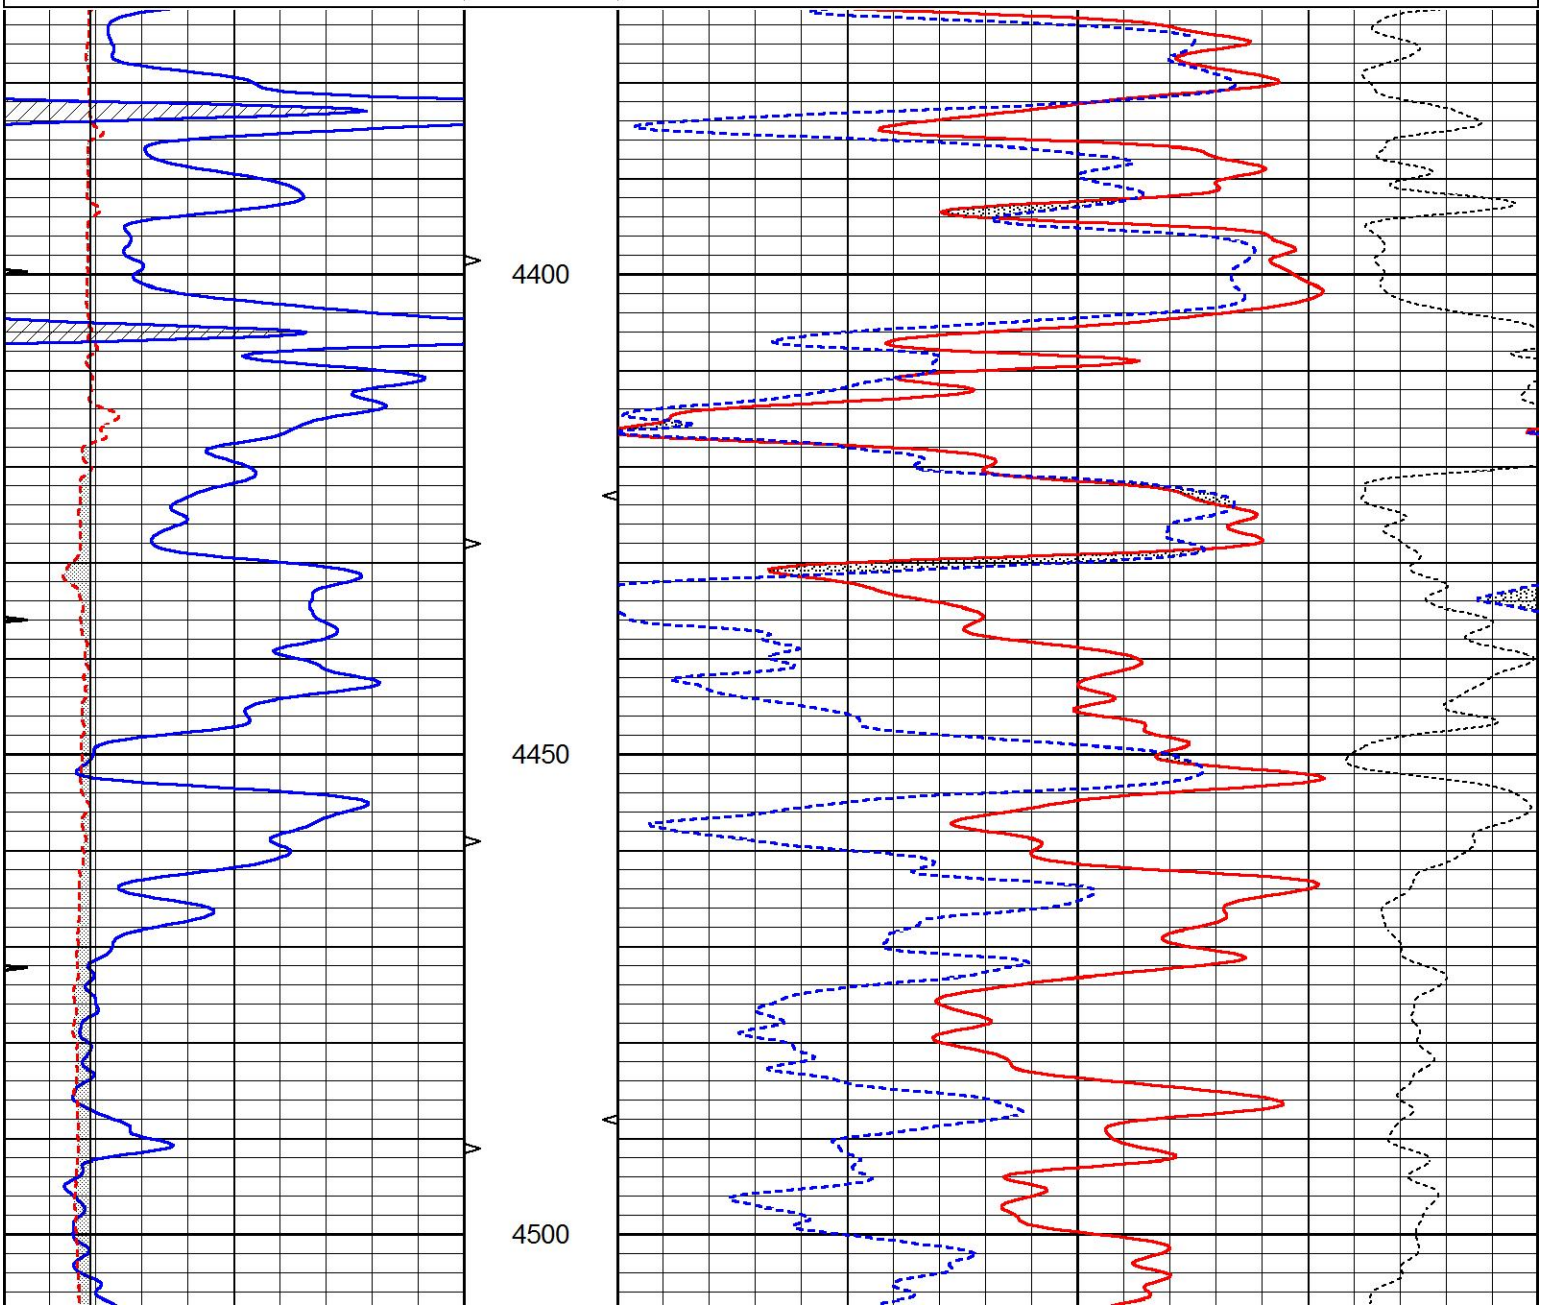

4400
4450
4500
4550

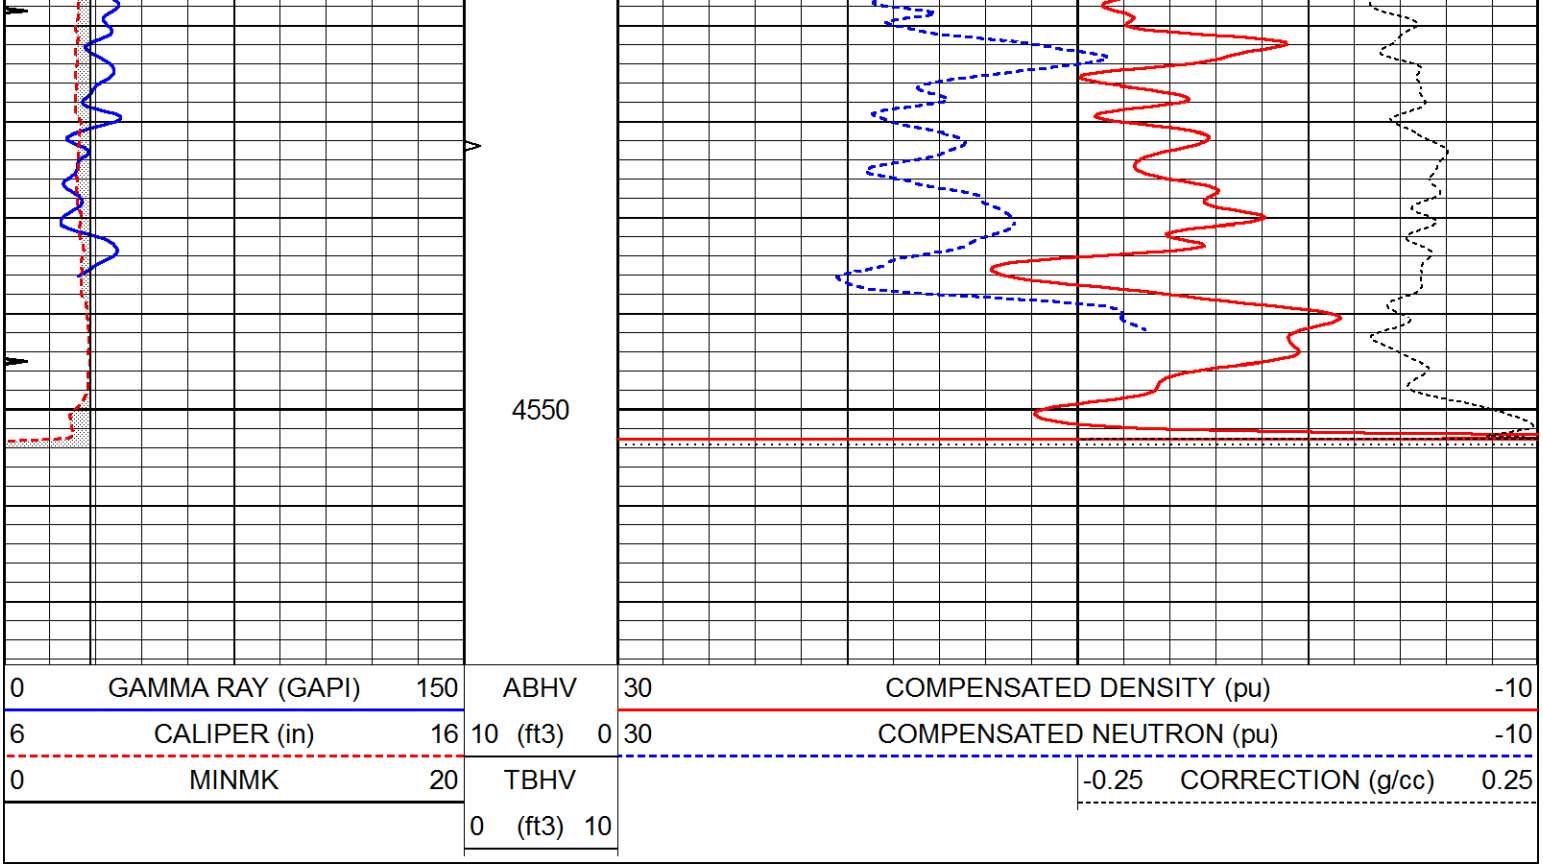
0	GAMMA RAY (GAPI)	150	ABHV		30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV			-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10			

REPEAT SECTION

Database File	5884ddn.db
Dataset Pathname	pass2.1
Presentation Format	den_neu
Dataset Creation	Tue Oct 12 08:10:24 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV		30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV			-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10			





Calibration Report

Database File	5884ddn.db
Dataset Pathname	pass2.1
Dataset Creation	Tue Oct 12 08:10:24 2021

Dual Induction Calibration Report

Serial-Model:	PROBE8-DILG
Surface Cal Performed:	Fri Oct 01 14:24:33 2021
Downhole Cal Performed:	Mon Sep 10 14:28:38 2018
After Survey Verification Performed:	Mon Sep 10 14:28:40 2018

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-15.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	

	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 001N Model: PRB

Master Calibration — Performed Thu Mar 19 11:30:16 2020

	Background	Magnesium	Aluminum	Aluminum+Fe	
Window 1	1572.2	7510.8	2837.3	2643.1	cps
Window 2	1446.2	6523.9	2552.8	2409.9	cps
Window 3	1060.9	3611.4	1731.5	1684.8	cps
Window 4	145.5	363.4	363.2	368.1	cps
Long Space	0.0	5077.7	1106.6	963.7	cps
Short Space	3.1	1709.3	1103.4	916.9	cps
Rho		1.7100	2.5900	0.0000	g/cc
Pe		2.0000	2.7500	5.7900	

Rib Angle	: 44.0	Rib Slope	: 0.965	Density/Spine Ratio	: 0.555
Spine Angle	: 74.0	Spine Slope	: 3.481	Spine Intercept	: -17.4

Before Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings	Target	Normalization

	Short Space	1.00	cps	1.00	cps	1.0000
	Long Space	1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings		Measured		Target	
1)	Short Space		cps				
	Long Space		cps		pu		pu
2)	Short Space		cps				
	Long Space		cps		pu		
3)	Short Space		cps				
	Long Space		cps		pu		

POST-SURVEY VERIFICATION

	Detector	Readings		Measured		Target	
1)	Short Space		cps				
	Long Space		cps		pu		pu
2)	Short Space		cps				
	Long Space		cps		pu		pu
3)	Short Space		cps				
	Long Space		cps		pu		pu

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Thu Jul 30 20:04:35 2020	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.7500	GAPI/cps