


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Greenwood County, Sec. 22 Twp. 23 Rge. 10 (E) (W)
Location as "NE/CNW/SE" or footage from lines SE NW SE 1/4

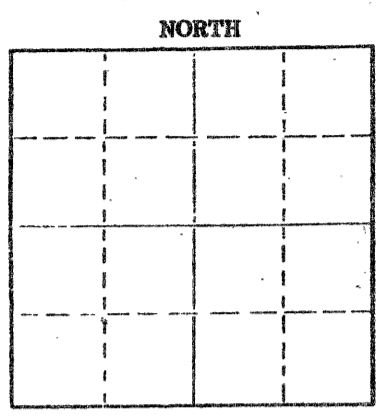

Locate well correctly on above Section Plat

Lease Owner E. W. Sauder
Lease Name ~~XXXXXX~~ Center - Pearson Well No. 6
Office Address 1710 Center - Emporia, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 7/20/75 1975
Application for plugging filed 7/20/75 1975
Application for plugging approved 7/20/75 1975
Plugging commenced 7/20/75 1975
Plugging completed 7/20/75 1975
Reason for abandonment of well or producing formation
No producing formation found
If a producing well is abandoned, date of last production - 1975
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Merle Hickey
Producing formation - Depth to top - Bottom - Total Depth of Well 2390 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	RECEIVED STATE CORPORATION COMMISSION 7/22/75 JUL 22 1975			7"	156'	0
	CONSERVATION DIVISION Wichita, Kansas					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from - feet to - feet for each plug set.

Filled with rotary mud from TD to 200' and set bridge plug consisting of burlap bags and cottonseed hulls and cemented with 12 sacks cement. Filled with mud to 50' and set bridge plug as above and cemented with 8 sacks. Plugged rat hole and cemented with 2 sacks.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Jackman & Jackman
Address c/o C. R. McClelland

STATE OF Kansas COUNTY OF Greenwood ss.
C. R. McClelland (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) CR McClelland

SUBSCRIBED AND SWORN TO before me this 21 day of July 1975

My commission expires August 29, 1975
Robert H. [Signature] Notary Public.



15-073-20999-00-00

WELL LOG

Company E. W. Sauder

Farm Pearson

Well 6

Location SE NW SE of 22 - 23 10E Greenwood County, Kansas

Commenced 7/16/75

Completed 7/20/75

Casing 156" of 7" cemented to surface

Contractor Jackman & Jackman

Production D & A

Total Depth 2390"

No record	0	156 (Surface pipe set 1963)
Shale & shells	156	175
Shale & lime	175	790
Shale & shells	790	1011
Shale	1011	1170
Lime	1170	1172
Sand - Water	1172	1276
Lime	1276	1450
Shale	1450	1576
Lime	1576	1732
Shale & shells	1732	2117
Sand	2117	2158
Shale	2158	2170
Shale & shells	2170	2366
Lime	2366	2390

0' is 4' above ground level.

RECEIVED
STATE CORPORATION COMMISSION

7/22/75
JUL 22 1975

CONSERVATION DIVISION
Wichita, Kansas