

15-163-20344-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

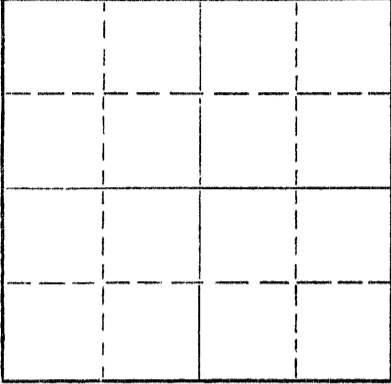

Locate well correctly on above
Section Plat

Rooks County, Sec. 32 Twp. 8 Rge. 17 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE NW SW
Lease Owner Black Petroleum, Inc.
Lease Name Stamper "B" Well No. 1
Office Address Suite 445, Garvey Building, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 1-13-19 71
Application for plugging filed 1-13-19 71
Application for plugging approved 1-13-19 71
Plugging commenced 1-13-19 71
Plugging completed 1-13-19 71
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3,430 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	263'	Cmtd. w/ 175 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole w/ heavy mud
Push bridge plug to 660'
Spot 70 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/ heavy mud
Push bridge plug to 225'
Spot 20 sax cement on plug thru 4 1/2" drill pipe
Push bridge plug to 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
JAN 28 1971
CONSERVATION DIVISION
Wichita, Kansas

1/28/71

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Company, Inc.
Address Shields Building, Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss. contractor
(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Shields Building, Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of January, 19 71

My commission expires May 26, 1971 Notary Public.




Shields

15-163-20344-0800
Russell, Kansas

WELL LOG

Operator: Black Petroleum, Inc.
Well: Stamper "B" # 1
Commenced: January 2, 1971
Completed: January 13, 1971
Contractor: Shields Drilling Co., Inc.

Well Description: SE NW SW
Sec. 32-8s-17w
Rooks County, Kansas



CASING RECORD		
Size	Run	Pulled
8 5/8"	263'	Cmtd. w/ 175 sax

Elevation:
Treatment:
Production: D & A

Tops:

..... Figures Indicate Bottom of Formations

Rock	268'
Shale	820'
Sand, shale & redbed	1,200'
Redbed	1,279'
Anhydrite	1,316'
Shale & shells	2,100'
Lime & shale	2,260'
Lime	2,388'
Lime & shale	2,903'
Lime	3,355'
Lime & conglomerate	3,430' RTD

RECEIVED
STATE CORPORATION COMMISSION
JAN 28 1971
CONSERVATION DIVISION
Wichita, Kansas

1/28/71

/Notes