

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-025-21344-00-00  
Spot: SESW Sec/Twnshp/Rge: 3-34S-23W  
660 feet from S Section Line, 1980 feet from W Section Line  
Lease Name: BISEL Well #: 2-3  
County: CLARK Total Vertical Depth: 5750 feet

Operator License No.: 5254  
Op Name: MIDCO EXPLORATION, INC.  
Address: 414 PLAZA DRIVE #204  
WESTMONT, IL 60559

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		5426		WITH 2 SX CMT
COND	20	84		
PROD	4.5	5643	2721	WITH 325 SX CMT
SURF	8.625	817		WITH 450 SX CMT

\$ 186.88

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/28/2006 1:45 PM  
Plug Co. License No.: 30891 Plug Co. Name: LEIKER WELL SERVICE, INC.  
Proposal Rcvd. from: DAVID MAYFIELD Company: MIDCO EXPLORATION Phone: (630) 655-2198

Proposed Plugging Method: CIBP @ 5426' WITH 2 SX CMT. PLUG AT 830' WITH 15 SX GEL & 50 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 60' WITH 20 SX CMT.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 12/28/2006 2:45 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

CIBP @ 5426' WITH 2 SX CMT. 1ST PLUG AT 830' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 300' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT. CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
5476	5488		

**INVOICED**  
DATE 1-16-07  
INV. NO. 2007061196


RECEIVED  
KANSAS CORPORATION COMMISSION  
JAN 08 2007

Remarks: USED 60/40 POZMIX 6% GEL BY CONSOLIDATED OIL WELL.

CONSERVATION DIVISION  
WICHITA, KS

Plugged through: CSG

District: 01

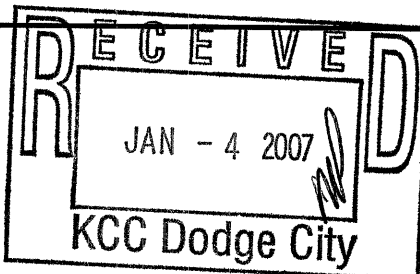

Signed

Jerry W. Stapleton PRT-II  
(TECHNICIAN)