

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-21996-00-00

Spot: N2SENE

Sec/Twnshp/Rge: 9-19S-28W

3630 feet from S Section Line,

660 feet from E Section Line

Lease Name: PANZNER A

Well #: 1-9

County: LANE

Total Vertical Depth: 4660 feet

Operator License No.: 9408

Op Name: TRANS PACIFIC OIL CORPORATION

Address: 100 SOUTH MAIN STE 200
WICHITA, KS 67202

String Size Depth (ft) Pulled (ft) Comment

SURF 8.625 251

151.45

Well Type: DH

UIC Docket No:

Date/Time to Plug: 01/01/2007 3:00 AM

Plug Co. License No.: 5929

Plug Co. Name: DUKE DRILLING CO., INC.

Proposal Revd. from: RICH WHEELER

Company: DUKE DRILLING CO., INC.

Phone: (316) 267-1331

Proposed
Plugging
Method:

1ST PLUG AT 2100' WITH 50 SX CMT. 2ND PLUG AT 1200' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 40 SX CMT. 4TH PLUG AT 280' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: RICHARD LACEY

WitnessType: NONE

Date/Time Plugging Completed: 01/01/2007 5:30 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

Perfs:

1ST PLUG AT 2100' WITH 50 SX CMT. 2ND PLUG AT 1200' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 40 SX CMT. 4TH PLUG AT 280' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

INVOICED
DATE 1-16-07
INV. NO. 2007061202

RECEIVED
KANSAS CORPORATION COMMISSION


JAN 08 2007

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

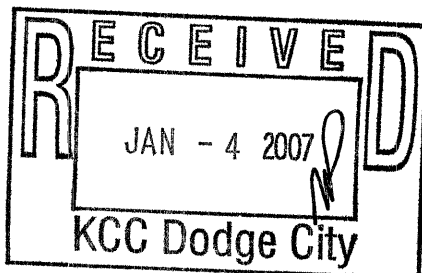

Signed

Richard W. Lacey

(TECHNICIAN)

Form CP-2/3

[Handwritten signature]
PK