

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-20510-00-00  
Spot: NWNENE Sec/Twnshp/Rge: 21-19S-25W  
4944 feet from S Section Line, 1114 feet from E Section Line  
Lease Name: DINGES B Well #: 1  
County: NESS Total Vertical Depth: 4482 feet

PLG'S  
CPSD  
PKT

Operator License No.: 5086  
Op Name: PINTAIL PETROLEUM, LTD.  
Address: 225 NORTH MARKET, STE 300  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	4475	337	WITH 150 SX CMT
SURF	8.625	339		WITH 175 SX CMT

\$145.67

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/27/2006 9:00 AM  
Plug Co. License No.: 31627 Plug Co. Name: WHITETAIL CRUDE, INC  
Proposal Rcvd. from: RICKY Company: WHITETAIL CRUDE, INC Phone: (785) 798-3641

Proposed Plugging Method: TUBING TO BOTTOM SPOT 25 SX CMT. 15 SX GEL SPACER WITH 200-300# HULLS. PLUG AT 1800' WITH 50 SX CMT. PLUG AT 1000' WITH 80 SX CMT. PLUG AT 600' WITH 40 SX CMT. PLUG AT 360' WITH 40 SX CMT. PLGU AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 12/27/2006 12:15 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMPED 25 SX CMT & 200# HULLS. 1ST PLUG AT 1800' WITH 50 SX CMT. PERFORATED AT 800'. PUMPED 80 SX CMT & DISPLACED TO 600'. SHOT CASING OFF AT 470', WOULD NOT COME LOOSE. SHOT PIPE OFF AT 337'. PUMPED 80 SX CMT AND IT CIRCULATED. PULLED CASING AND TOPPED OFF WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4475	4481	OH	


INVOICED

DATE 1-17-07  
INV. NO. 2007061216

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

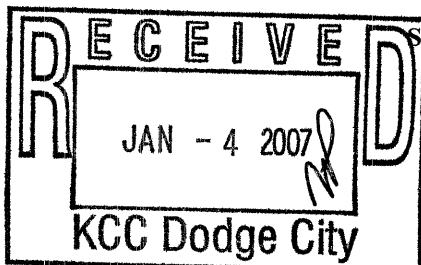

Signed Michael Maier  
(TECHNICIAN)

RECEIVED  
JAN 16 2007  
KCC WICHITA

Form CS 2/3

PKT