

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-101-21567-00-00  
Spot: S2SESE Sec/Twnshp/Rge: 26-16S-29W  
330 feet from S Section Line, 660 feet from E Section Line  
Lease Name: E M LAND Well #: 1  
County: LANE Total Vertical Depth: 4620 feet

Operator License No.: 31627  
Op Name: WHITETAIL CRUDE, INC  
Address: N HWY 283 PO BOX 544  
NESS CITY, KS 67560

String	Size	Depth (ft)	Pulled (ft)	Comment
PC		2190		WITH 403 SX CMT
PROD	5.5	4612	0	WITH 175 SX CMT \$ 150.15
SURF	8.625	259		WITH 160 SX CMT

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/13/2006 11:00 AM  
Plug Co. License No.: 31627 Plug Co. Name: WHITETAIL CRUDE, INC  
Proposal Revd. from: WAYNE WILSON Company: SWIFT SERVICES Phone: \_\_\_\_\_

Proposed Plugging Method: PUMP 35 SX CMT WITH 200-300# HULLS , GEL SPACER TO 2200'. CMT TO SURFACE AT 2200'. CHECK BACKSIDE WITH 50 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 12/13/2006 4:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 300# HULLS & 35 SX CMT. GEL SPACER TO 2200'. PUMP 170 SX CMT. NO PRESSURE. HOLE DID NOT LOAD. WAIT 2 1/2 HOURS. PUMPED 175 SX CMT DOWN 5 1/2" CASING. 5 1/2" CASING STANDING FULL OF CMT. PUMP 50 SX CMT DOWN 5 1/2" X 8 5/8" ANNULUS. MAXIMUM PRESSURE 250#.

Perfs:

Top	Bot	Thru	Comments
4280	4284		
4250	4256		
4220	4224		

**INVOICED**  
DATE 1-16-07  
INV. NO. 2007061206

**RECEIVED**  
KANSAS CORPORATION COMMISSION


JAN 08 2007

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

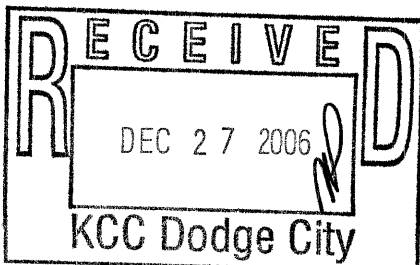

Signed

*[Signature]*

(TECHNICIAN)

Form CP-27

*[Handwritten initials]*