



MIDWEST WIRELINE

DUAL INDUCTION LOG

Company Gore Oil Company
 Well Arleta #1-27
 Field
 County Trego State Kansas

Company Gore Oil Company
 Well Arleta #1-27
 Field
 County Trego
 State Kansas

Location: API #: 15-195-23128-00-00
 SE SW SW NW
 2520 FNL & 450 FWL
 SEC 27 TWP 11S RGE 21W
 Permanent Datum Ground Level Elevation 2305
 Log Measured From Kelly Bushing
 Drilling Measured From Kelly Bushing
 Other Services
 CNL/CDL
 MEL/BHCS
 Elevation
 K.B. 2310
 D.F.
 G.L. 2305

Date	11/19/2021
Run Number	One
Depth Driller	4060
Depth Logger	4060
Bottom Logged Interval	4059
Top Log Interval	300
Casing Driller	8.625 @ 322
Casing Logger	317
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	4000
Density / Viscosity	9.0 56
pH / Fluid Loss	10.0 7.6
Source of Sample	FLOWLINE
Rm @ Meas. Temp	0.95 @ 60
Rmt @ Meas. Temp	0.71 @ 60
Rmc @ Meas. Temp	1.28 @ 60
Source of Rmf / Rmc	CHARTS
Rm @ BHT	0.49 @ 117
Operating Rig Time	4.5 Hours
Max Rec. Temp. F	117
Equipment Number	P-108
Location	HAYS
Recorded By	T. Martin
Witnessed By	Marc Downing

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and Midwest Wireline LLC cannot and does not guarantee the accuracy or correctness of any interpretation, and Midwest Wireline LLC will not be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees.

Comments

N/A DENOTES NOT AVAILABLE OR NON-APPLICABLE.

I-70 & Riga Rd, 7 N, E into

Log Measured From: Kelly Bushing 5 Ft. Above Permanent Datum

THANK YOU FOR USING MIDWEST WIRELINE LLC
 785-625-3858

Your Midwest Wireline Crew

Engineer: T. Martin
 Operator:
 Operator:
 Operator:

This Log Record Was Witnessed By

Primary Witness: Marc Downing
 Secondary Witness:
 Secondary Witness:
 Secondary Witness:

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb)
GR	32.50		GR-M&W (89-M&W)	3.00	3.50	50.00
CNLSC CNSSC	29.90 29.15		CNT-M&W (tk10-MW)	5.50	3.50	100.00
LSD DCAL SSD	20.85 20.83 20.35		CDL-M&W (915-956)	8.50	4.00	250.00
RLL3F RLL3	15.80 15.80		DIL-PSI HIGH TEMP (959-1032)	18.50	3.50	220.00
CILD	8.00					
CILM	4.70					
SP	0.20					

Dataset: gore_arleta #1-27.db: field/well/Stack/pass3.1
 Total length: 35.50 ft
 Total weight: 620.00 lb
 O.D.: 4.00 in

Log Variables

DatabaseC:\ProgramData\Warrior\Data\gore_arleta #1-27.db
 Dataset field/well/Stack/pass3.1/_vars_

Top - Bottom

A	BOREID in	BOTTEMP degF	CASEOD in	CASETHCK in	FLUIDDEN g/cc	M	MATRXDEN g/cc
1	7.875	117	5.5	0	1	2	2.71
NPORSEL	PERFS	SNDERR mmho/m	SNDERRM mmho/m	SPSHIFT mV	SRFTEMP degF	SZCOR	TDEPTH ft
Limestone	0	0	0	530	50	Off	4060





2" SCALE RESISTIVITY

MAIN PASS



Database File gore_arleta #1-27.db
 Dataset Pathname Stack/pass3.2
 Presentation Format _dil2in
 Dataset Creation Fri Nov 19 04:21:07 2021
 Charted by Depth in Feet scaled 1:600



0	Gamma Ray (GAPI)	150	1000	Conductivity (mmho/m)	0
			15000	Line Tension (lb)	0
			0	Shallow Resistivity (Ohm-m)	50
			0	Deep Resistivity (Ohm-m)	50
				Shallow Resistivity	
			50	(Ohm-m)	200
			50	Deep Resistivity (Ohm-m)	200


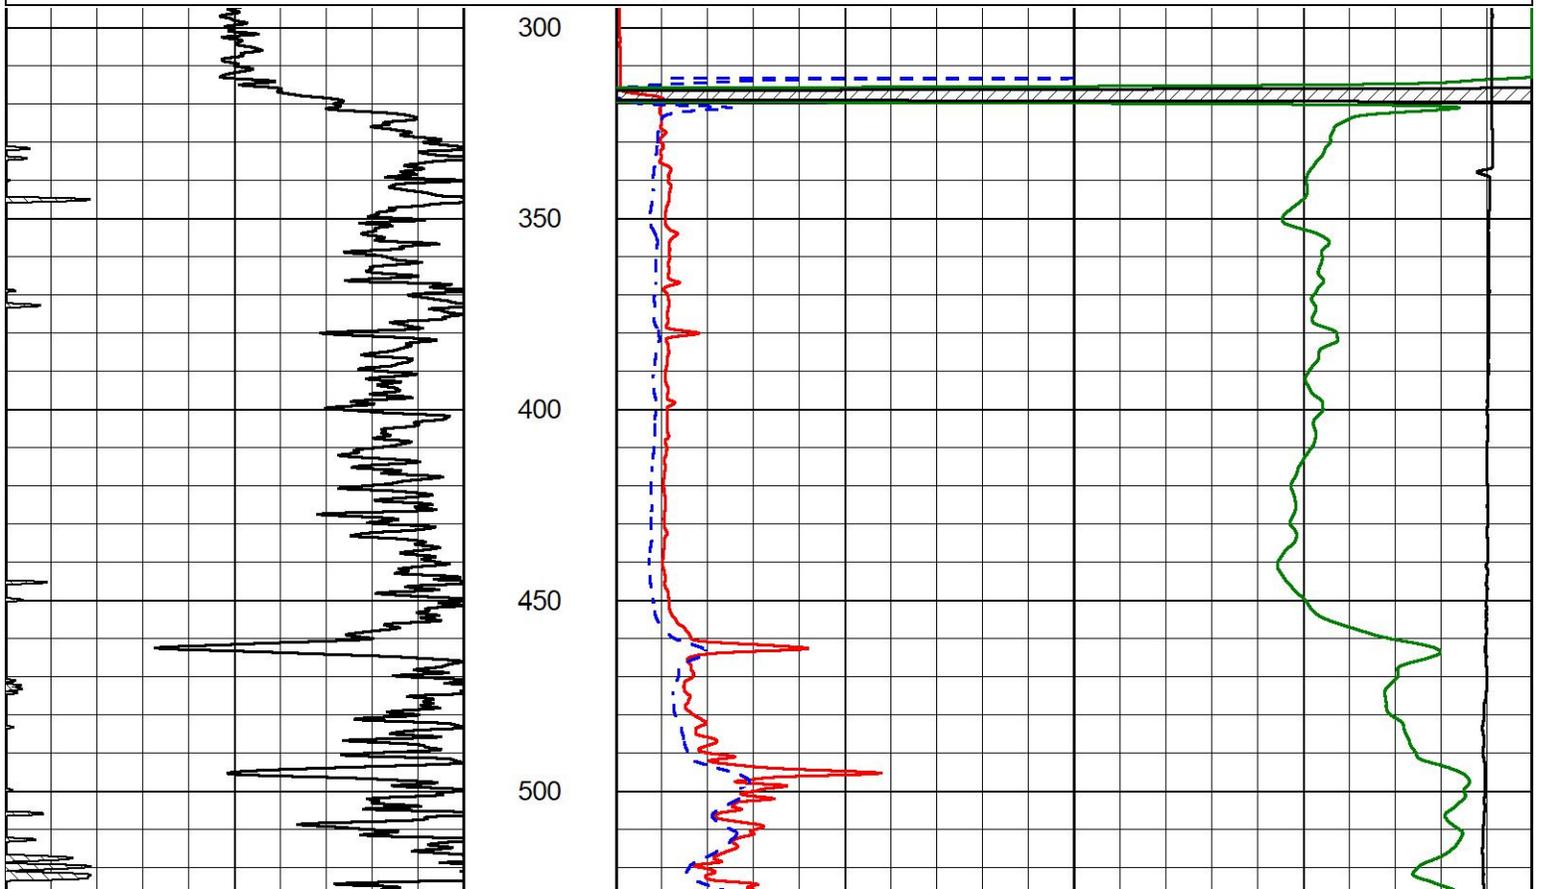


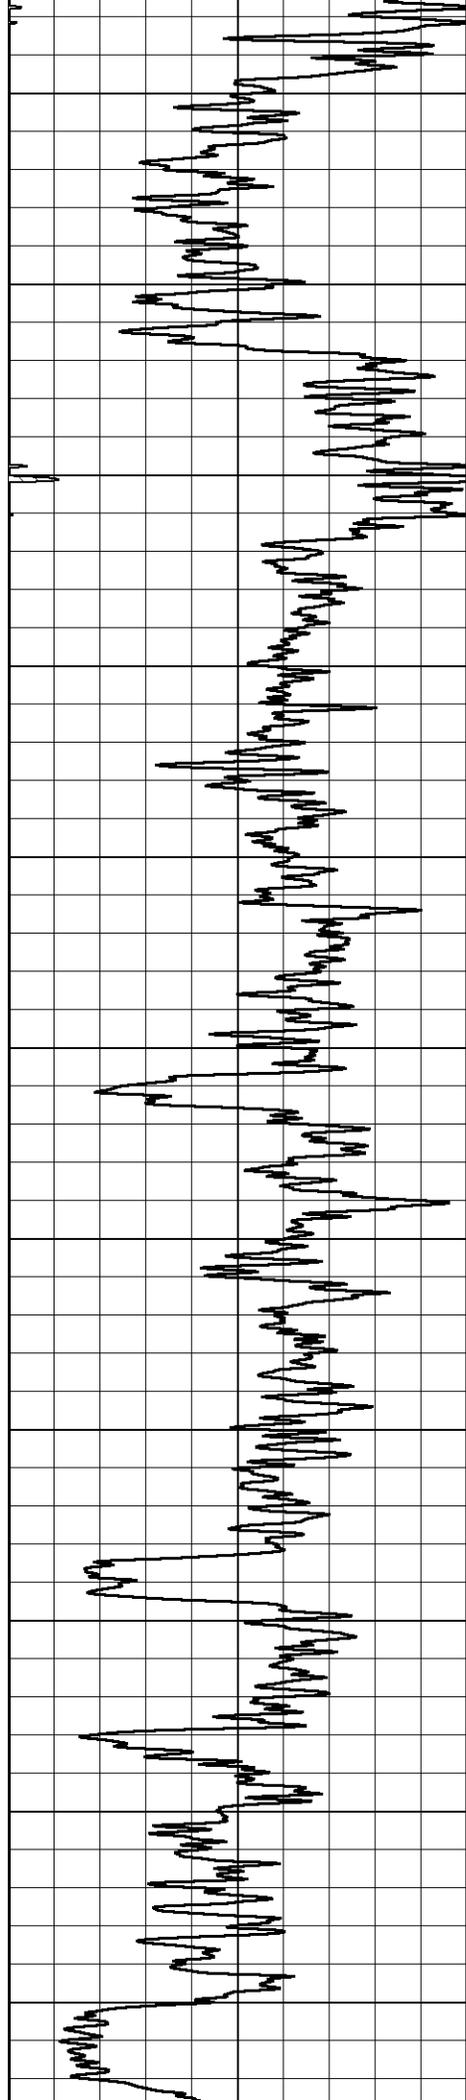



550
600
650
700
750
800
850
900
950
1000
1050

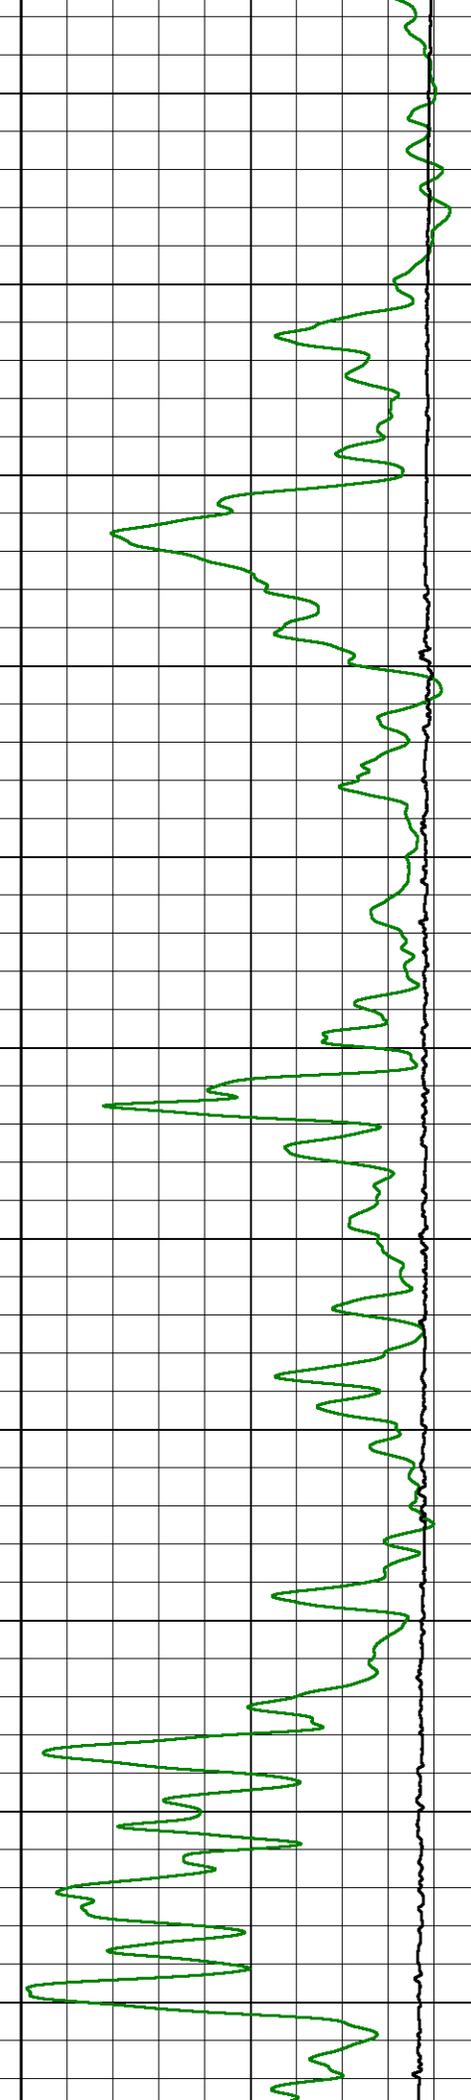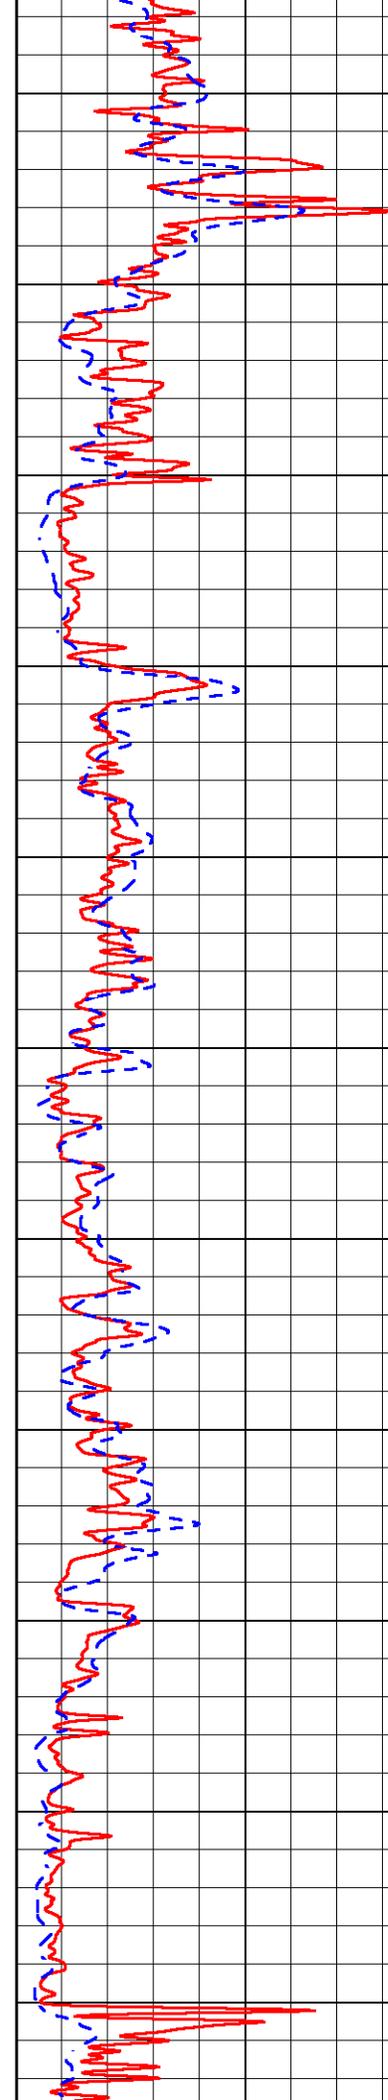

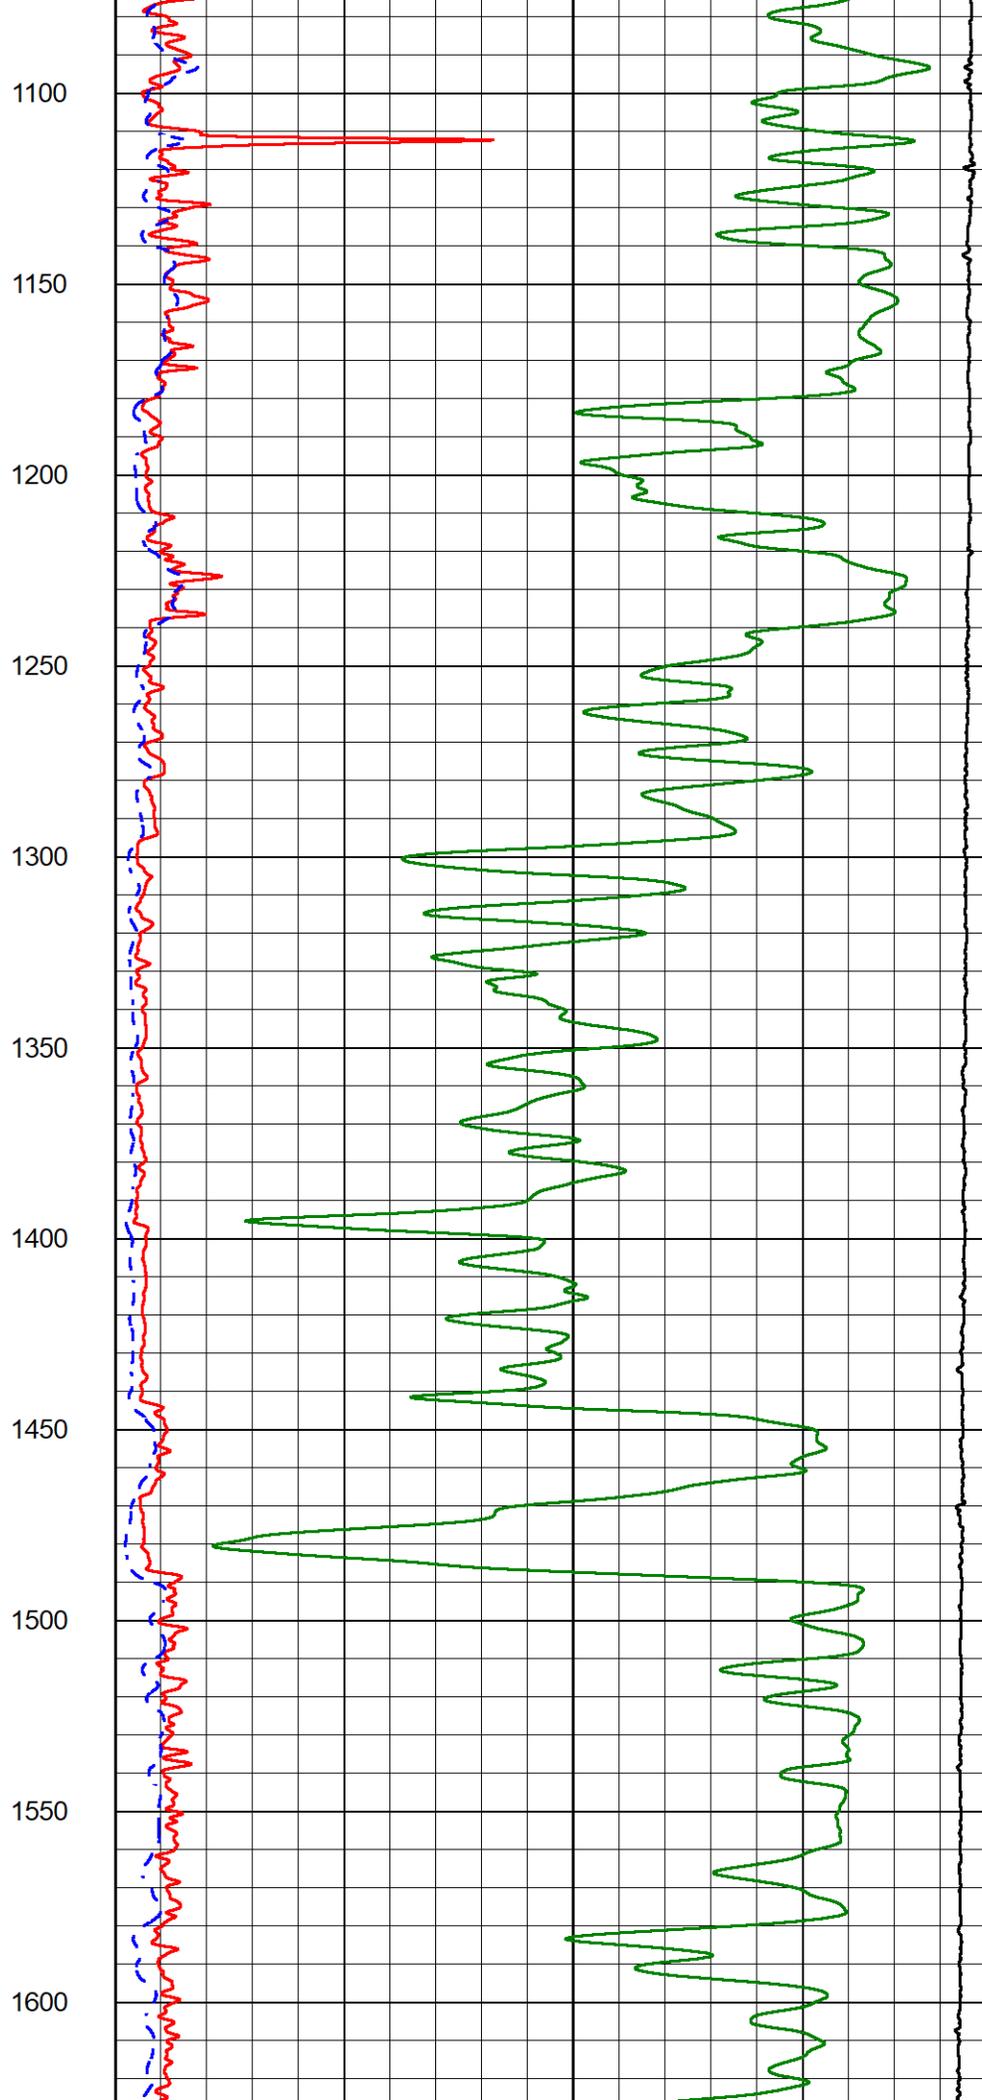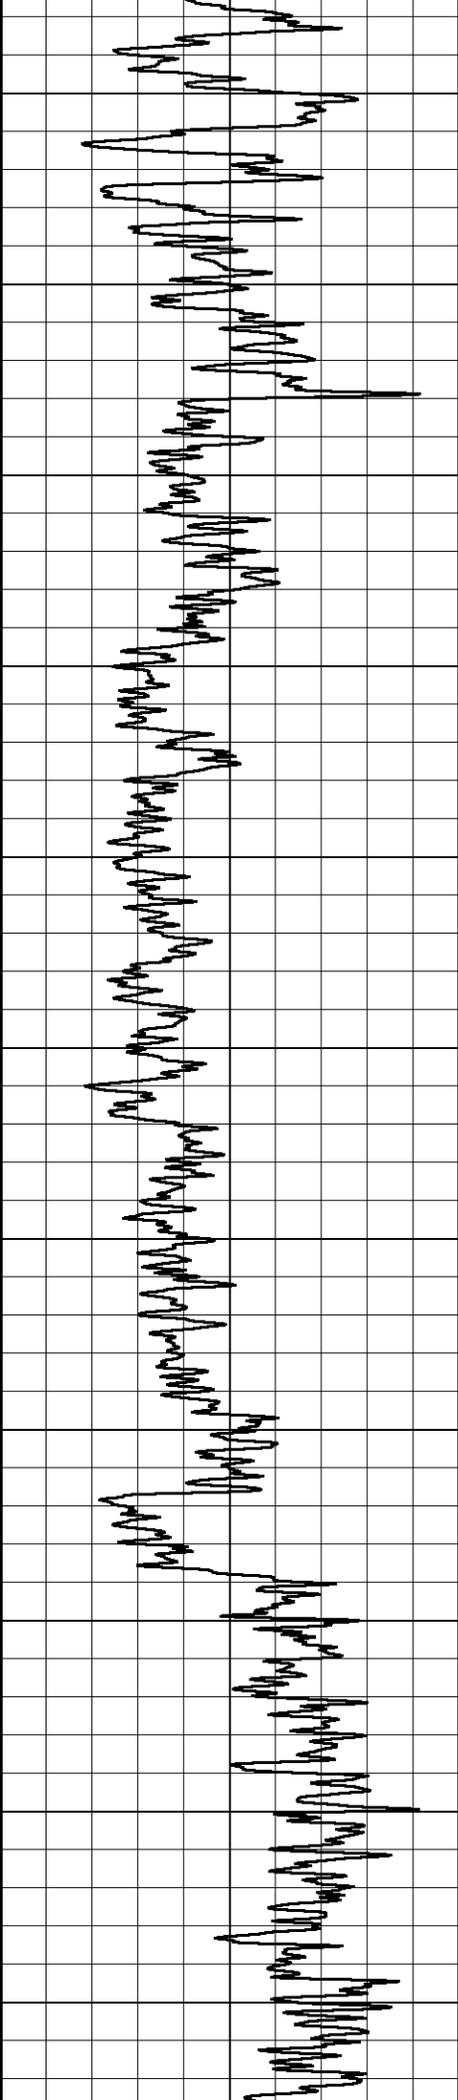


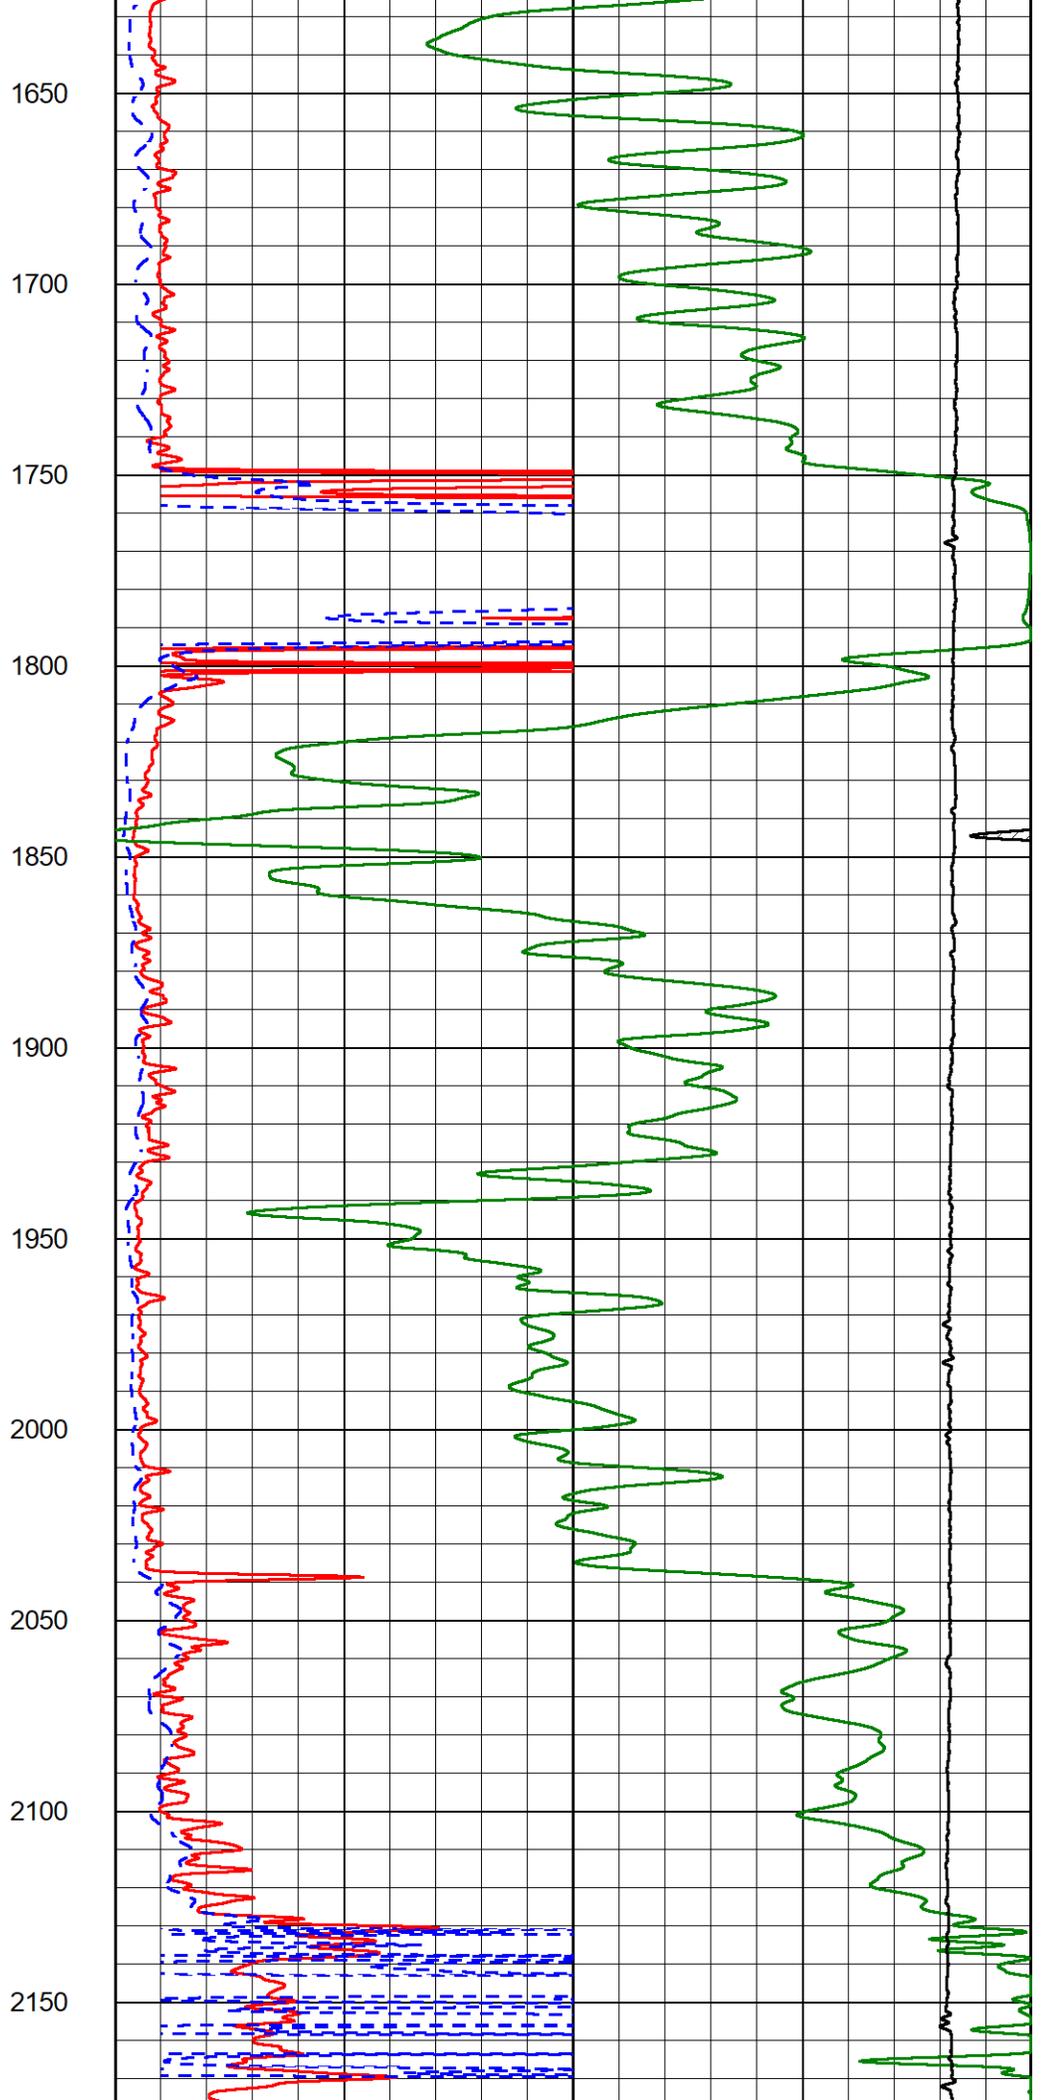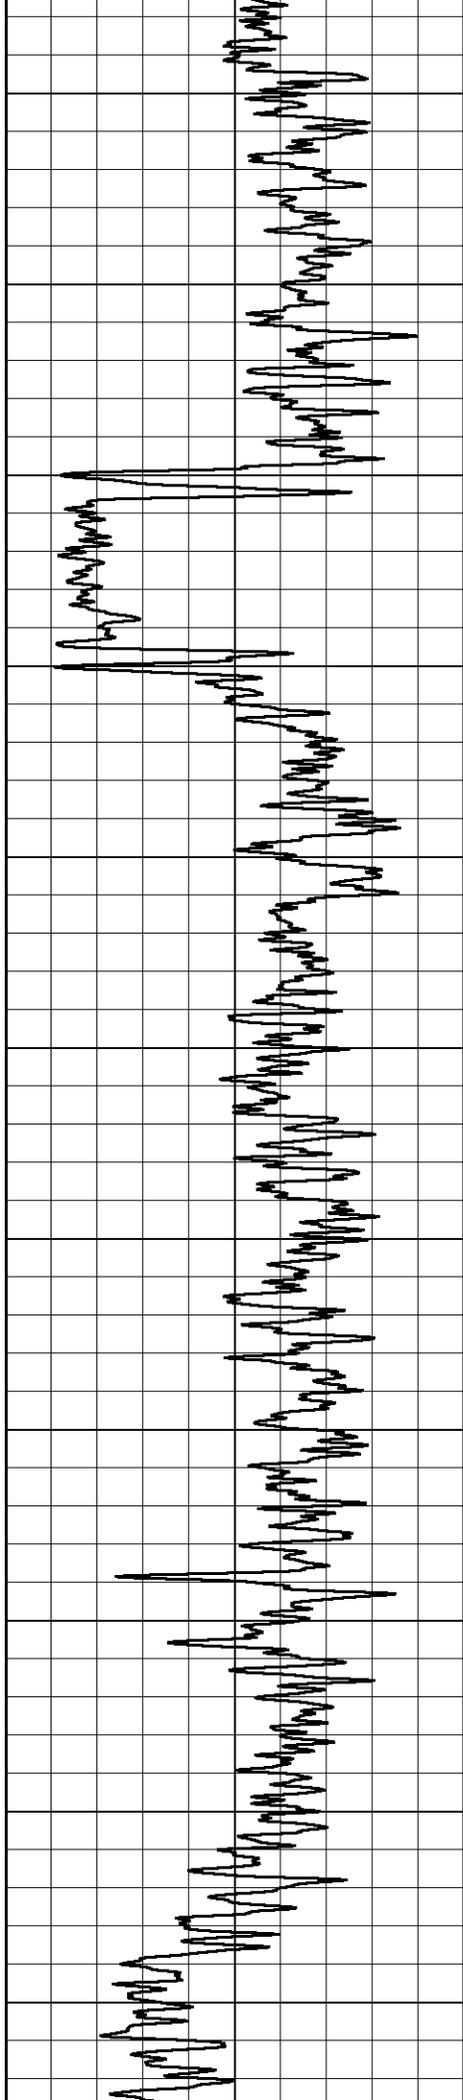


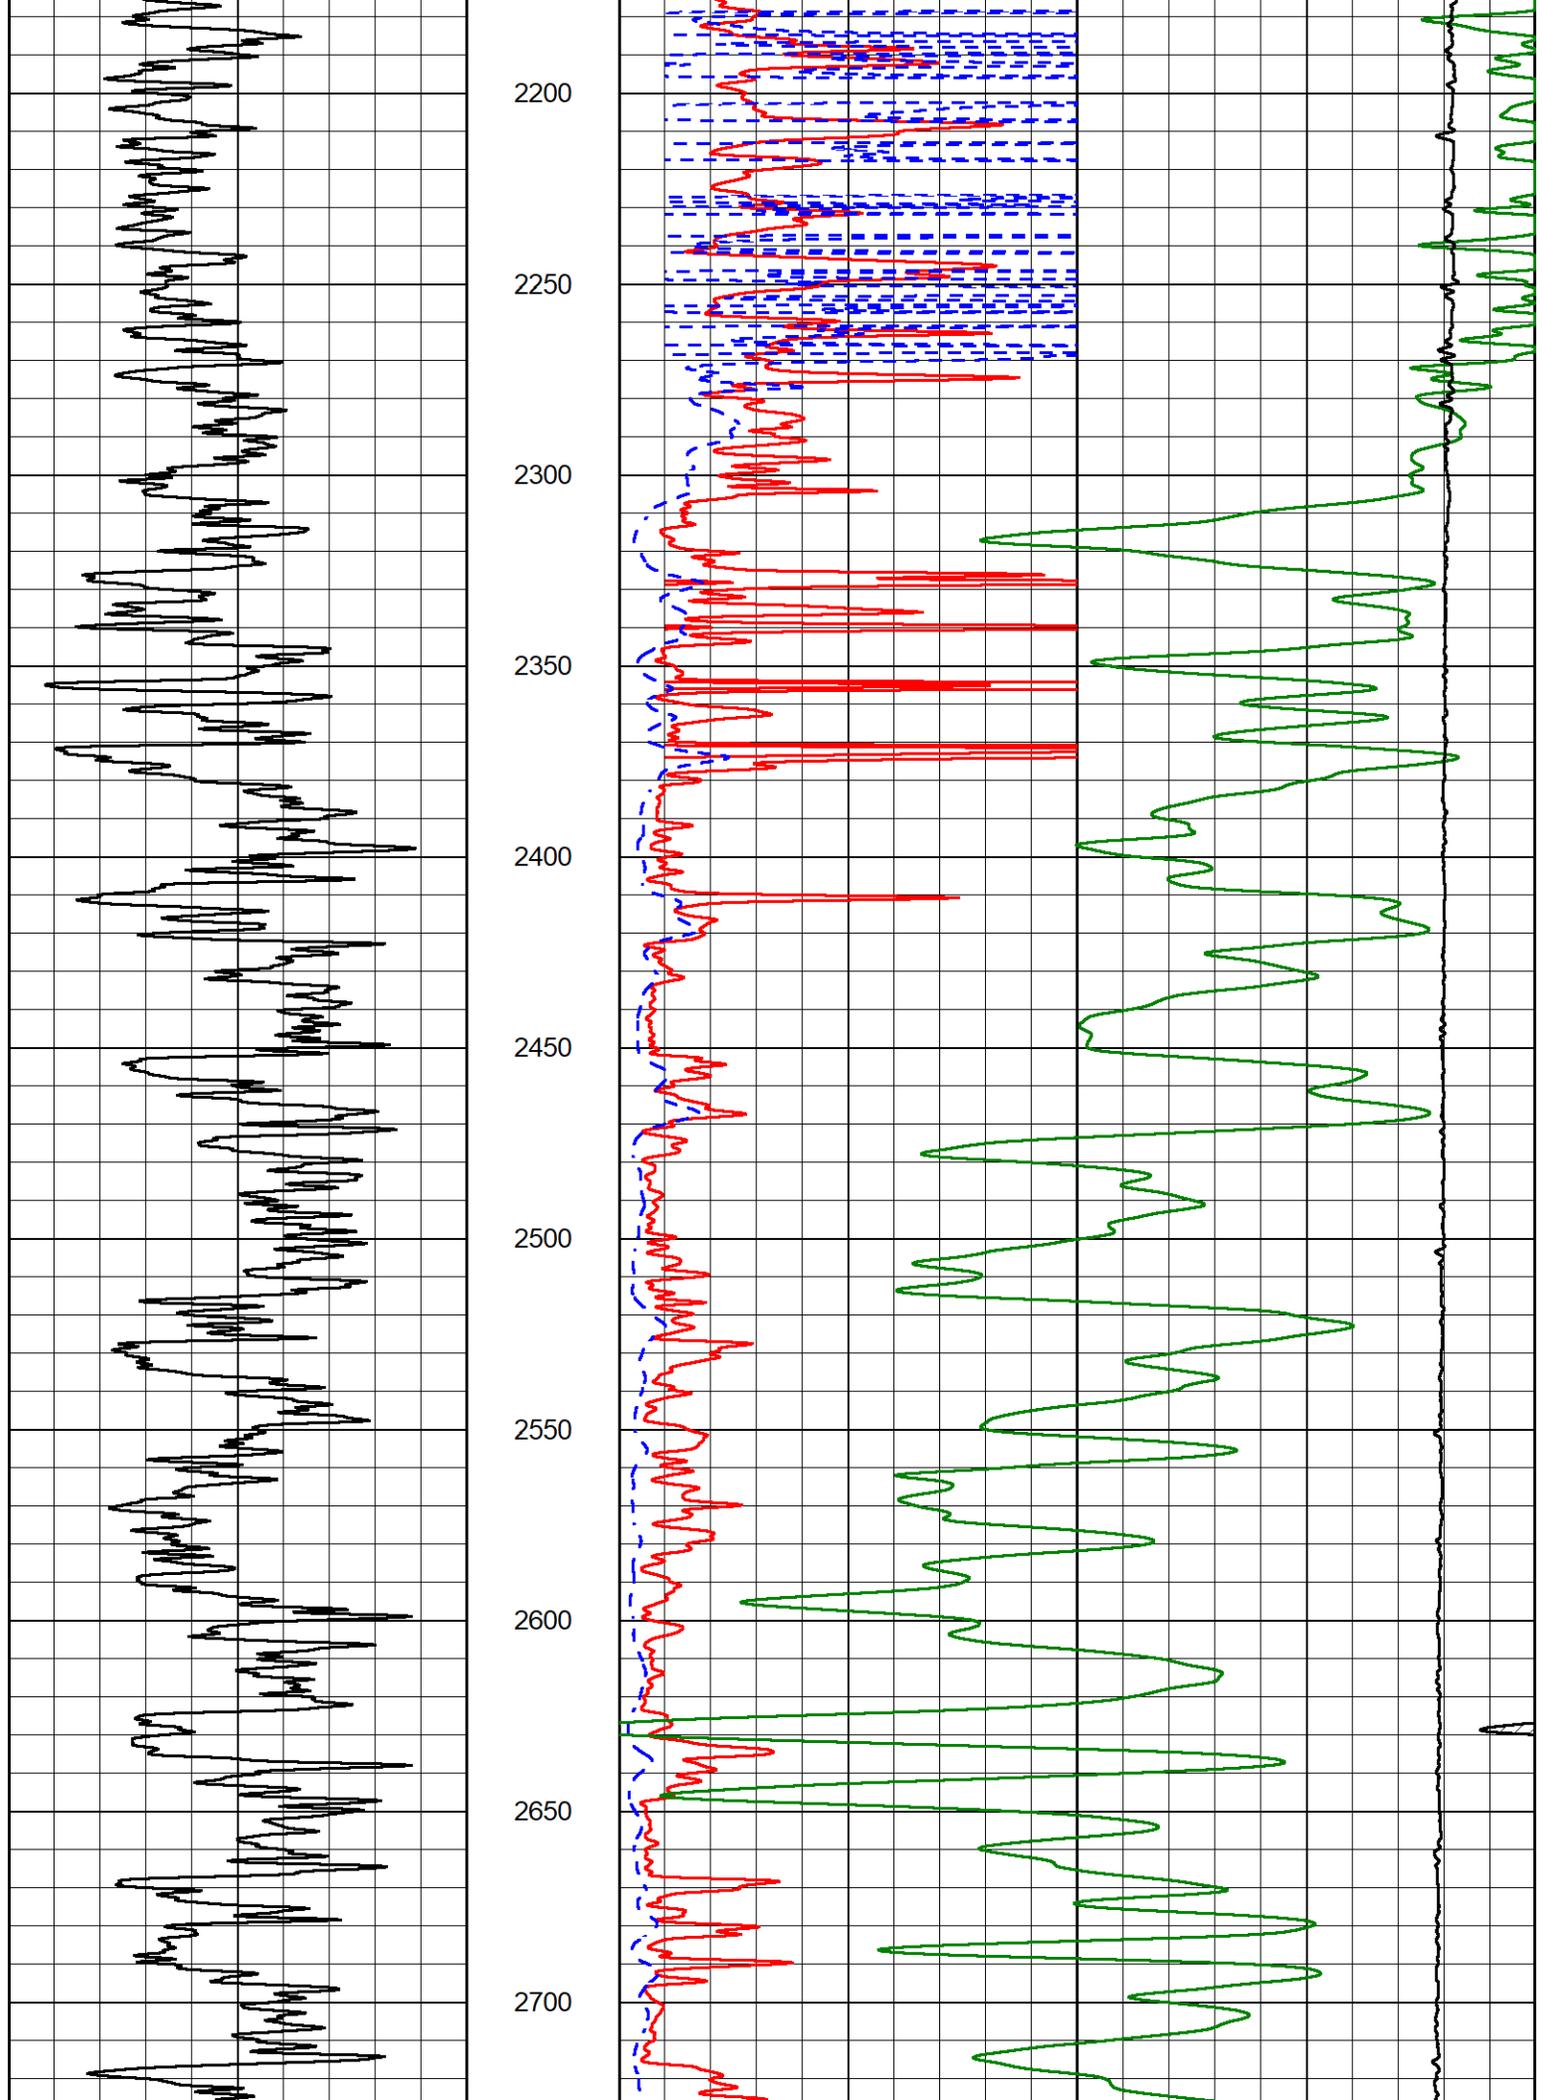


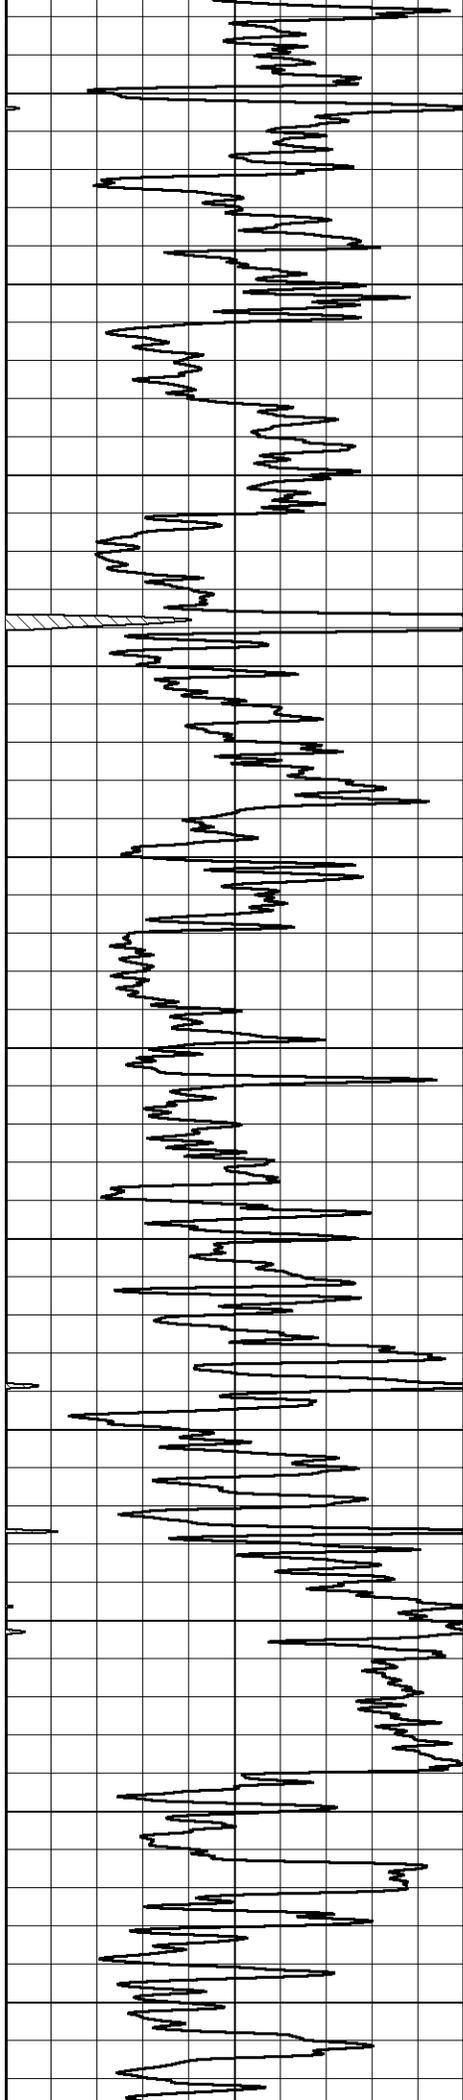

2750
2800
2850
2900
2950
3000
3050
3100
3150
3200
3250

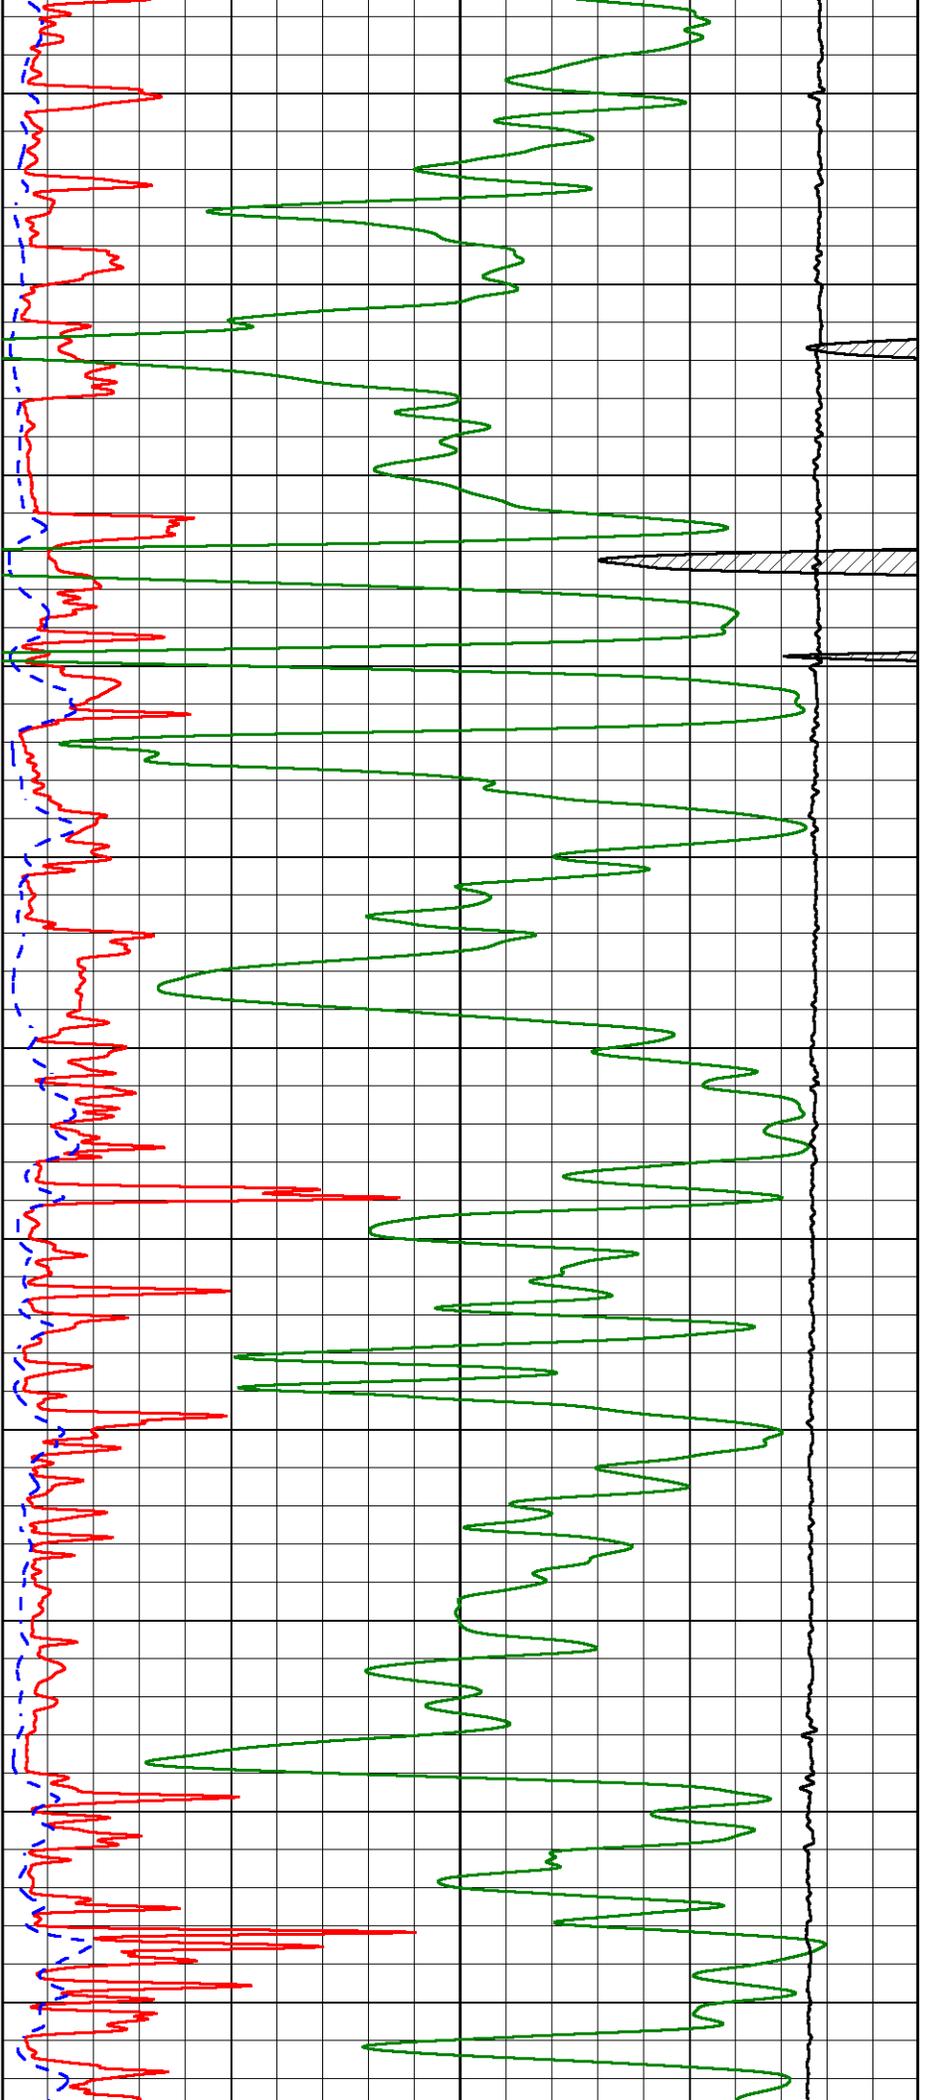


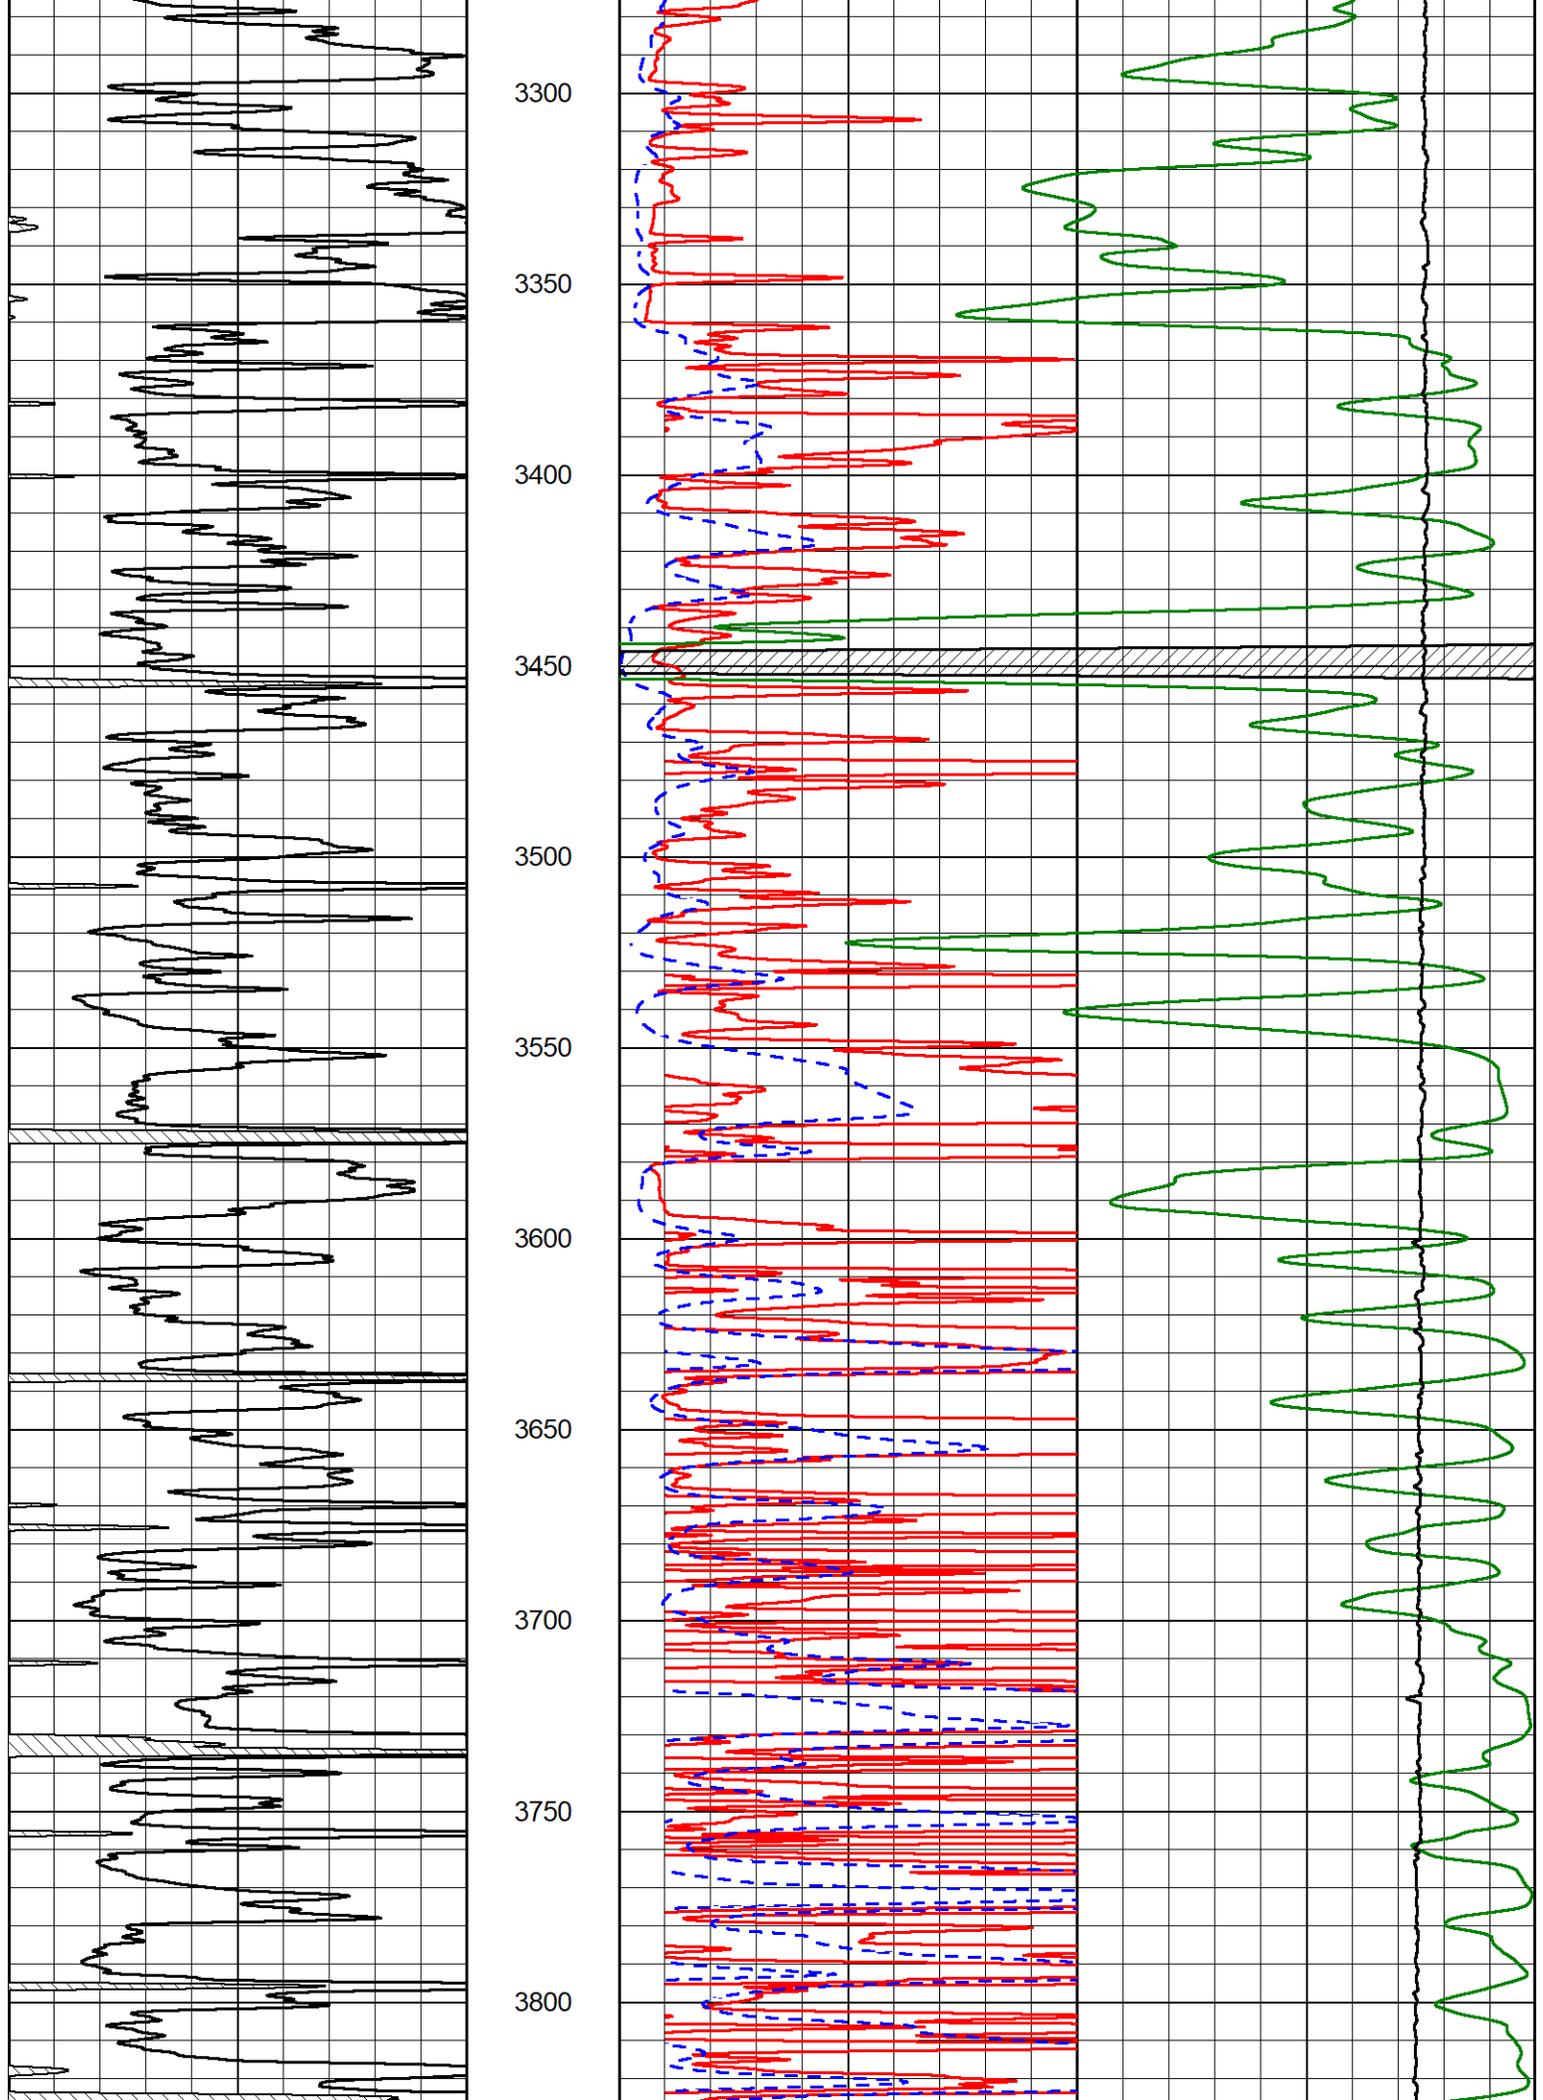


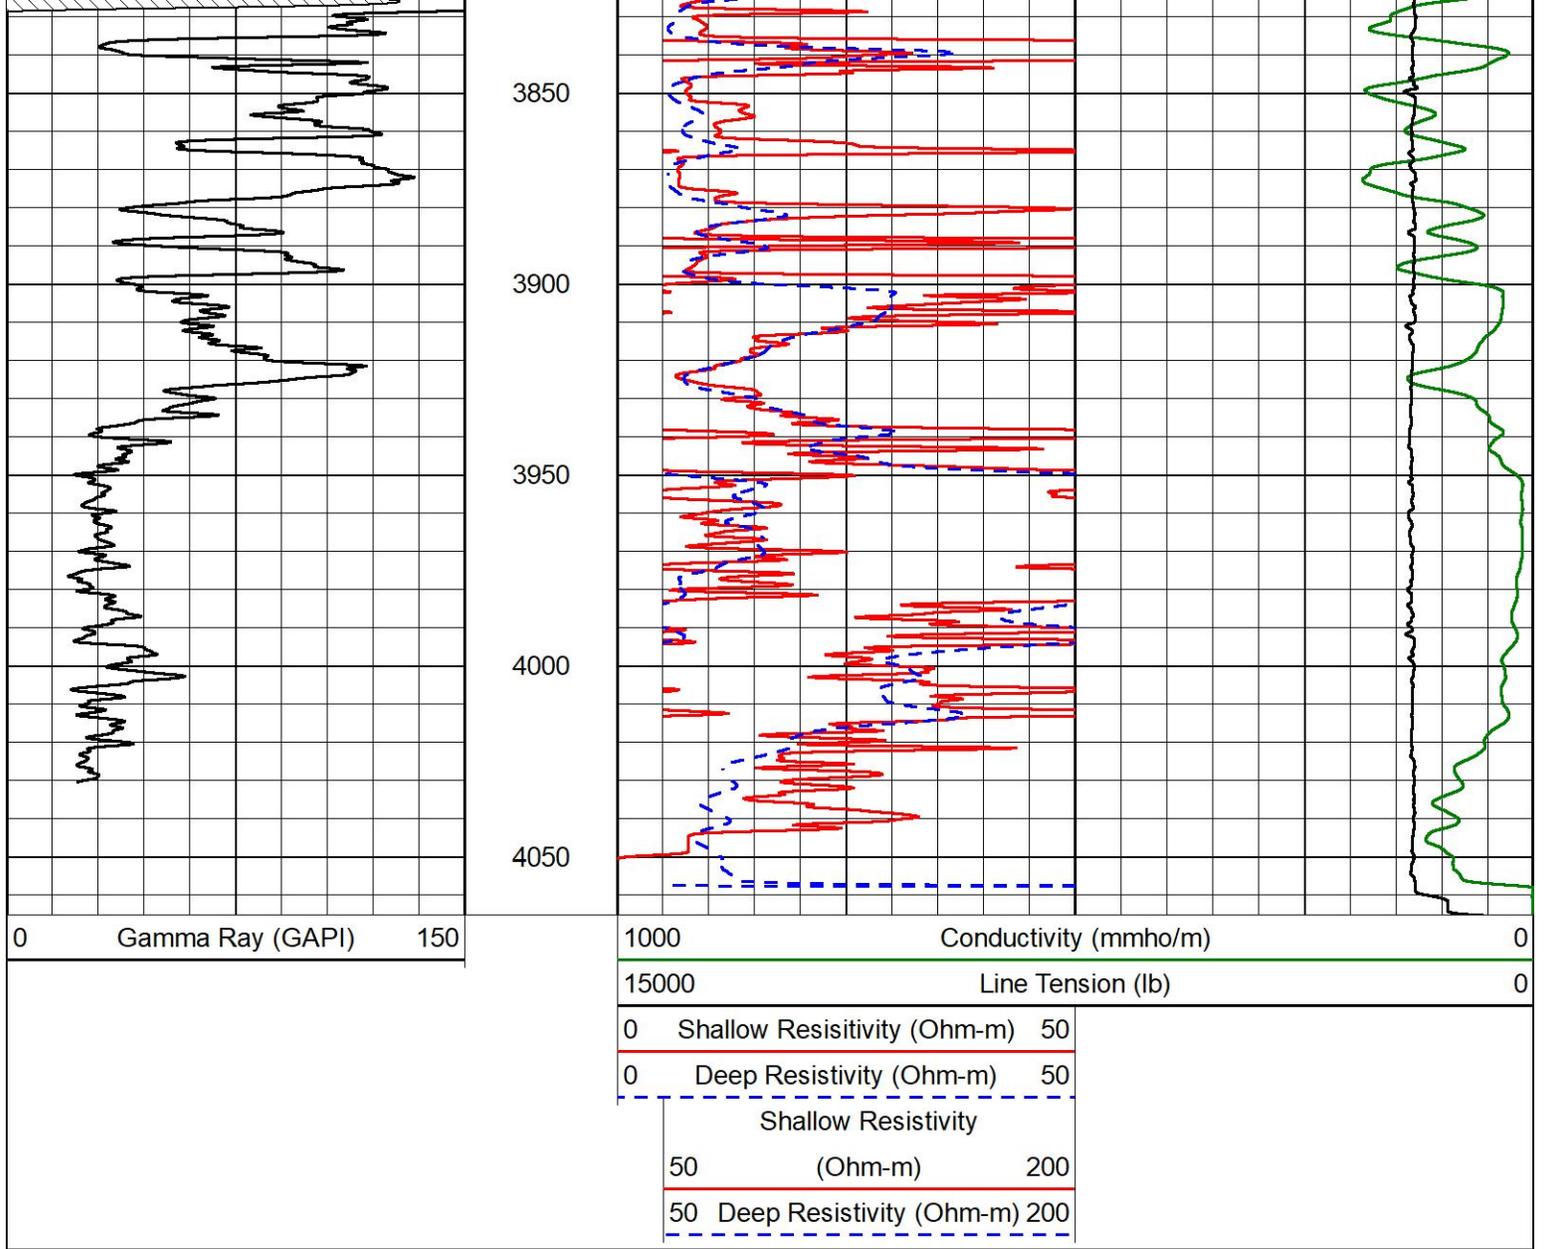


ANHYDRITE SECTION

MAIN PASS

Database File gore_arleta #1-27.db
 Dataset Pathname Stack/pass3.4
 Presentation Format _dil
 Dataset Creation Fri Nov 19 04:01:03 2021
 Charted by Depth in Feet scaled 1:240

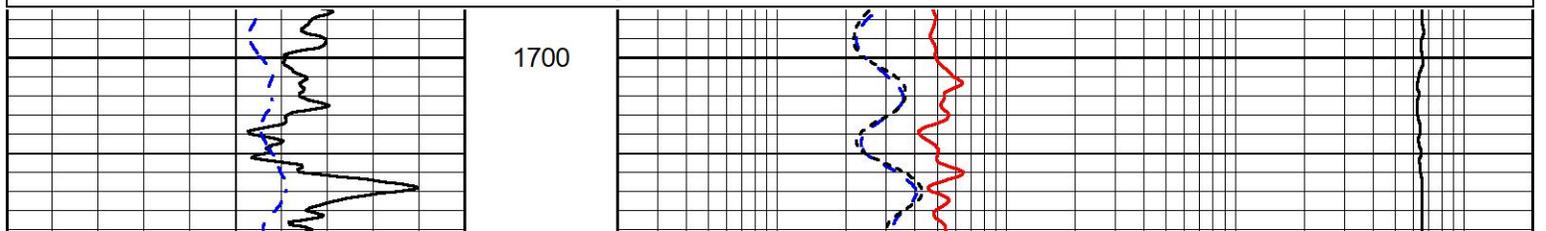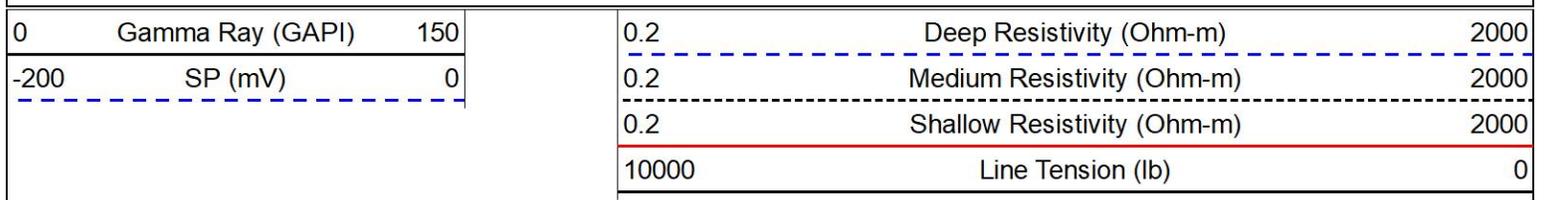


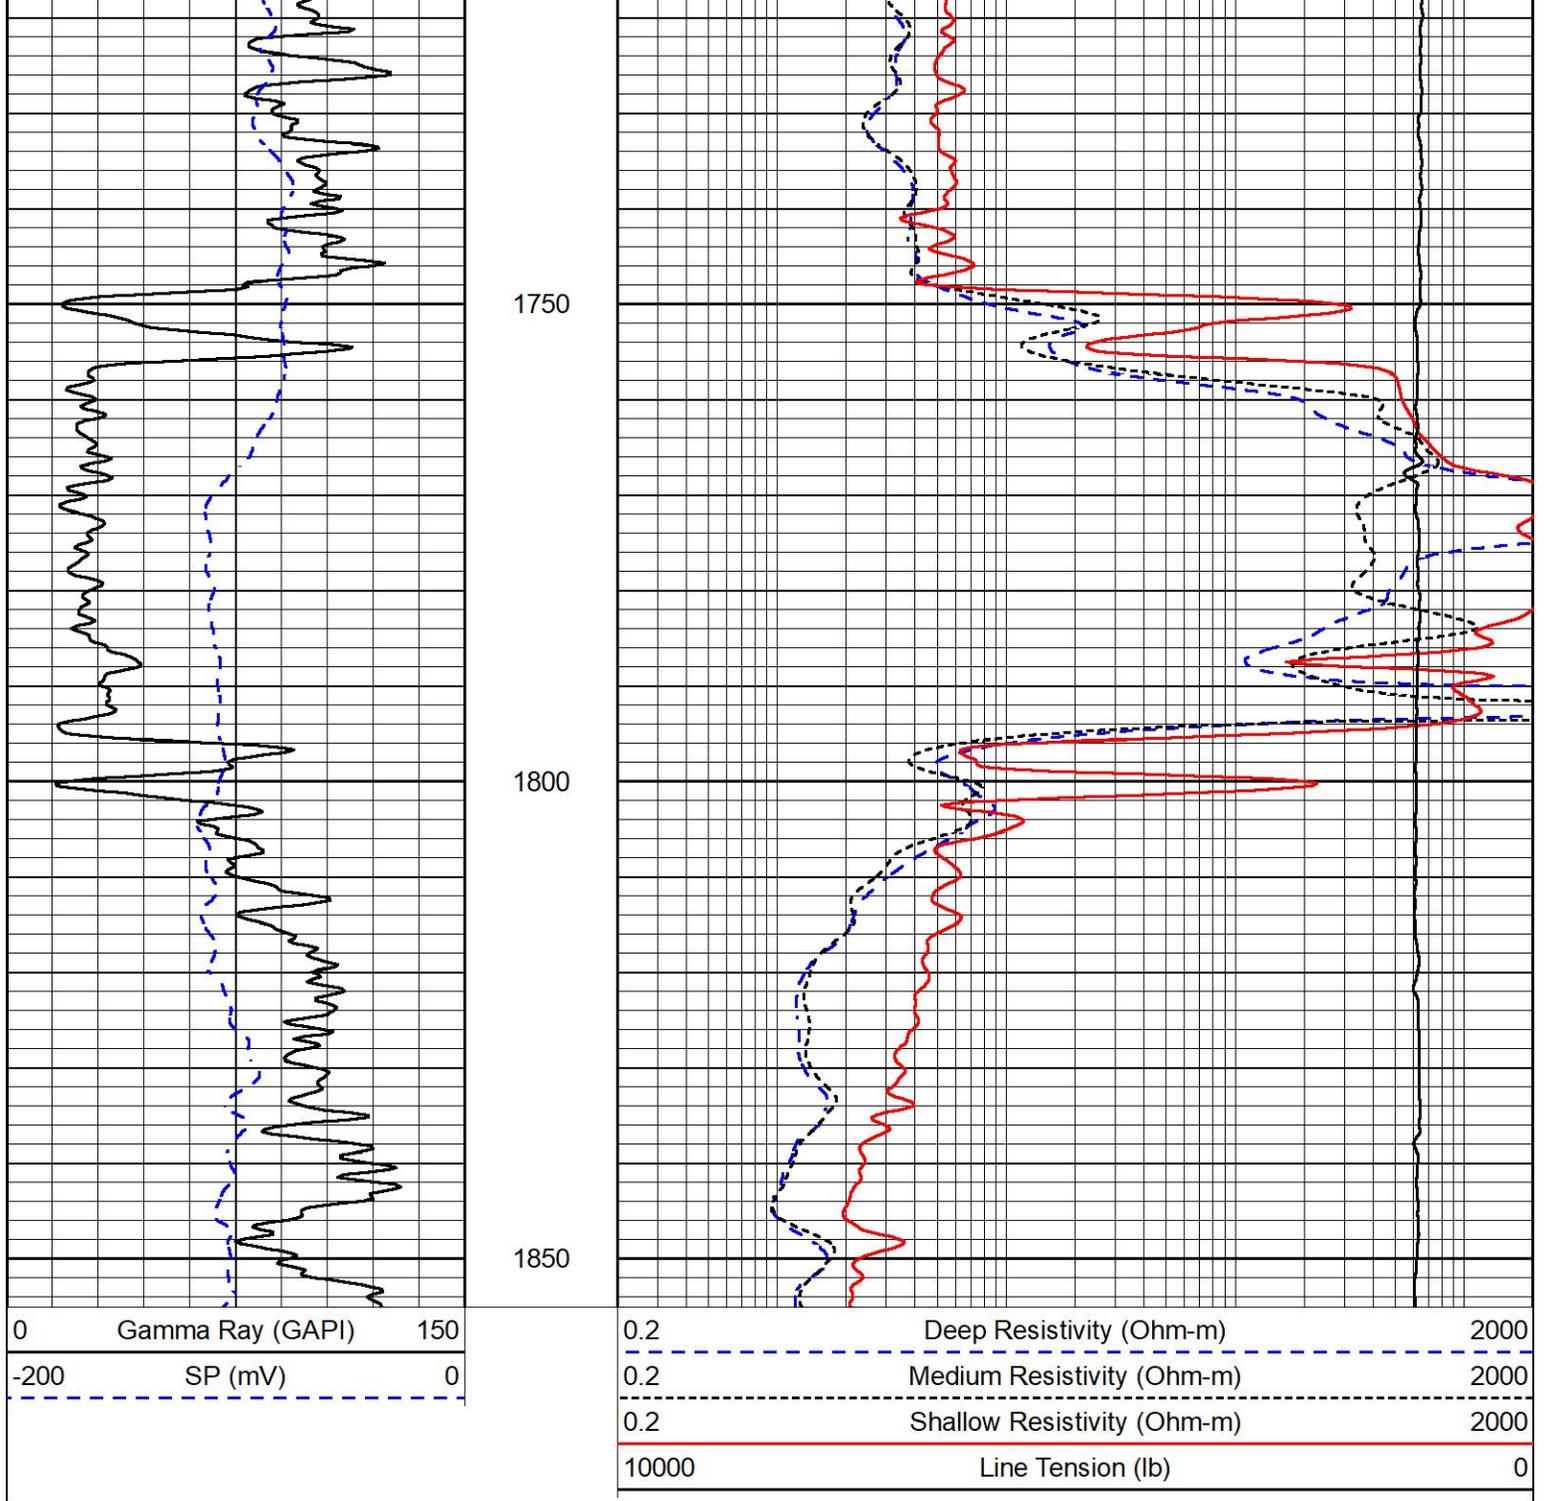


DETAIL SECTION

MAIN PASS

Database File gore_arleta #1-27.db
 Dataset Pathname Stack/pass3.1
 Presentation Format _dil
 Dataset Creation Fri Nov 19 04:21:19 2021
 Charted by Depth in Feet scaled 1:240

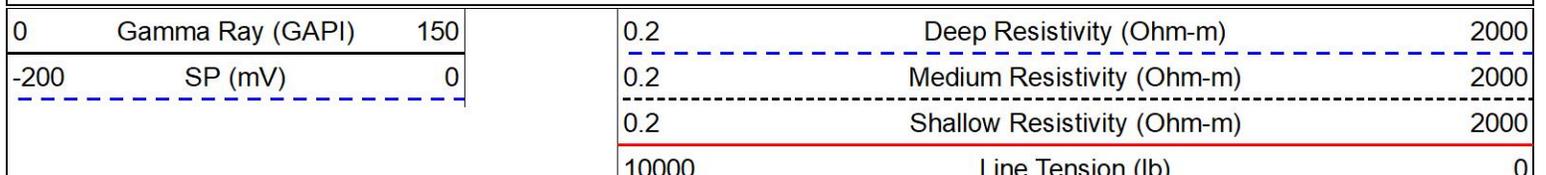

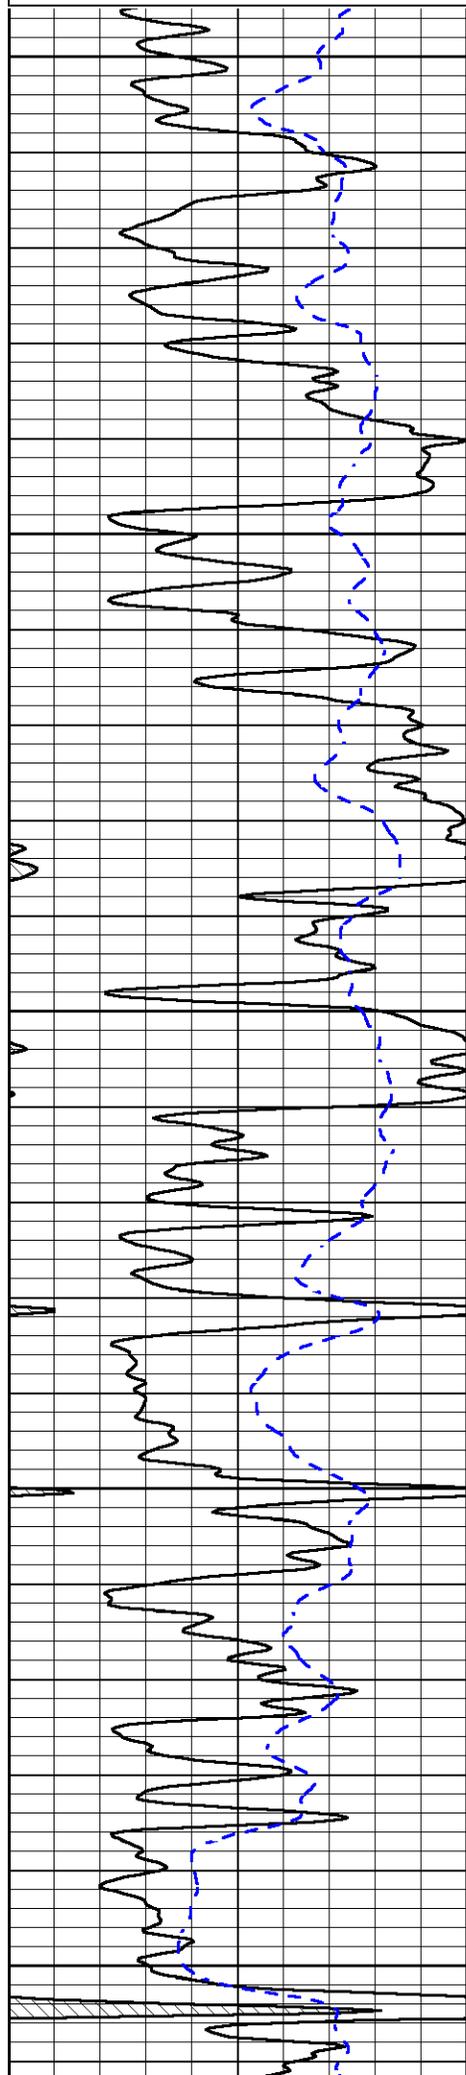


3250

3300

3350

3400

3450

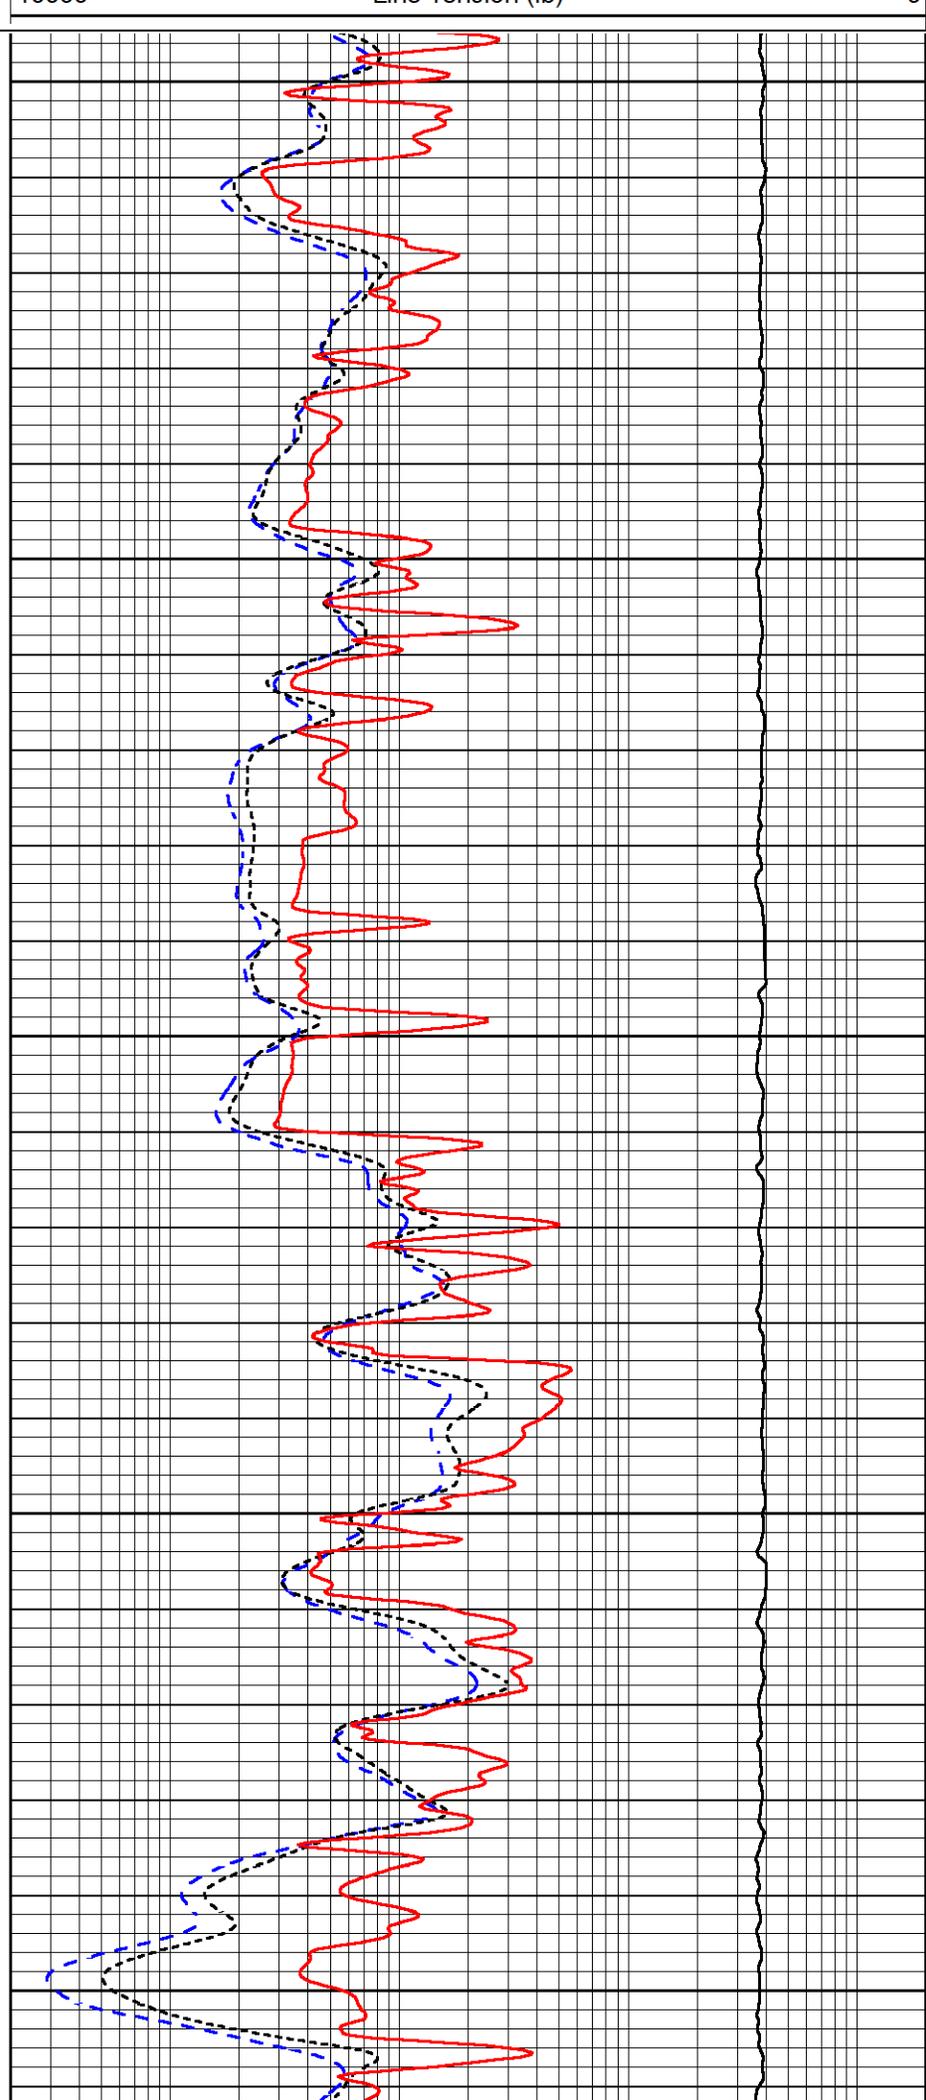

LINE FUNCTION (k)


3250

3300

3350

3400

3450

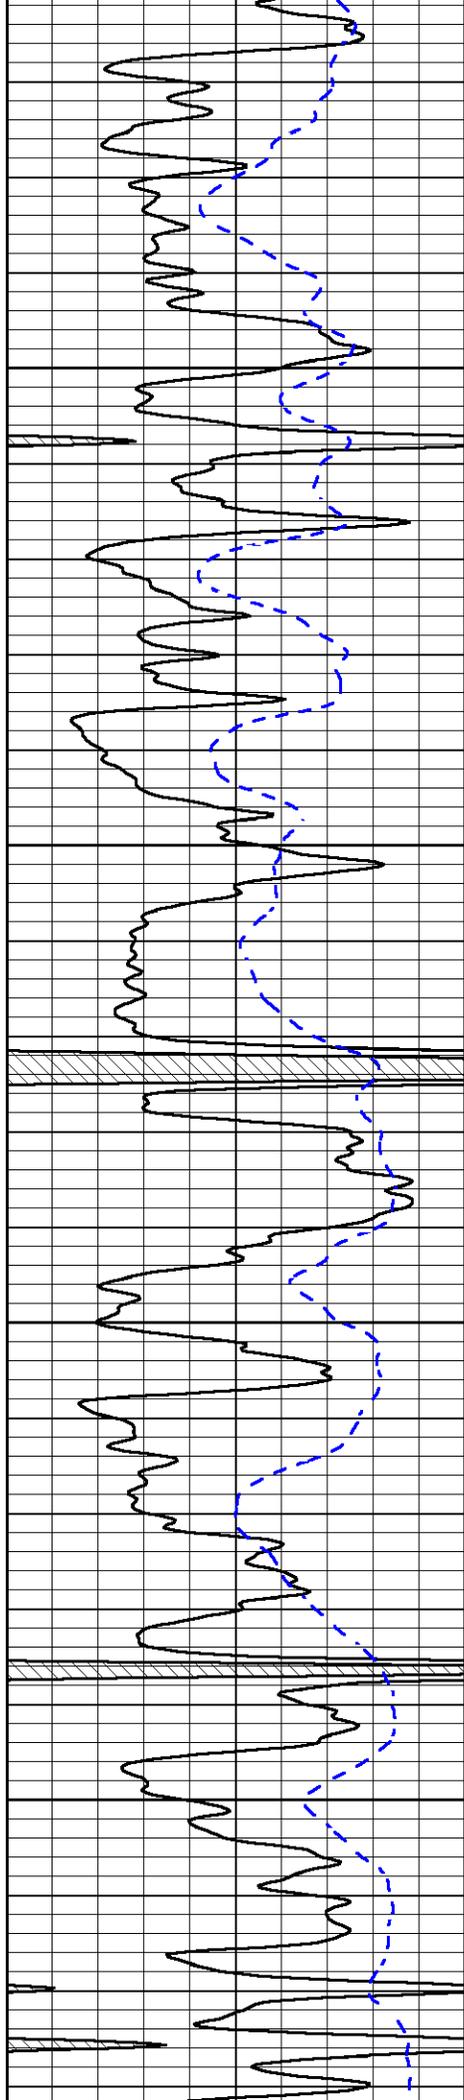



3500

3550

3600

3650

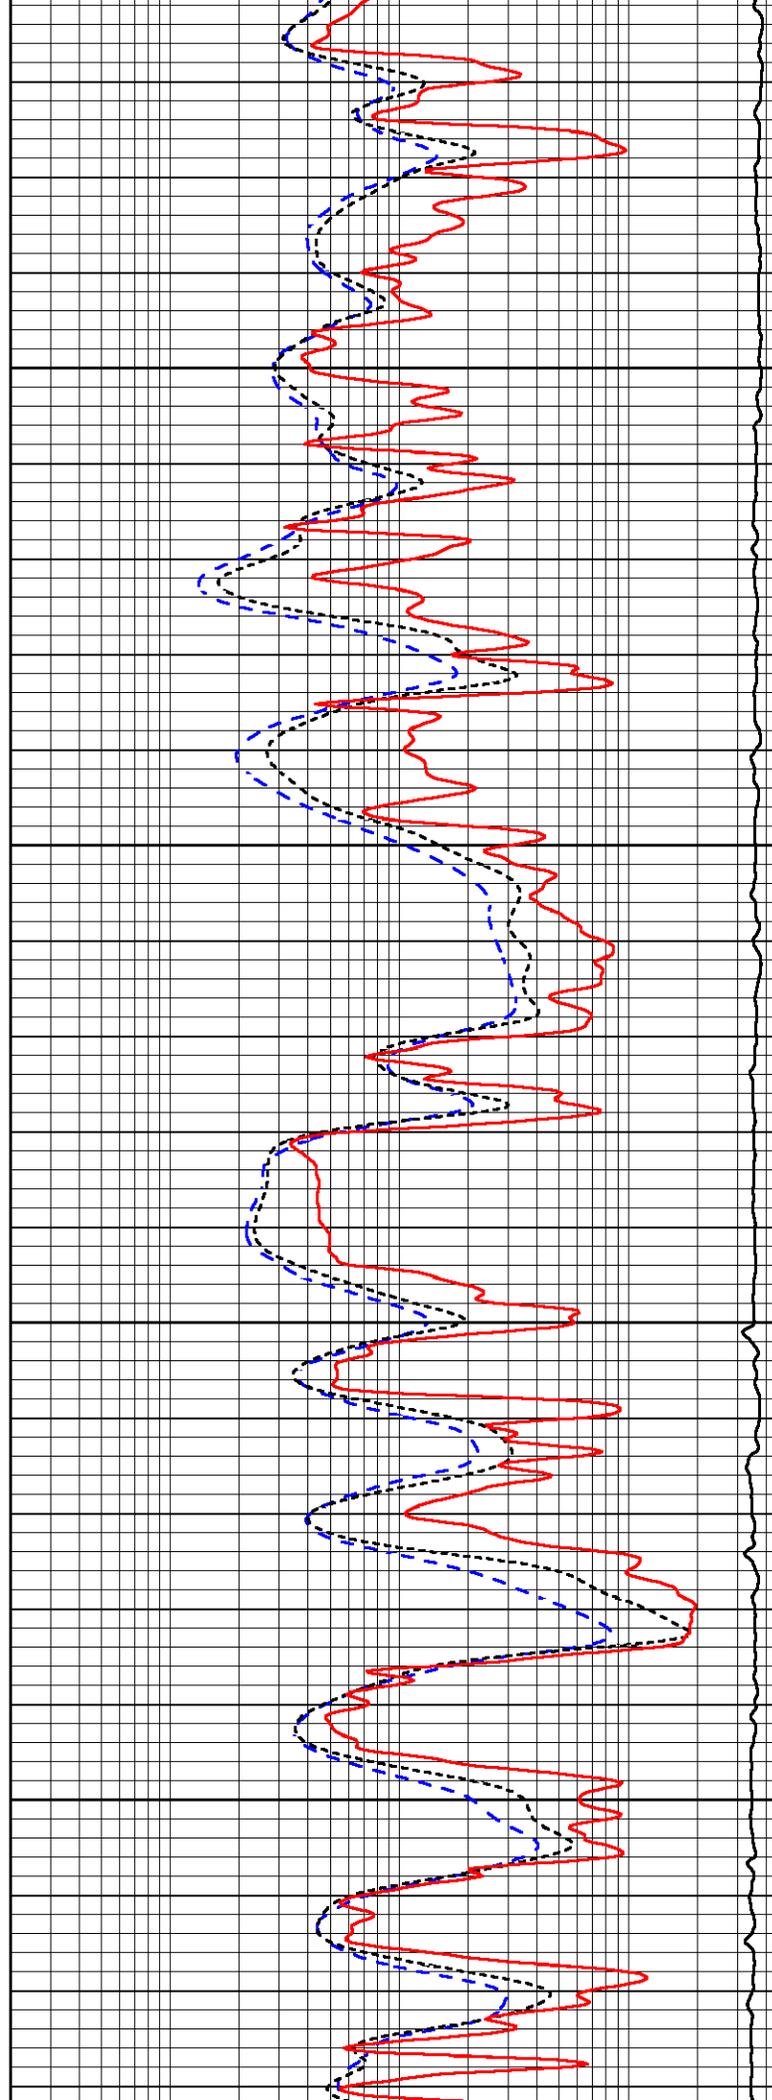

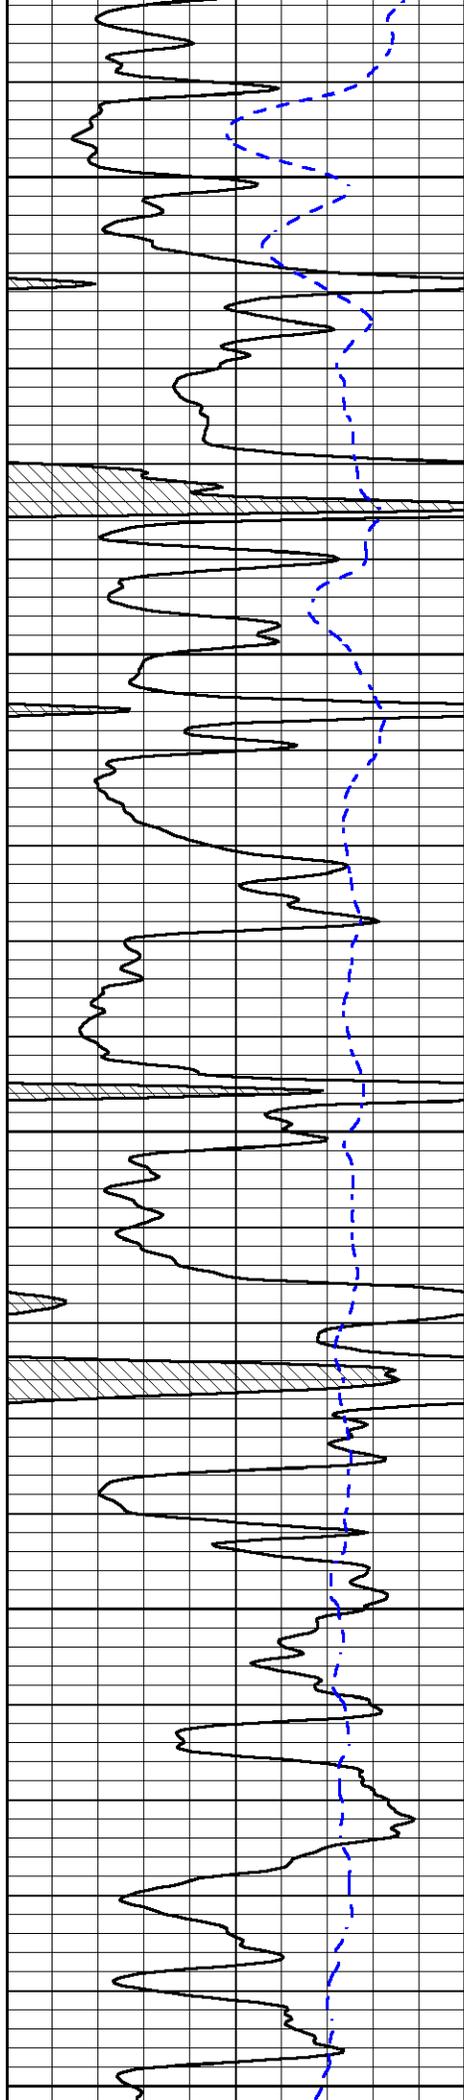


3700


3750

3800

3850

3900

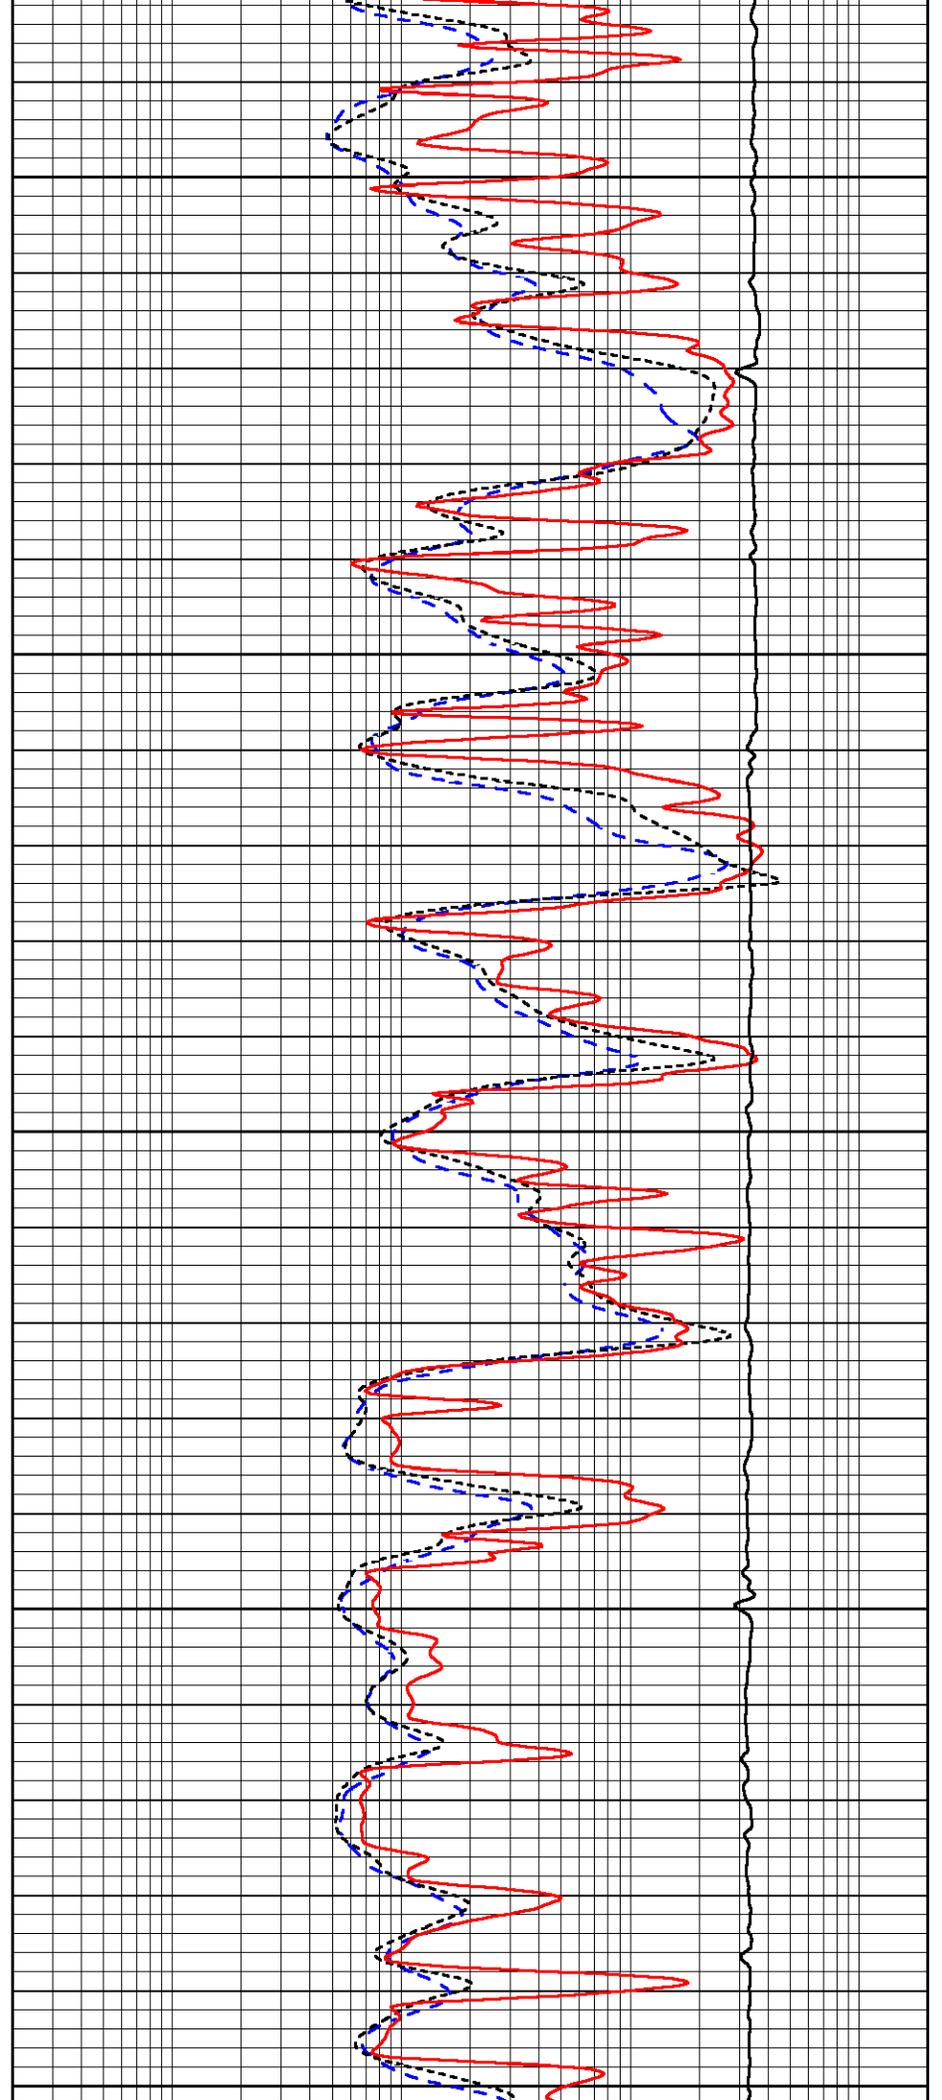

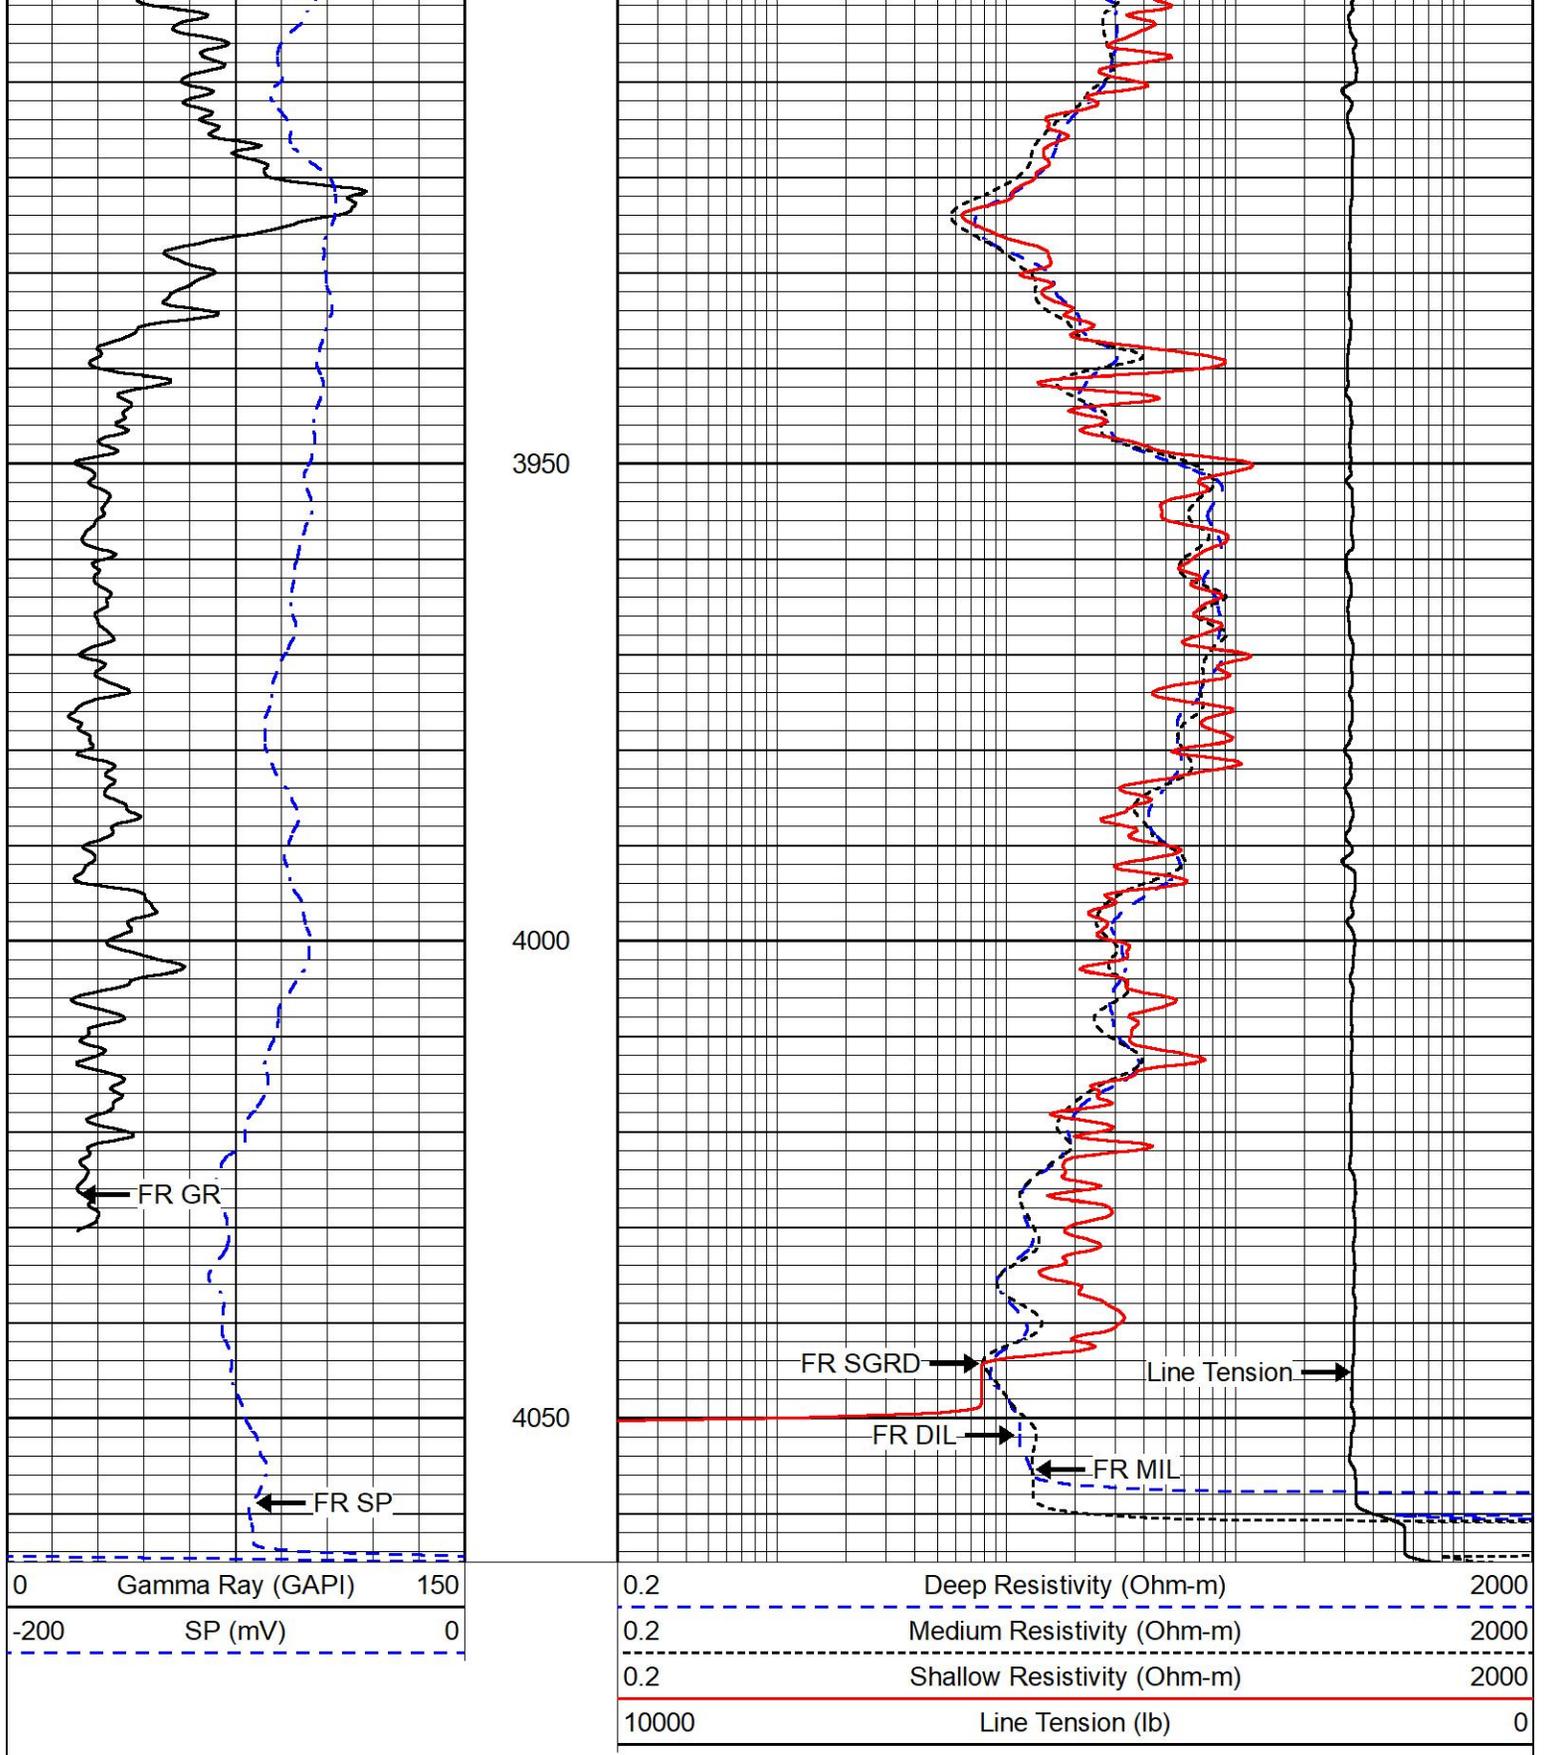


REPEAT SECTION


REPEAT PASS

Database File gore_arleta #1-27.db
 Dataset Pathname Stack/pass2.1
 Presentation Format dil

0	Gamma Ray (GAPI)	150
-200	SP (mV)	0

0.2	Deep Resistivity (Ohm-m)	2000
0.2	Medium Resistivity (Ohm-m)	2000
0.2	Shallow Resistivity (Ohm-m)	2000
10000	Line Tension (lb)	0

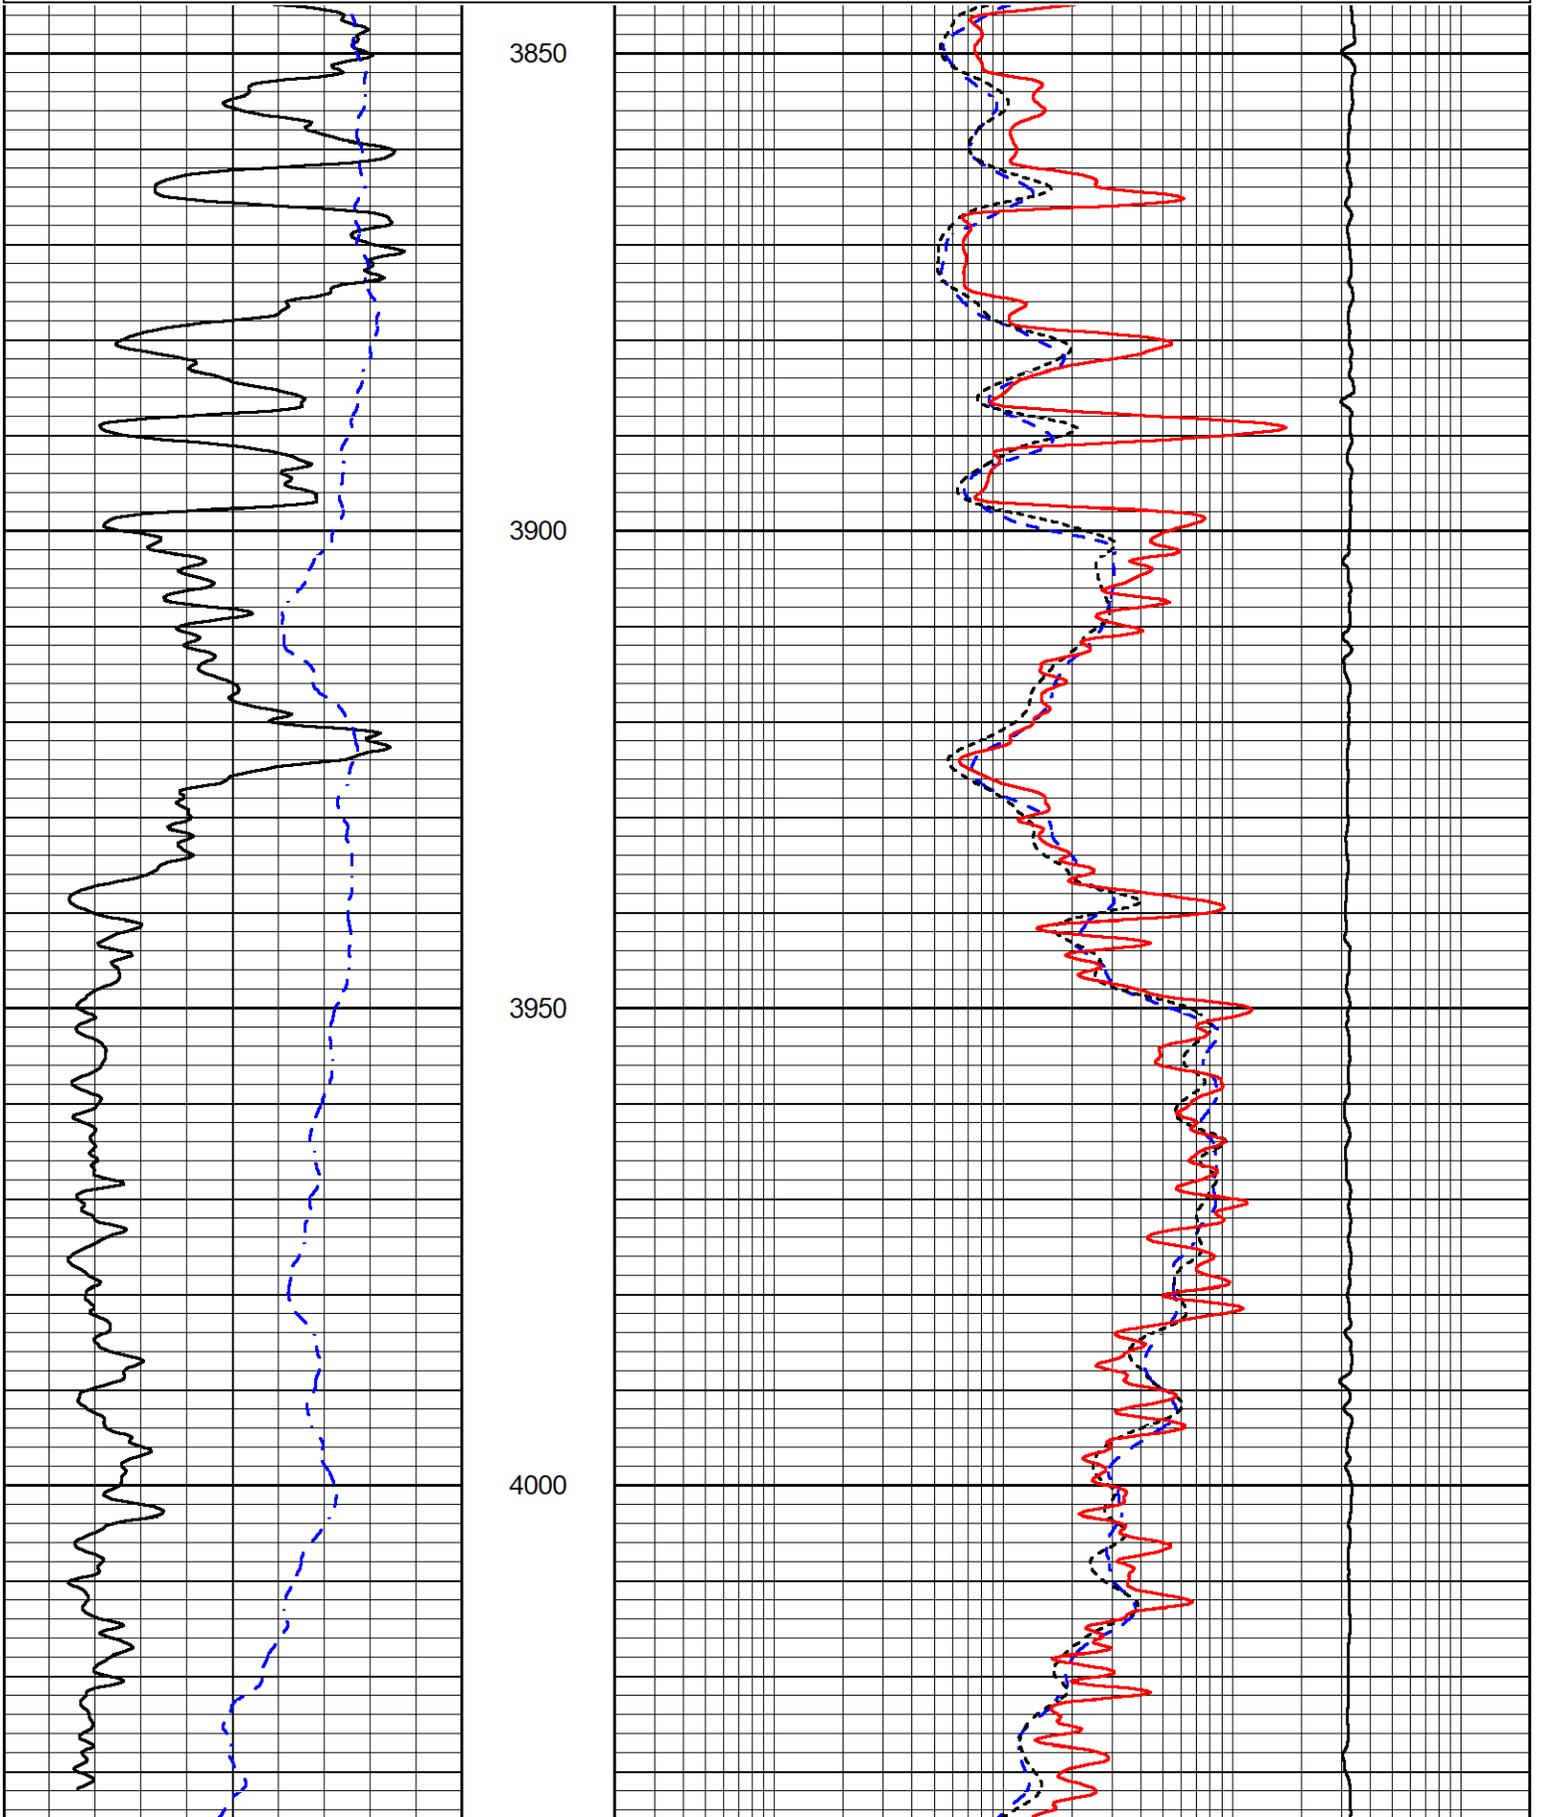

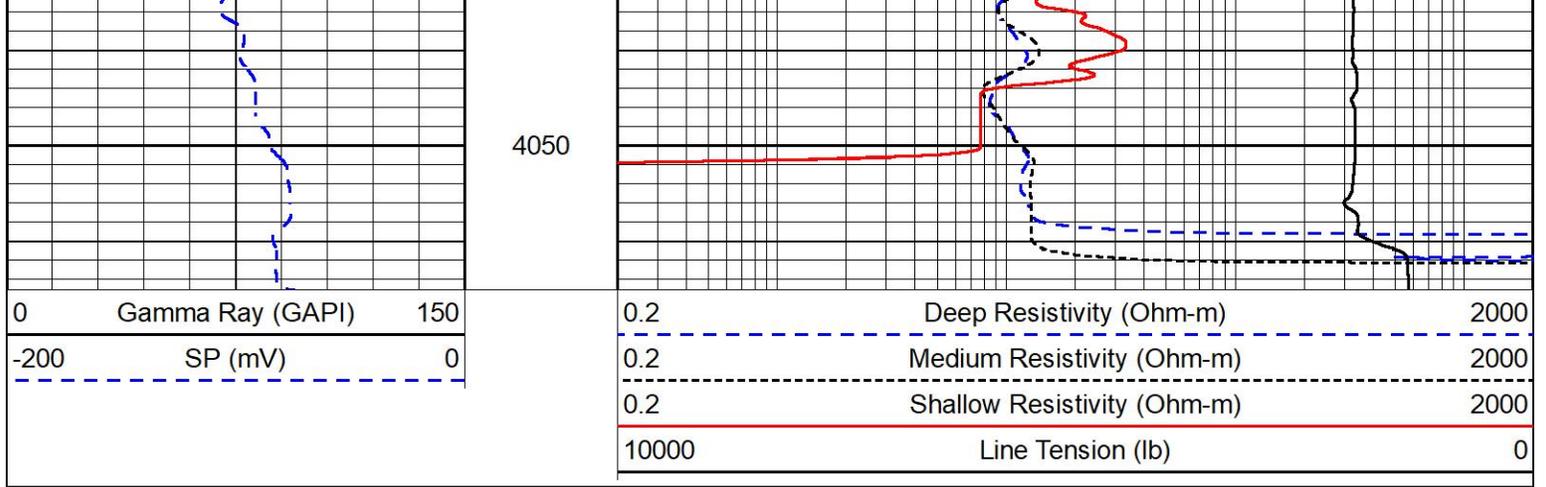

Company	Gore Oil Company
Well	Arleta #1-27
Field	
County	Trego
State	Kansas