

DUAL INDUCTION LOG

Company	PALOMINO PETROLEUM		
Well	SKYFALL #2		
Field	ALDRICH NORTHEAST		
County	NESS		
State	KANSAS		
Location:	API # : 15-135-26114-0000 2102' FSL & 1731' FEL		Other Services CDL/CNL ML
Permanent Datum	SEC 27 TWP 17S RGE 25W	GROUND LEVEL Elevation 2463	
Log Measured From	KELLY BUSHING 5' A.G.L.		Elevation K.B. 2468 D.F. 2466 G.L. 2463
Drilling Measured From	KELLY BUSHING		
Date	10/12/21		
Run Number	ONE		
Depth Driller	4527		
Depth Logger	4529		
Bottom Logged Interval	4527		
Top Log Interval	00		
Casing Driller	8 5/8" @ 214		
Casing Logger	214		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.2/46		
pH / Fluid Loss	9.0/12.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.85@ 70F		
Rmf @ Meas. Temp	.64@ 70F		
Rmc @ Meas. Temp	1.02 @ 70F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.49@ 121F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	121F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	RYAN SEIB		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS:NESS CITY WEST TO H RD., NORTH 6 MILES, 1 EAST,
SOUTH INTO.








MAIN PASS



Database File	5885ddn.db
Dataset Pathname	pass4.1
Presentation Format	_dil2
Dataset Creation	Tue Oct 12 20:49:13 2021
Charted by	Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
-----			0	RILD (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

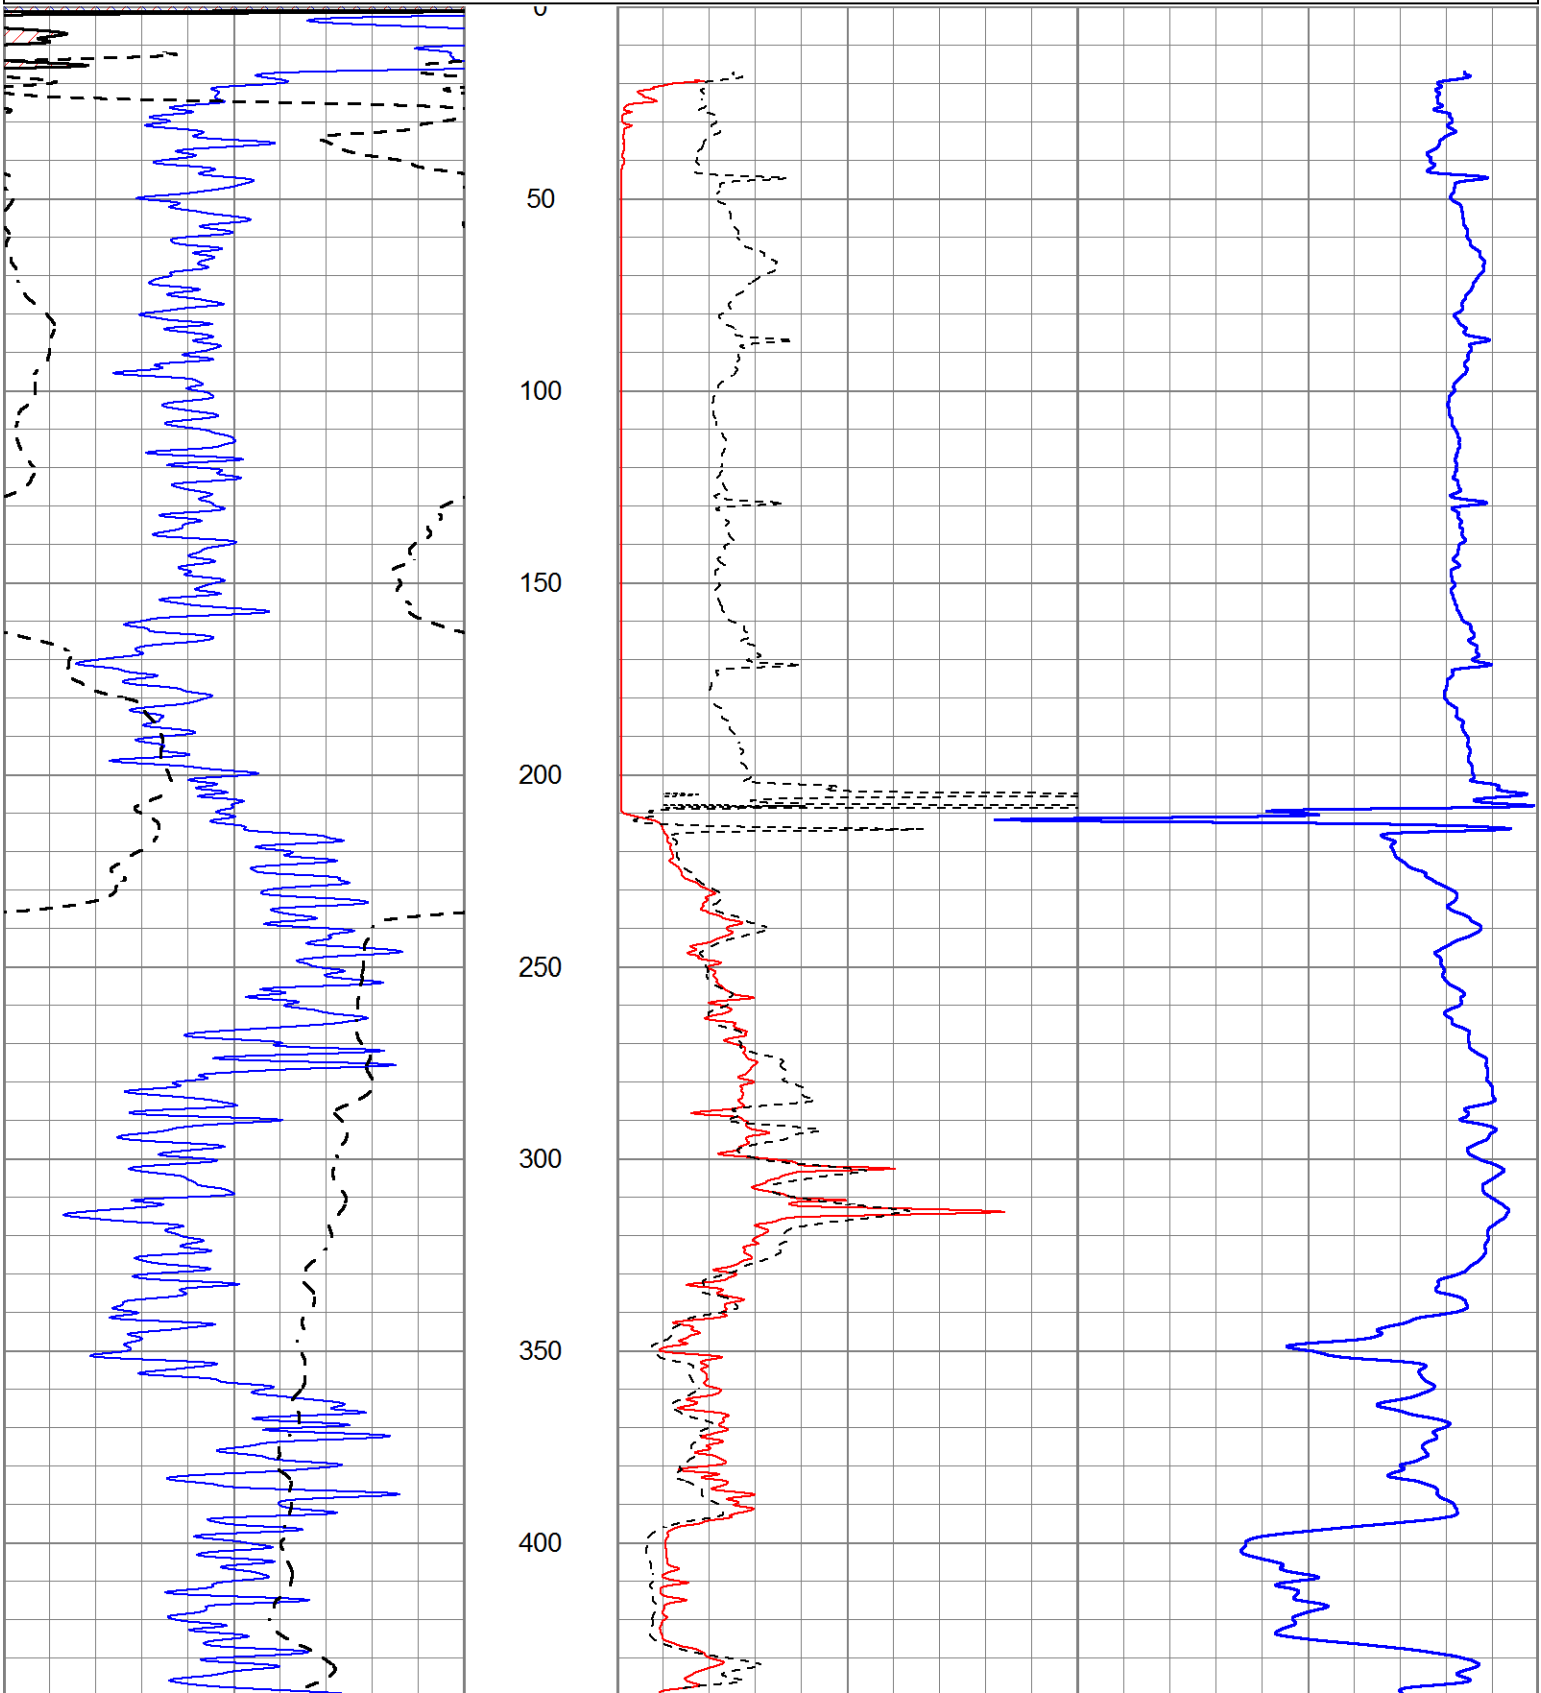

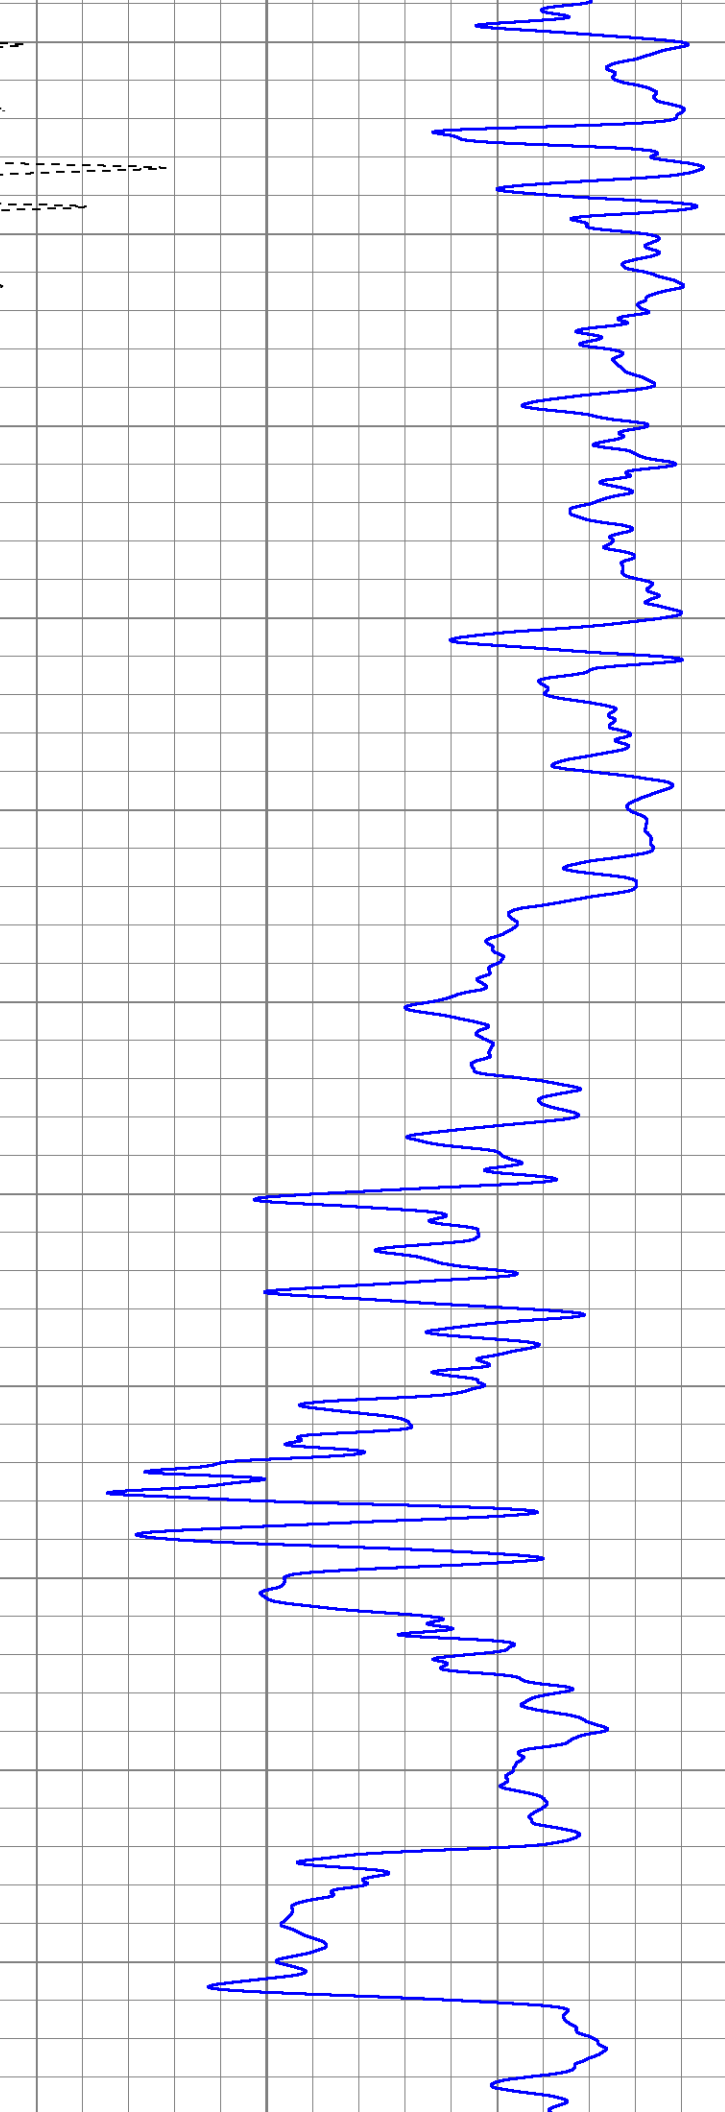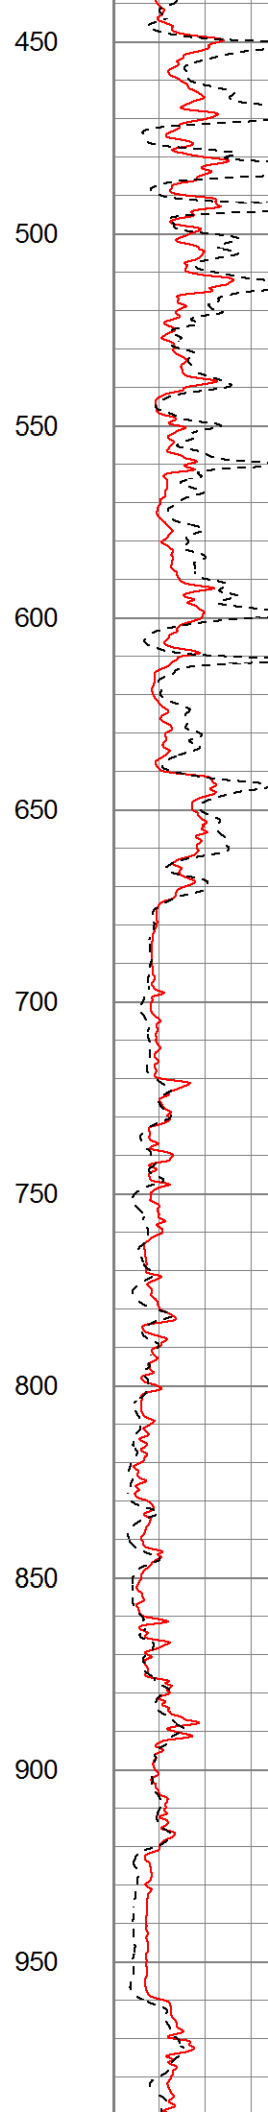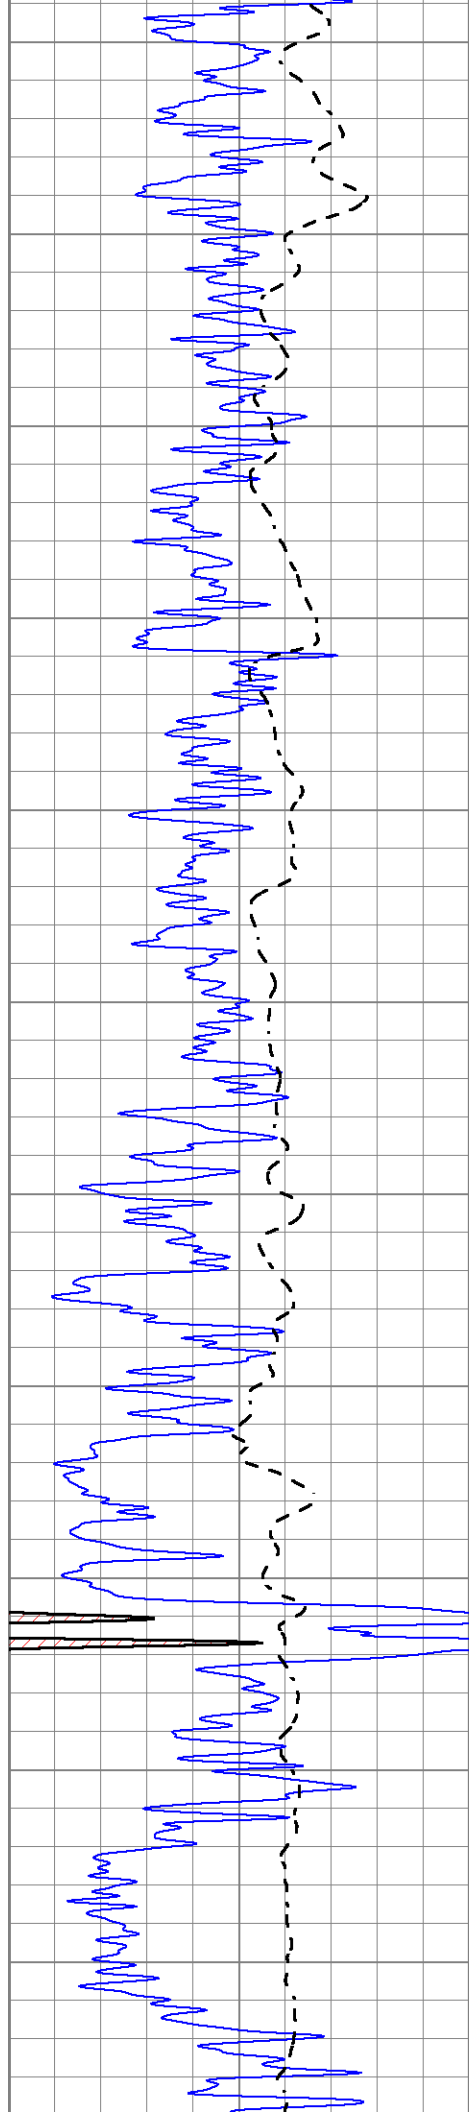

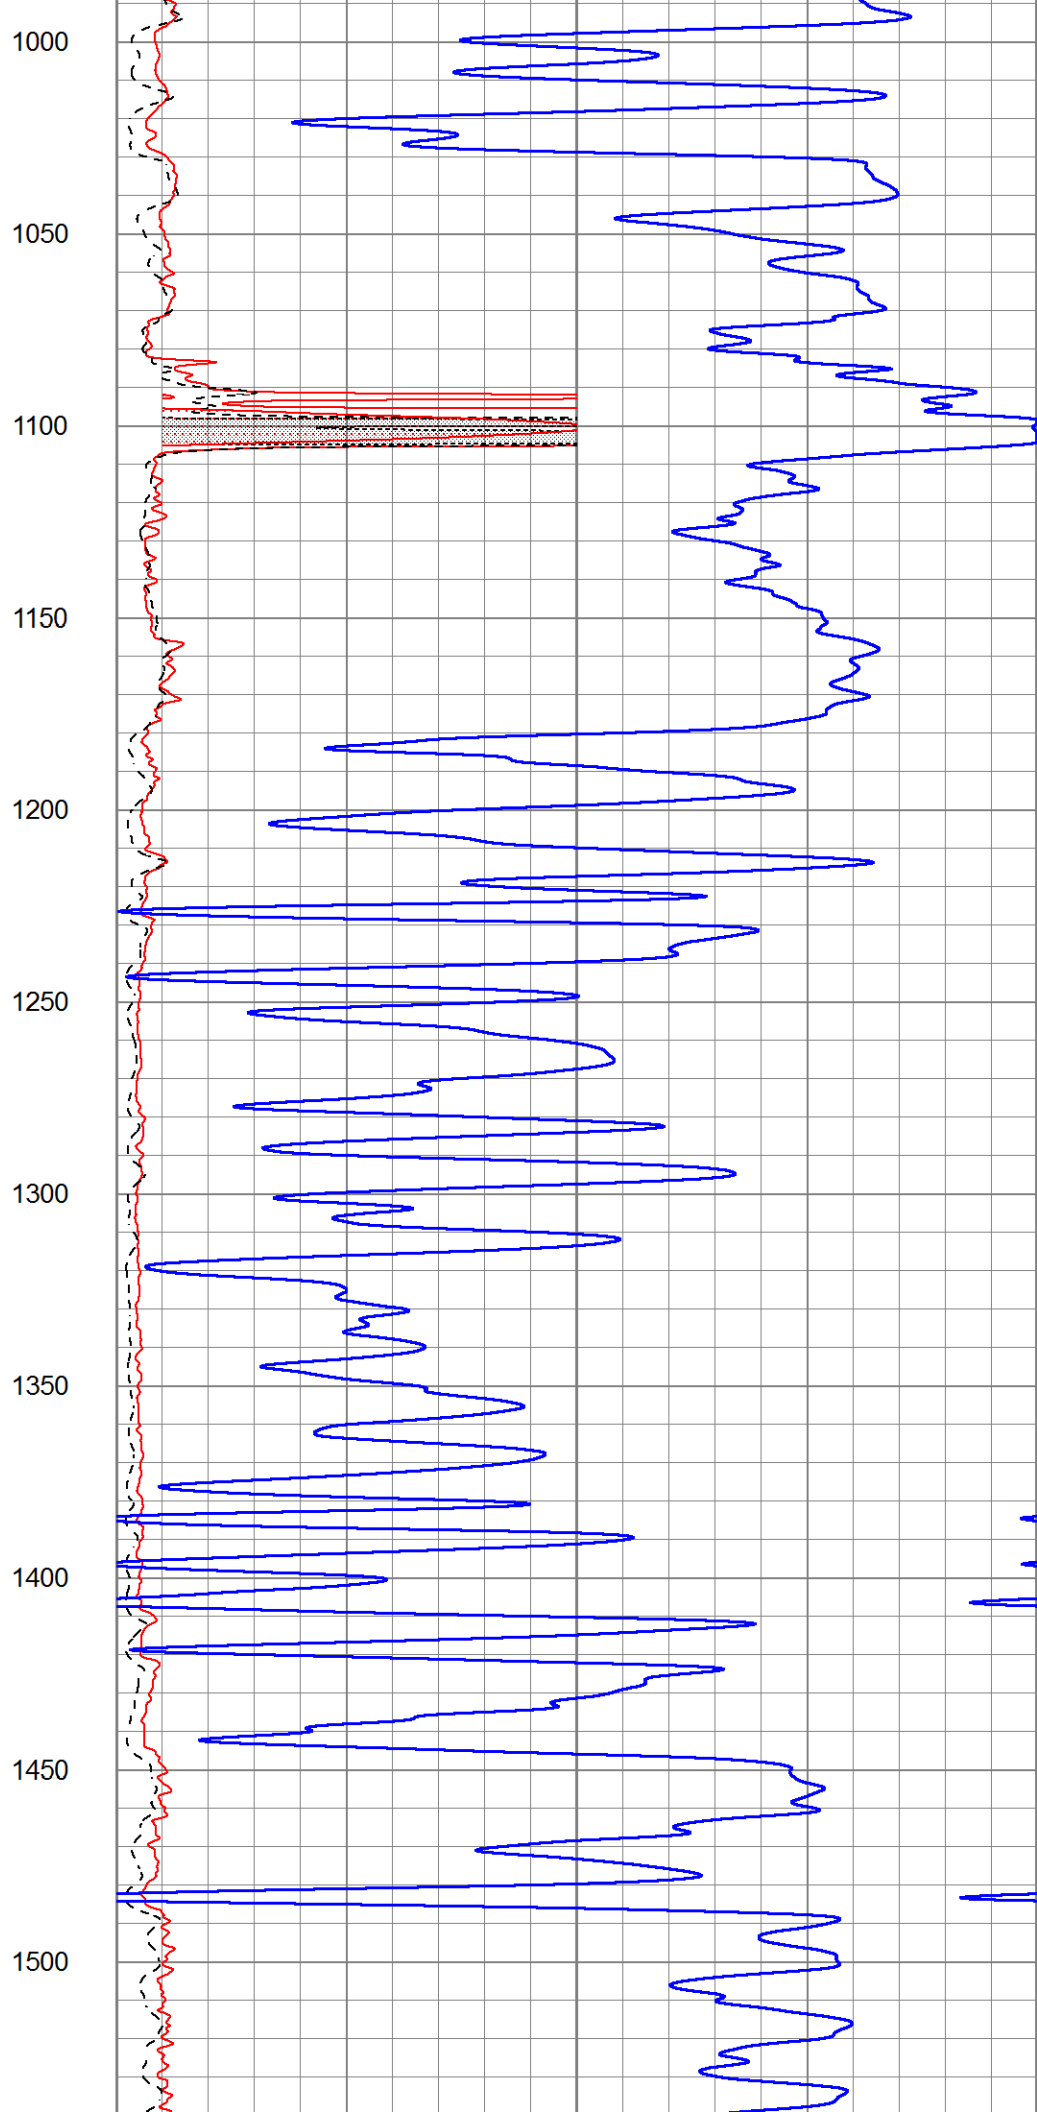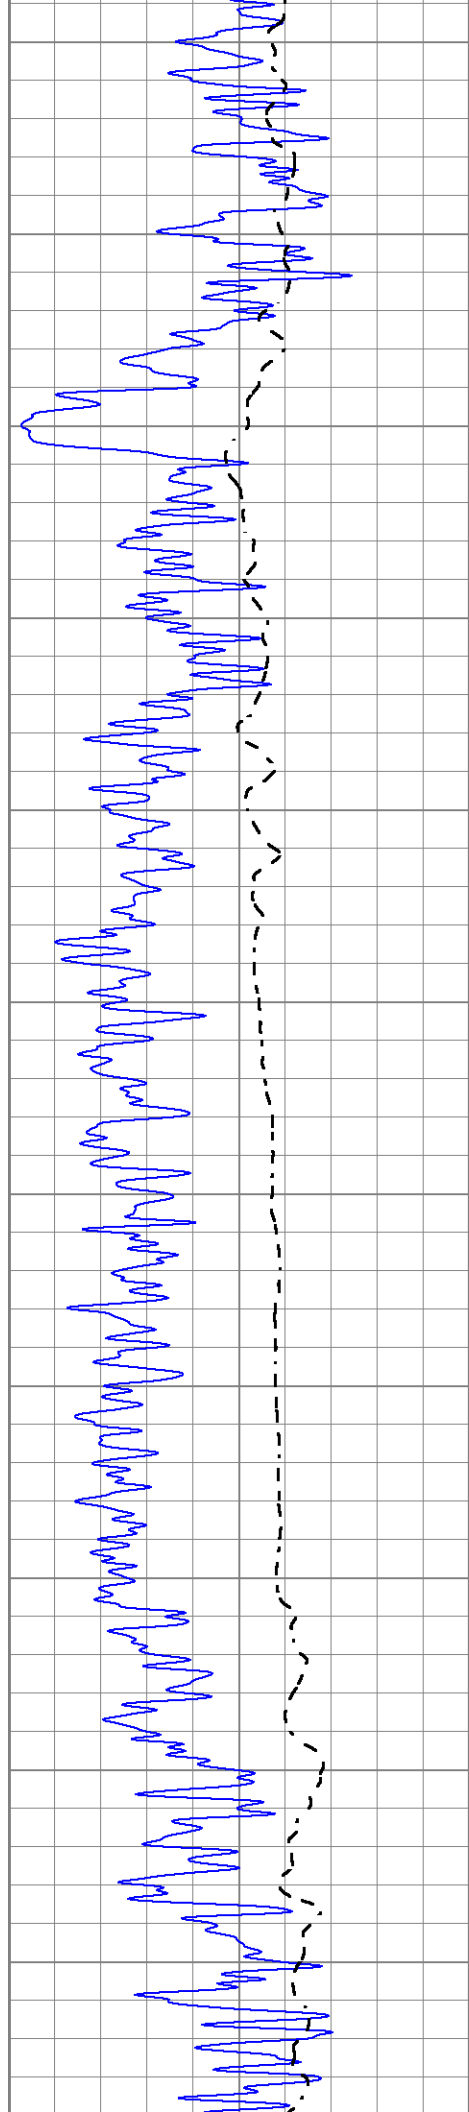

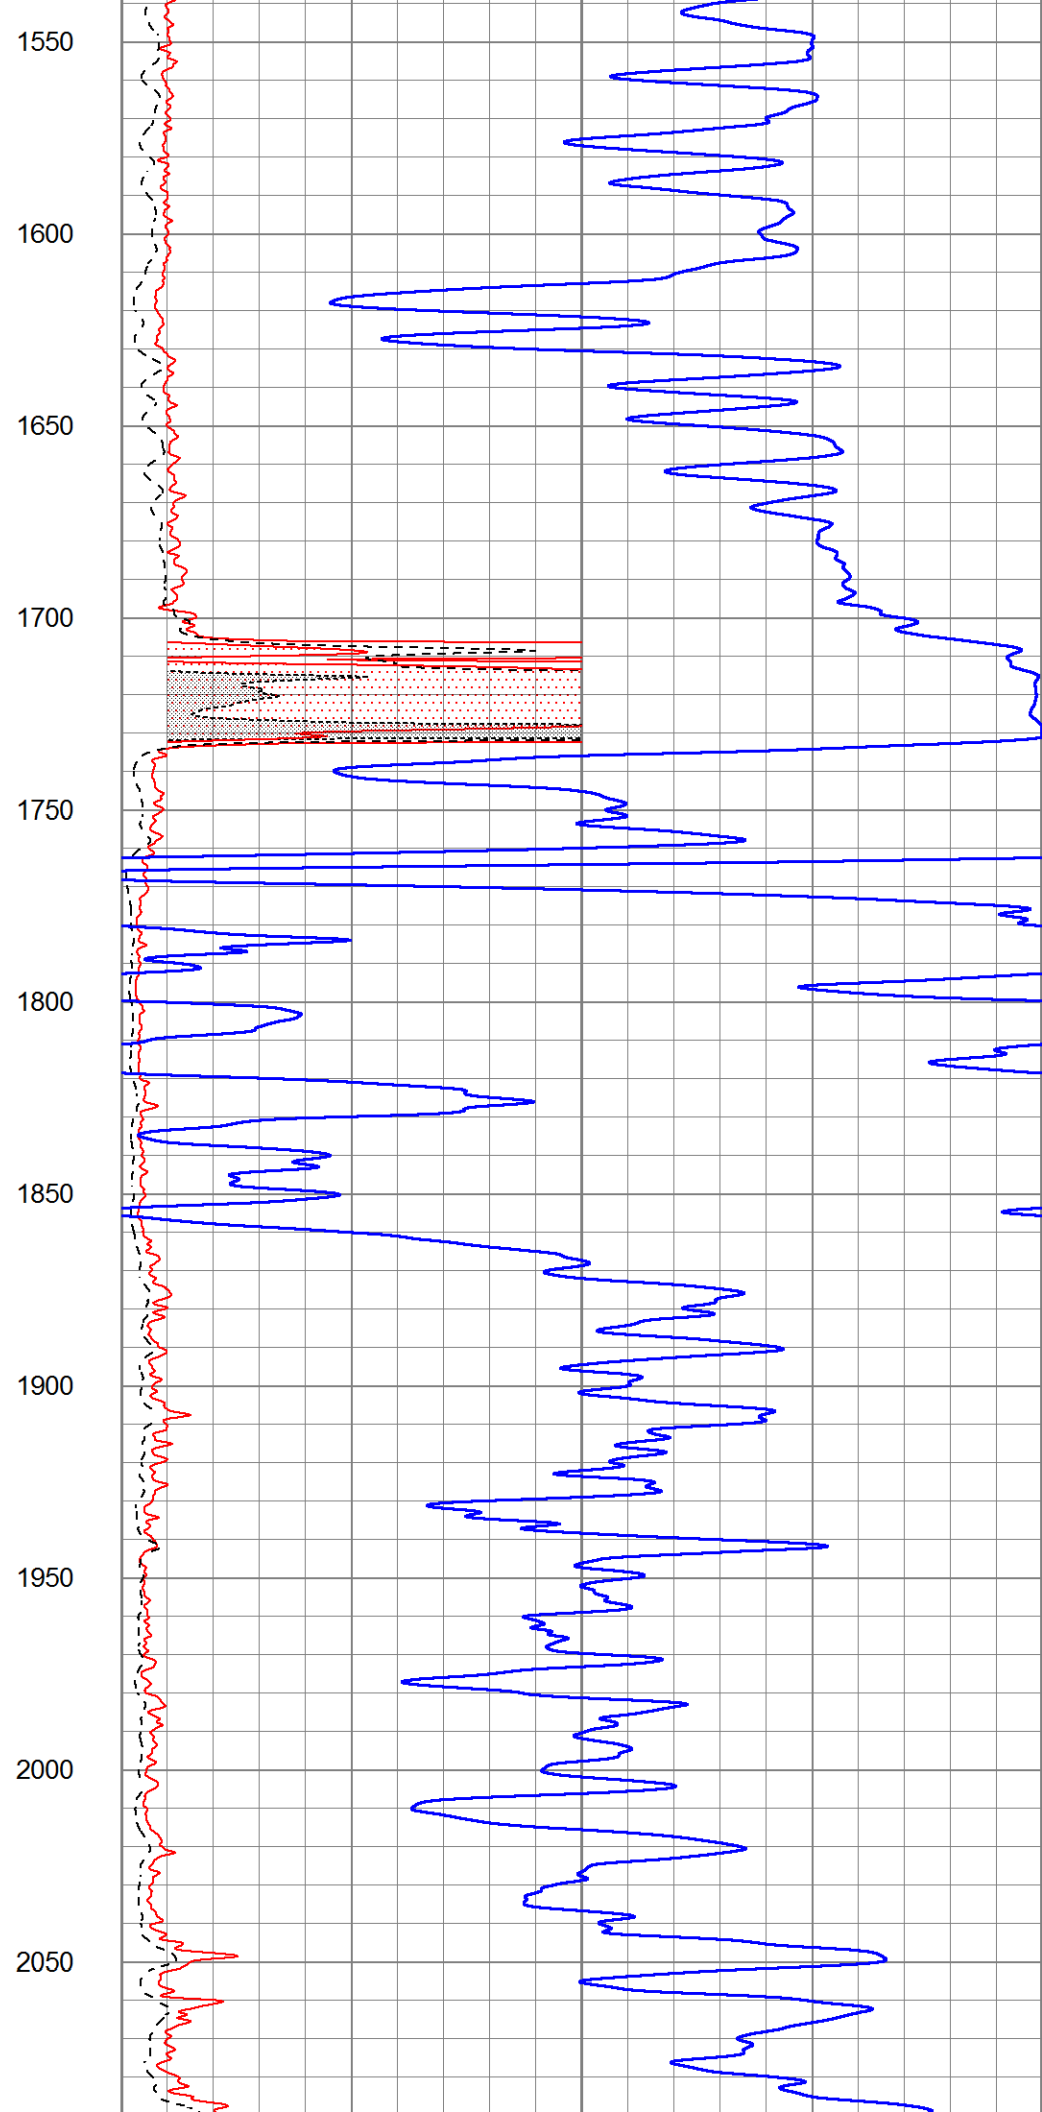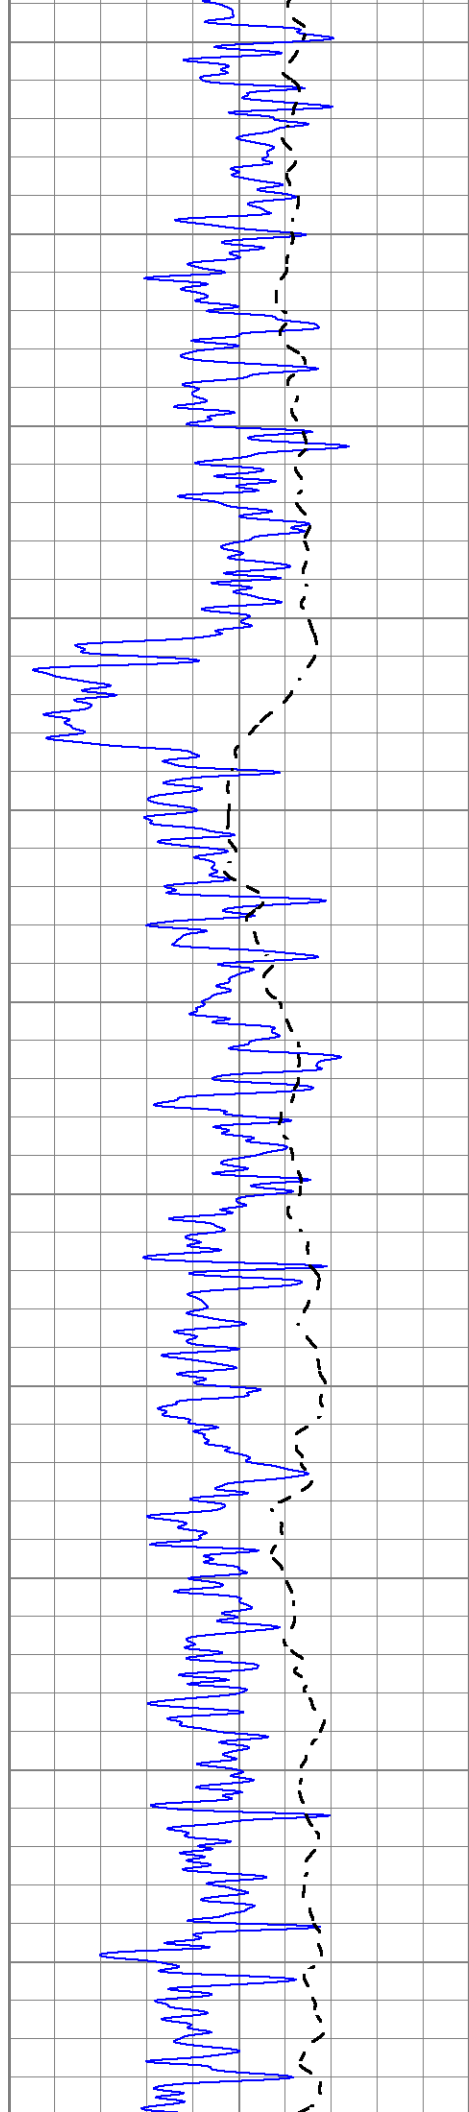

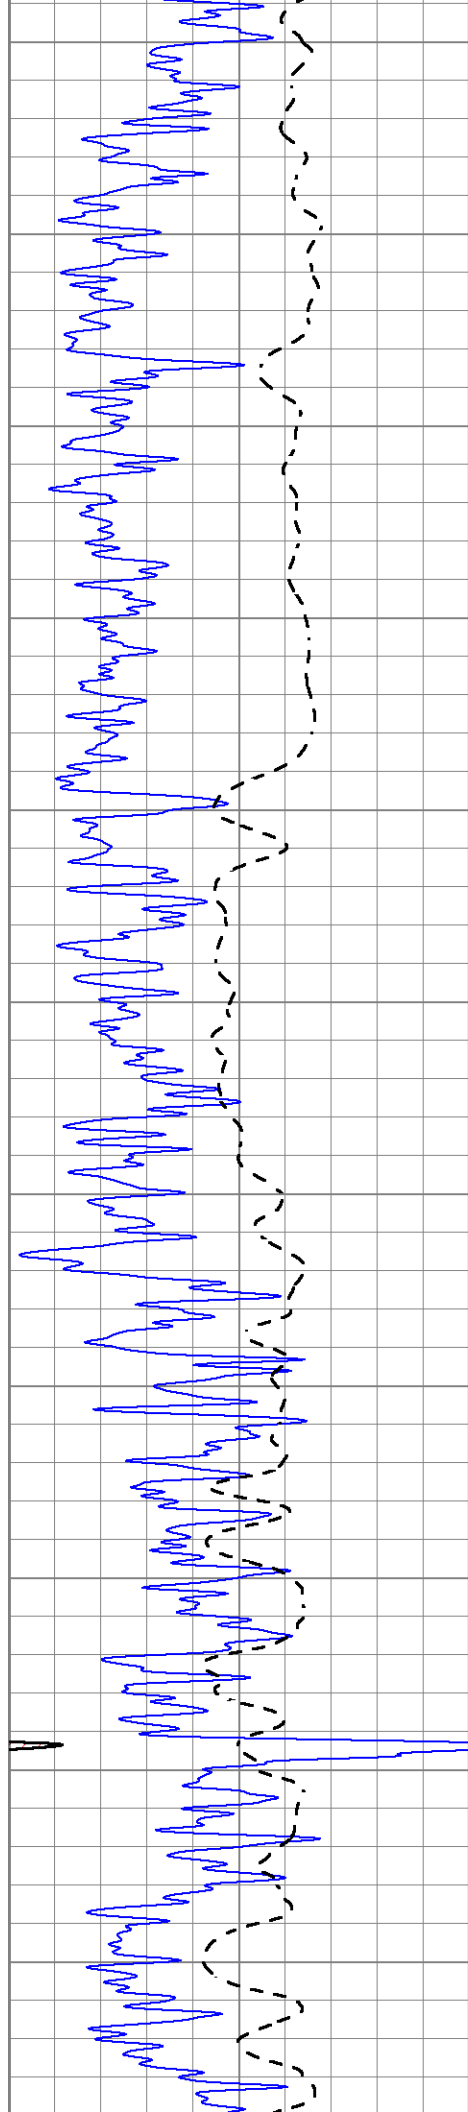

2100

2150

2200

2250

2300

2350



2400



2450



2500


2550

2600

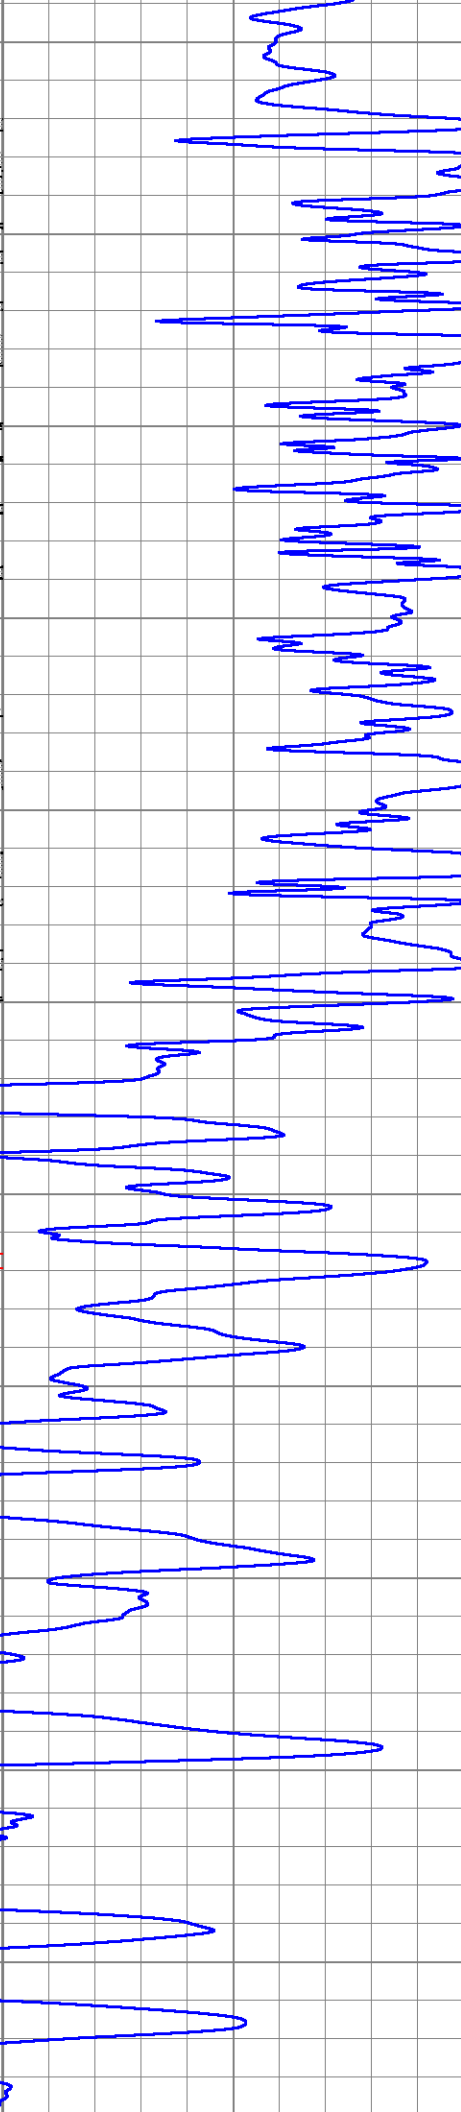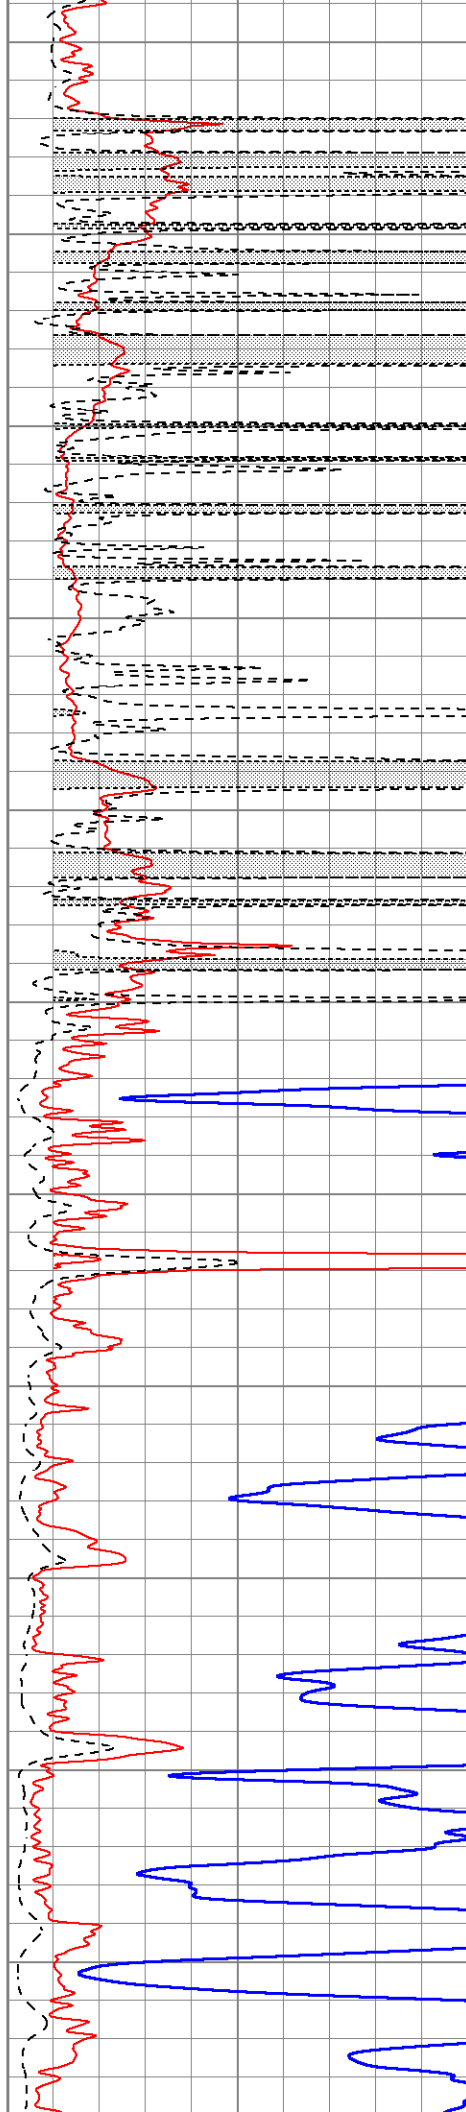

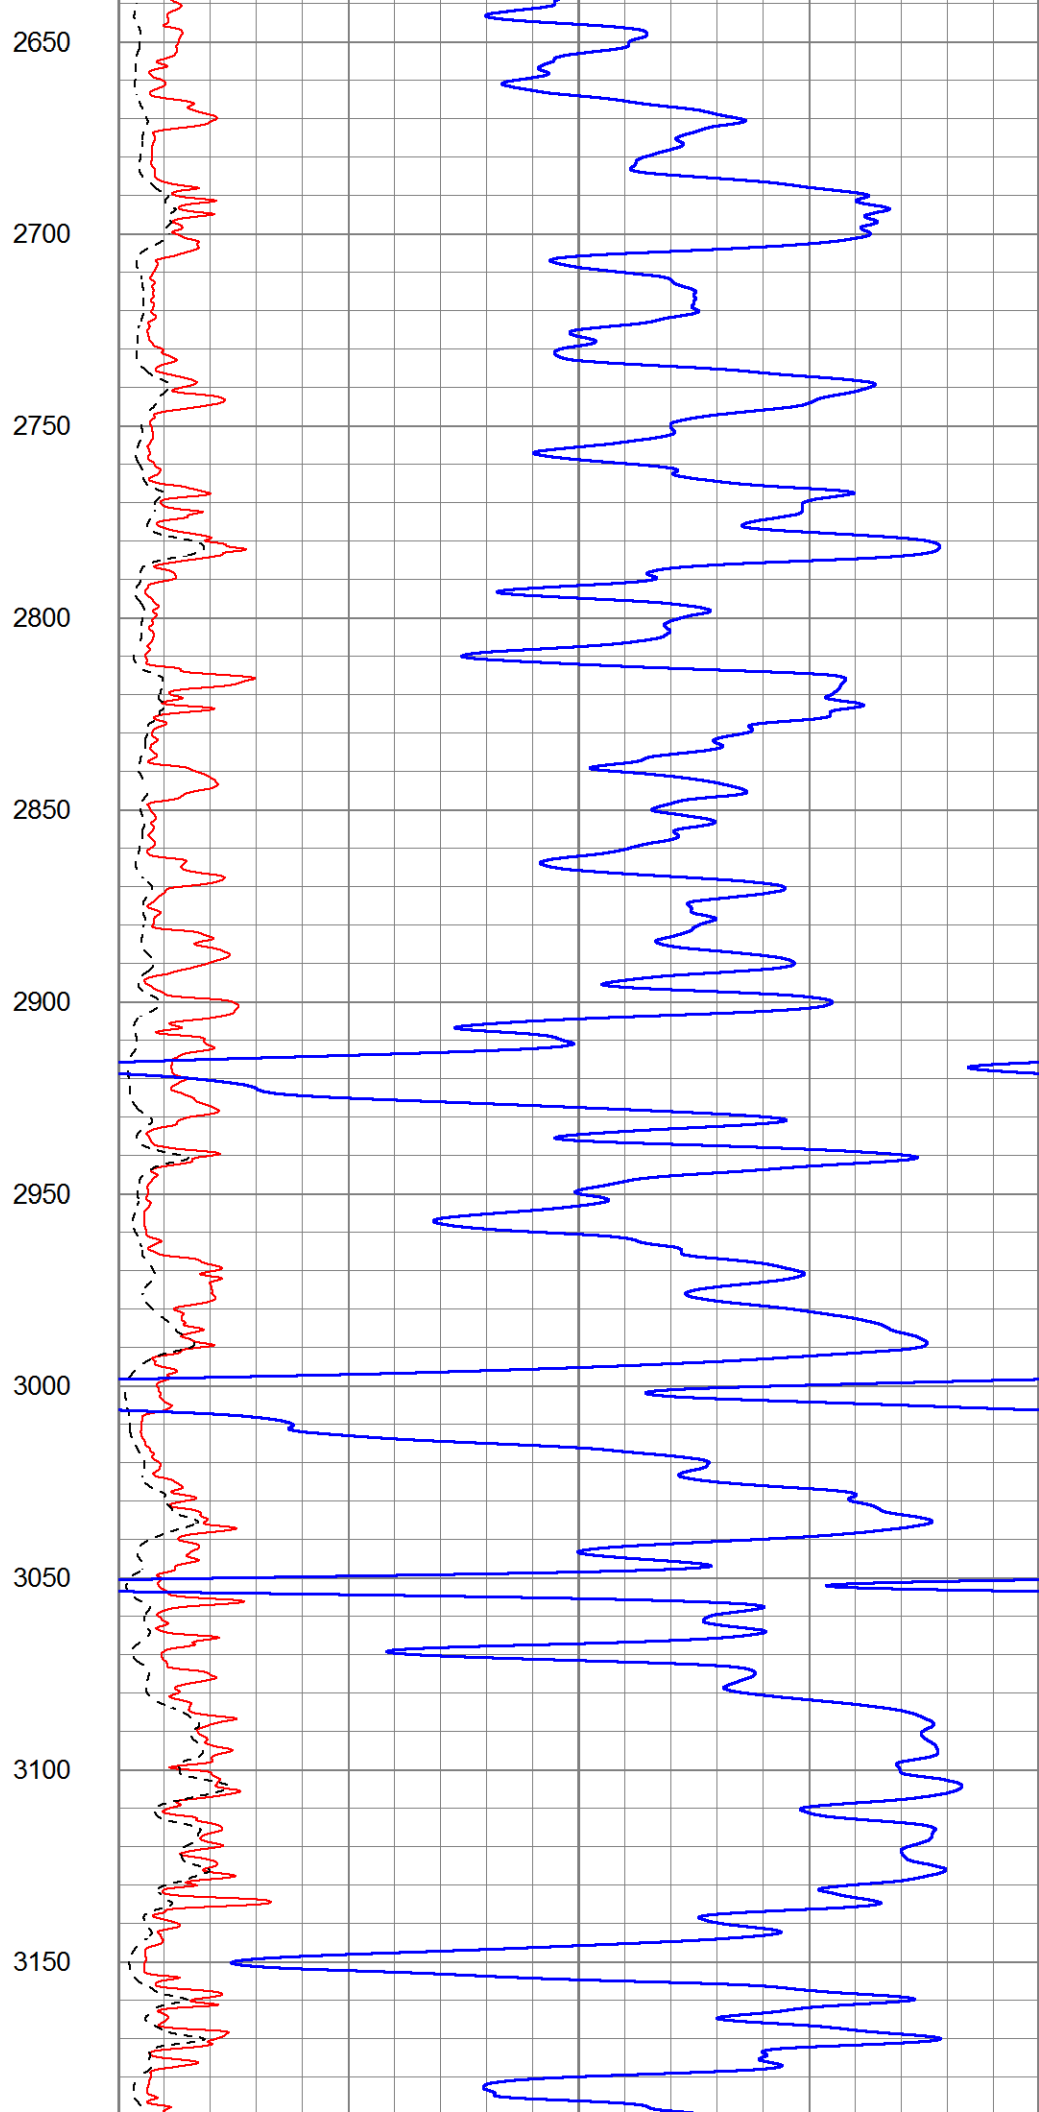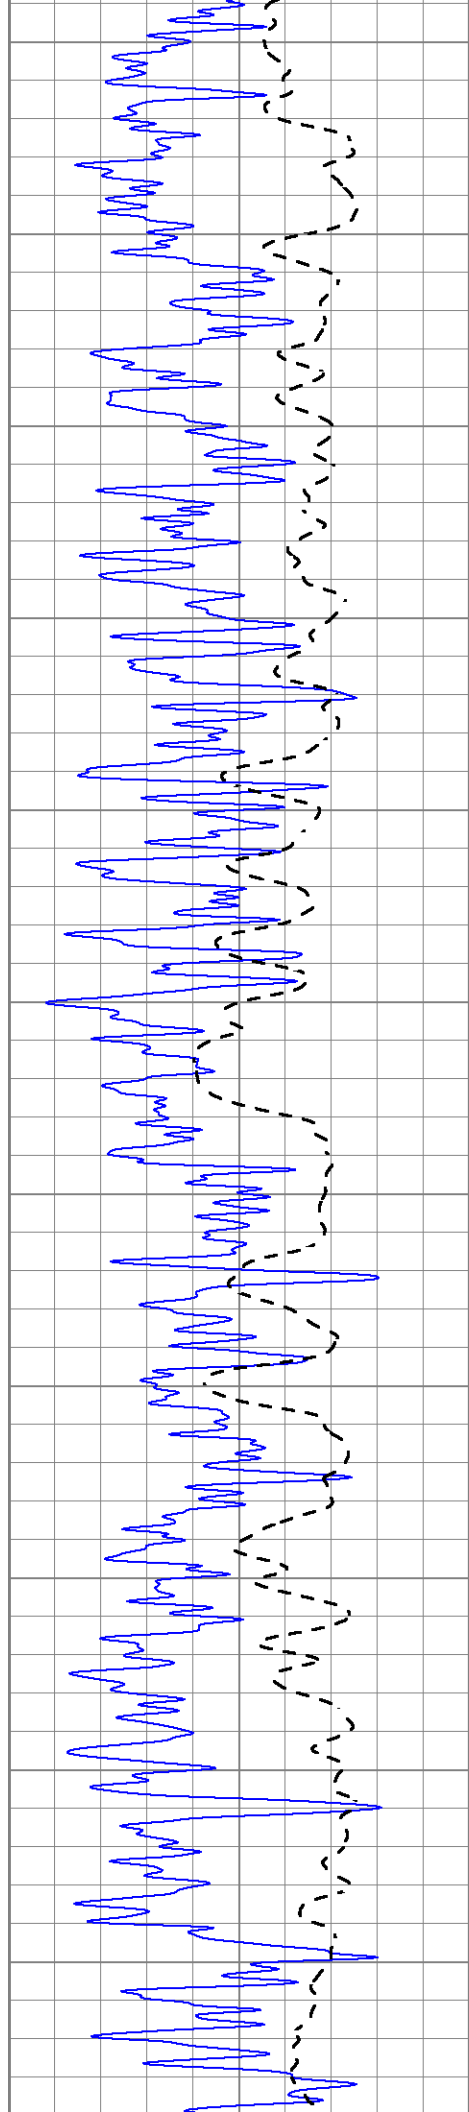

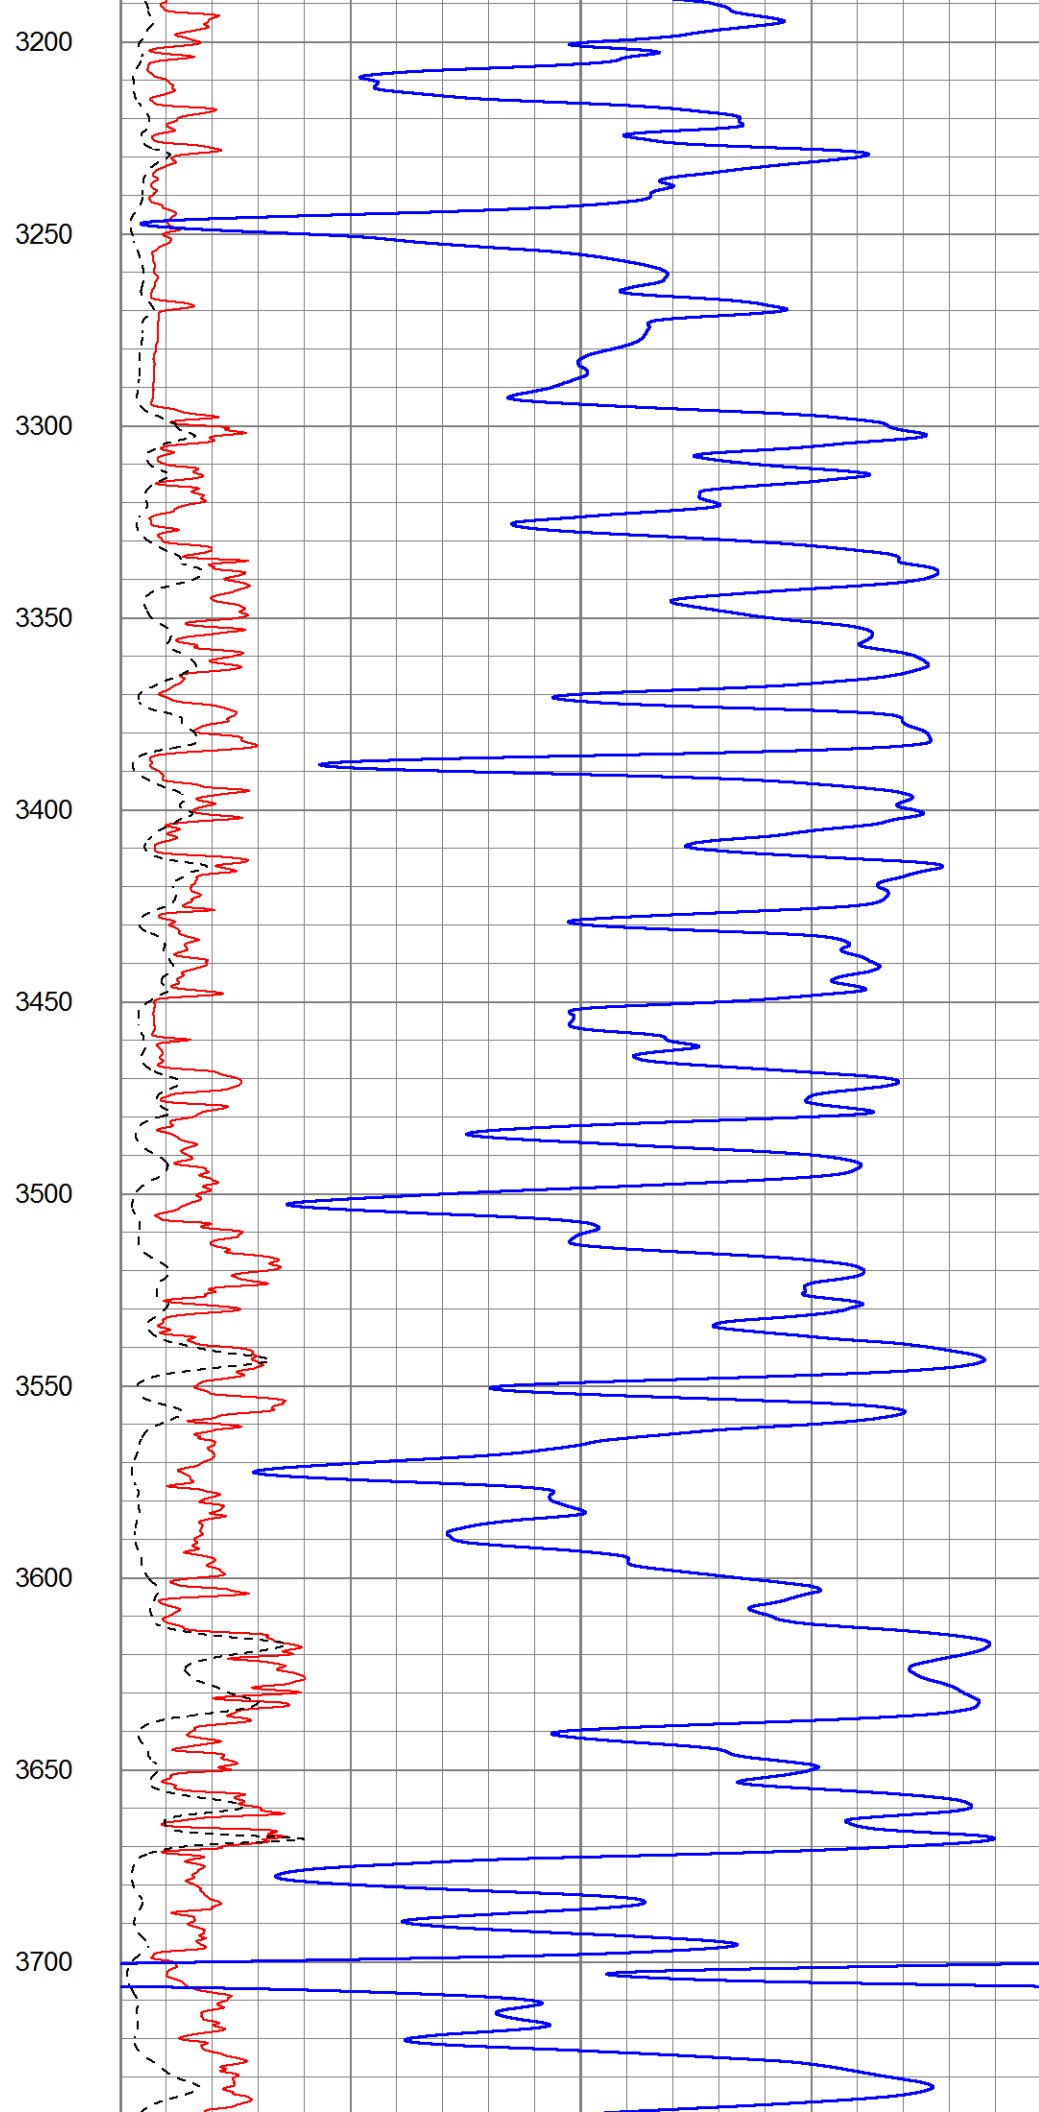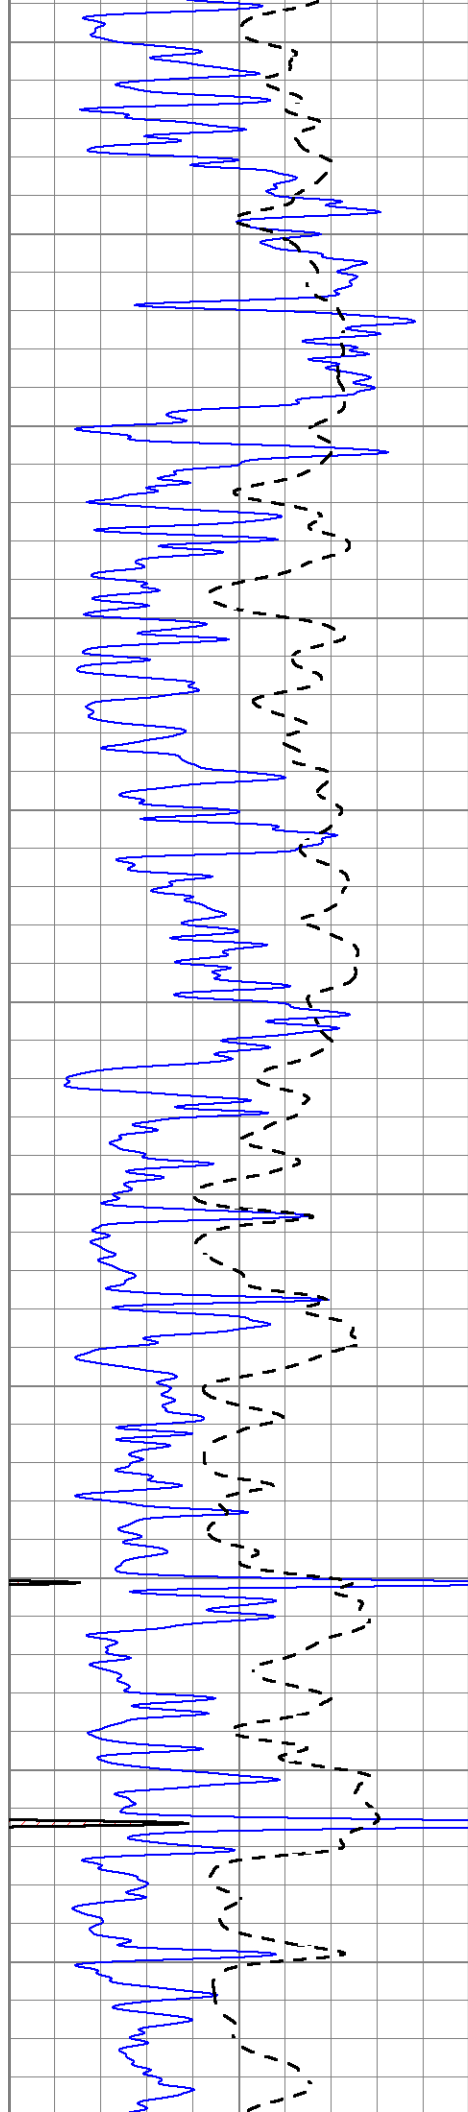

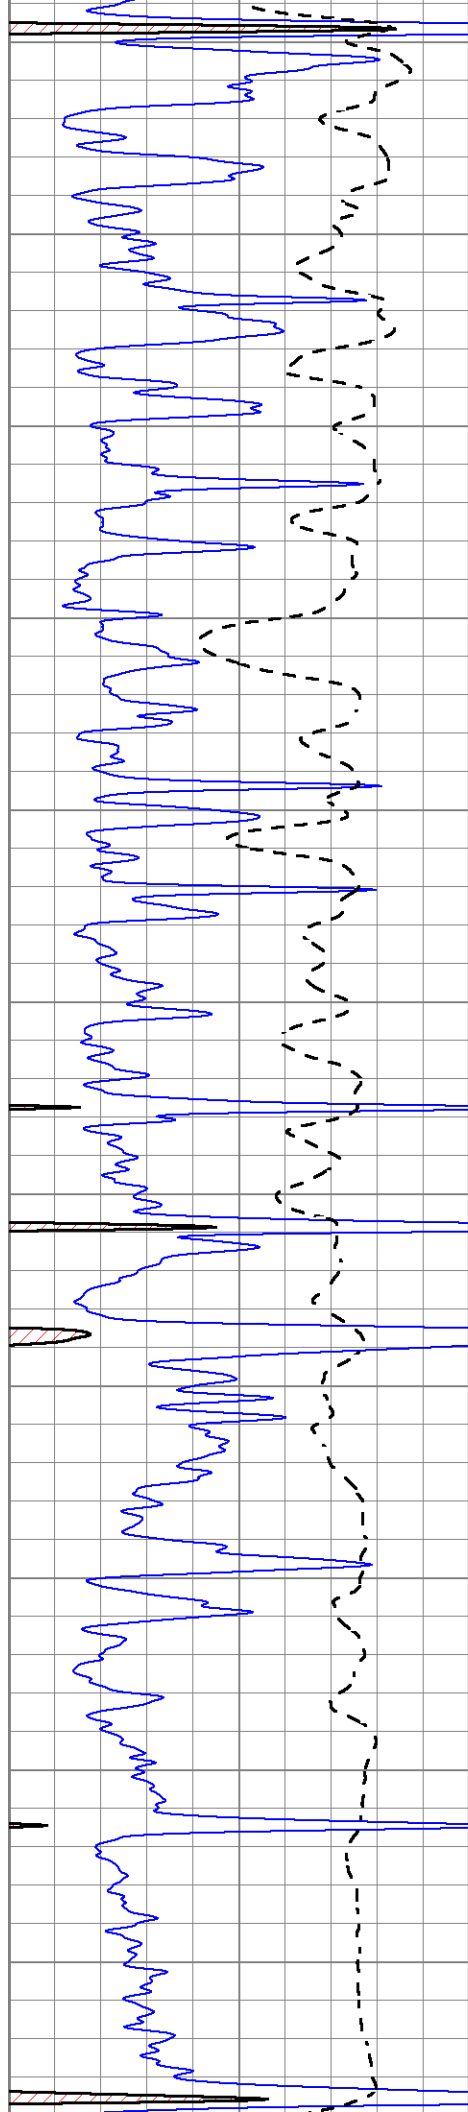

3750

3800

3850

3900

3950

4000


4050


4100

4150

4200

4250

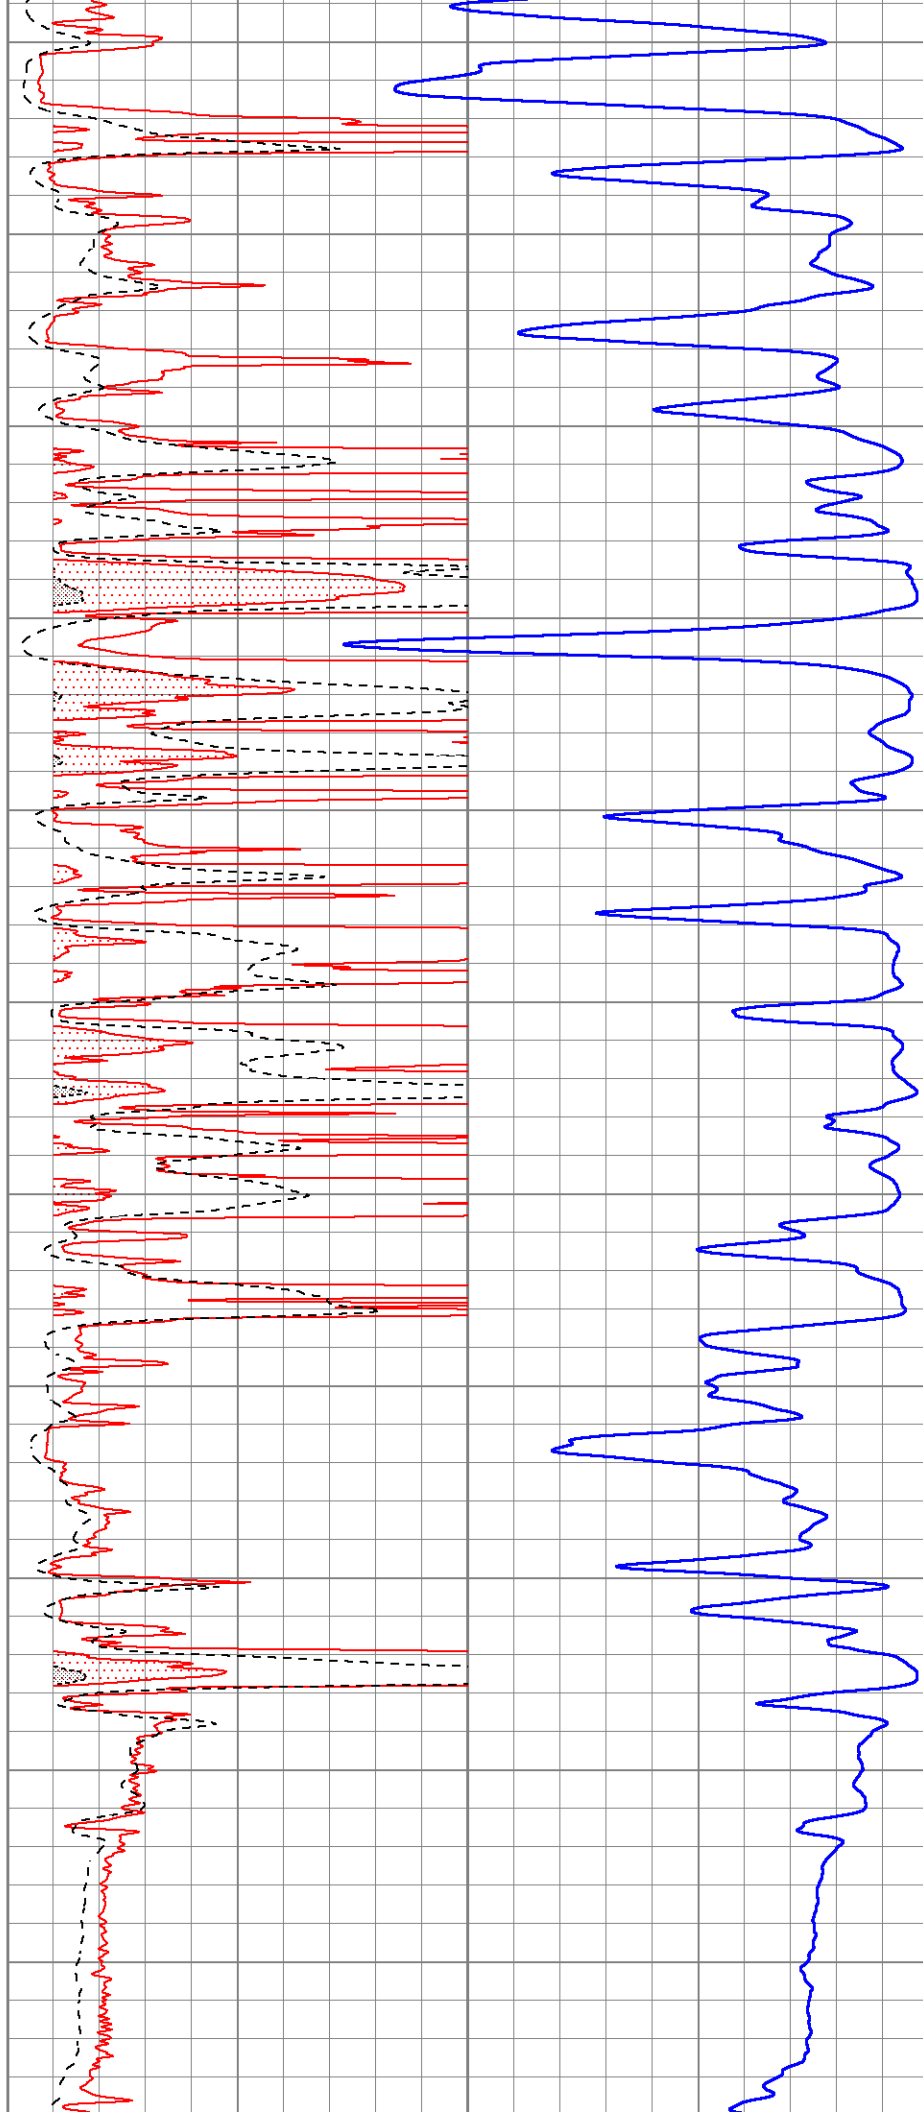



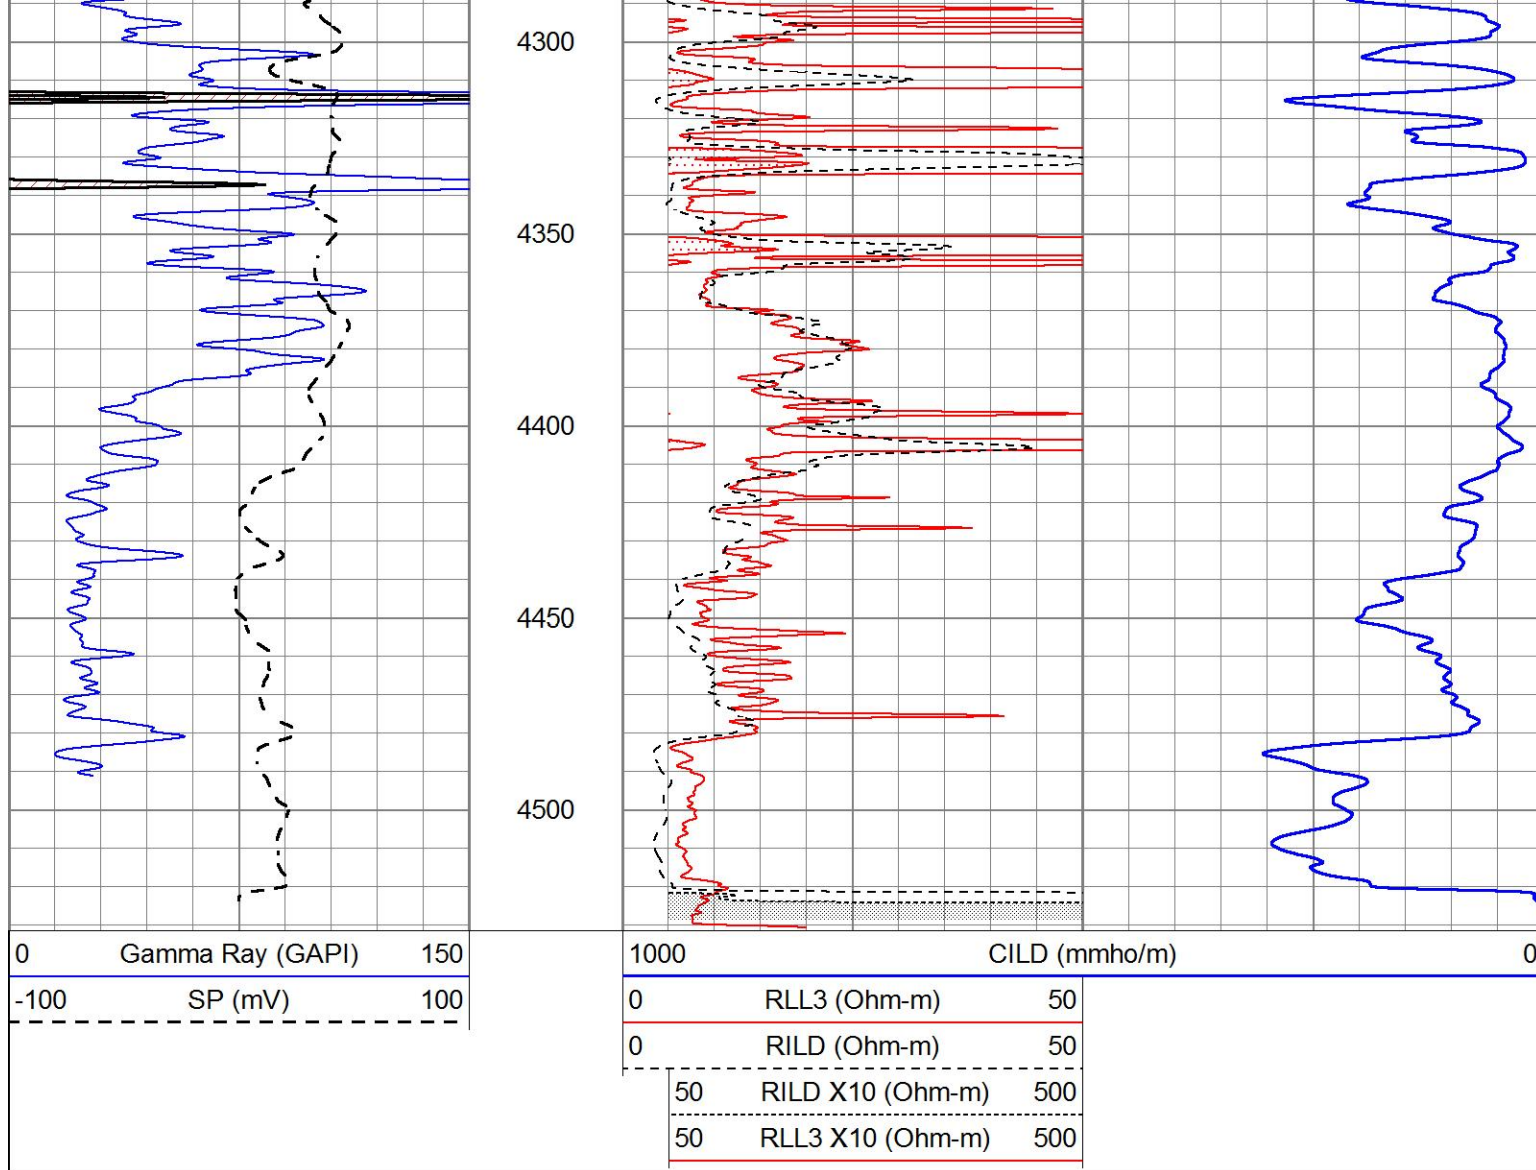


MAIN PASS

Database File 5885ddn.db
 Dataset Pathname pass4.1
 Presentation Format _dil
 Dataset Creation Tue Oct 12 20:49:13 2021
 Charted by Depth in Feet scaled 1:240




0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

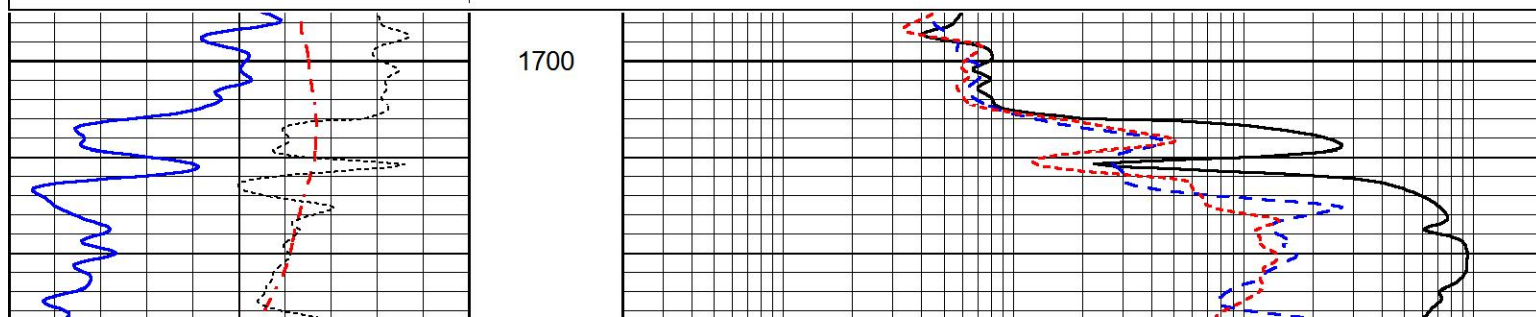

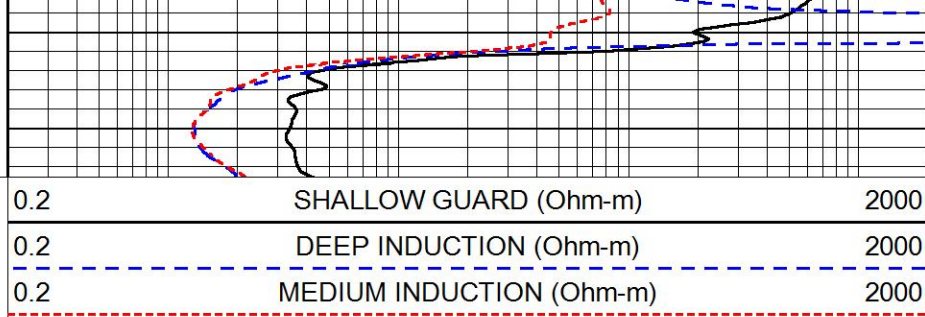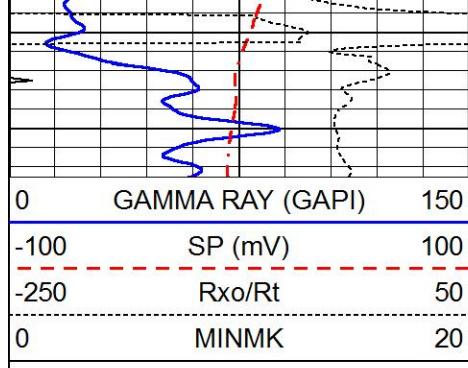

MAIN PASS


Database File 5885ddn.db
 Dataset Pathname pass4.1
 Presentation Format _dil
 Dataset Creation Tue Oct 12 20:49:13 2021
 Charted by Depth in Feet scaled 1:240

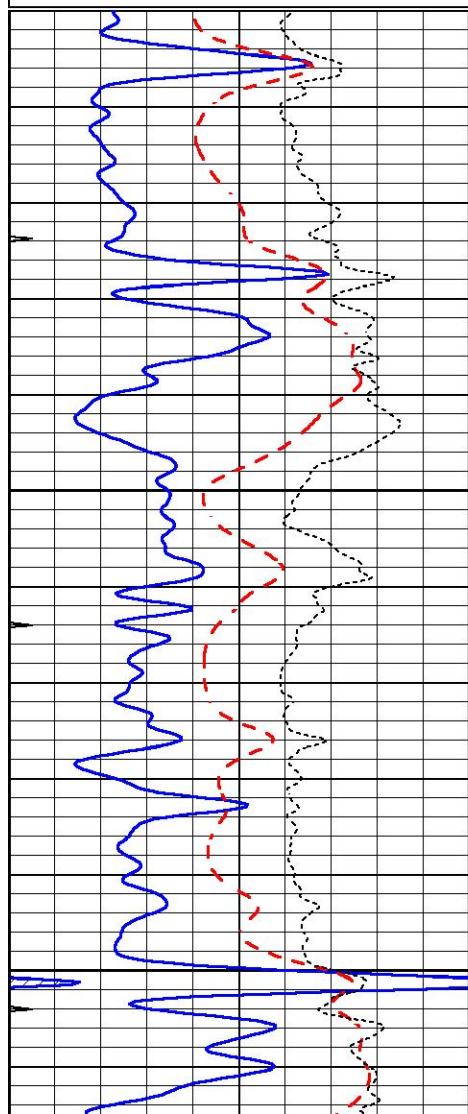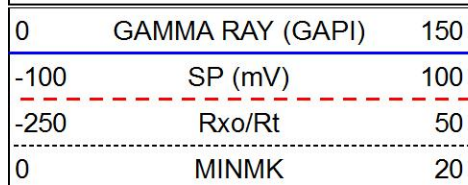


3500

3550

3600

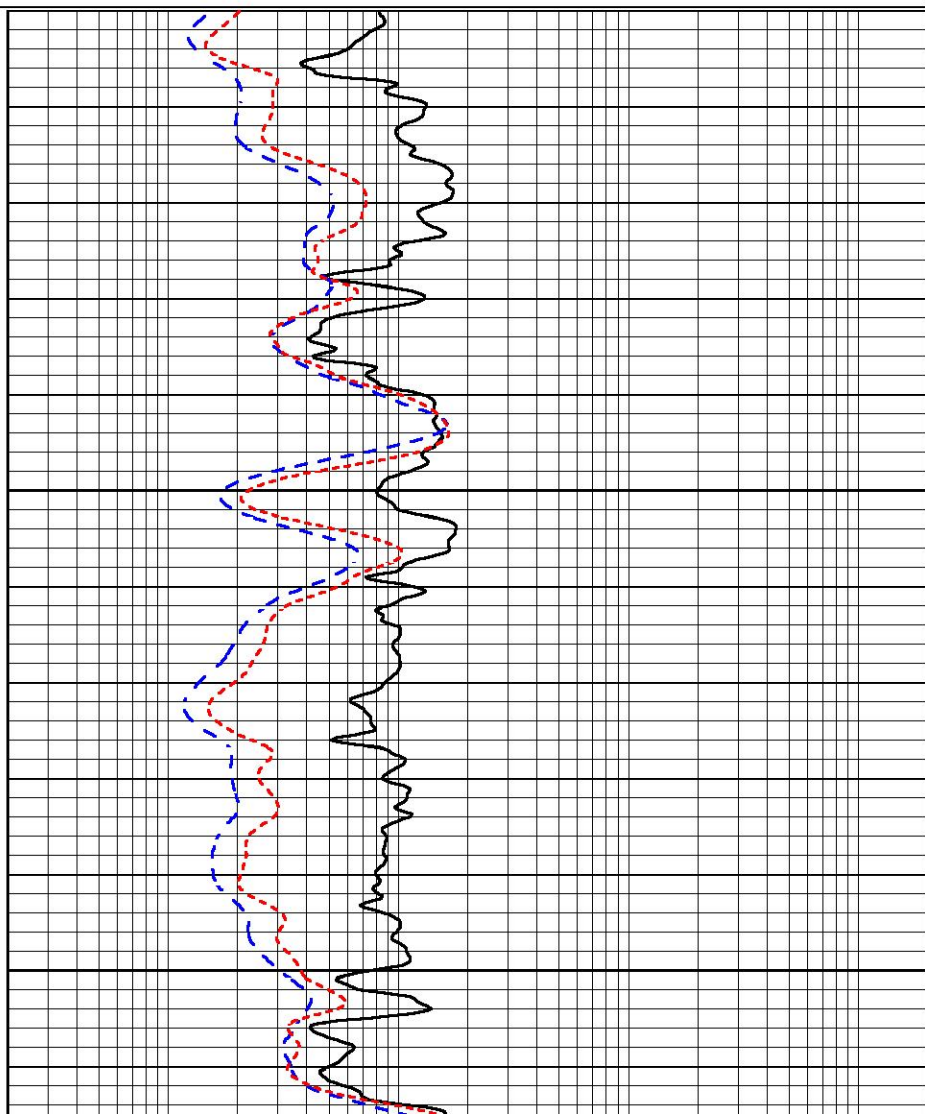

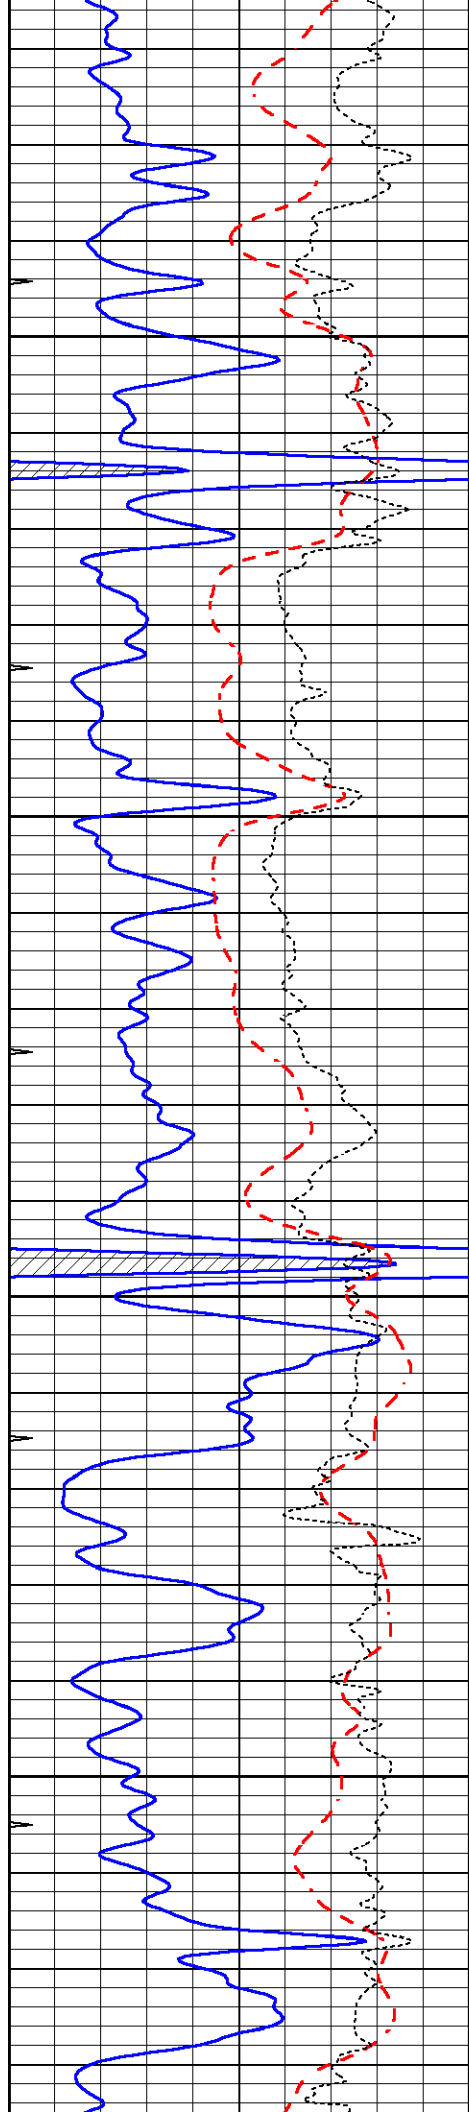



3650

3700

3750

3800

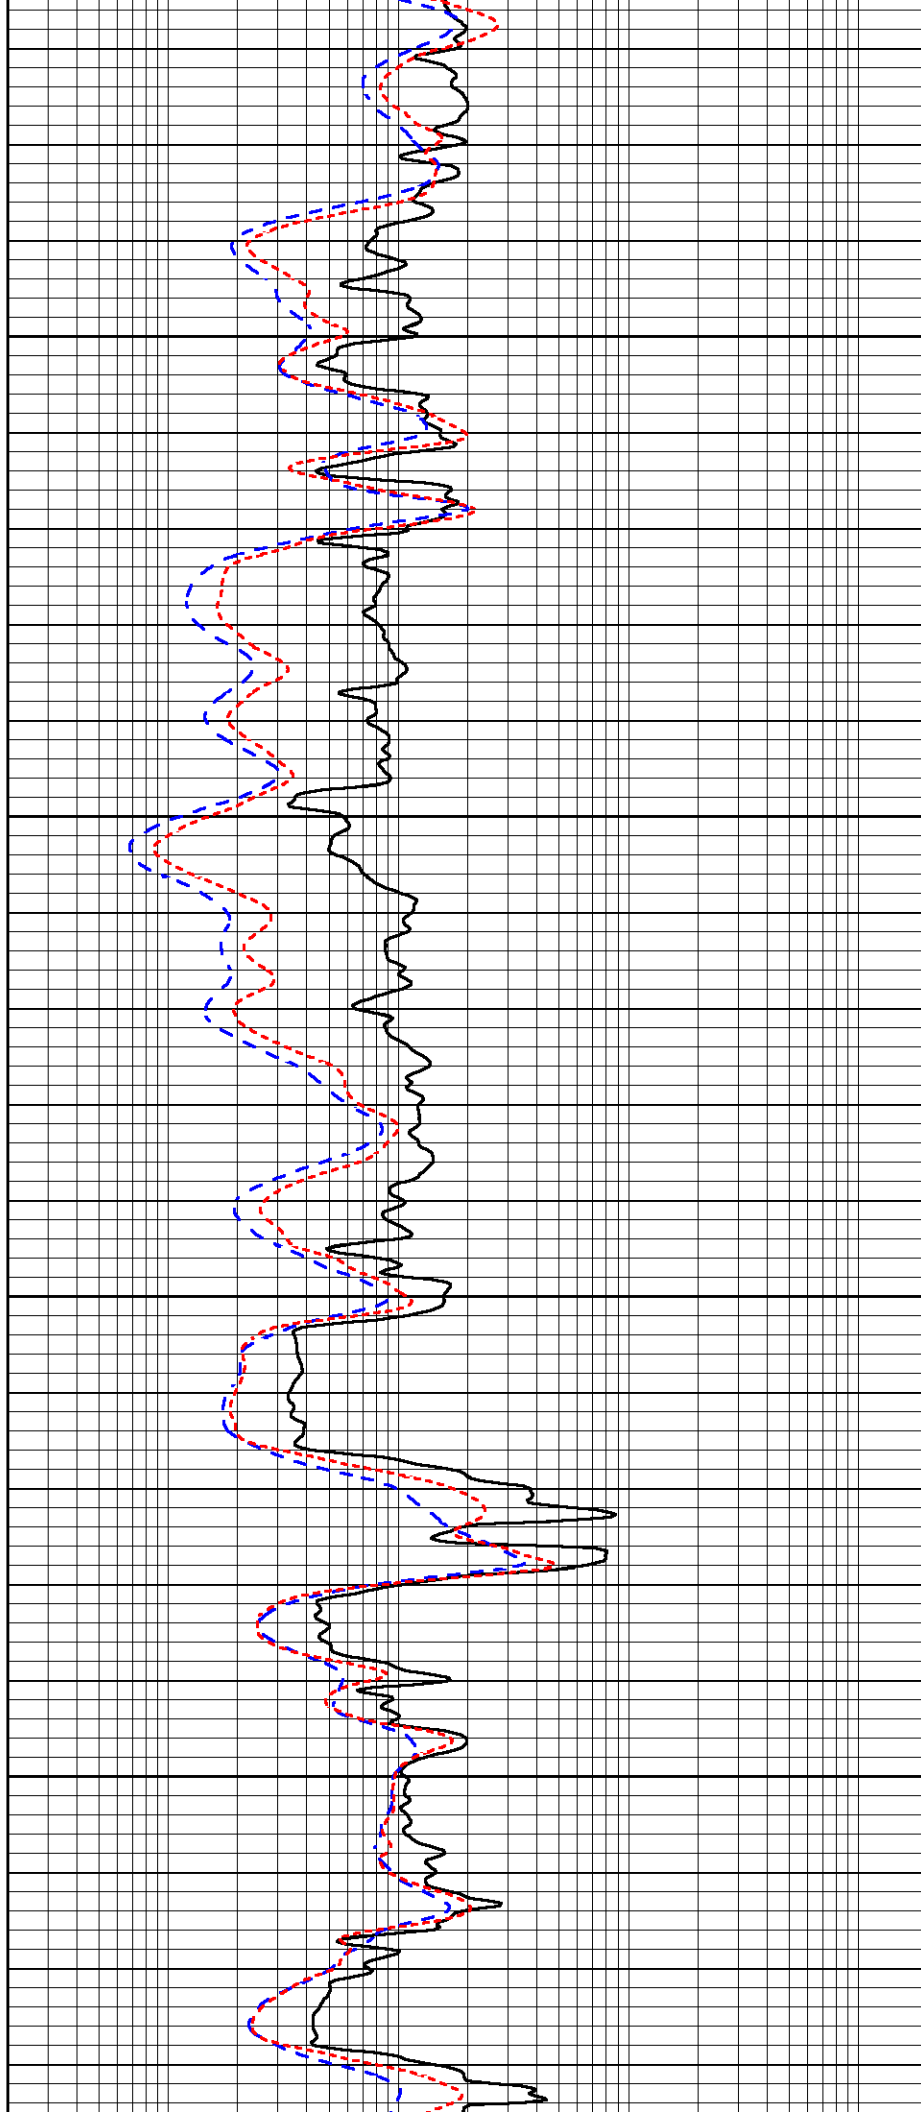

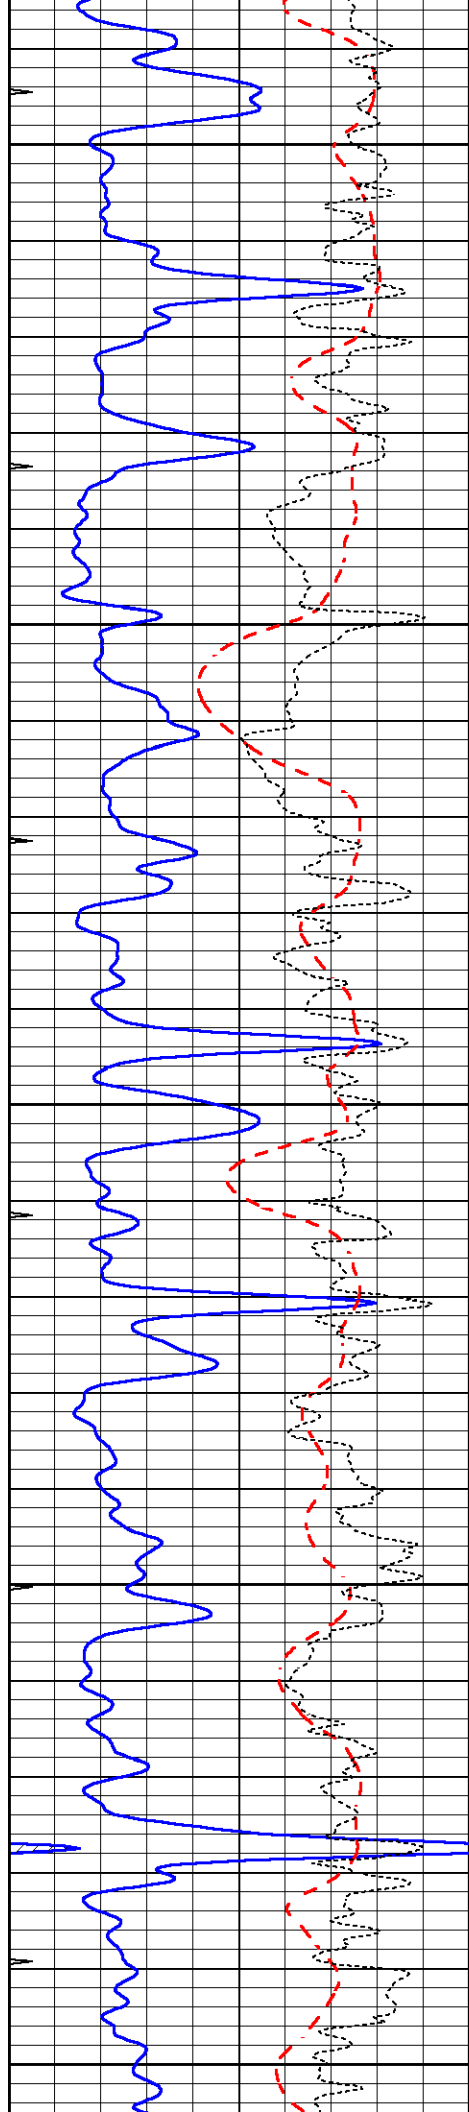


3850


3900

3950

4000

4050

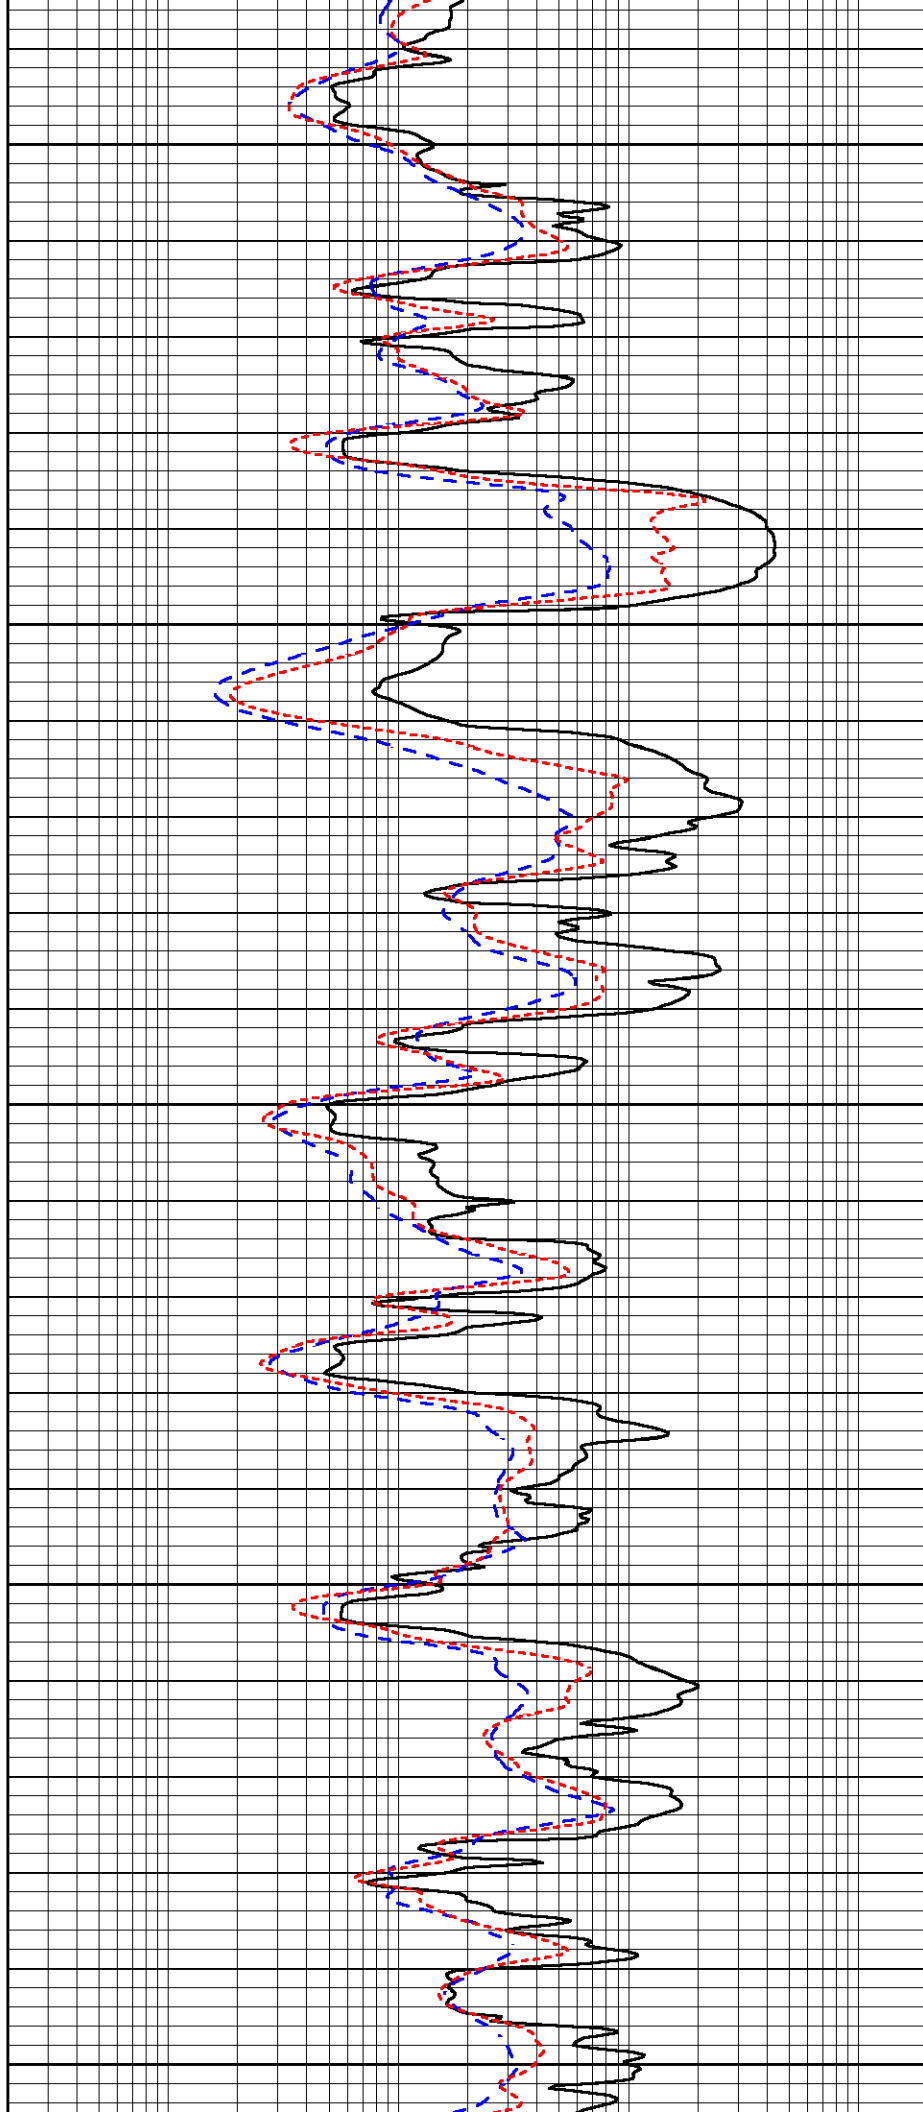

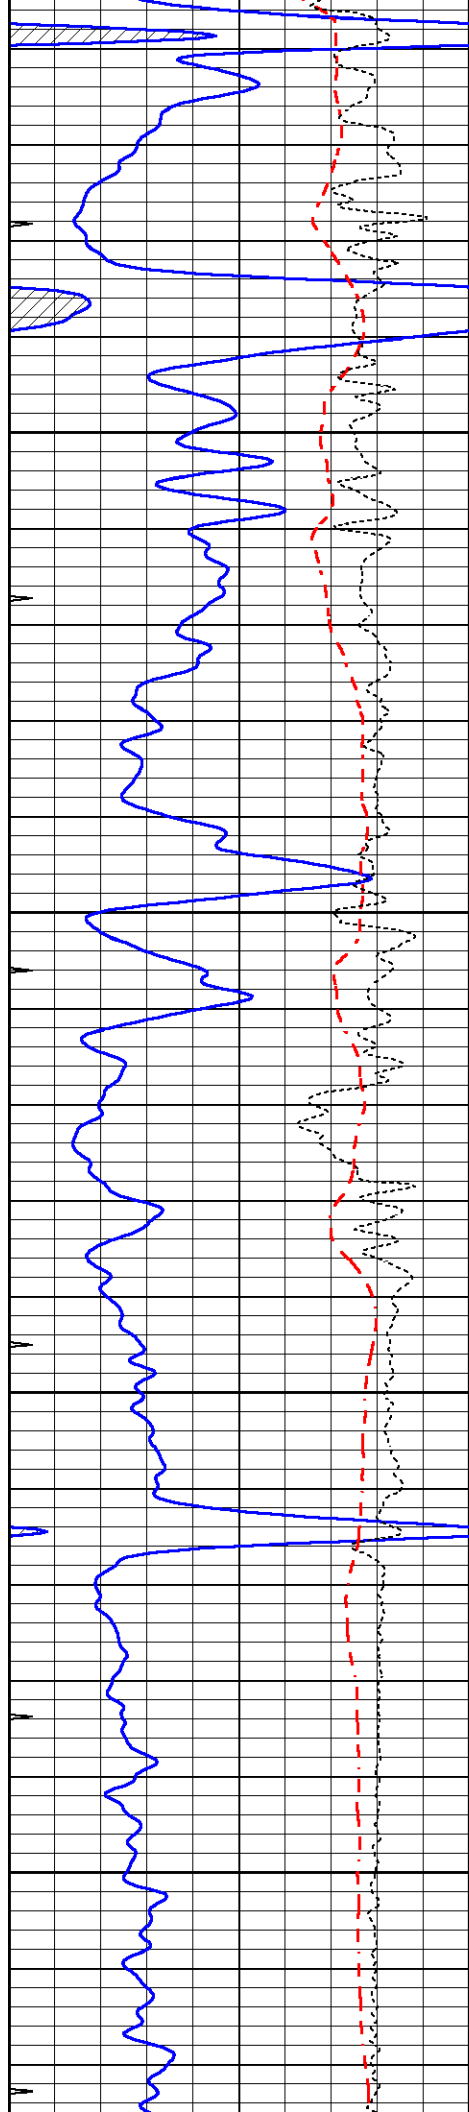



4100

4150

4200

4250

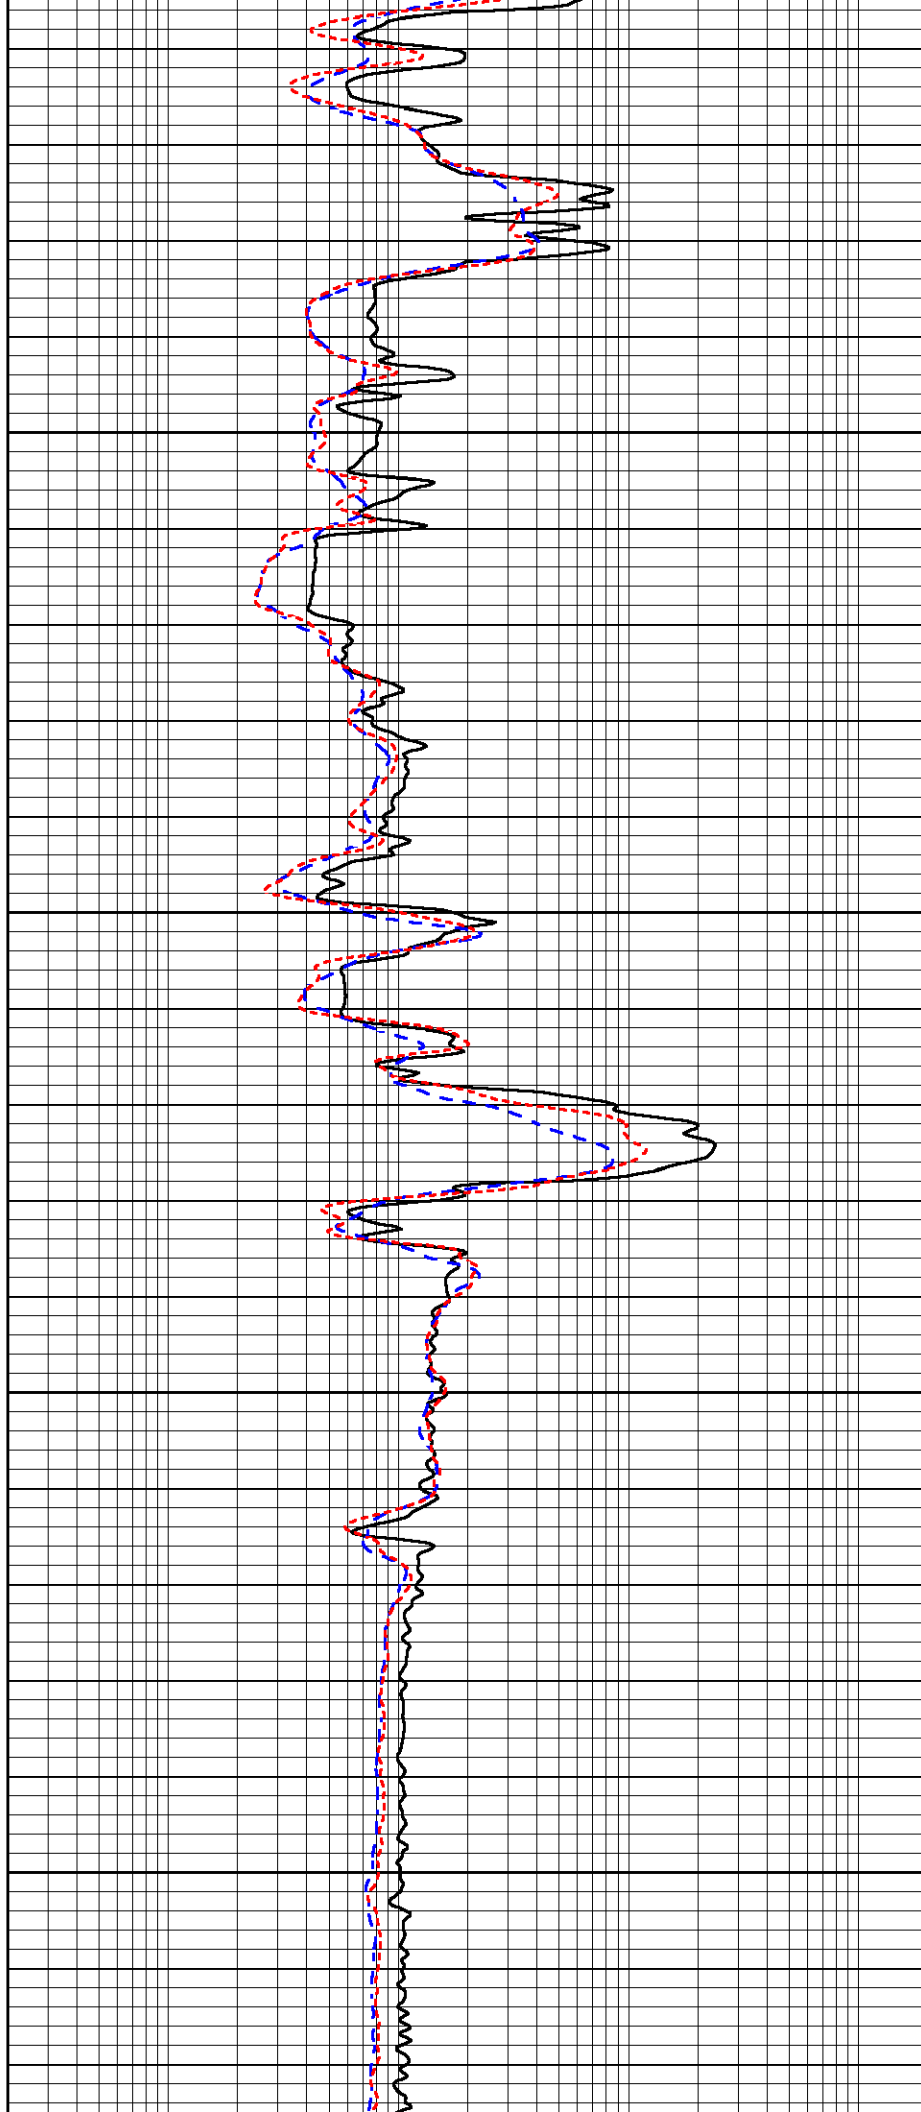

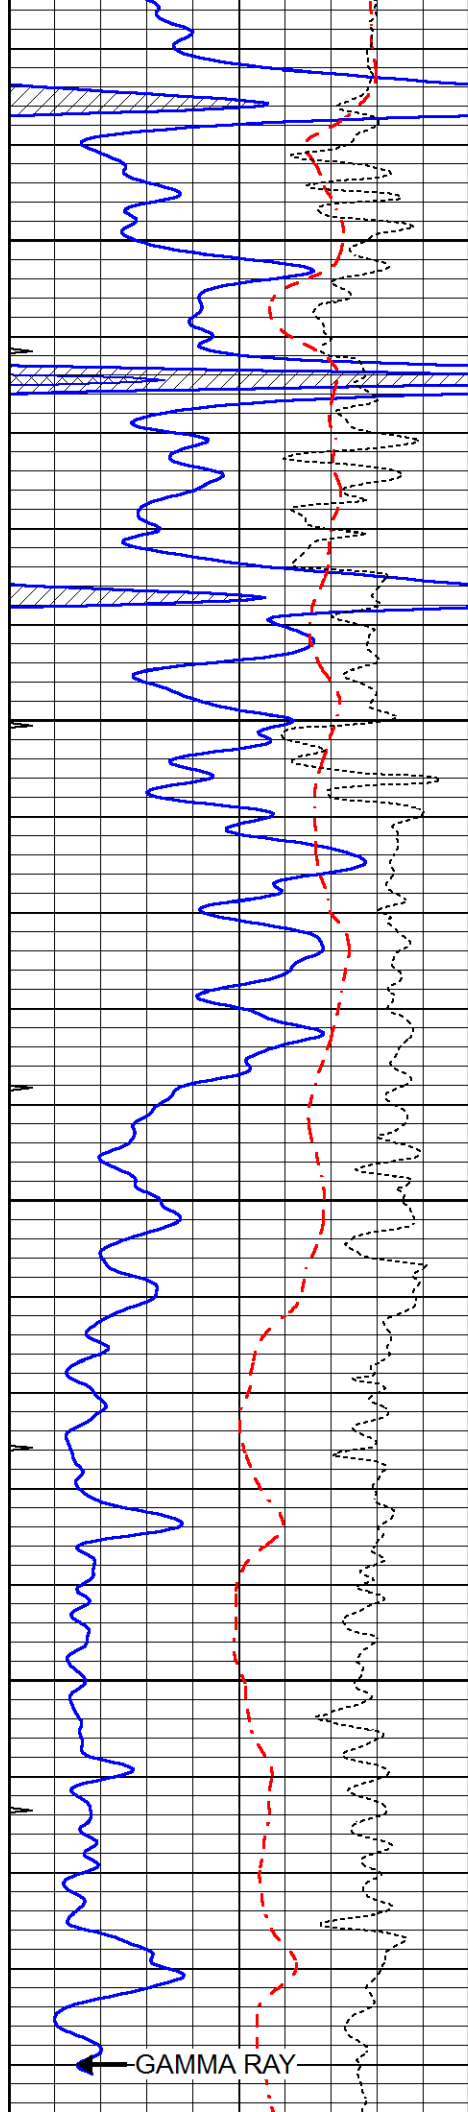




4300

4350

4400





4450

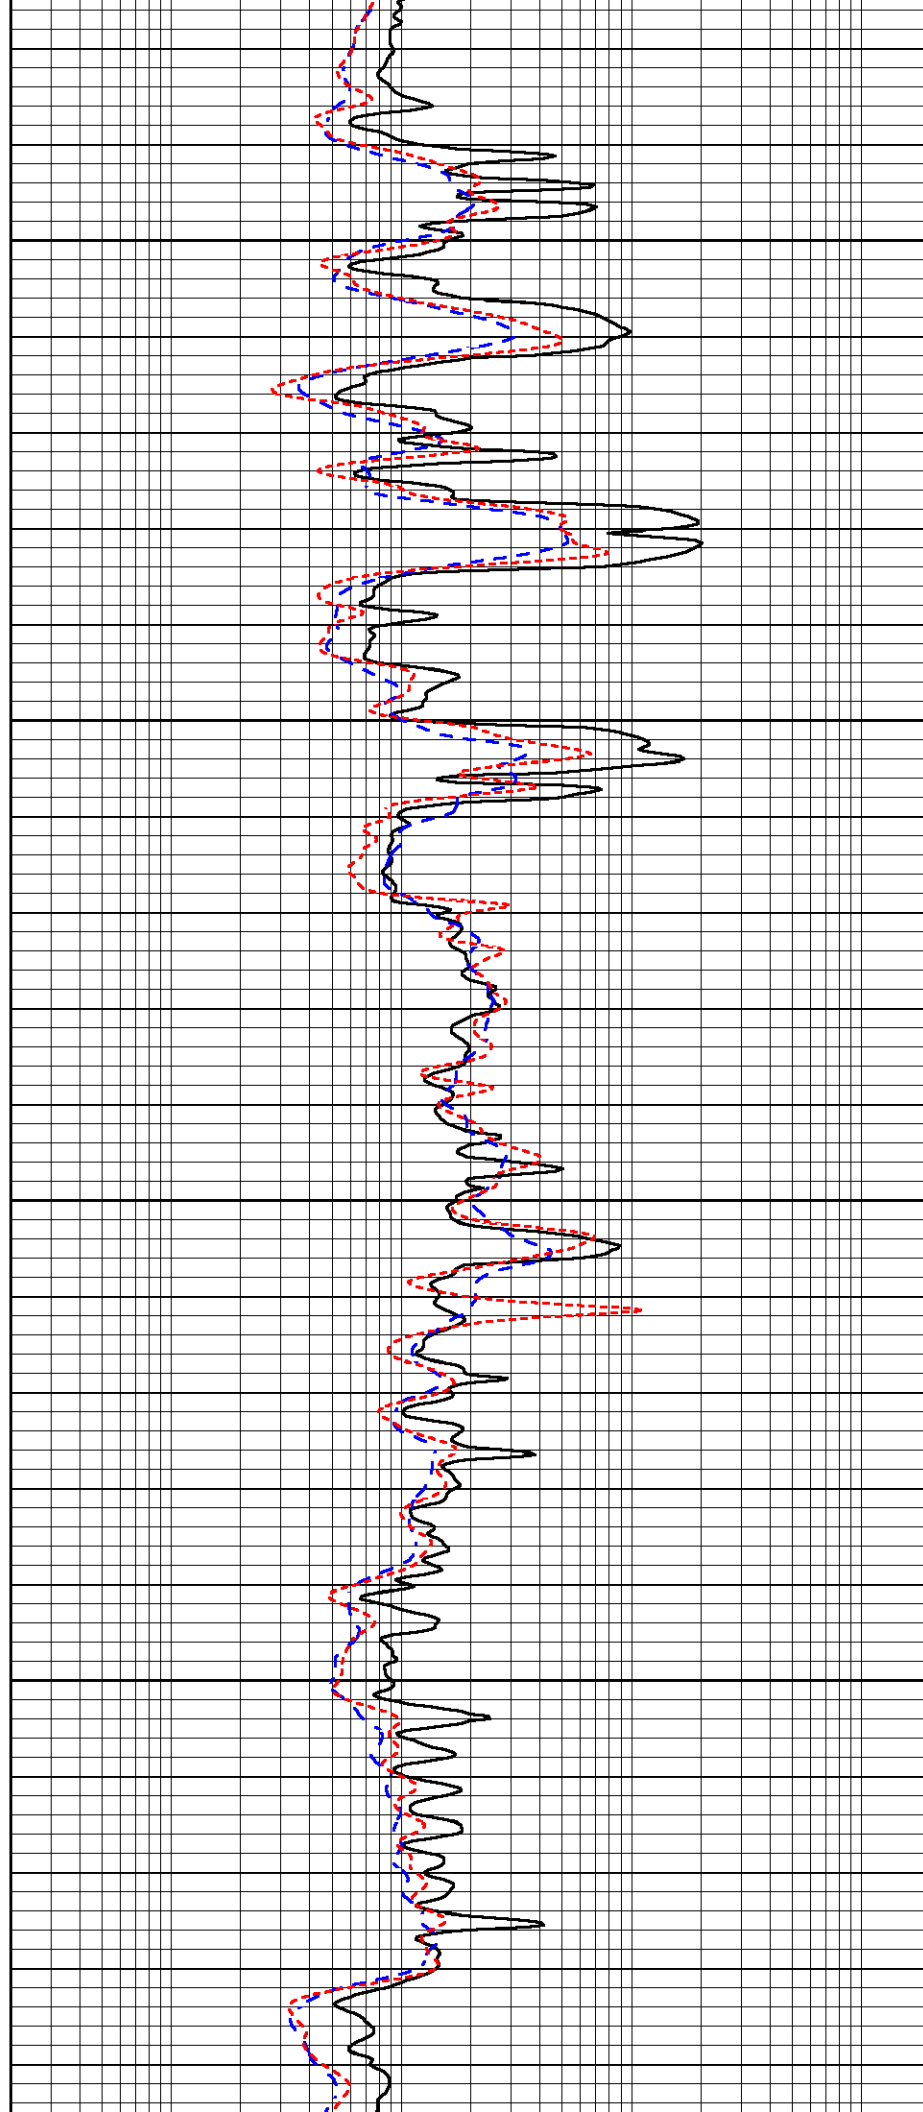


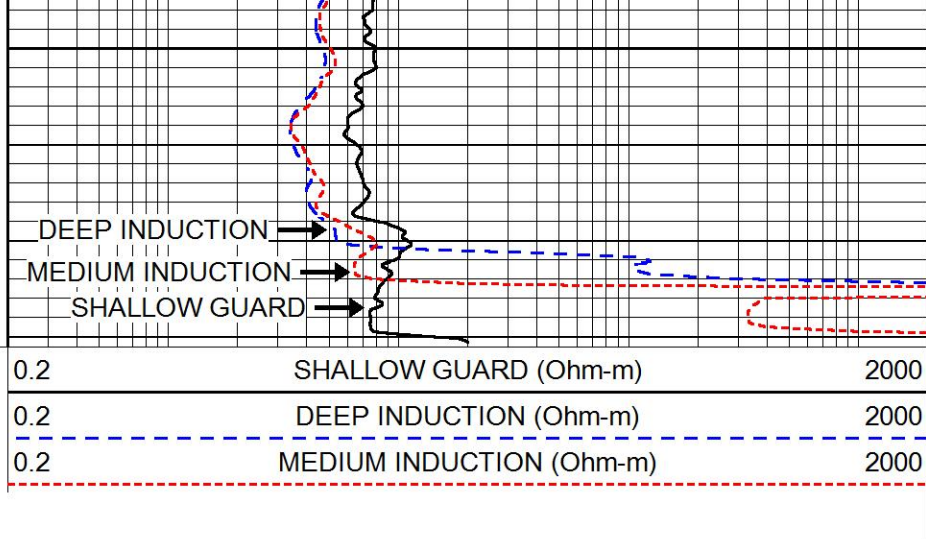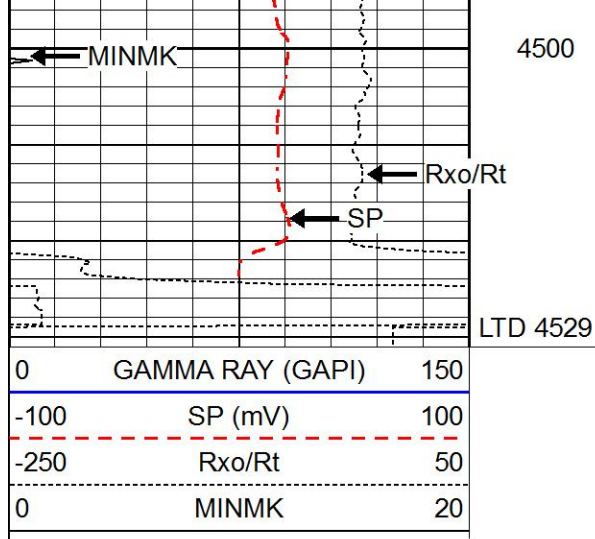

REPEAT SECTION

Database File 5885ddn.db
 Dataset Pathname pass3.1
 Presentation Format _dil
 Dataset Creation Tue Oct 12 20:54:29 2021
 Charted by Depth in Feet scaled 1:240

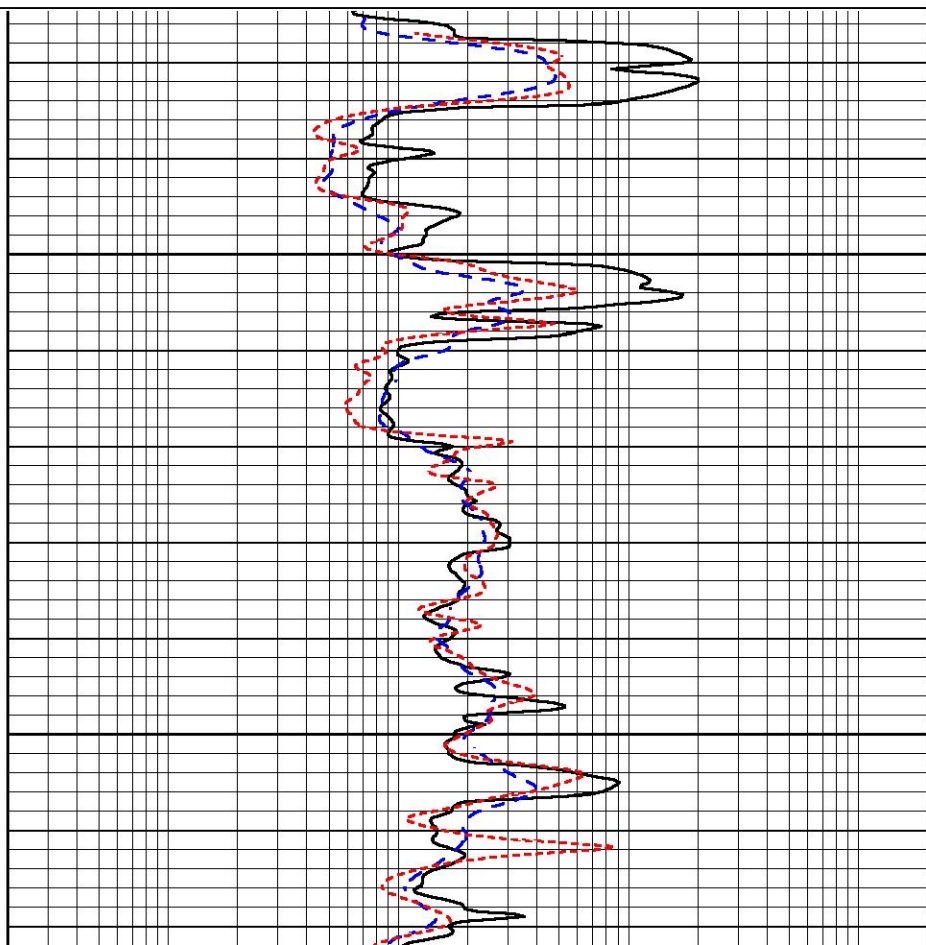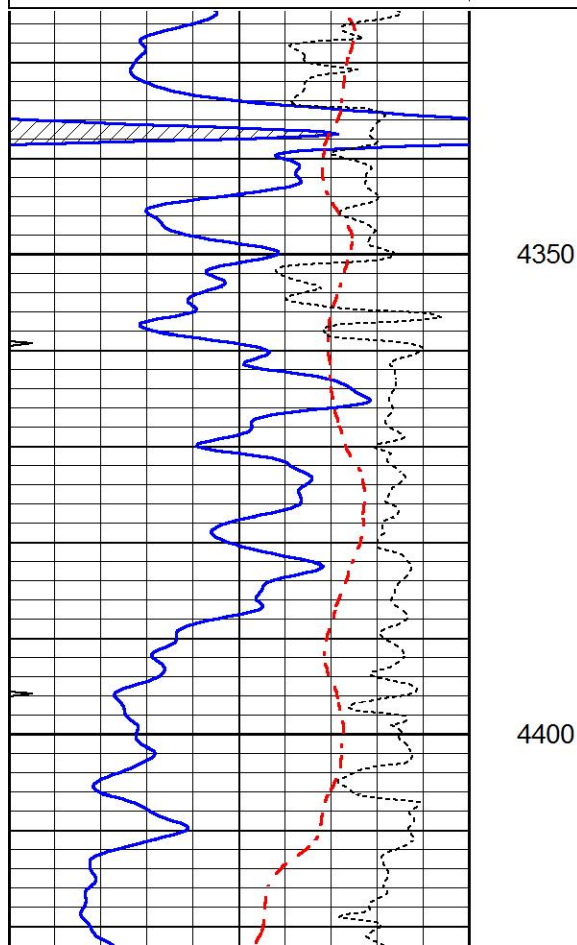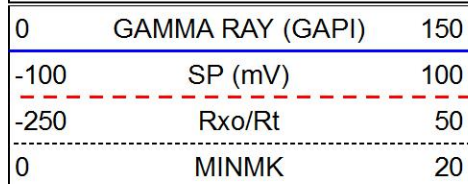


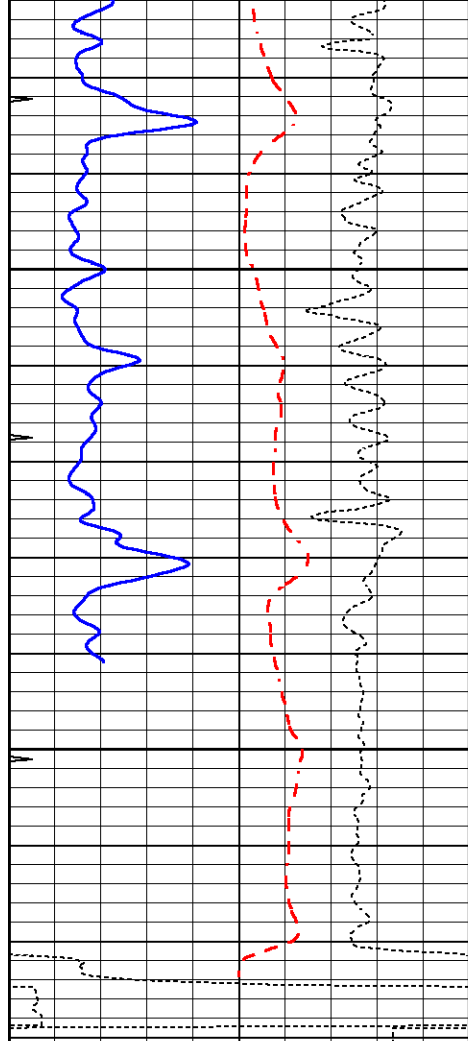

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

4450

4500

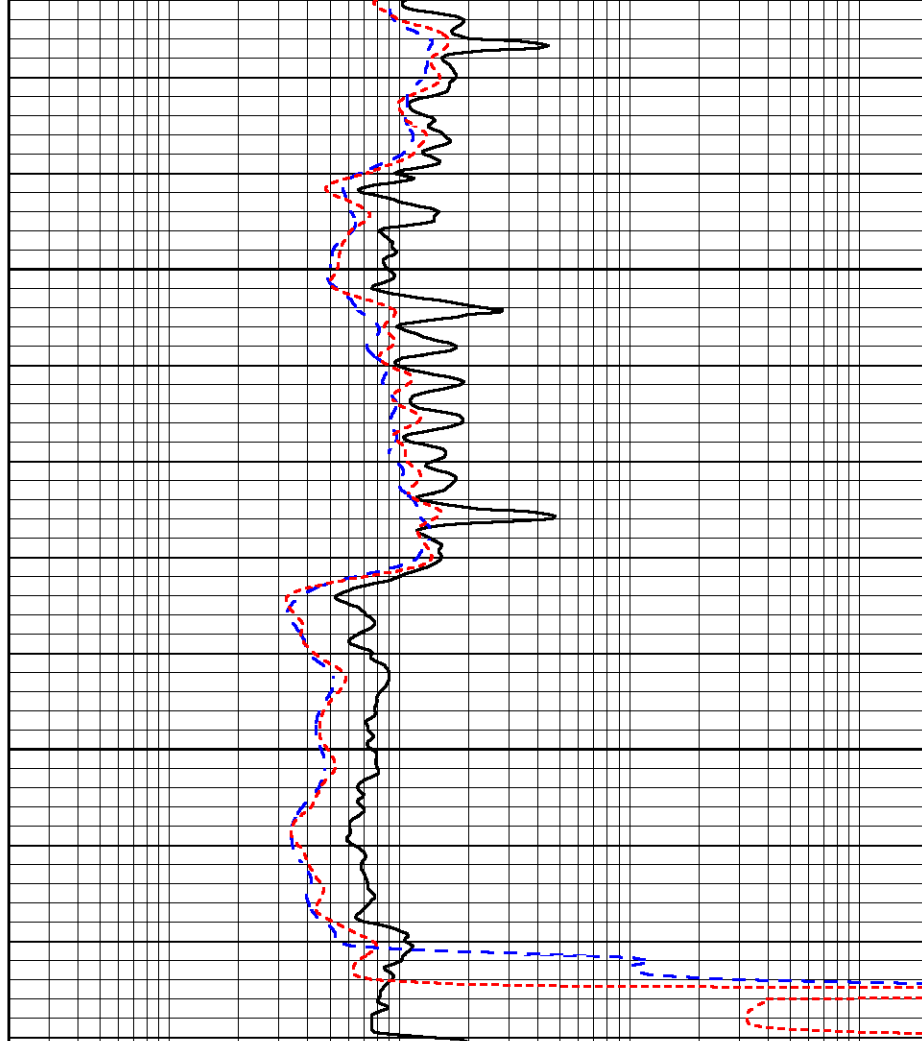

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File 5885ddn.db
Dataset Pathname pass3.1
Dataset Creation Tue Oct 12 20:54:29 2021

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
Surface Cal Performed: Fri Oct 01 14:24:33 2021
Downhole Cal Performed: Mon Sep 10 14:28:38 2018
After Survey Verification Performed: Mon Sep 10 14:28:40 2018

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-15.000
Internal:	Zero			Cal			Results	
	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 002N				Model: PRB				

Master Calibration				Performed Tue Mar 10 15:08:00 2020				
	Background	Magnesium		Aluminum	Aluminum+Fe			
Window 1	780.1	6981.9		2088.6	1871.2			cps
Window 2	718.6	5898.2		1813.8	1664.1			cps
Window 3	580.0	2989.5		1088.0	1039.1			cps
Window 4	172.8	175.7		175.3	173.5			cps
Long Space	0.0	5179.6		1095.2	945.5			cps
Short Space	1.1	1228.6		821.2	690.4			cps
Rho		1.7100		2.5900	0.0000			g/cc
Pe		2.0000		2.7500	5.7900			
Rib Angle	: 45.5	Rib Slope	: 1.016	Density/Spine Ratio			: 0.548	
Spine Angle	: 75.5	Spine Slope	: 3.857	Spine Intercept			: -18.9	

Before Survey Verification				Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0		0.0	0.0			cps
Window 2	0.0	0.0		0.0	0.0			cps
Window 3	0.0	0.0		0.0	0.0			cps
Window 4	0.0	0.0		0.0	0.0			cps
Long Space	0.0	0.0		0.0	0.0			cps
Short Space	0.0	0.0		0.0	0.0			cps
Measured Rho		0.0000		0.0000	0.0000			g/cc
Measured Correction		0.0000		0.0000	0.0000			g/cc
Measured Pe				0.0000	0.0000			

After Survey Verification				Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0		0.0	0.0			cps
Window 2	0.0	0.0		0.0	0.0			cps
Window 3	0.0	0.0		0.0	0.0			cps
Window 4	0.0	0.0		0.0	0.0			cps
Long Space	0.0	0.0		0.0	0.0			cps
Short Space	0.0	0.0		0.0	0.0			cps
Measured Rho		0.0000		0.0000	0.0000			g/cc
Measured Correction		0.0000		0.0000	0.0000			g/cc
Measured Pe				0.0000	0.0000			

Measured Pe

0.0000

0.0000

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings	Target	Normalization
Short Space	1.00 cps	1.00 cps	1.0000
Long Space	1.00 cps	1.00 cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	
3)	Short Space	cps		
	Long Space	cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: GR6
Tool Model: OPEN
Performed: Thu Jul 30 20:04:35 2020

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 276.0 cps

Sensitivity: 0.7500 GAPI/cps