



MICRO LOG

Company ANCHOR BAY PETROLEUM, LLC.

Well SANDY #1

Field HERR

County RUSH State KANSAS

Location: API #: 15-165-22177-0000
3064' FSL & 3959' FEL
NW - SW - SE - NW

Other Services
CDL/CNL
DIL/SON

SEC 13 TWP 16S RGE 18W

Permanent Datum GROUND LEVEL Elevation 2002
Log Measured From KELLY BUSHING 5' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 2007
D.F. 2005
G.L. 2002

Date 10/21/21

Run Number TWO

Depth Driller 3630

Depth Logger 3632

Bottom Logged Interval 3616

Top Log Interval 2700

Casing Driller 8 5/8"@1132'

Casing Logger 1132

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD CHLORIDES 6,400 PPM

Density / Viscosity 9.4/60

pH / Fluid Loss 10.0/8.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .660@59F

Rmf @ Meas. Temp .495@59F

Rmc @ Meas. Temp .792@59F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .345@113F

Time Circulation Stopped 4.5 HOURS

Time Logger on Bottom 1:00 P.M.

Maximum Recorded Temperature 113F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By ED GLASSMAN

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-165-22177-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
LIEBENTHAL, KS., 2 1/2E. ON BLKTOP TO "RD 270", 1/2N., E. INTO @SHED






MAIN SECTION


Database File	5673ddn.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Thu Oct 21 13:47:28 2021
Charted by	Depth in Feet scaled 1:240


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

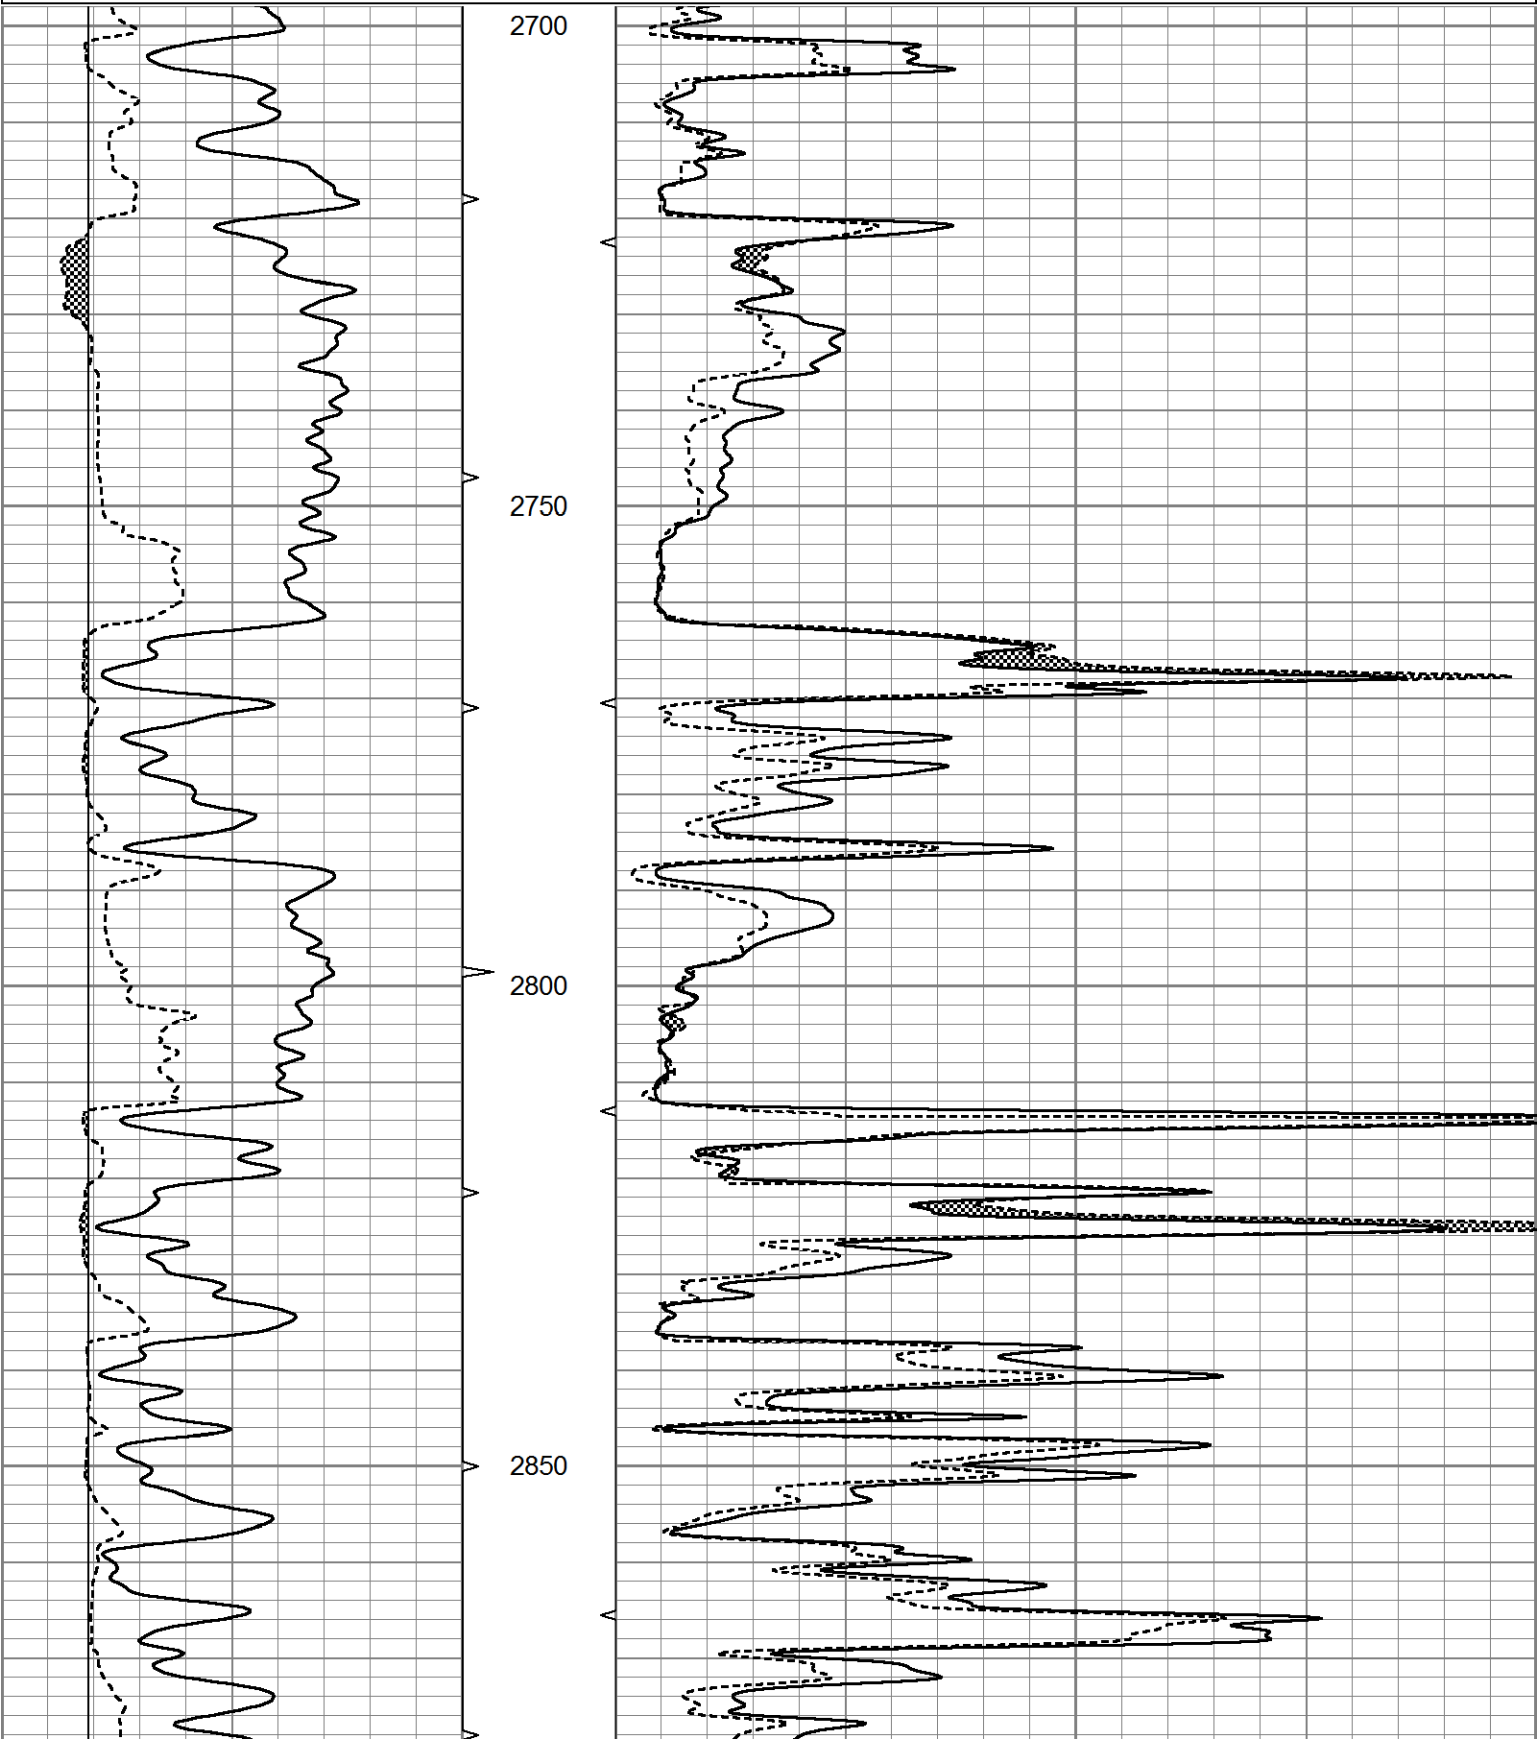

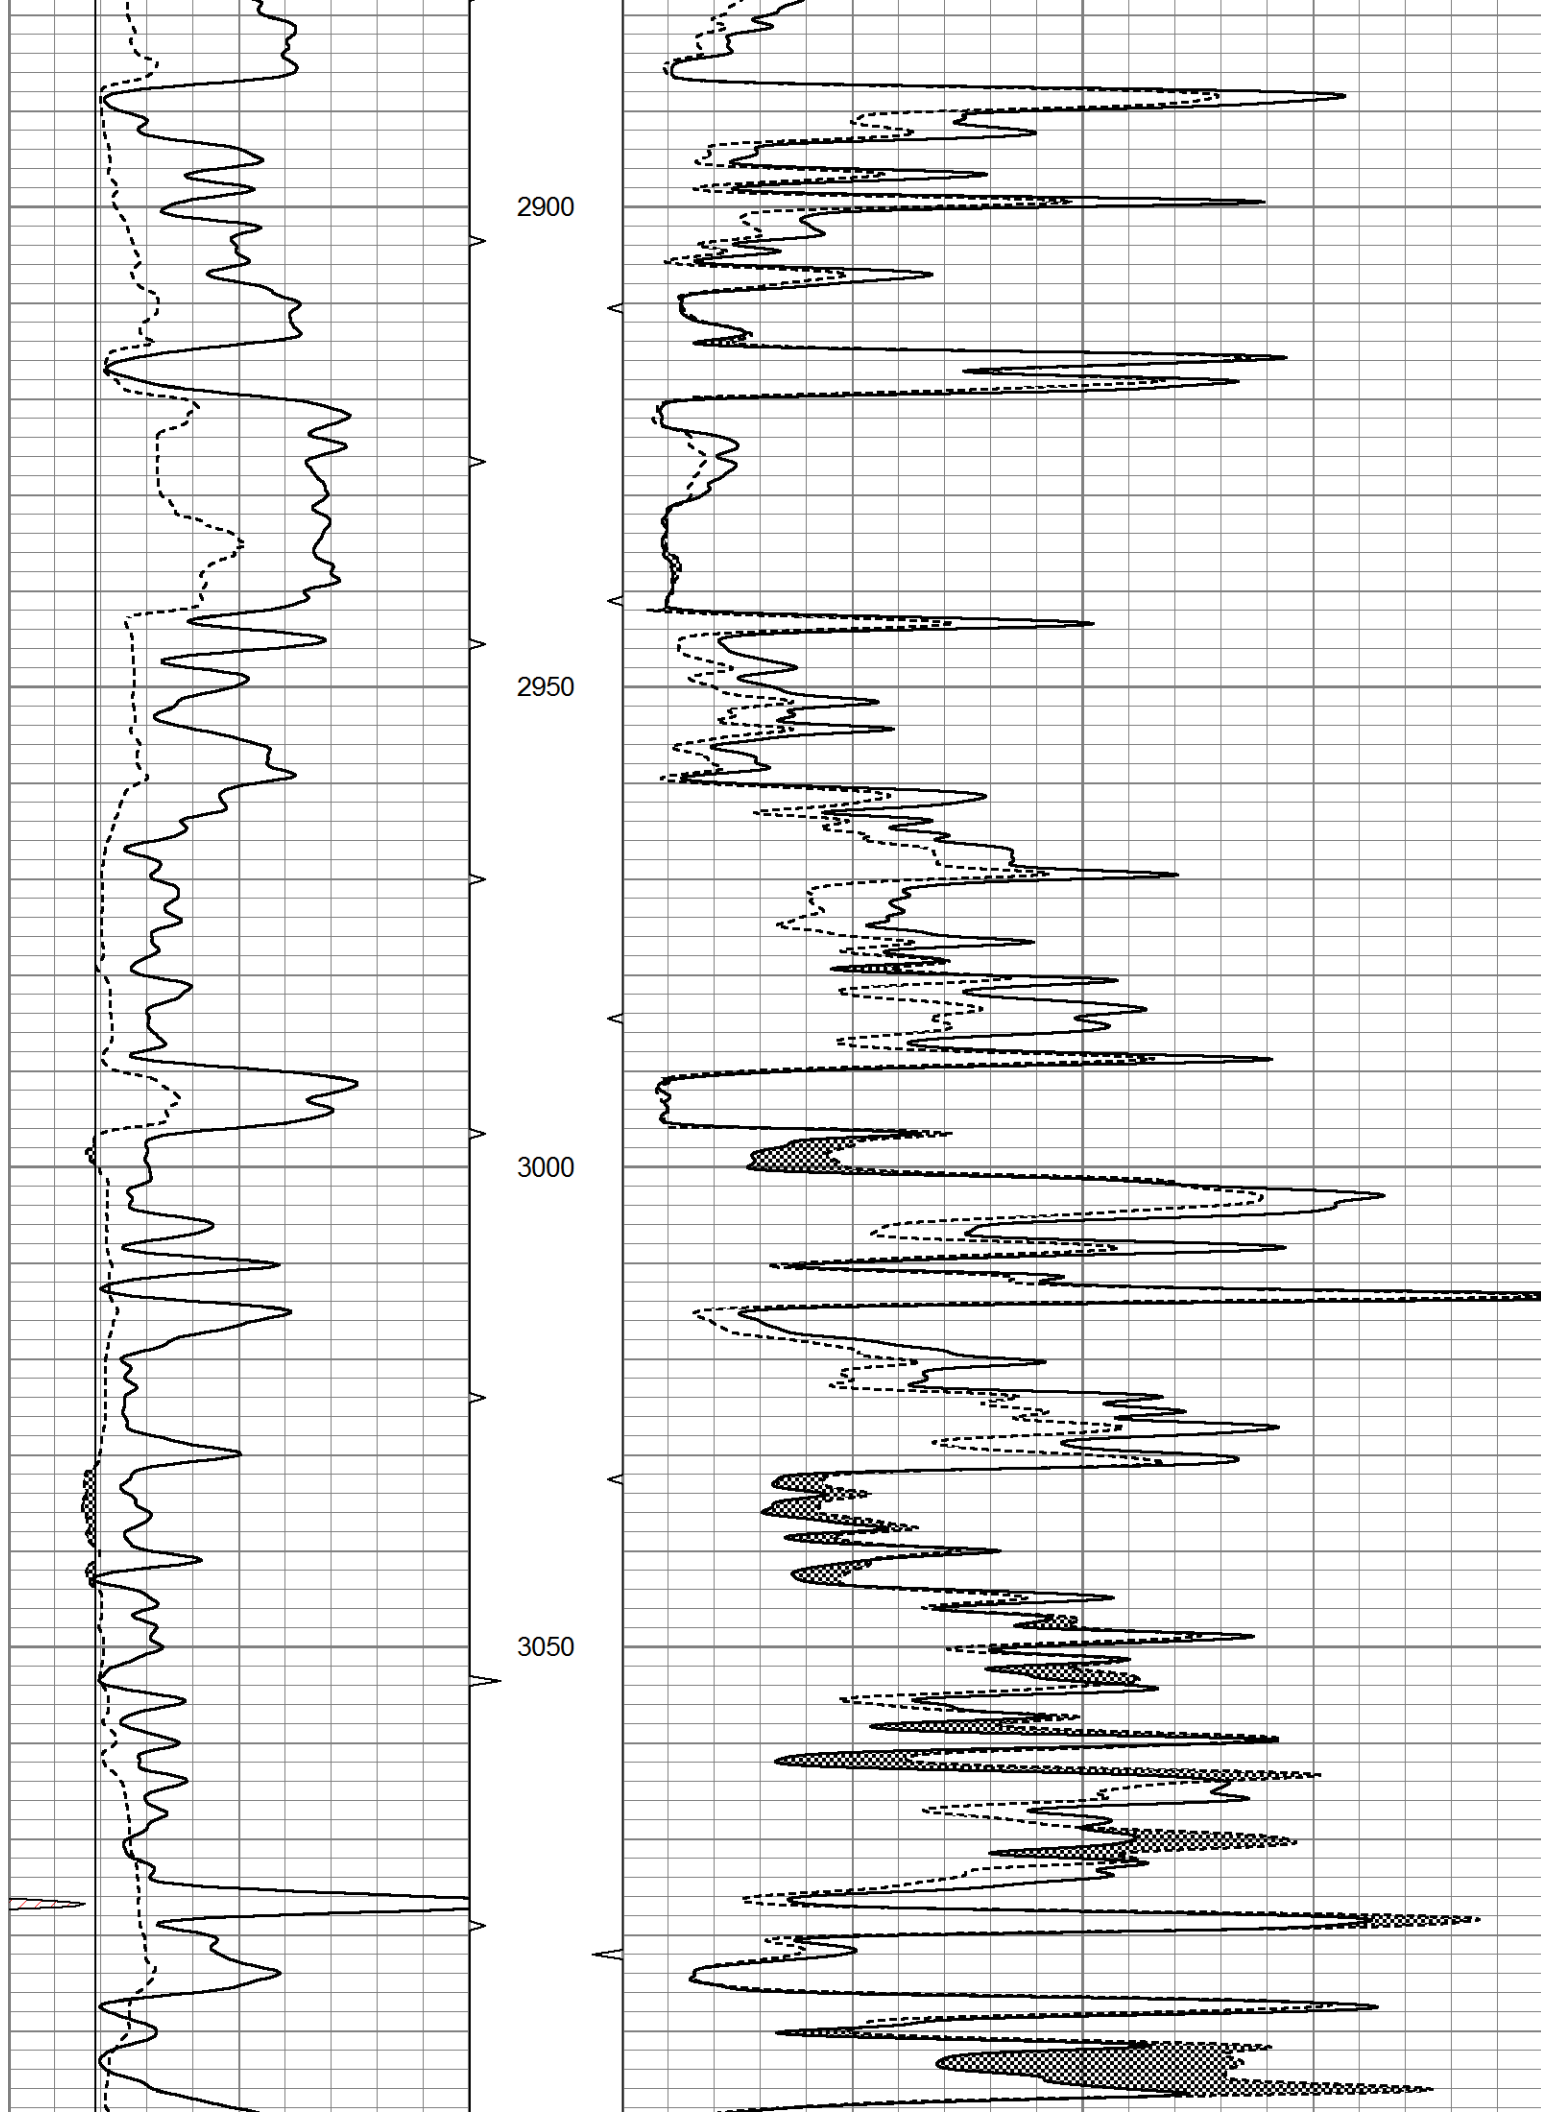

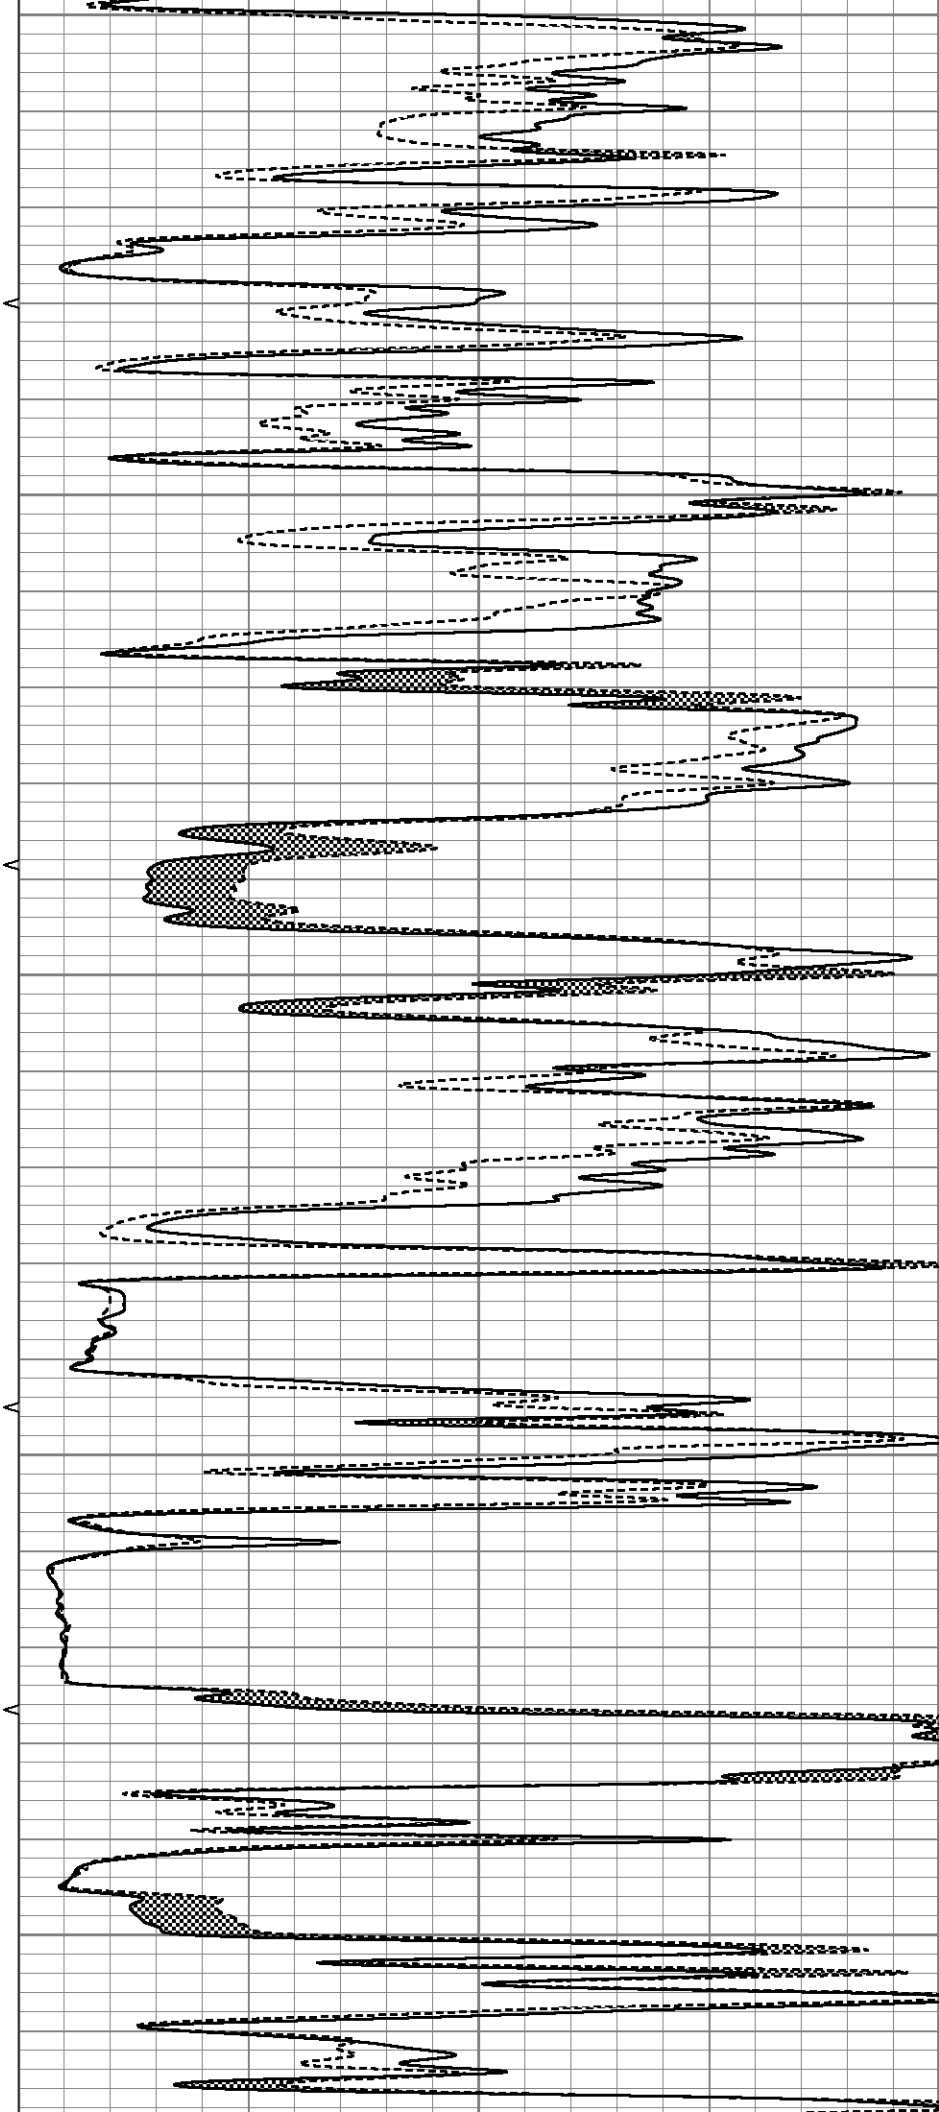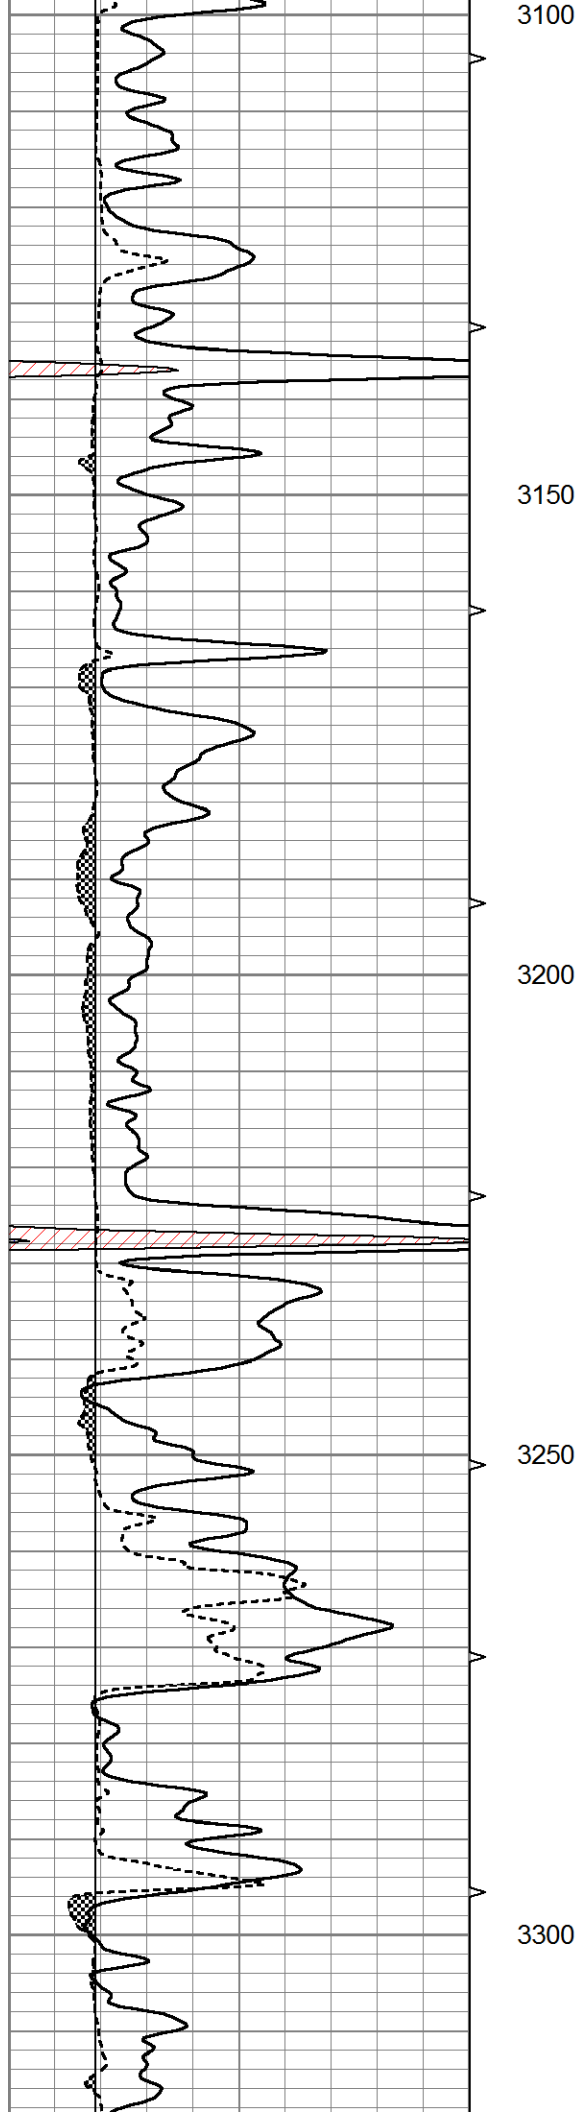

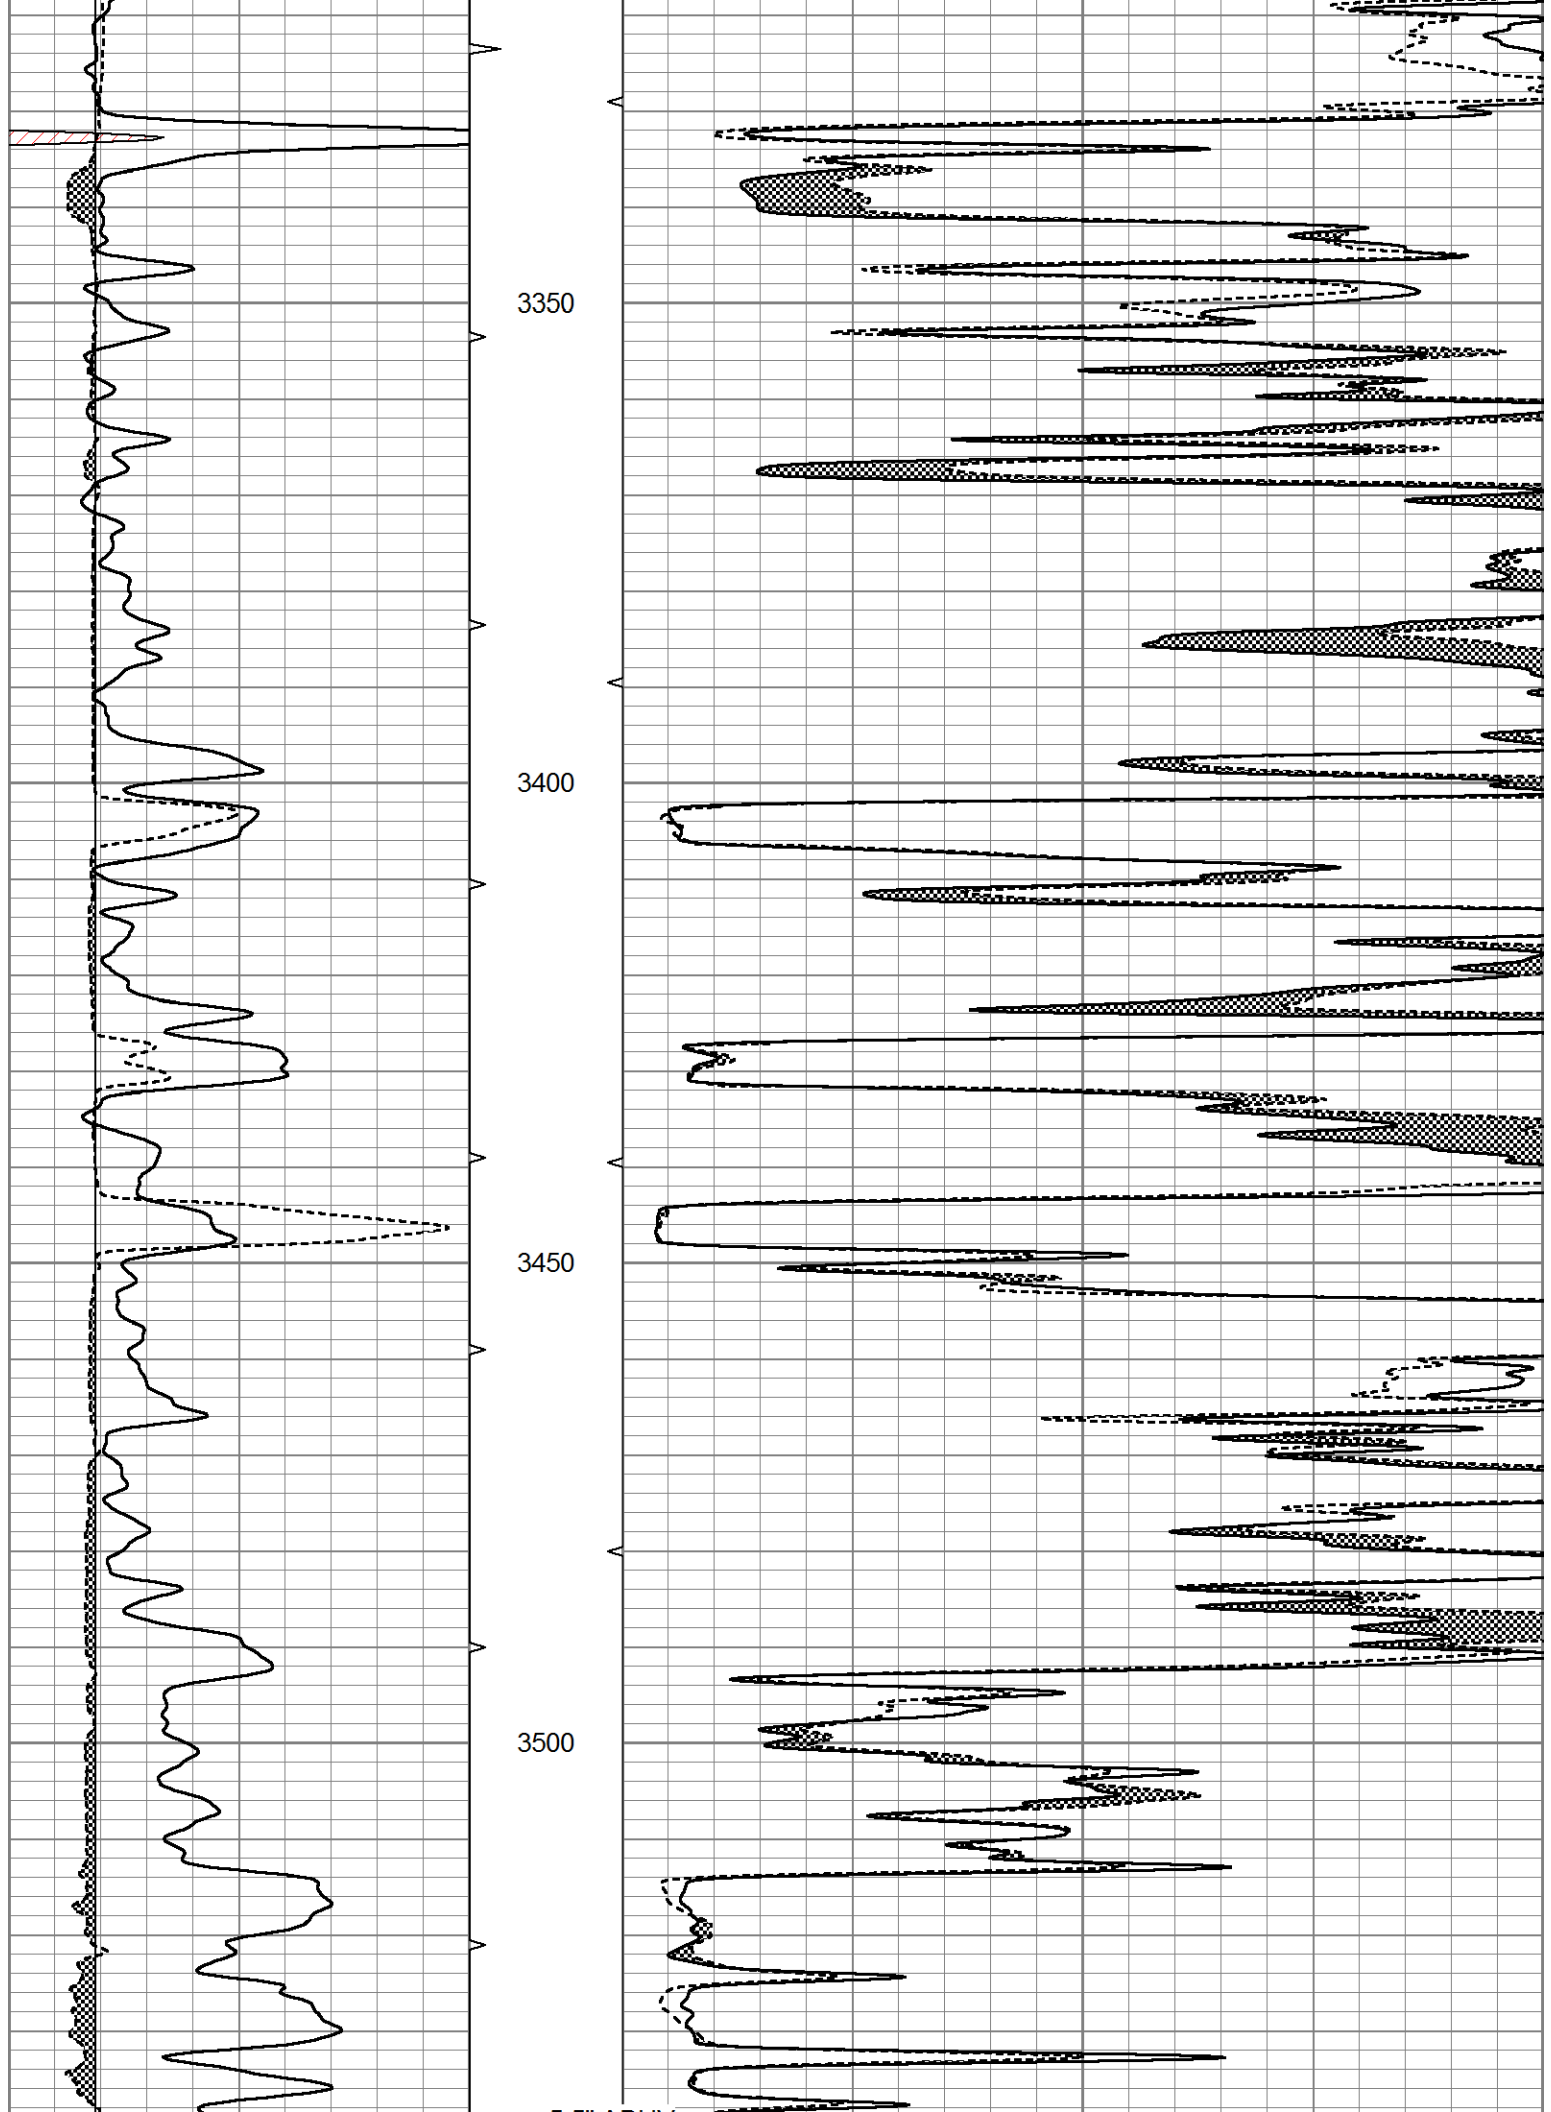


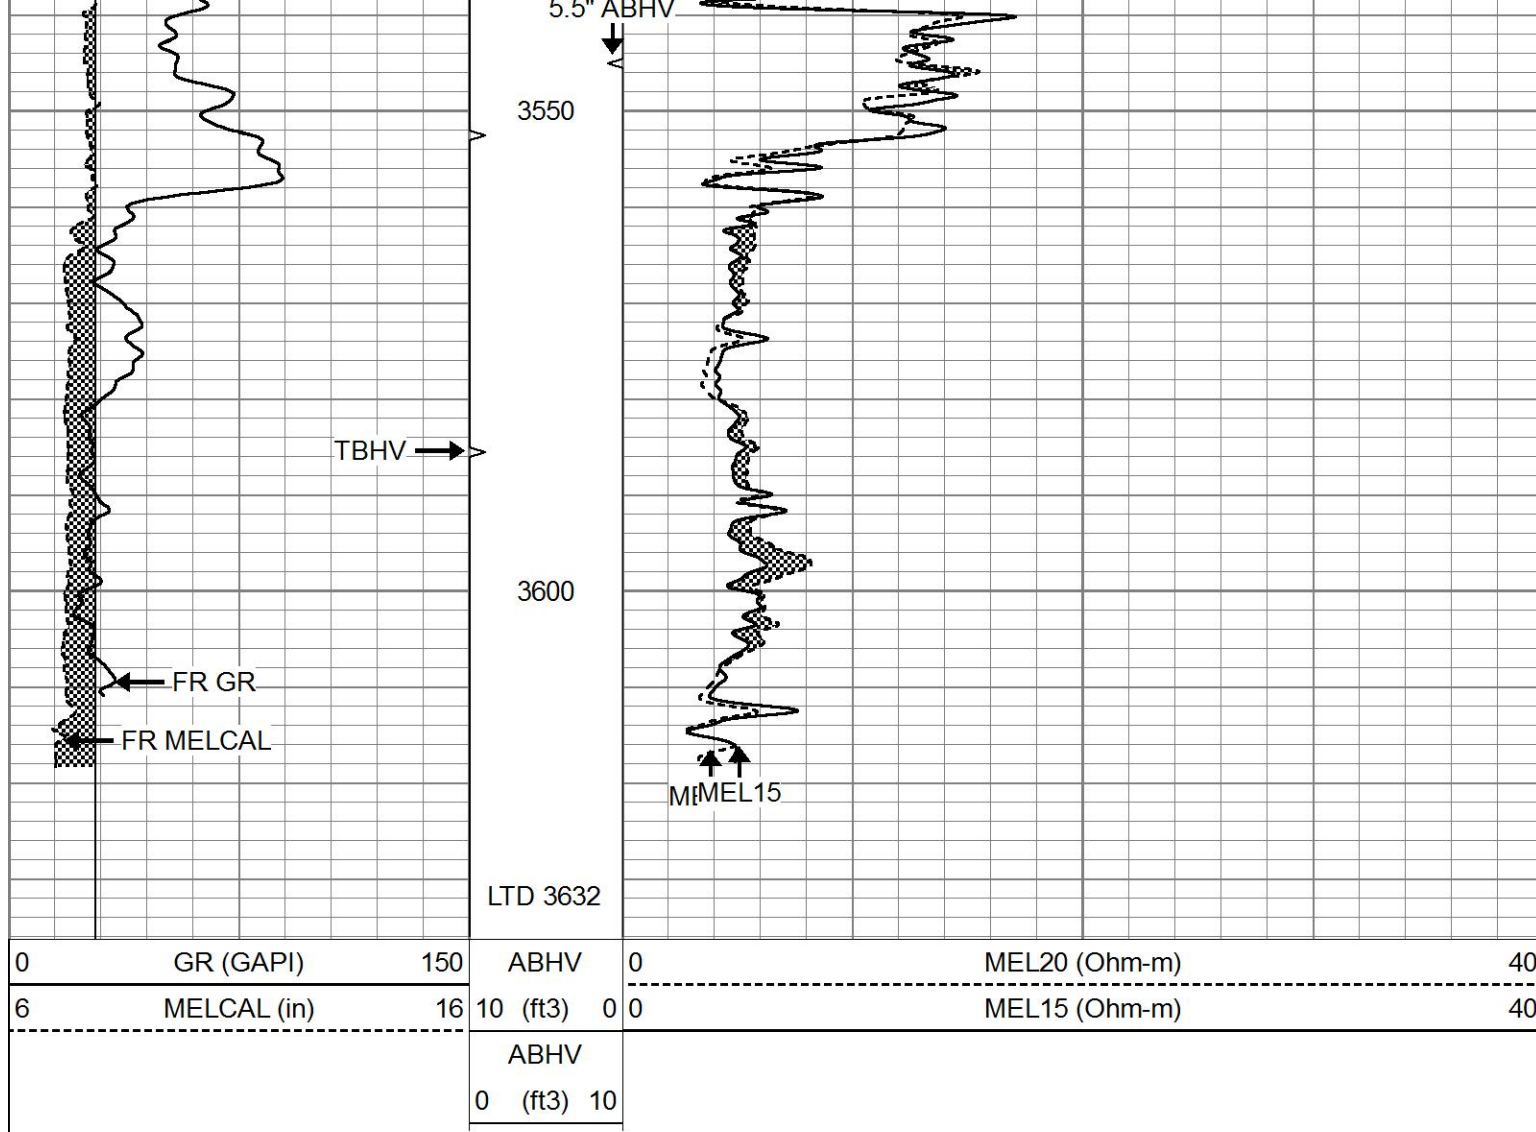


REPEAT SECTION

Database File 5673ddn.db
 Dataset Pathname pass5.1
 Presentation Format micro
 Dataset Creation Thu Oct 21 13:16:26 2021
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

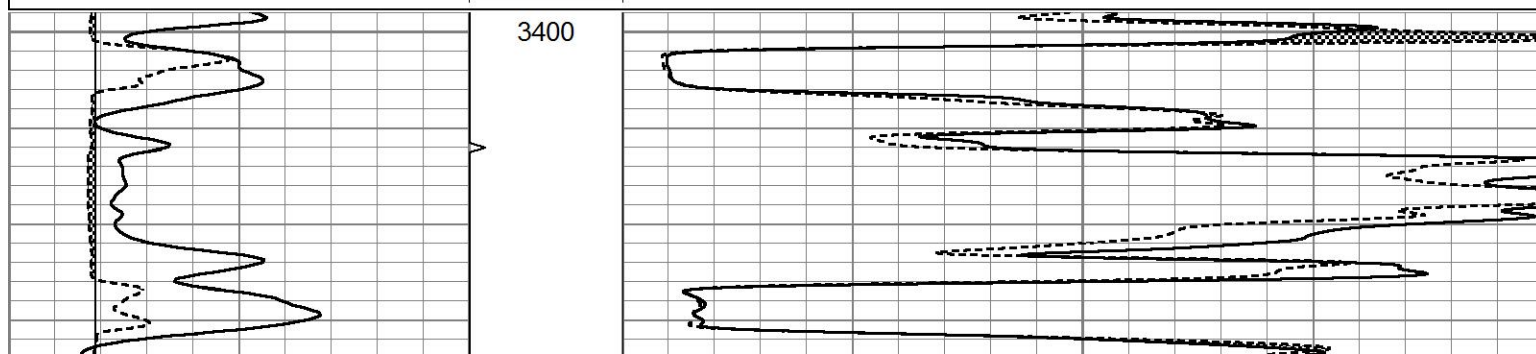

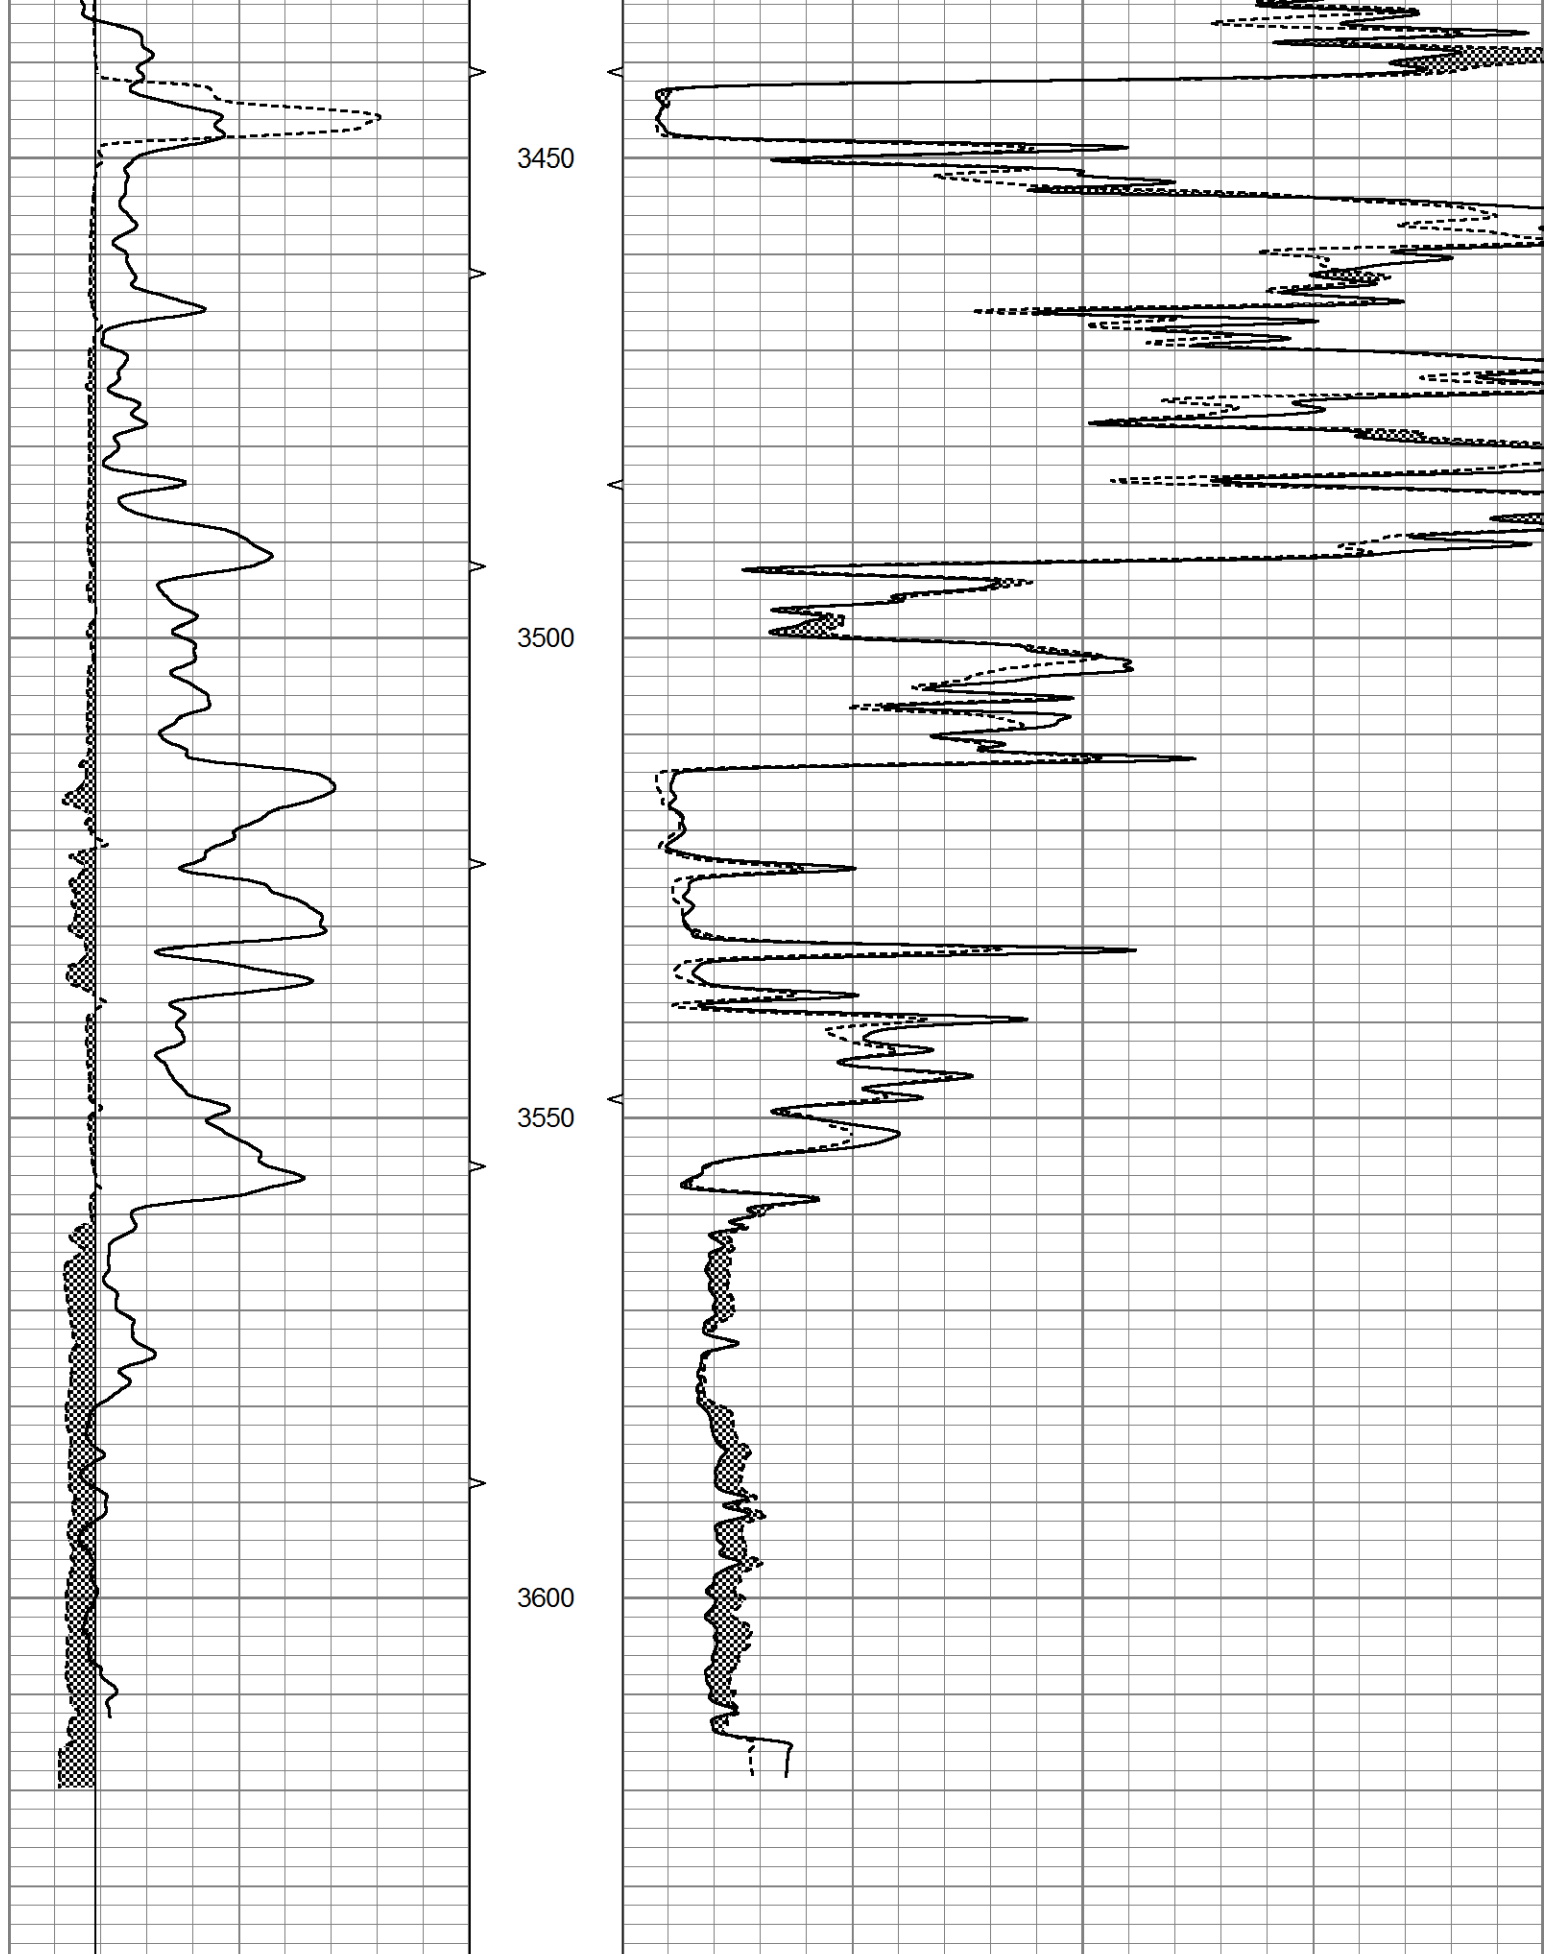

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0 0	MEL15 (Ohm-m)	40
			ABHV			

Calibration Report

Database File 5673ddn.db
 Dataset Pathname pass6.2
 Dataset Creation Thu Oct 21 13:47:28 2021

MICRO Calibration Report

Serial Number: 070912
 Tool Model: ProbeN
 Performed: Sat Oct 16 16:00:07 2021

Caliper Calibration: Gain=3.509 Offset=0.561

	Low Cal	High Cal
References	8.000	16.000
Readings	2.120	4.400

1.5" Calibration: Gain=28.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.002	1.239

2" Calibration: Gain=42.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.003	1.075

Gamma Ray Calibration Report

Serial Number: 070559
 Tool Model: OPEN_GR
 Performed: Thu Oct 07 18:44:52 2021

Calibrator Value: 1.0 GAPI

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity: 0.3800 GAPI/cps