



MICRO LOG

Company VINCENT OIL CORPORATION

Well PERKINS #4-3

Field MULBERRY CREEK

County FORD State KANSAS

Location: API #: 15-057-21057-0000

496' FNL & 364' FWL
S/2 - NW - NW - NW

SEC 3 TWP 29S RGE 23W

Permanent Datum GROUND LEVEL Elevation 2534
Log Measured From KELLY BUSHING 12' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL/SONIC

Elevation
K.B. 2546
D.F. 2544
G.L. 2534

Date 10/16/21

Run Number TWO

Depth Driller 5340

Depth Logger 5340

Bottom Logged Interval 5324

Top Log Interval 4200

Casing Driller 8 5/8" @ 679'

Casing Logger 678

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.1/58

pH / Fluid Loss 10.0/8.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .450 @ 75F

Rmf @ Meas. Temp .338 @ 75F

Rmc @ Meas. Temp .540 @ 75F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .264 @ 128F

Time Circulation Stopped 5 HOURS

Time Logger on Bottom 3.45 P.M.

Maximum Recorded Temperature 128F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By KEN LeBLANC

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-057-21057-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
KINGSDOWN, KS. & HWY 54, 2N. TO "WILBURN RD.", 4W., S. INTO





MAIN SECTION


Database File	5671pe.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Sat Oct 16 16:30:04 2021
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

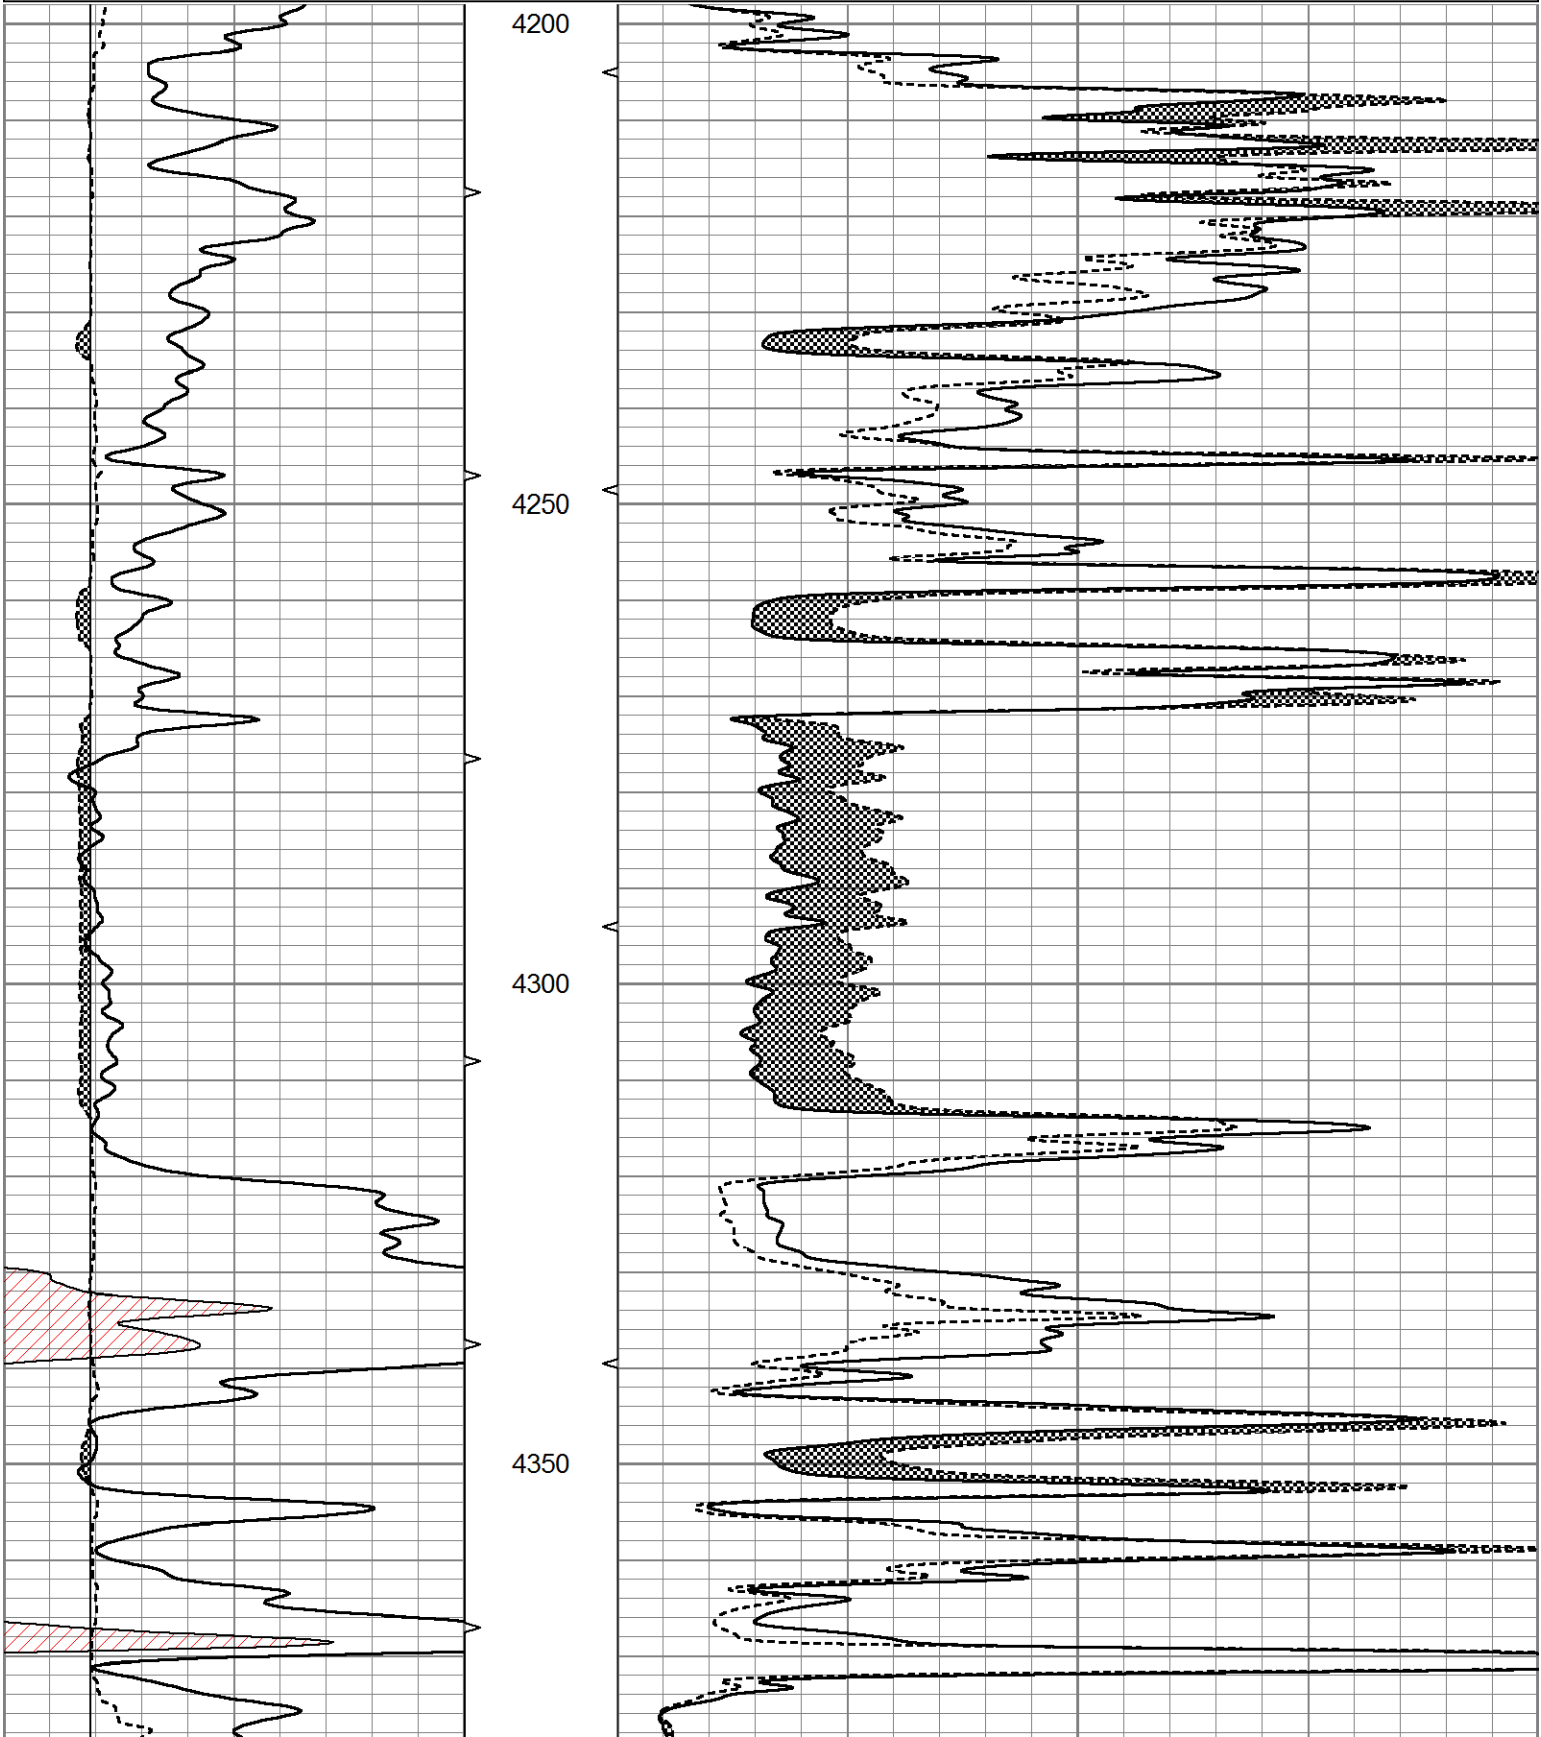

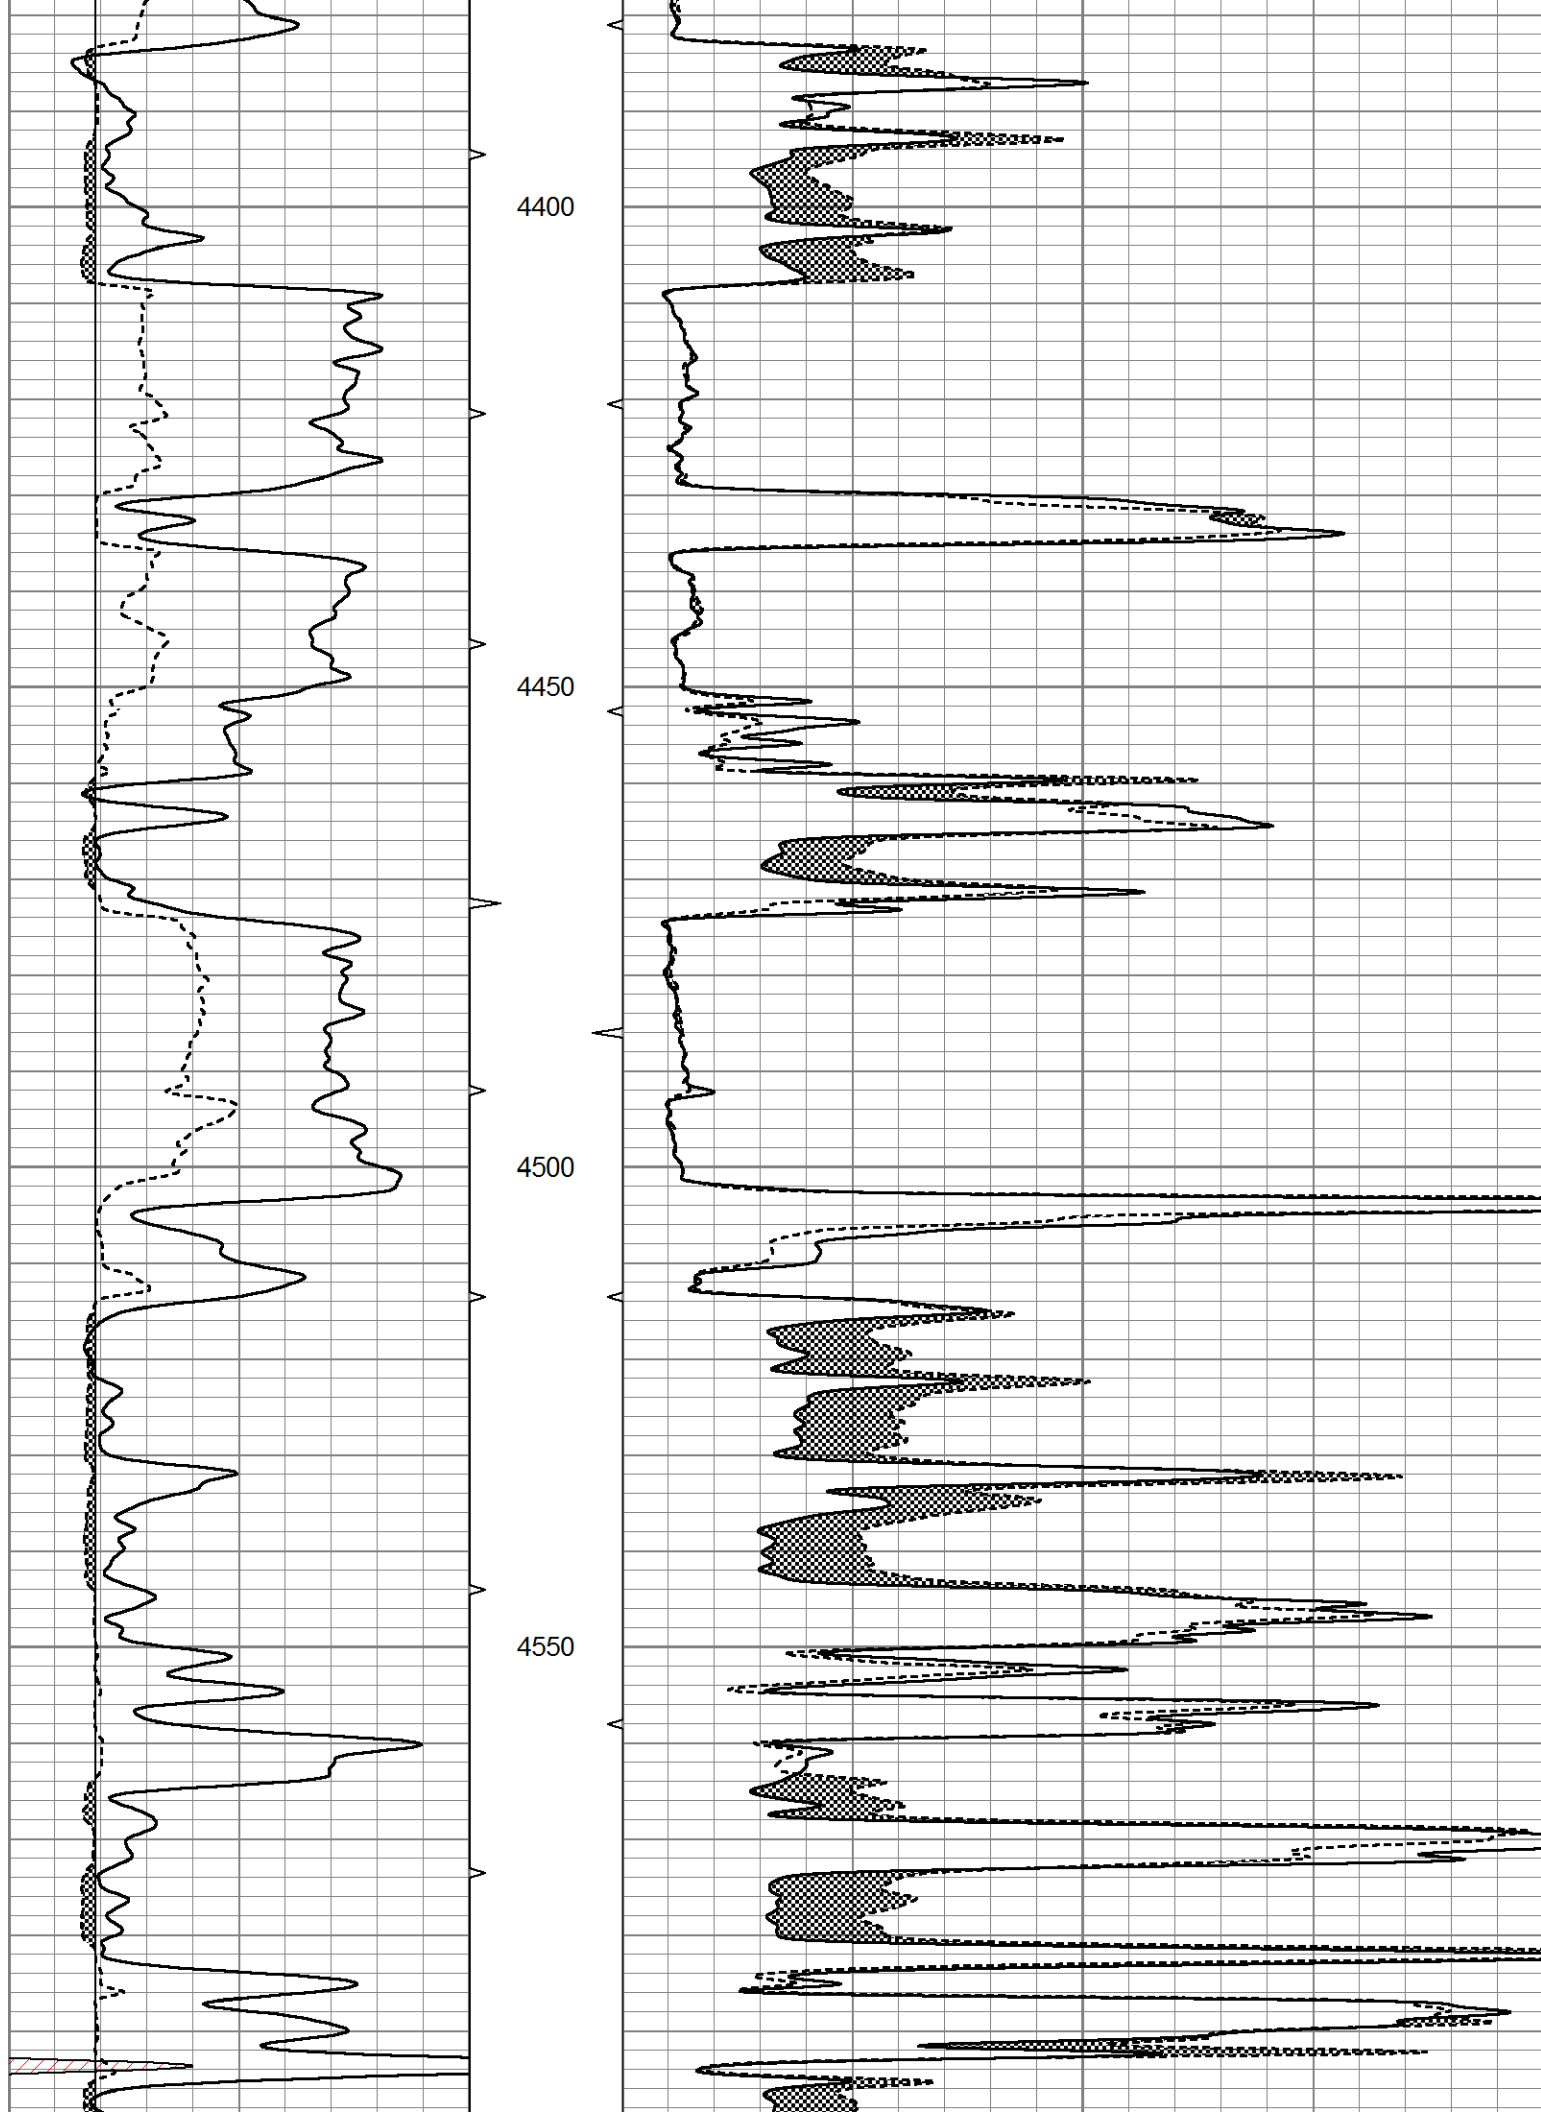

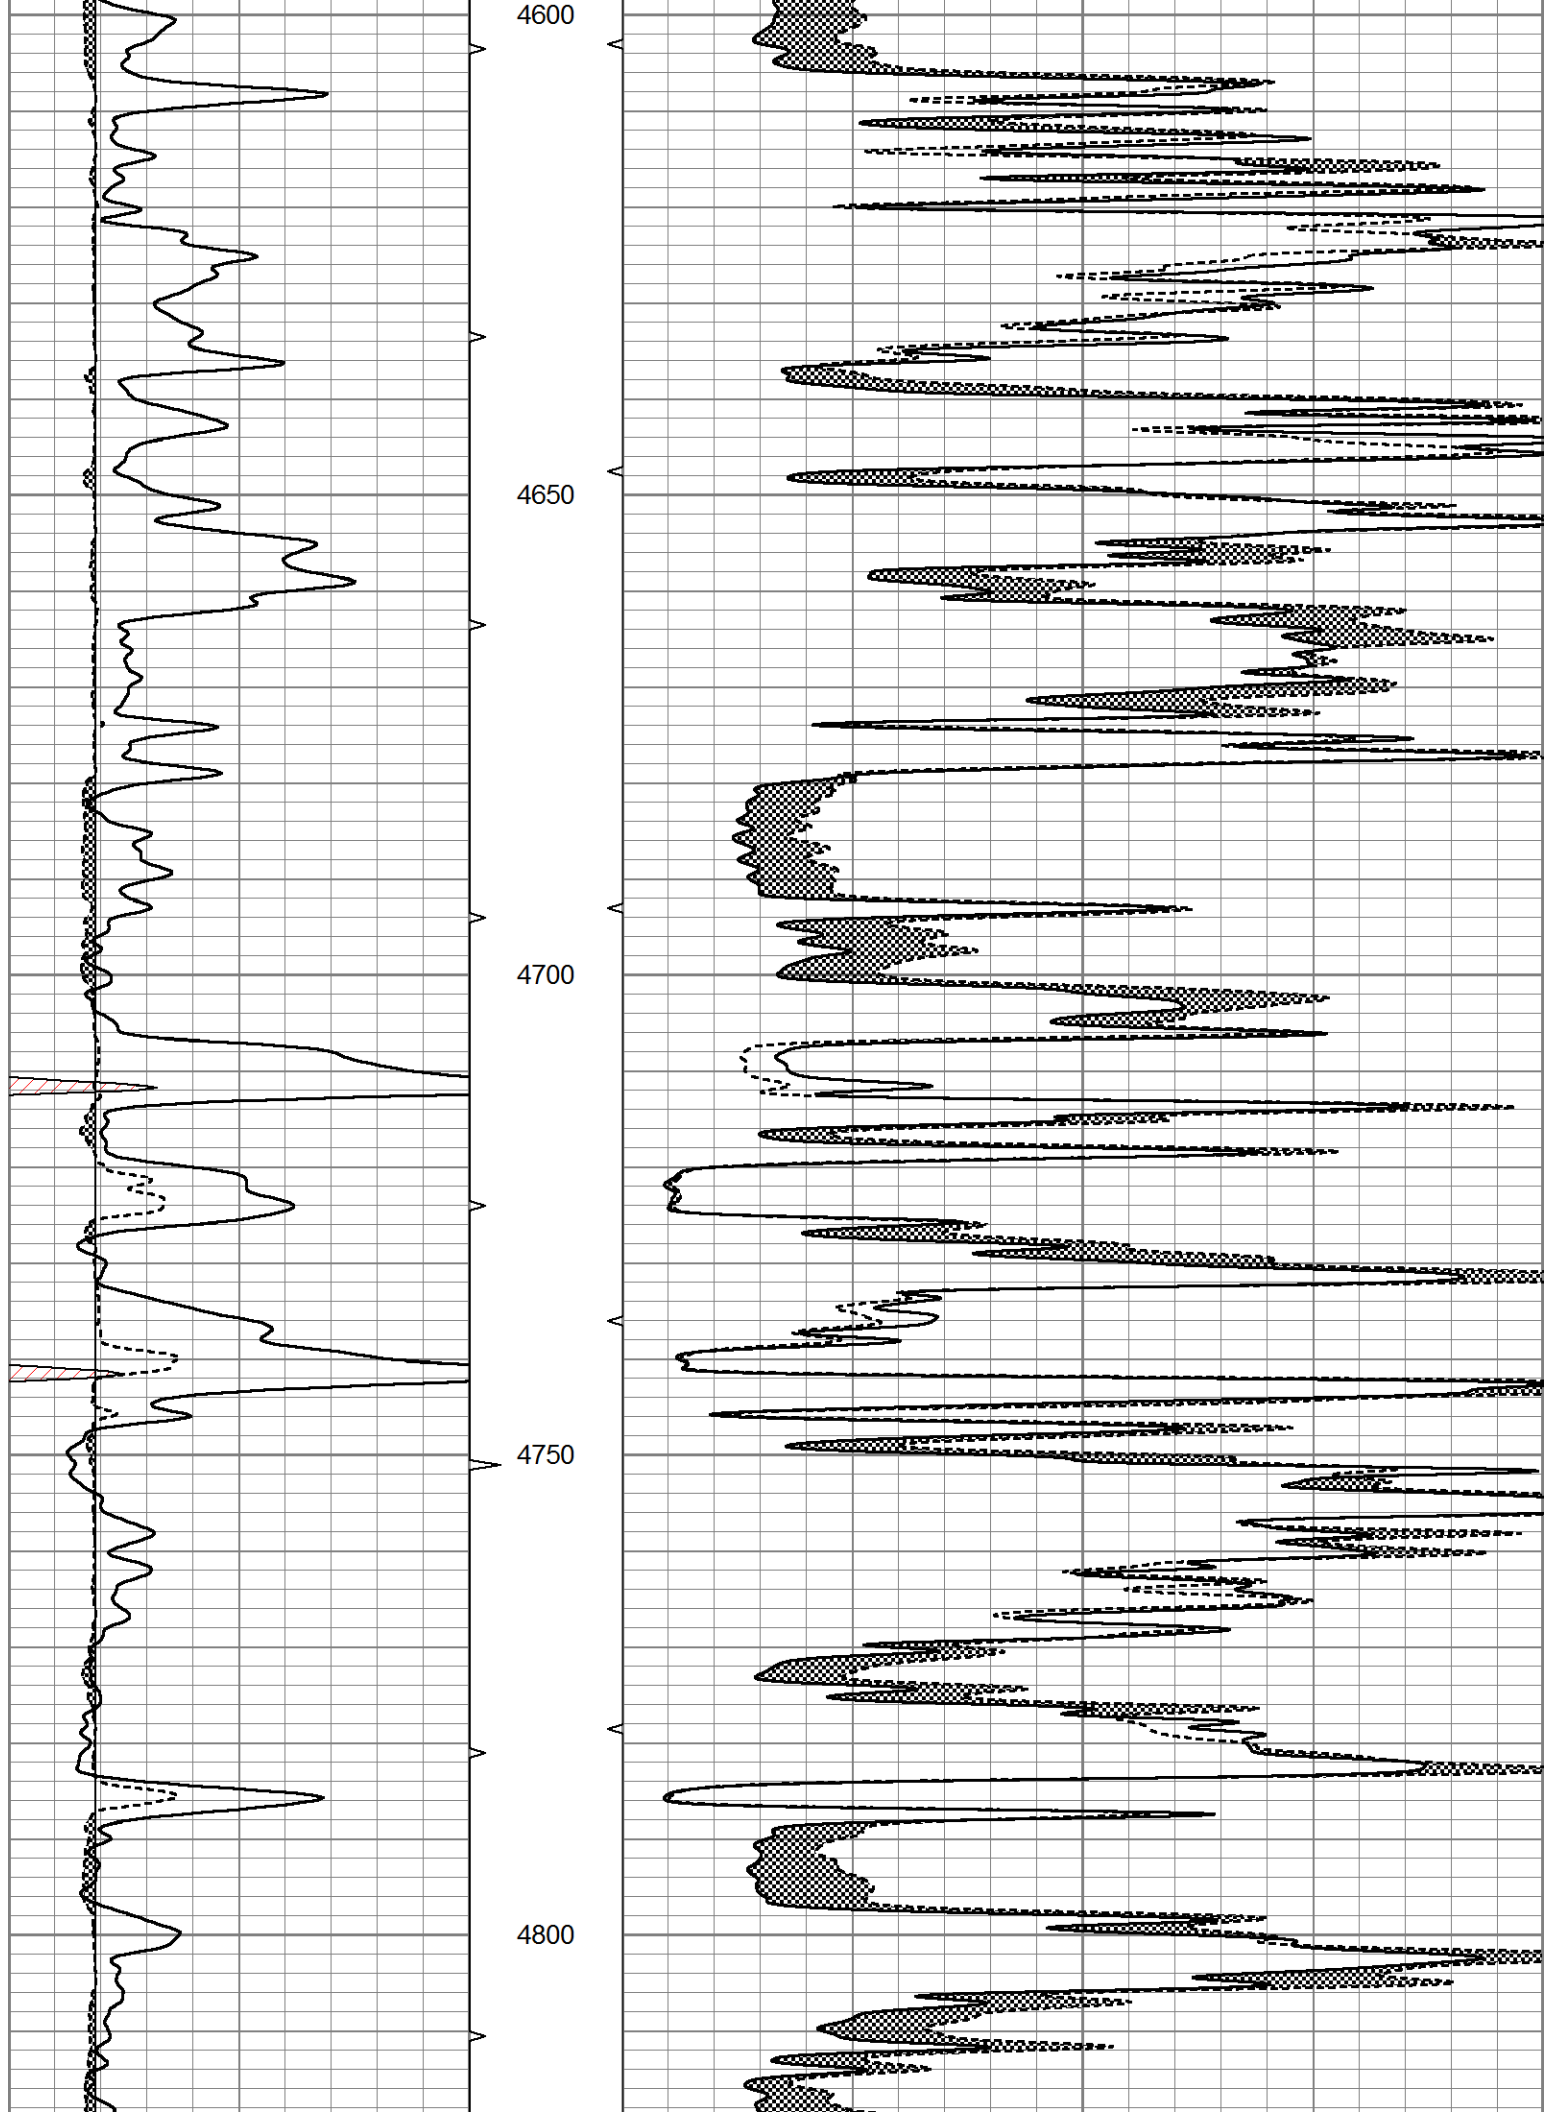

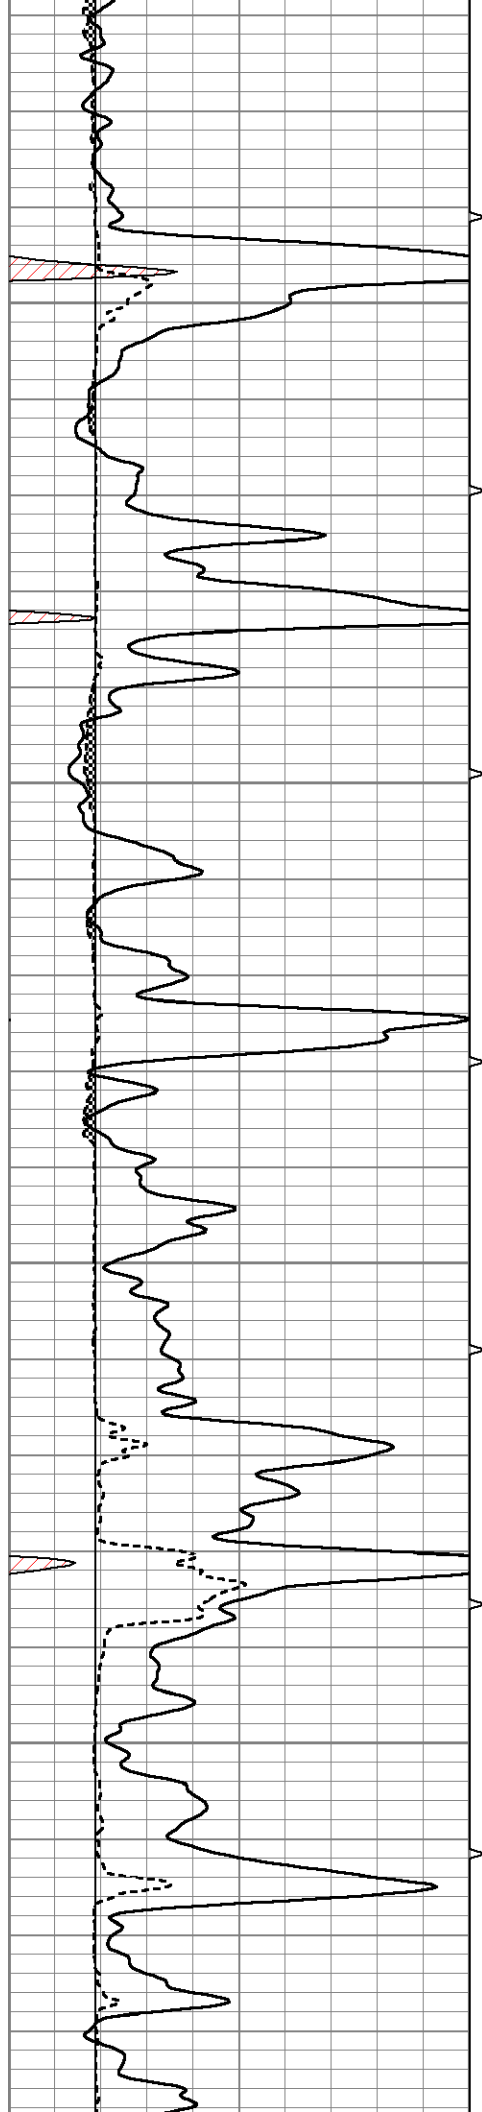



4850

4900

4950

5000

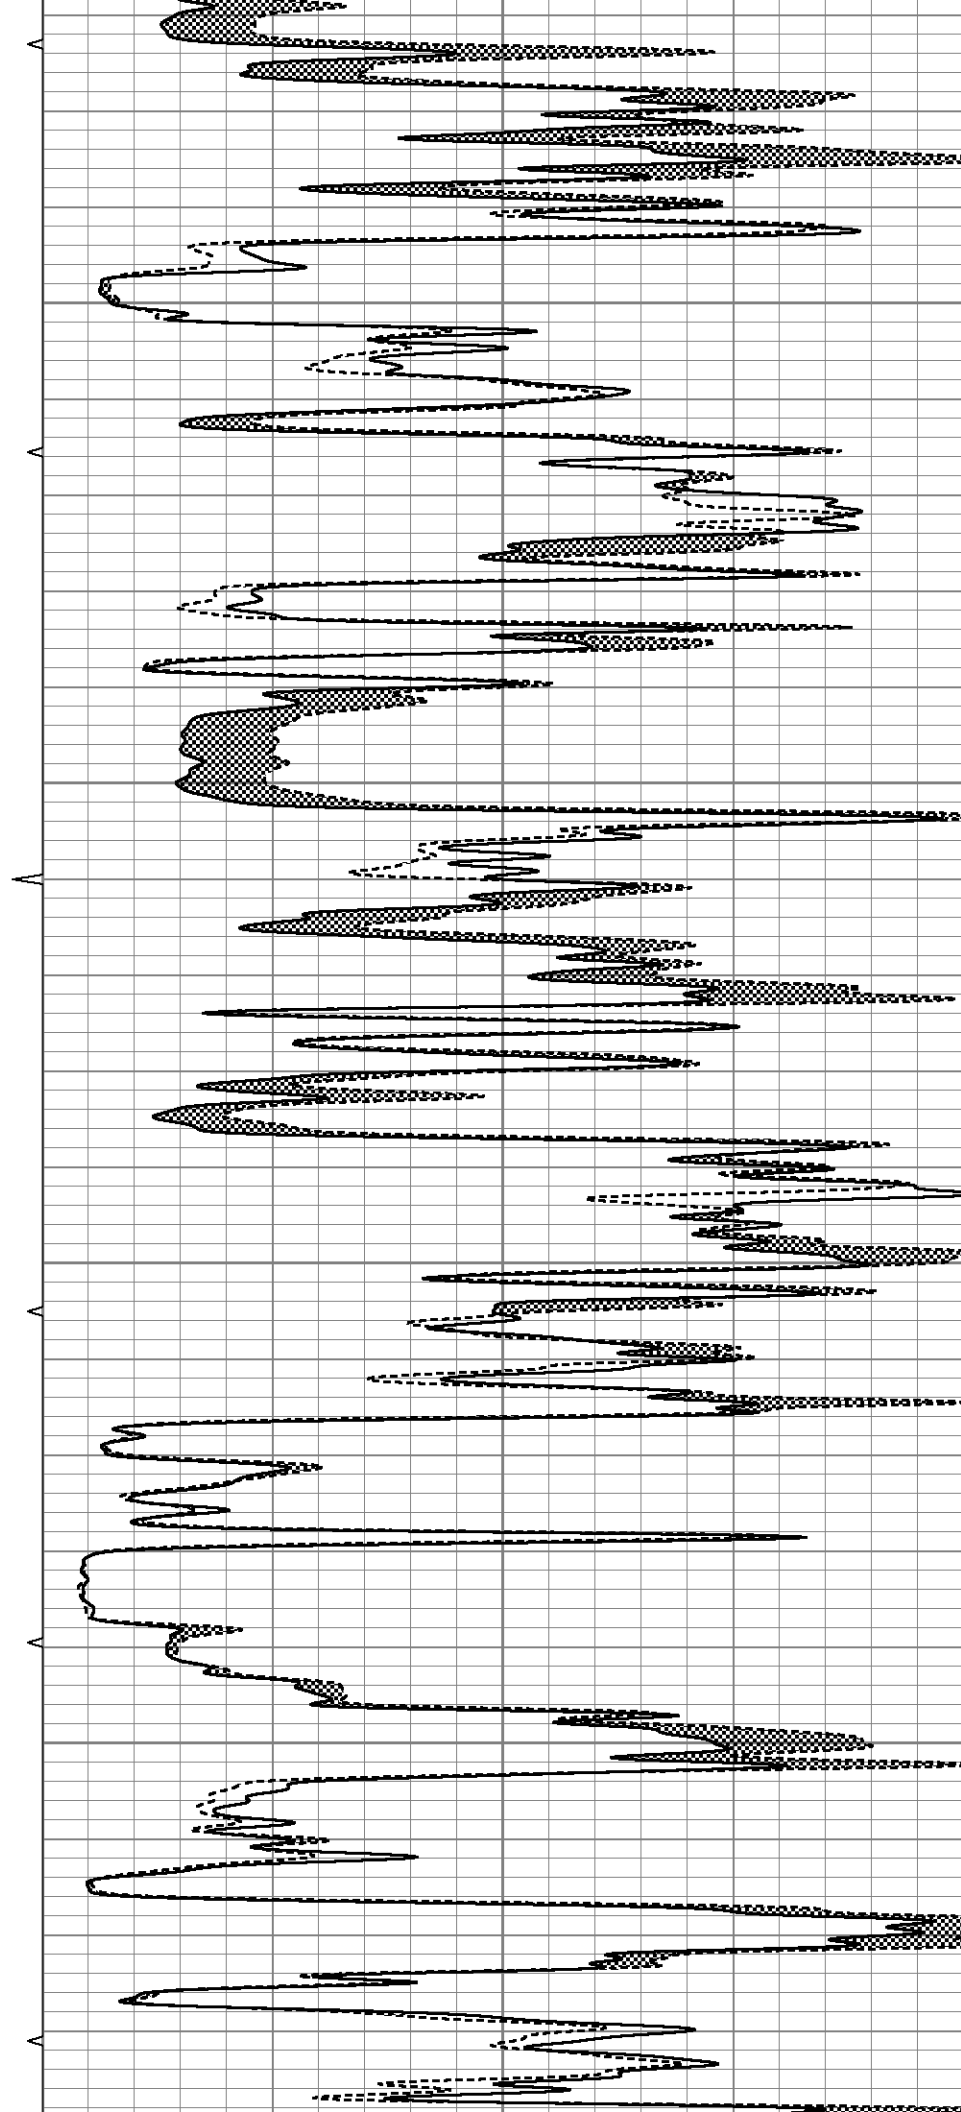

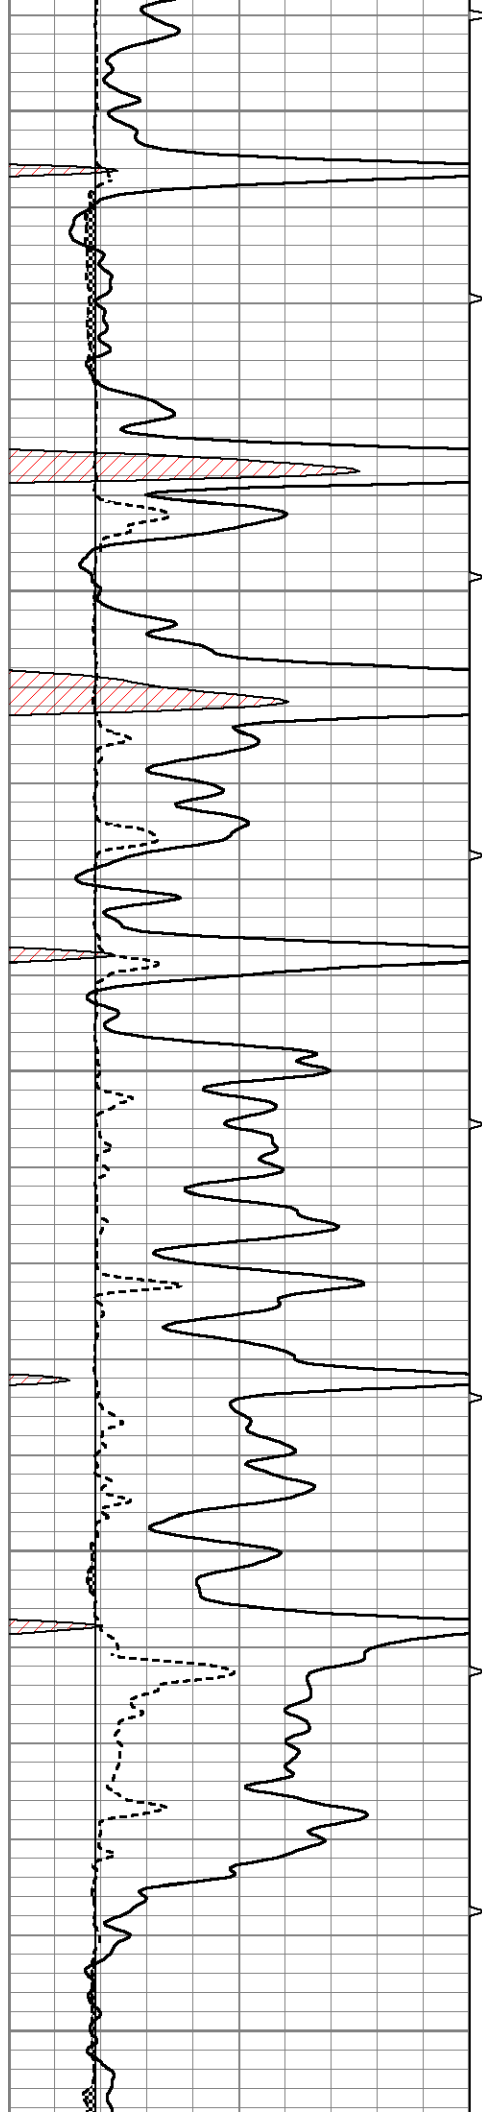


5050


5100

5150

5200



5250

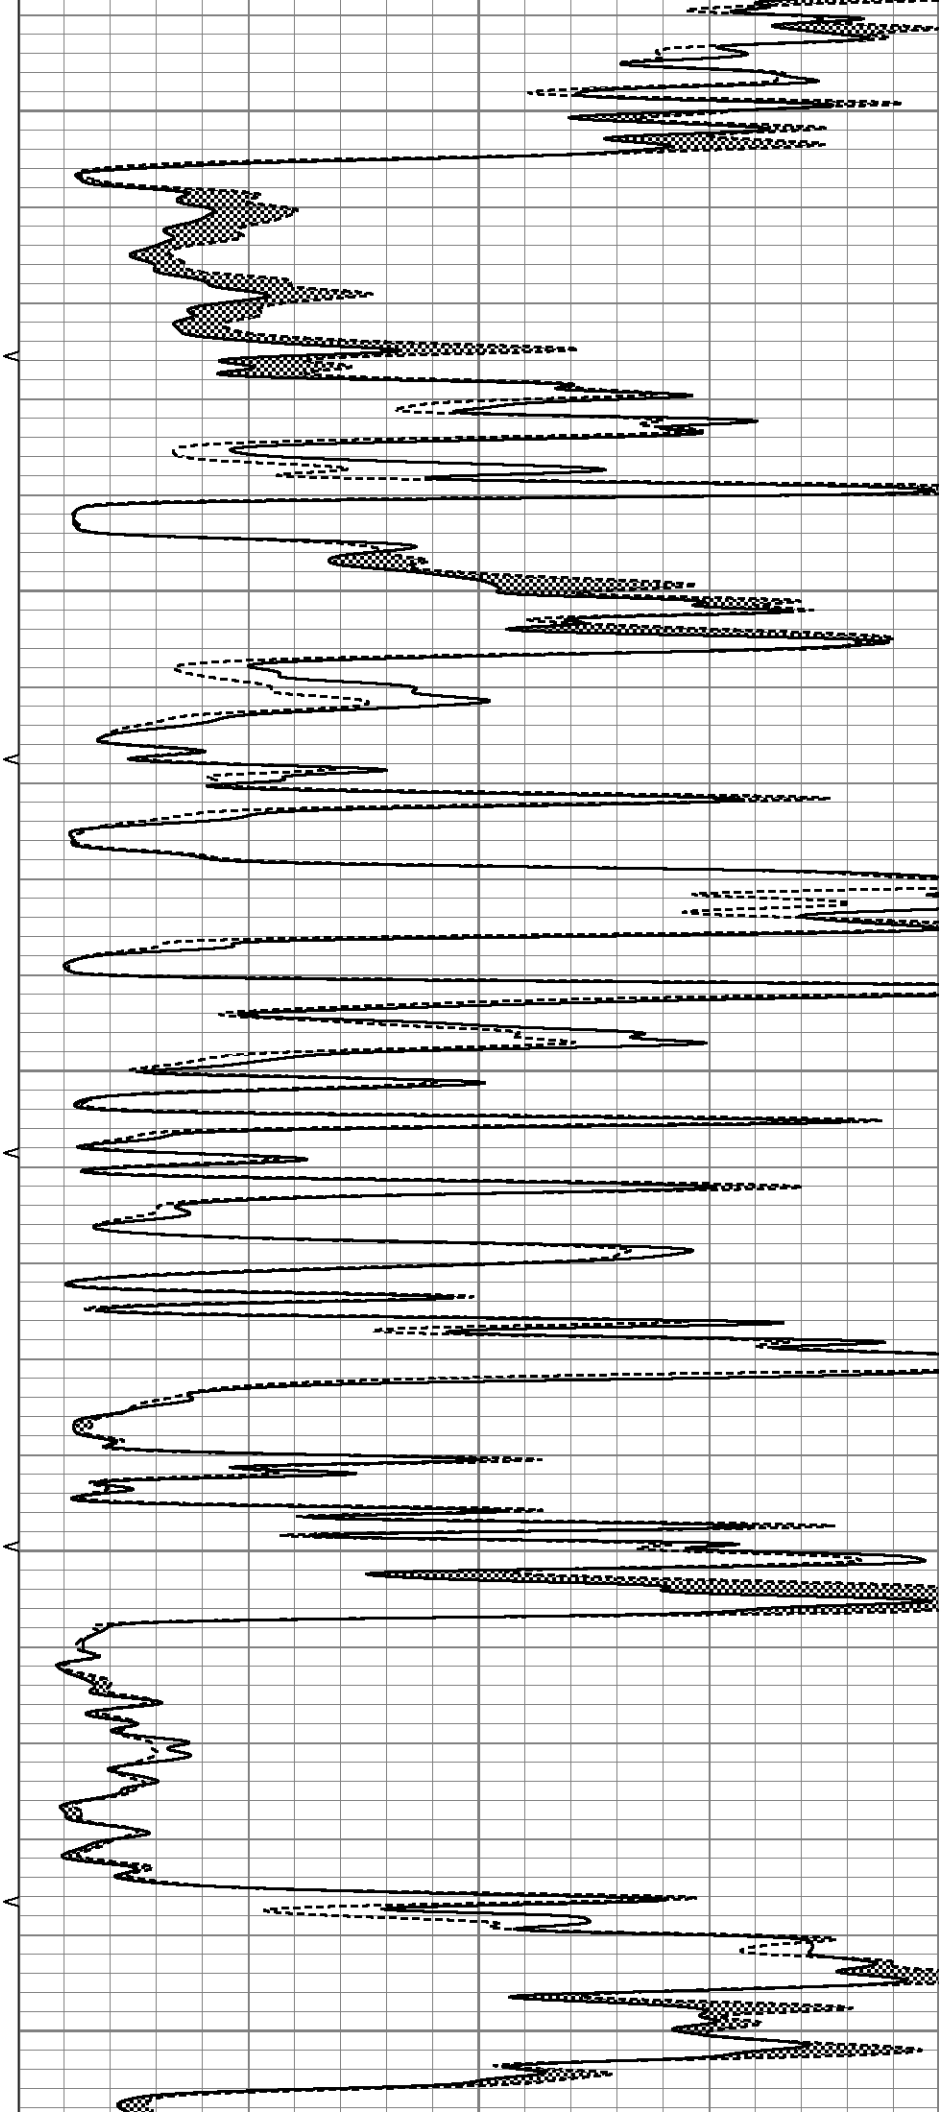


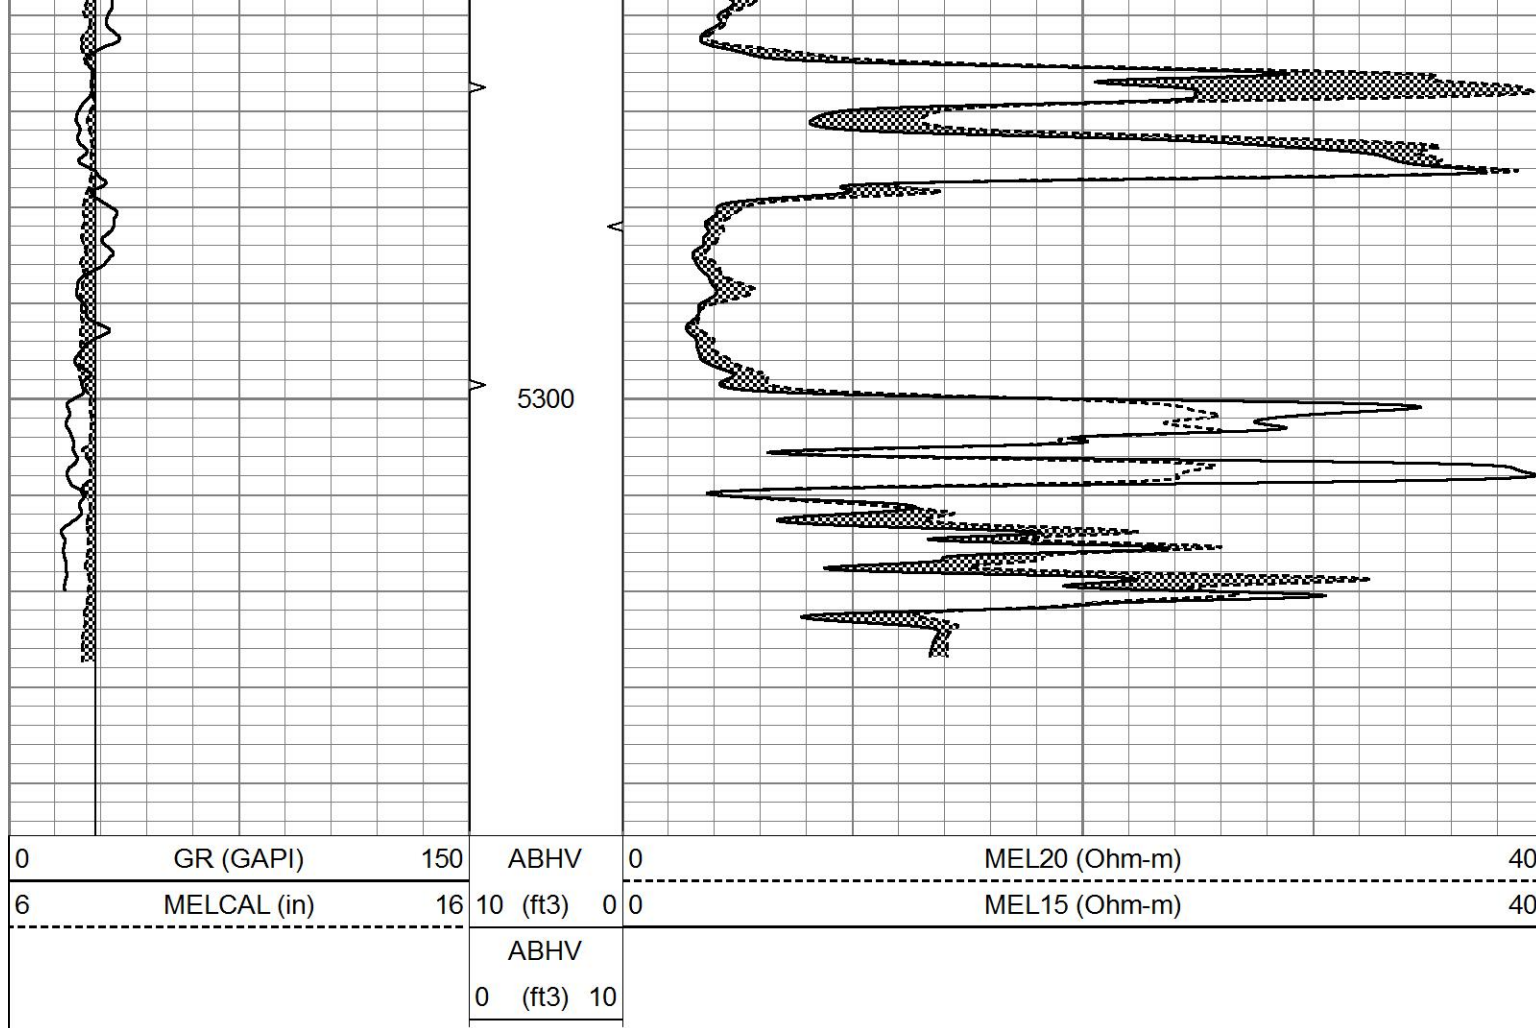

REPEAT SECTION

Database File 5671pe.db
 Dataset Pathname pass5.1
 Presentation Format micro
 Dataset Creation Sat Oct 16 15:55:14 2021
 Charted by Depth in Feet scaled 1:240

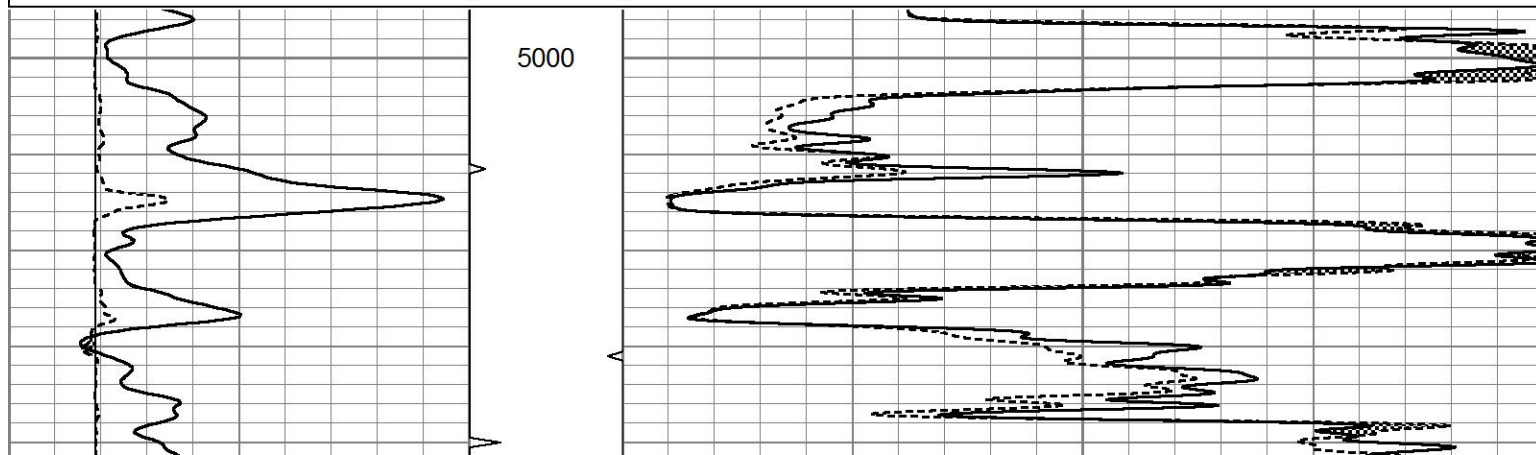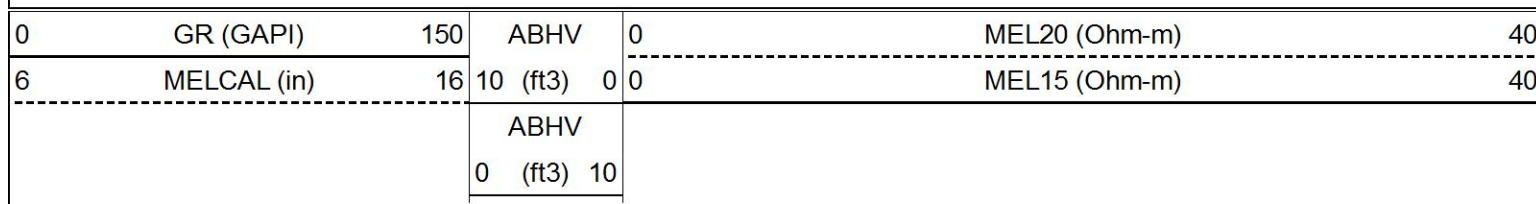

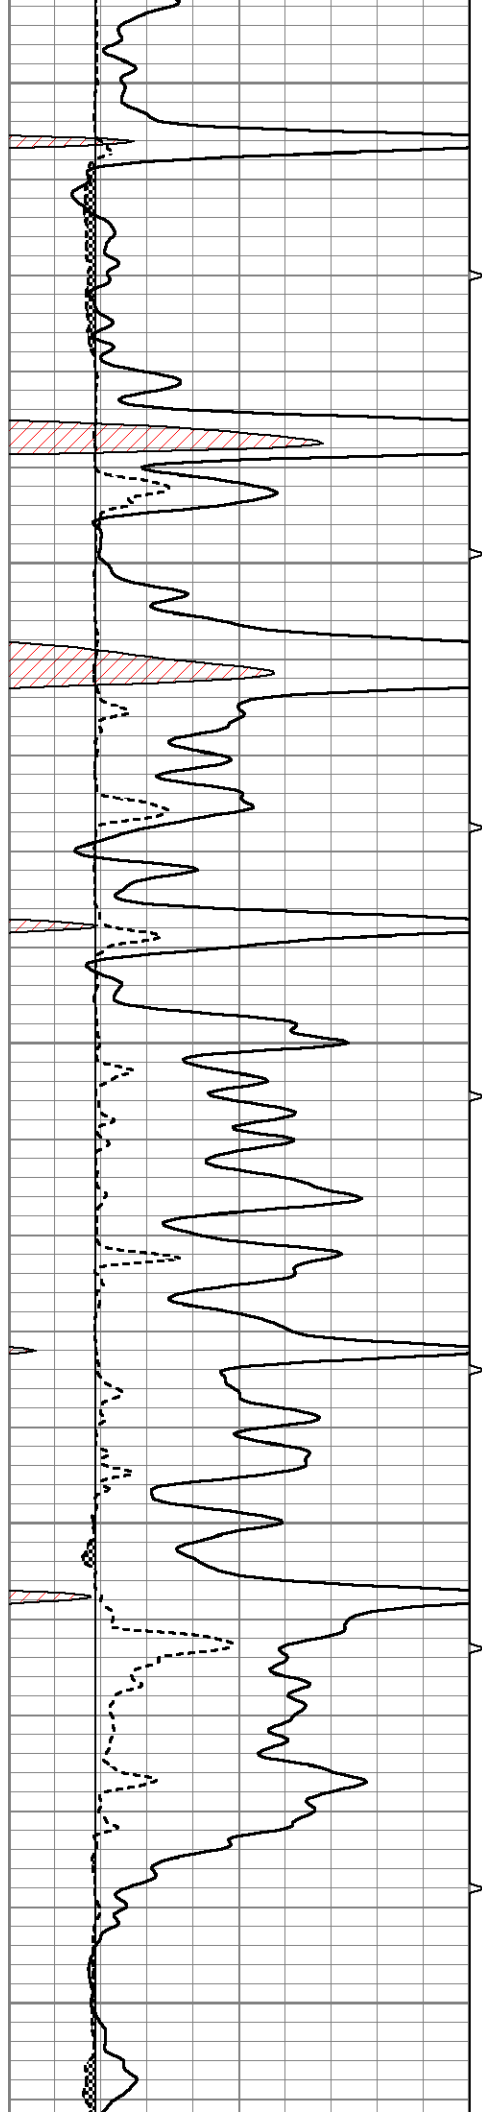


5050


5100

5150

5200

5250

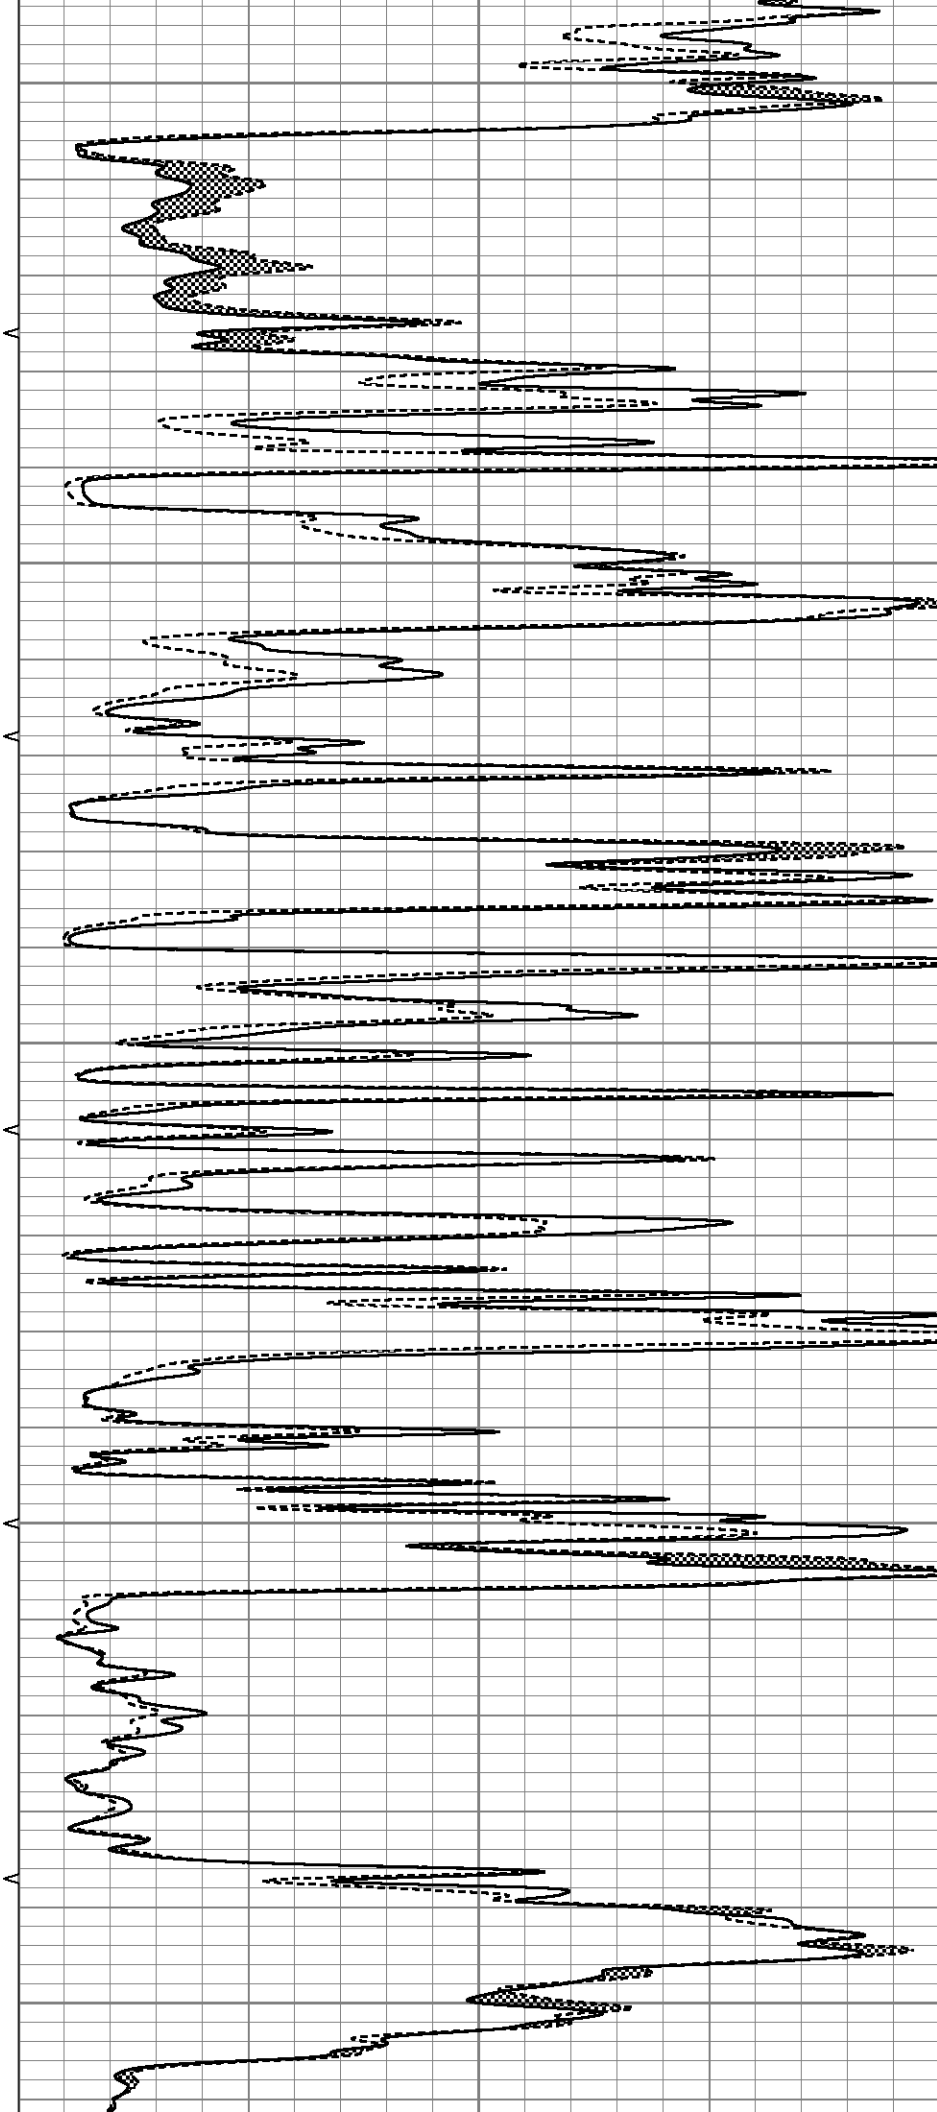

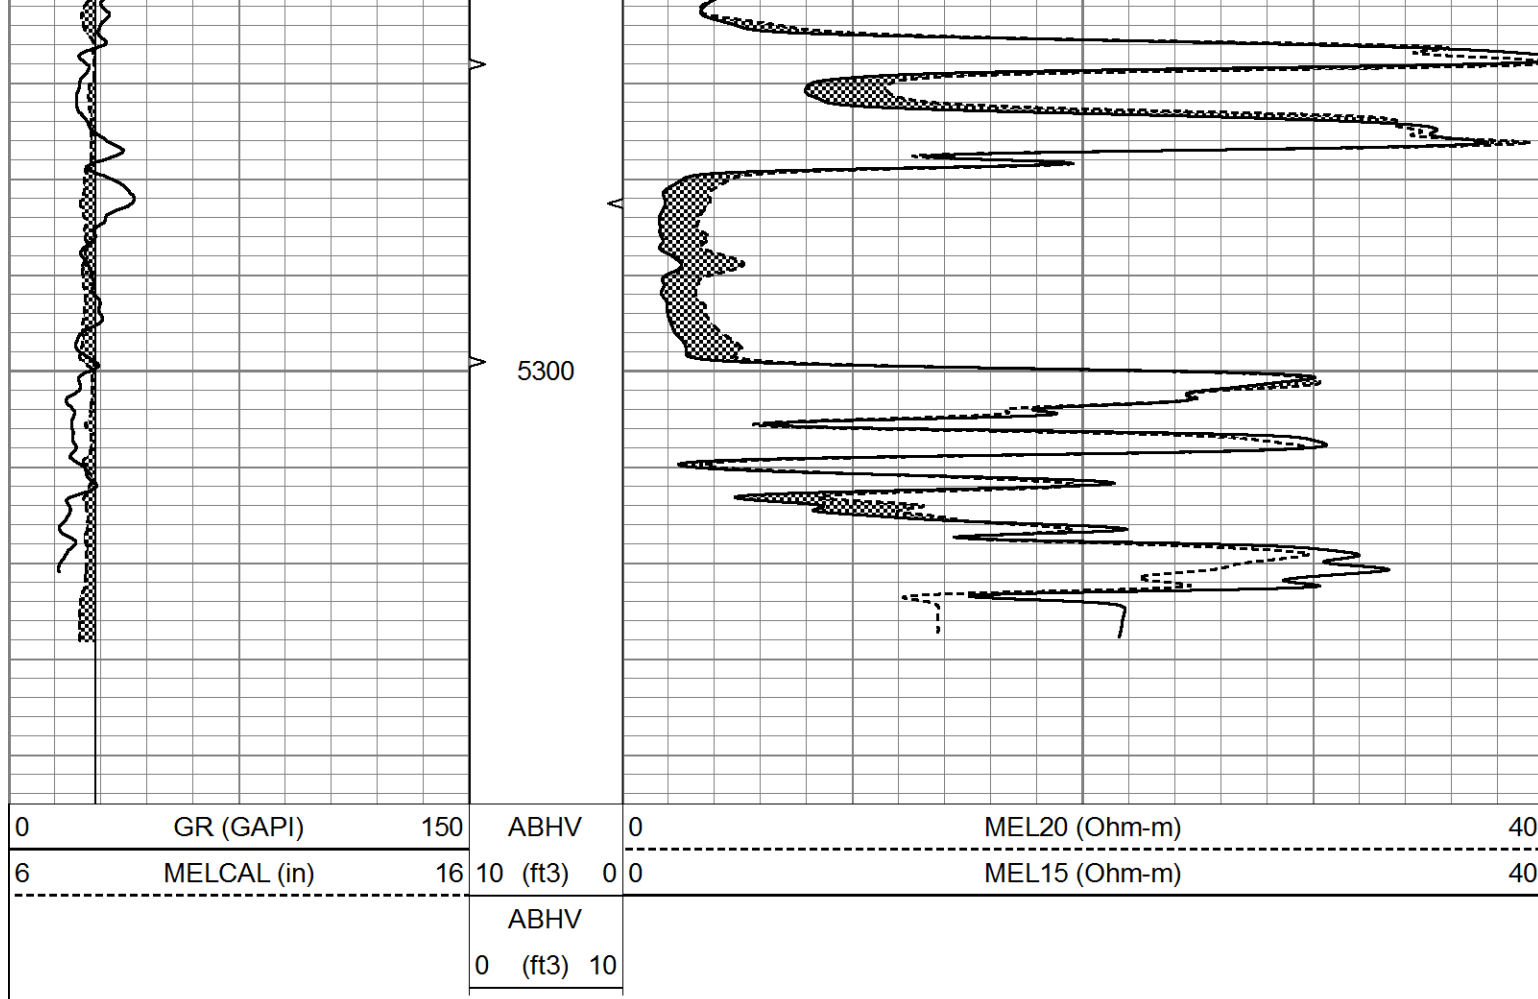

Database File		5671pe.db	
Dataset Pathname		pass6.2	
Dataset Creation		Sat Oct 16 16:30:04 2021	
MICRO Calibration Report			
Serial Number:		070912	
Tool Model:		ProbeN	
Performed:		Tue Sep 21 12:41:26 2021	
Caliper Calibration:		Gain=3.509	Offset=0.561
References		Low Cal	High Cal
Readings		8.000	16.000
		2.120	4.400
1.5" Calibration:		Gain=28.000	Offset=0.000
References		Low Cal	High Cal
Readings		0.000	20.000
		0.002	1.239
2" Calibration:		Gain=44.000	Offset=0.000
References		Low Cal	High Cal
Readings		0.000	20.000
		0.003	1.075
Gamma Ray Calibration Report			
Serial Number:		070559	
Tool Model:		OPEN_GR	
Performed:		Thu Oct 07 18:44:52 2021	

Download

Mid Oct 07 15:11:02 EDT

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3800	GAPI/cps