

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-20146-00-01
Spot: NENE Sec/Twnshp/Rge: 33-26S-13W
4620 feet from S Section Line, 660 feet from E Section Line
Lease Name: BECKER Well #: 1
County: PRATT Total Vertical Depth: 3500 feet

Operator License No.: 9232
Op Name: TIMBERLINE OIL & GAS CORPORATIO
Address: 4000 PENROSE PLACE
RAPID CITY, SD 57702

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3146		
PROD	4.5	3402	1800	WITH 350 SX CMT
SURF	8.625	820		WITH 550 SX CMT

\$113.75

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/04/2007 1:00 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: _____ Company: _____ Phone: _____

Proposed Plugging Method: SAND TO 1950' WITH 4 SX CMT. PLUG AT 840' WITH 5 SX GEL, 100# HULLS, 50 SX CMT. PLUG AT 400' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN
Date/Time Plugging Completed: 01/04/2007 2:00 PM

WitnessType: COMPLETE (100%)
KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SAND BACK TO 1940' WITH 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 840' WITH 5 SX GEL, 100# HULLS, 50 SX CMT. 2ND PLUG AT 300' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3171	3174		
3163	3172		
3161	3164		
3067	3070		
3066	3068		
2945	2953		
2772	2777		
2636	2644		
2126	2134		
2070	2078		
2034	2038		
2000	2012		

INVOICED


DATE 1-24-07

INV. NO. 200 7061238

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND.

Plugged through: CSG

District: 01

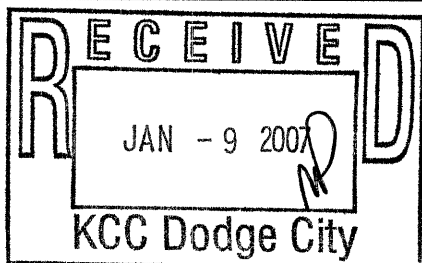

Signed

Stephen J. Pfeifer
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION

Form CP-2/3

JAN 18 2007

CONSERVATION DIVISION
WICHITA, KS

PKT