



MICRO LOG

Company	BLAKE EXPLORATION, LLC.	Company	BLAKE EXPLORATION, LLC.
Well	TREXLER #6	Well	TREXLER #6
Field	LESAGE NORTHWEST	Field	LESAGE NORTHWEST
County	GRAHAM	County	GRAHAM
State	KANSAS	State	KANSAS
Location:	API # : 15-065-24212-0000	Other Services CDL/CNL DIL/SON	
Permanent Datum	GROUND LEVEL	Elevation	2177
Log Measured From	KELLY BUSHING 8' A.G.L.	K.B. 2185 D.F. 2183 G.L. 2177	
Drilling Measured From	KELLY BUSHING		
Date	2/11/22		
Run Number	TWO		
Depth Driller	3698		
Depth Logger	3698		
Bottom Logged Interval	3680		
Top Log Interval	3000		
Casing Driller	8 5/8"@221'		
Casing Logger	221		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 1,400 PPM	
Density / Viscosity	9.0/54		
pH / Fluid Loss	11.0/6.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.35@55F		
Rmf @ Meas. Temp	1.01@55F		
Rmc @ Meas. Temp	1.62@55F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.657@113F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	5.15 P.M.		
Maximum Recorded Temperature	113F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	MIKE DAVIGNON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-065-24212-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
(HWY 24 & DAMAR BLKTOP), 6N. TO "RD. G", 2W., S. INTO




MAIN SECTION

Database File	5947ddn.db
Dataset Pathname	pass6.3
Presentation Format	micro
Dataset Creation	Fri Feb 11 18:08:38 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

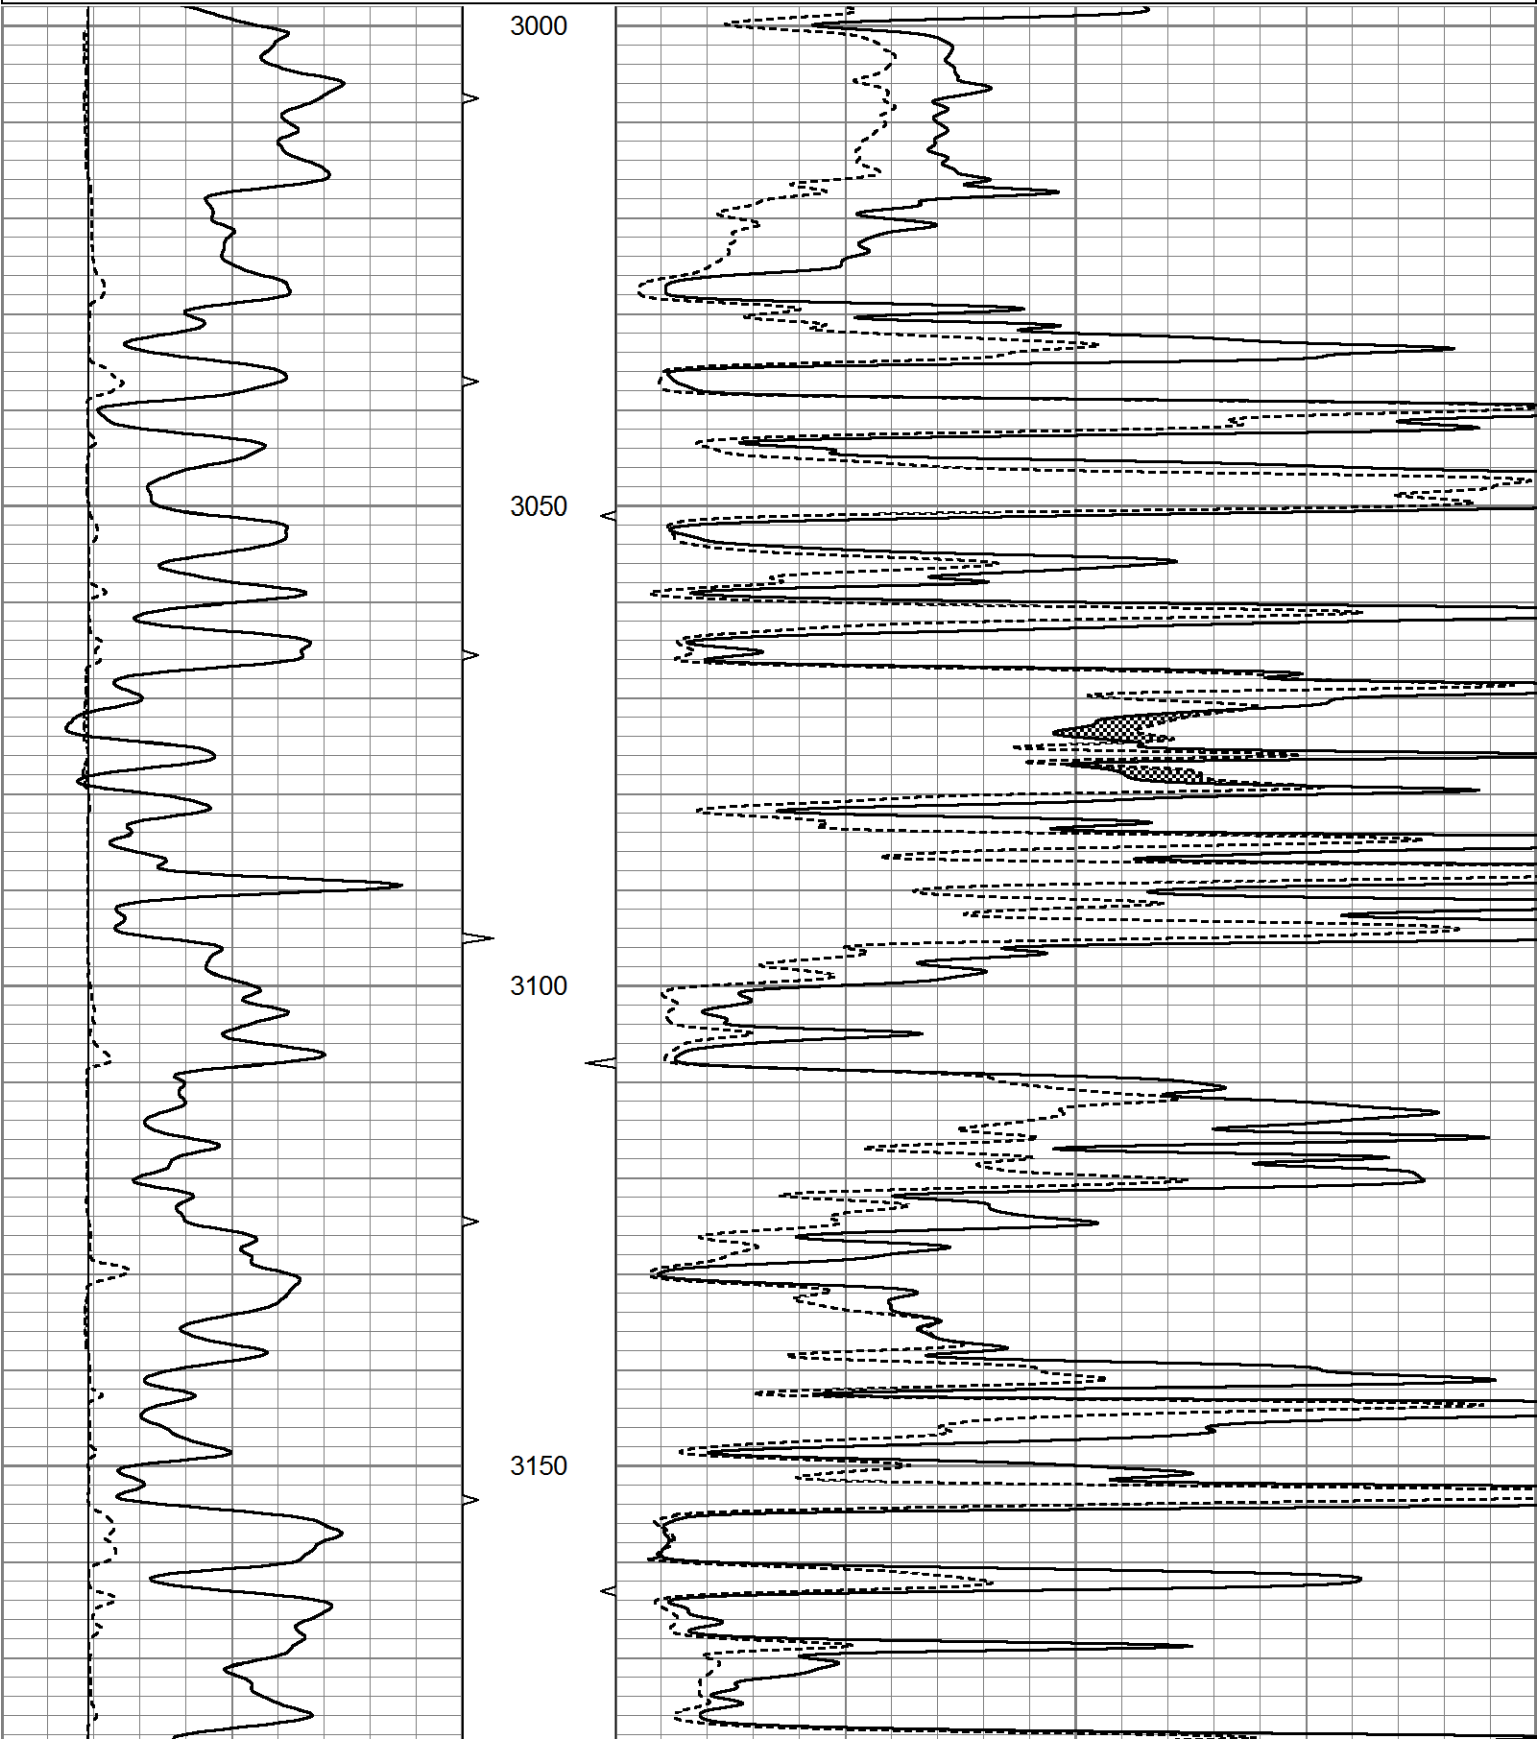

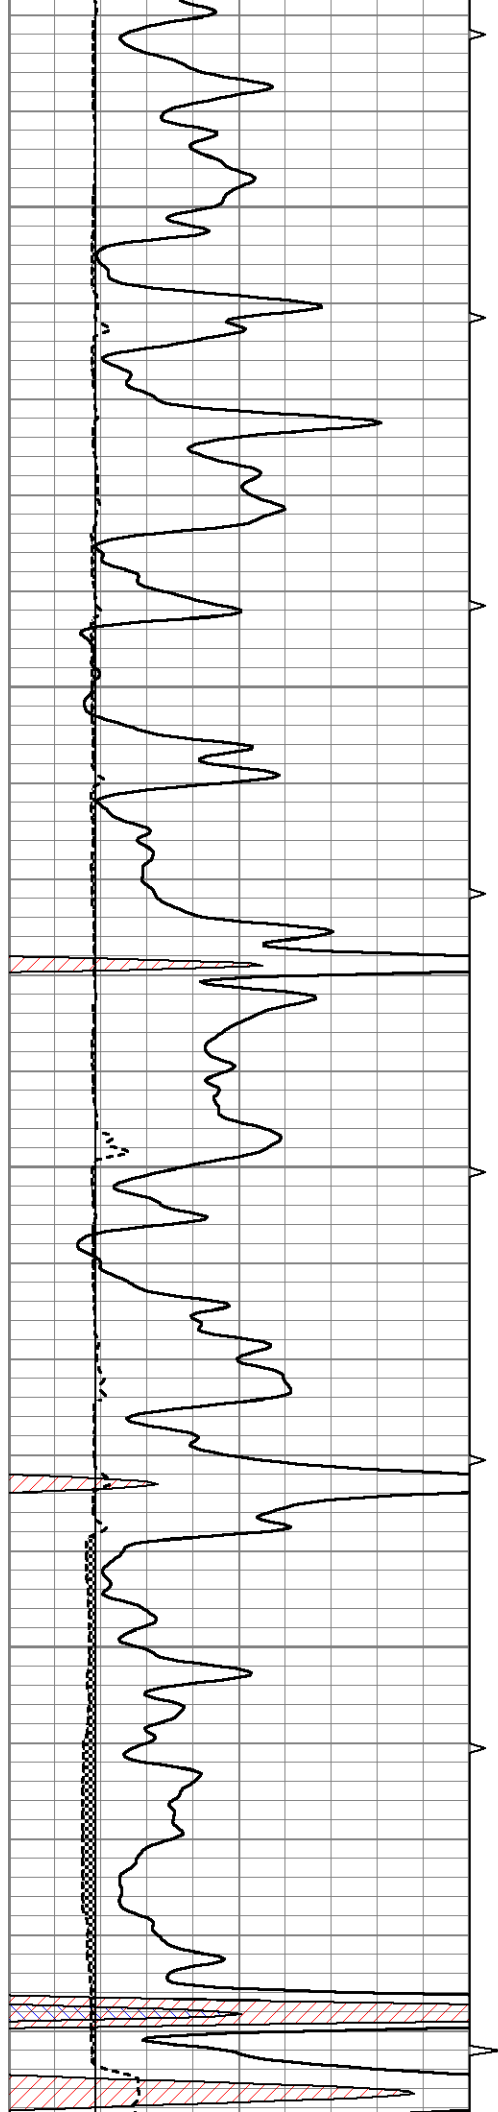



3200

3250

3300

3350

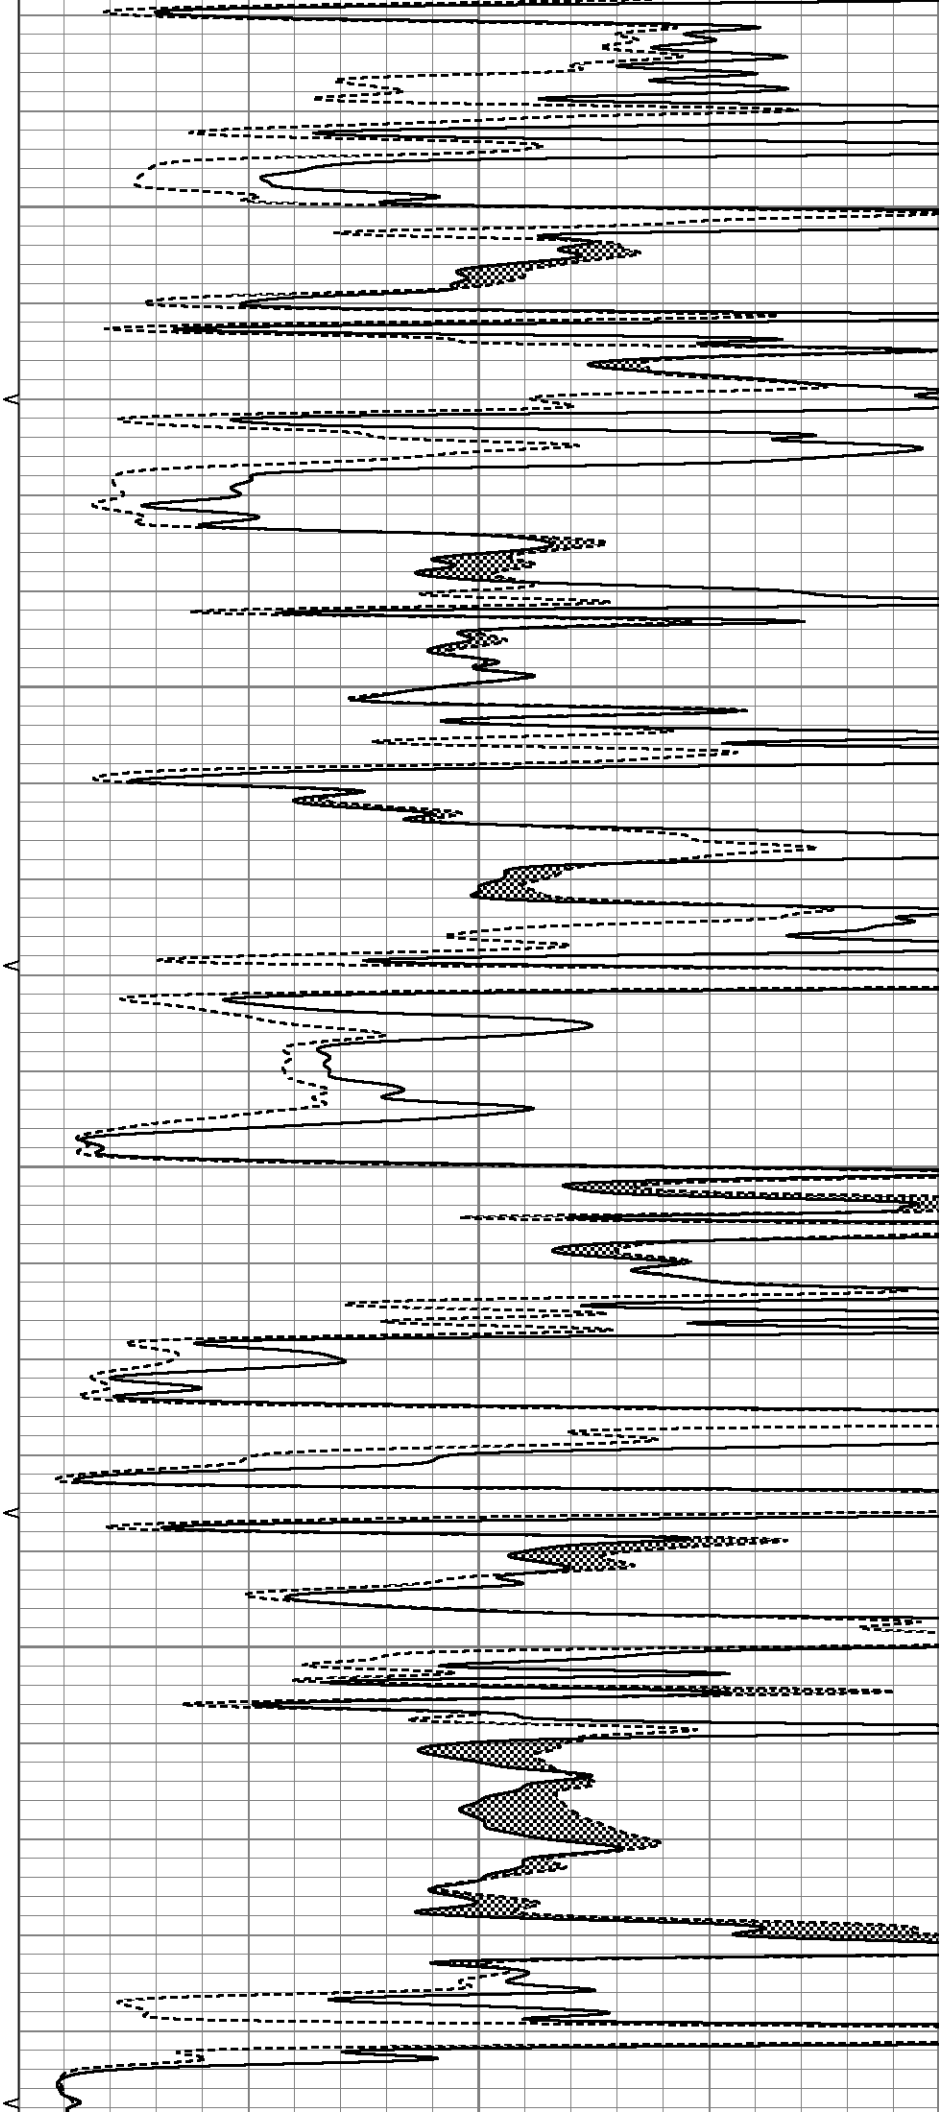

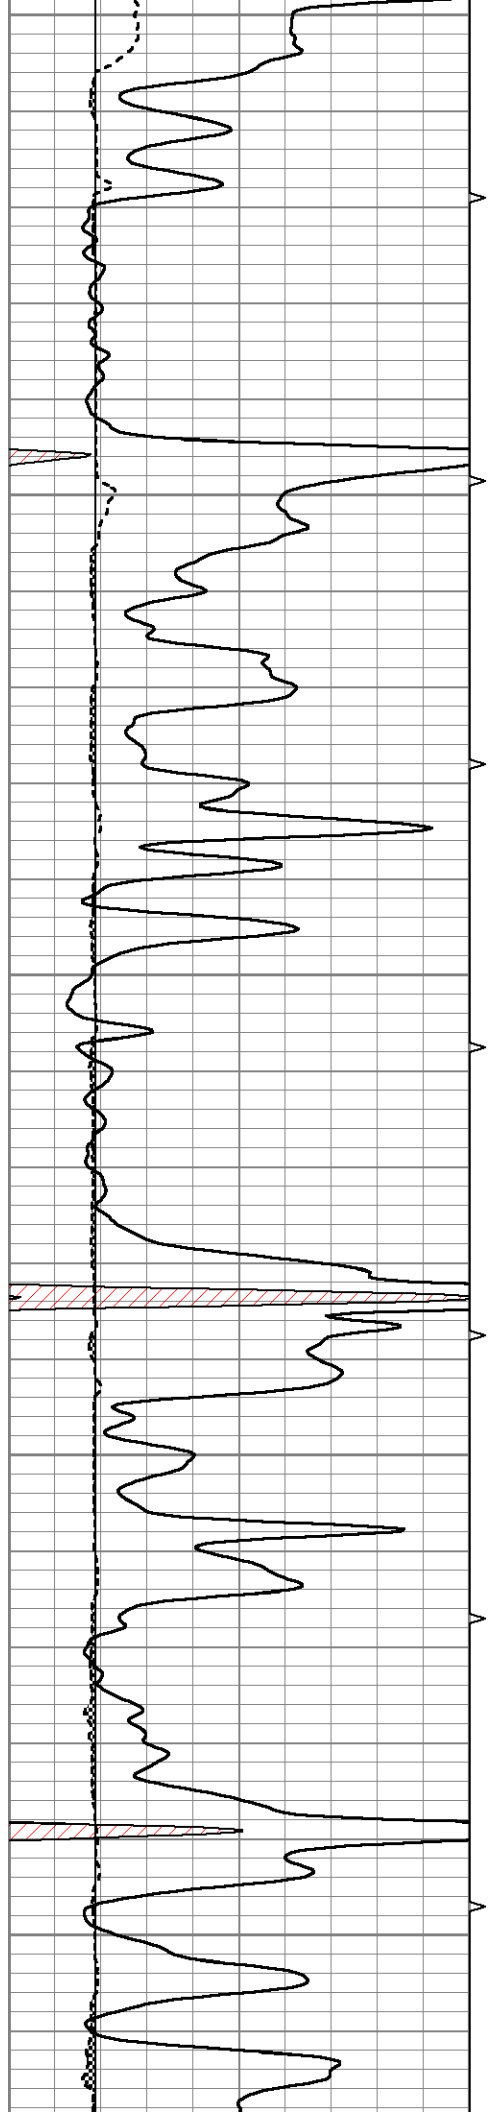


3400


3450

3500

3550

3600

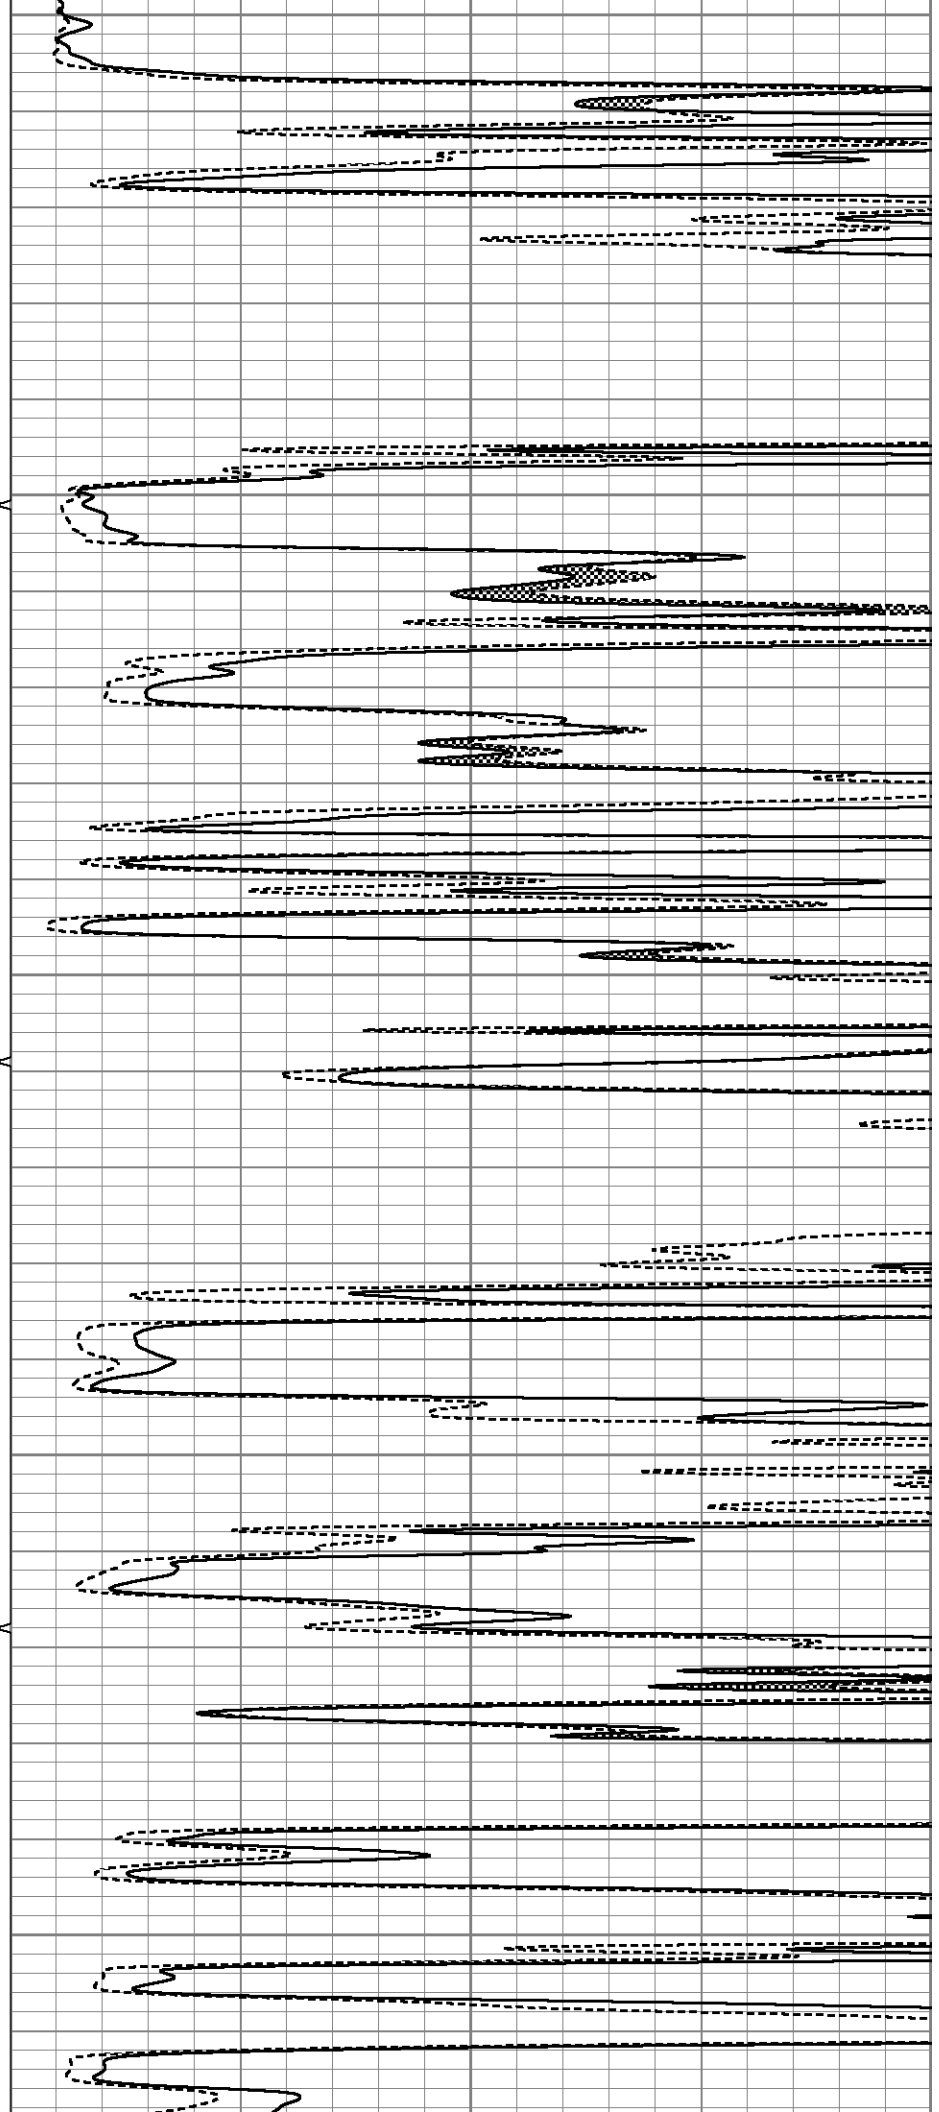


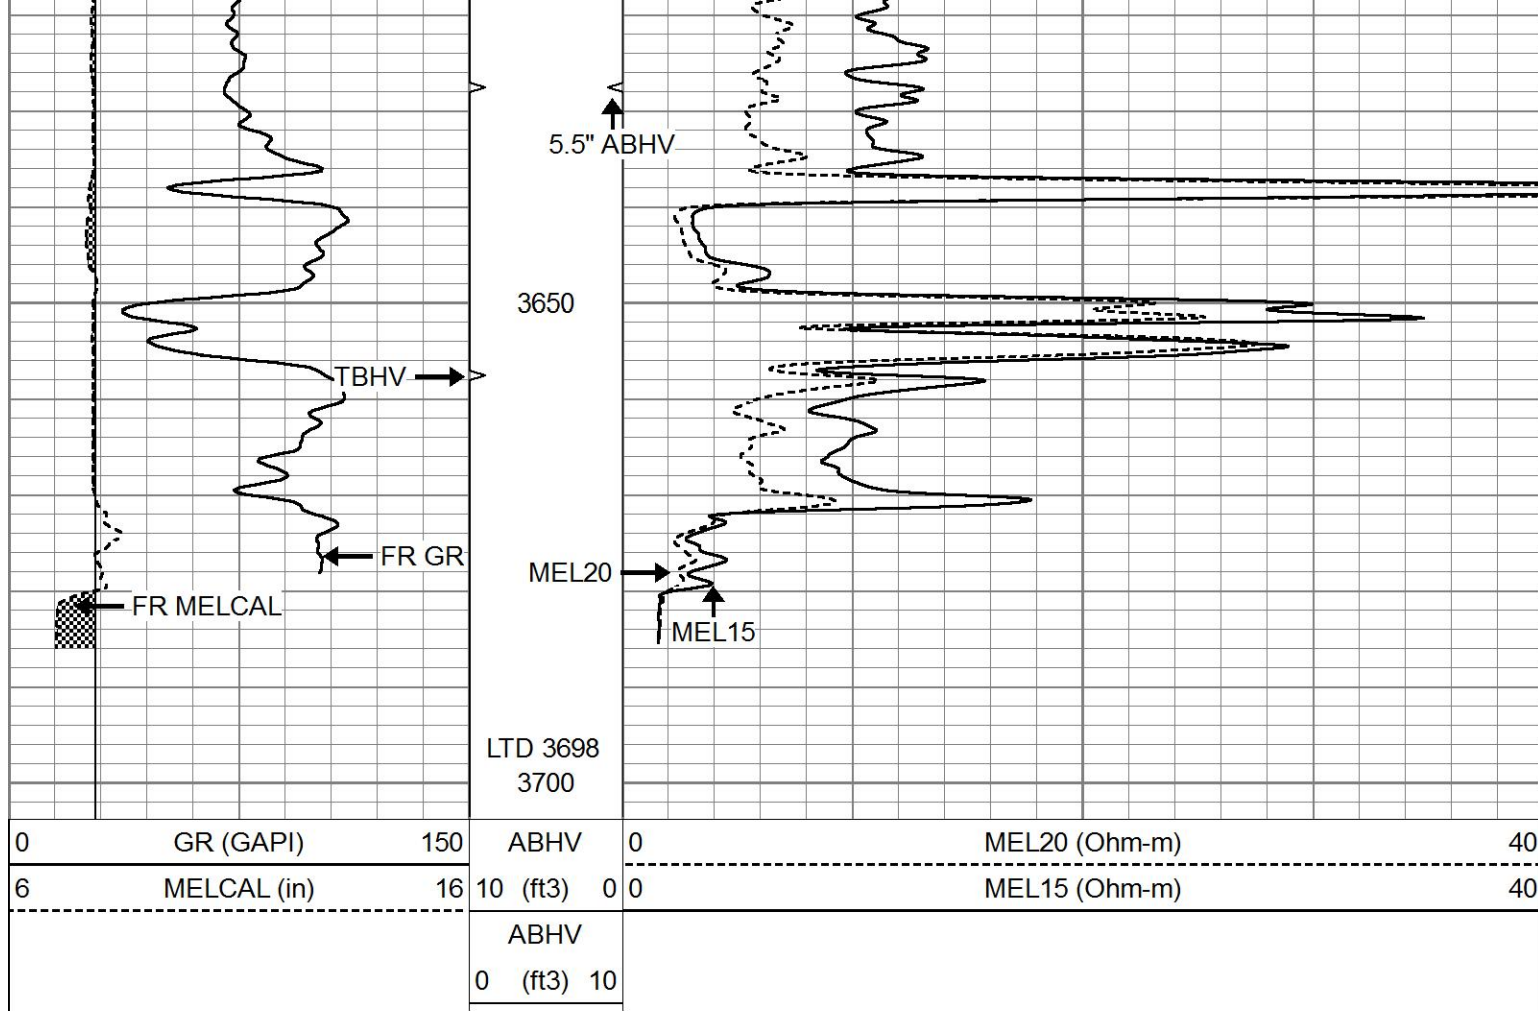


REPEAT SECTION

Database File 5947ddn.db
 Dataset Pathname pass5.4
 Presentation Format micro
 Dataset Creation Fri Feb 11 18:13:07 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

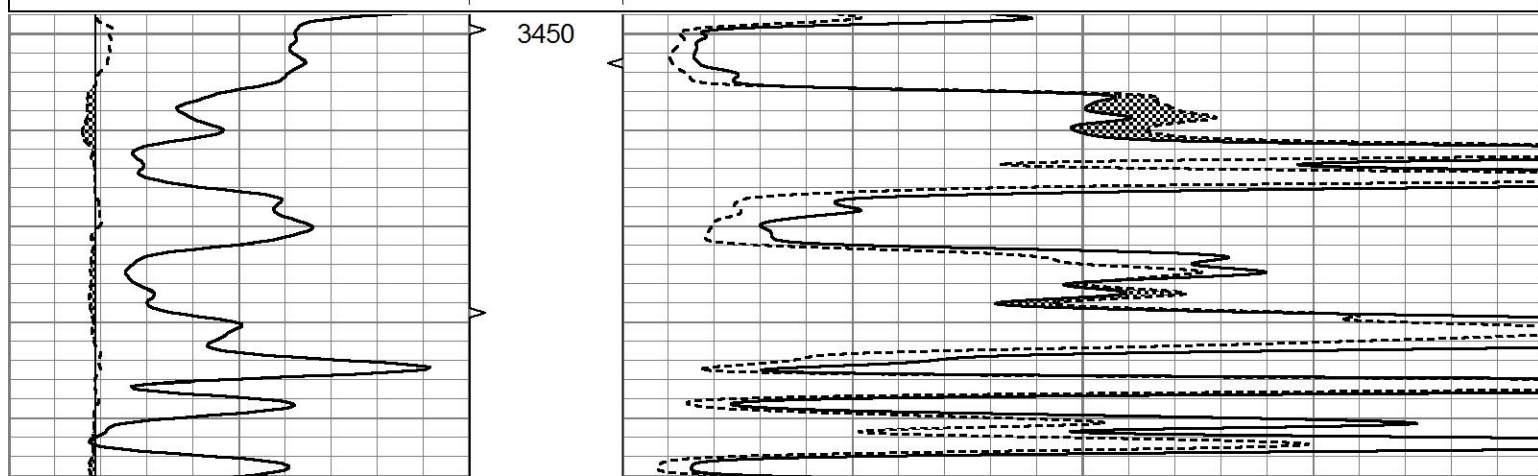

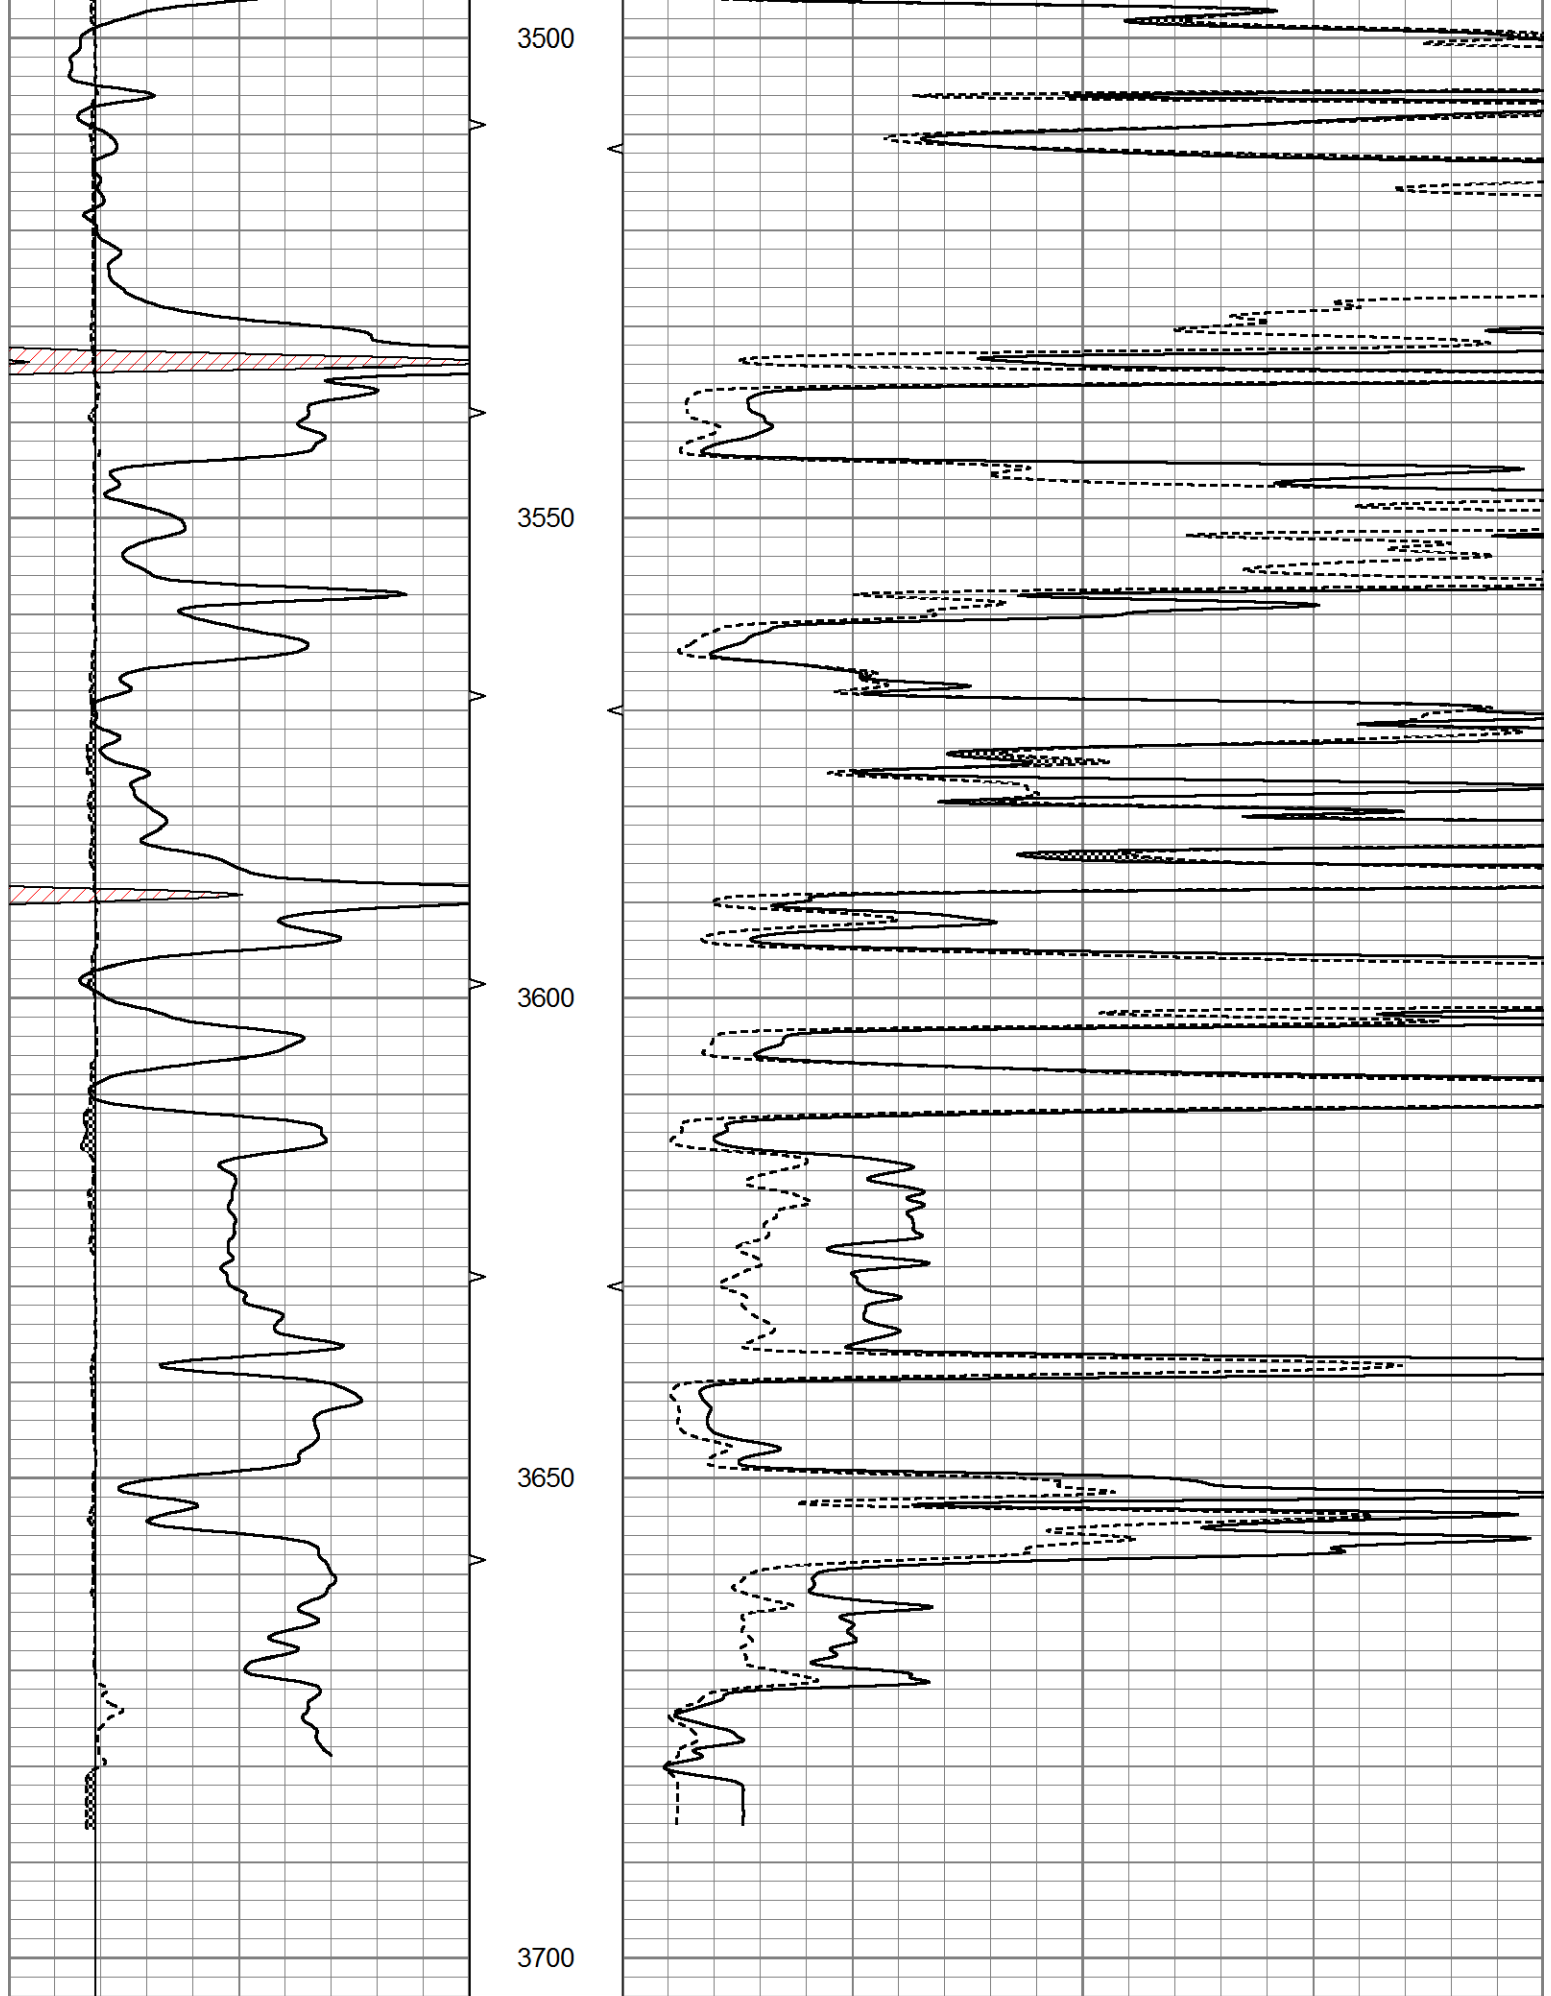

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40

Calibration Report

Database File 5947ddn.db
Dataset Pathname pass6.3
Dataset Creation Fri Feb 11 18:08:38 2022

MICRO Calibration Report

Serial Number: 070911
Tool Model: ProbeN
Performed: Wed Feb 02 03:04:30 2022

Caliper Calibration:	Gain=3.213	Offset=3.566
	Low Cal	High Cal
References	8.000	14.000
Readings	1.380	3.247

1.5" Calibration:	Gain=45.000	Offset=-1.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.001	1.291

2" Calibration:	Gain=42.000	Offset=-1.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.003	1.103

Gamma Ray Calibration Report

Serial Number: 070558
Tool Model: OPEN_GR
Performed: Sat Jan 29 13:06:40 2022

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps