

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
350 Bittling Building
Wichita, Kansas

OR

~~FORMATION PLUGGING RECORD~~

Strike out upper line
when reporting plug-
ging of formations.

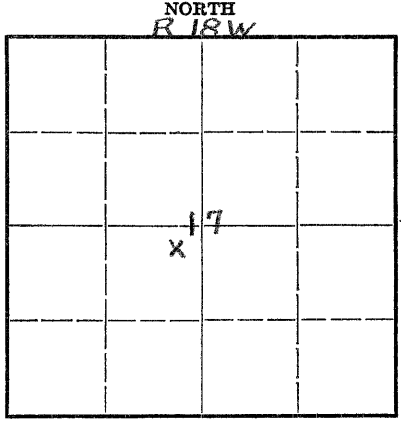

Locate well correctly on above
Section Plat

Rooks County. Sec. 17 Twp. 9 Rge. (E) 18 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NE NE SW
Lease Owner. The Atlantic Refining Company
Lease Name. Mary Ruzicka Well No. 1
Office Address. P. O. Box 17
Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole
Date well completed. July 30 1947
Application for plugging filed. July 31 1947
Application for plugging approved. August 1 1947
Plugging commenced. August 30 1947
Plugging completed. September 2 1947
Reason for abandonment of well or producing formation. No production

If a producing well is abandoned, date of last production. --- 19 ---
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well. C. D. Stough
Producing formation. Arbuckle Depth to top. 3559 Bottom. 3582 Total Depth of Well. 3582 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle	Water	3559	3580	5 1/2"	7-2-47	9-2-47

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- From 3582 to 3559 - Hole filled w/chert
- From 3559 to 3520 - Filled w/6 sacks cement
- From 3520 to 185 - Filled w/mud
- From 185 to 175 - Bridged solid w/rock
- From 175 to 145 - Filled w/15 sacks cement
- From 145 to 30 - Filled w/mud
- From 30 to Cellar - Capped w/5 sacks cement

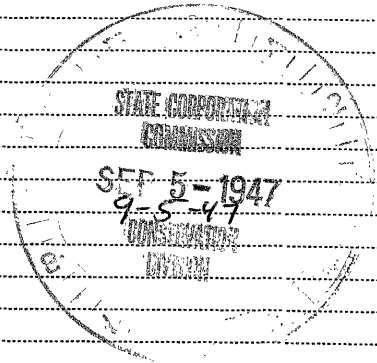

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. The Atlantic Refining Company
Address. P. O. Box 17, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Stanton K. Myers (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Stanton K. Myers
P. O. Box 17, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 4th day of September, 1947

Jeta R. Bird
Notary Public.

My commission expires July 29, 1951

