


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

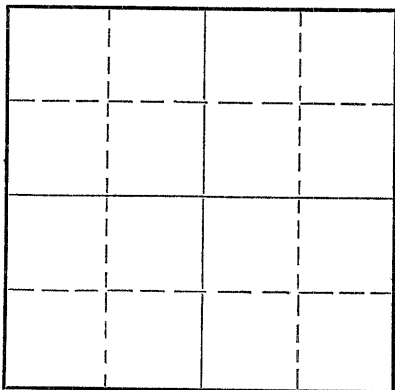

Locate well correctly on above
Section Plat

Rooks County. Sec. 17 Twp. 9 Rge. 18 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW/4 NW/4 SW/4
Lease Owner Petroleum, Inc.
Lease Name Ruzicka Well No. 1
Office Address 100 Derby Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed Dec. 30, 1948
Application for plugging filed Aug. 4, 1950
Application for plugging approved July 18, 1950
Plugging commenced July 12, 1950
Plugging completed July 17, 1950
Reason for abandonment of well or producing formation Production depleted

If a producing well is abandoned, date of last production April, 1950
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation Arbuckle Depth to top Bottom Total Depth of Well 3619 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	314	None
				5 1/2	3615	3253

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped 5 sacks of cement at bottom of the hole. Shot pipe off at 3253'. Pulled pipe and mudded hole to 300'. Set rock bridge at 300' and dumped 15 sacks of cement. Finished mudding hole and put 8 sacks of cement at top of surface.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Petroleum, Inc.
Address 100 Derby Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Eric H. Jager
Executive Vice-President
100 Derby Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 4 day of August, 1950


My commission expires April 27, 1953

Ann Uhlschmidt

Notary Public.

23-3273-s

4-50-10M



WELL LOG RUZICKA #1

Center NW/4 NW/4 SW/4 of Sec. 17-9S-18W, Rocks County

Ran 15 Jts. 314 feet of 8 5/8" surface pipe
Set at 314 feet and cemented with 200 sacks cement.

Ran 116 Jts. 3630' 5 1/2" casing. Set at 3615'.
Cemented with 50 sacks cement.

<u>FORMATION</u>	<u>From</u>	<u>To</u>	<u>TOPS</u>
Shale	0	25	Topeka 3142
Sand	25	65	Heebner 3312
Shale	65	125	Arbuckle 3614
Shale and sand	125	315	
Sable	315	535	
Shale and sand	535	1280	
Shale and redbed	1280	1555	
Anhydrite	1555	1600	
Redbed	1600	1900	
Salt, shale, lime	1900	2110	
Shale & Lime	2110	3205	
Lime	3215	3270	
Lime and shale	3270	3360	
Lime and Chert	3360	3410	
Lime	3410	3601	
Lime, cherty	3601	3619	T. D.

I, Eric H. Jager, hereby certify that the above log is true and correct, to the best of my knowledge and belief.

Eric H. Jager
Eric H. Jager

Subscribed and sworn to before me this 4th day of August, 1950.

Ann Unschmidt
Notary Public
Ann Unschmidt

My commission expires: 4/27/53

8-5-50
1950

