



**GAMMA RAY
CCL/RADIAL
CEMENT BOND
LOG**

Company		REDBUD OIL & GAS OPERATING	
Well		SULIVAN D2-35	
Field			
County		MONTGOMERY	
State		KANSAS	
Location:		API # : 15-125-32524-00-00 SE SW 2199' FWL & 420' FSL	
Other Services			
County		MONTGOMERY	
State		KANSAS	
Permanent Datum		GL	
Log Measured From		GL	
Drilling Measured From		GL	
SEC 35		TWP 32S	
RGE 14E			
Elevation		892'	
K.B. ---			
D.F. ---			
G.L. 892'			
Date		12-9-21	
Run Number		ONE	
Depth Driller		1502'	
Depth Logger		1469'	
Bottom Logged Interval		1468'	
Top Log Interval		SURFACE	
Open Hole Size		6.75"	
Type Fluid		WATER	
Density / Viscosity		---	
Max. Recorded Temp.		---	
Estimated Cement Top		SURFACE	
Time Well Ready		ON ARRIVAL	
Time Logger on Bottom		---	
Equipment Number		OW3	
Location		HOMINY, OK.	
Recorded By		K. HENSLEY	
Witnessed By		MR. SHARP	
MR. HAMMERSCHMIDT		MR. TAYLOR	
Borehole Record		Tubing Record	
Run Number		Bit	
From		To	
Size		Weight	
From		To	
Casing Record		Size	
Surface String		Wgt/Ft	
Prot. String		Top	
Production String		Bottom	
Liner		4.5"	
SURFACE		T.D.	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


**FILE # 6012 RBL OW3 REDBUD OIL & GAS SULIVAN D2-35
CREW: T. LUNN, M. TAFT
THANK YOU FOR USING OSAGE WIRELINE!!!**




GR/CCL/RADIAL BOND LOG

40	Casing Collar -4.5		Pipe Bond	0	Sector 1	100	Variable Density	1	Radial Map	8
	Gamma Ray		(mV)	0	Sector 2	100	(usec)	200		
0	(GAPI)	150	Pipe Bond x5	0	Sector 3	100				
			(mV)	0	Sector 4	100				
			Travel Time	0	Sector 5	100				
			(usec)	0	Sector 6	100				
				0	Sector 7	100				
				0	Sector 8	100				

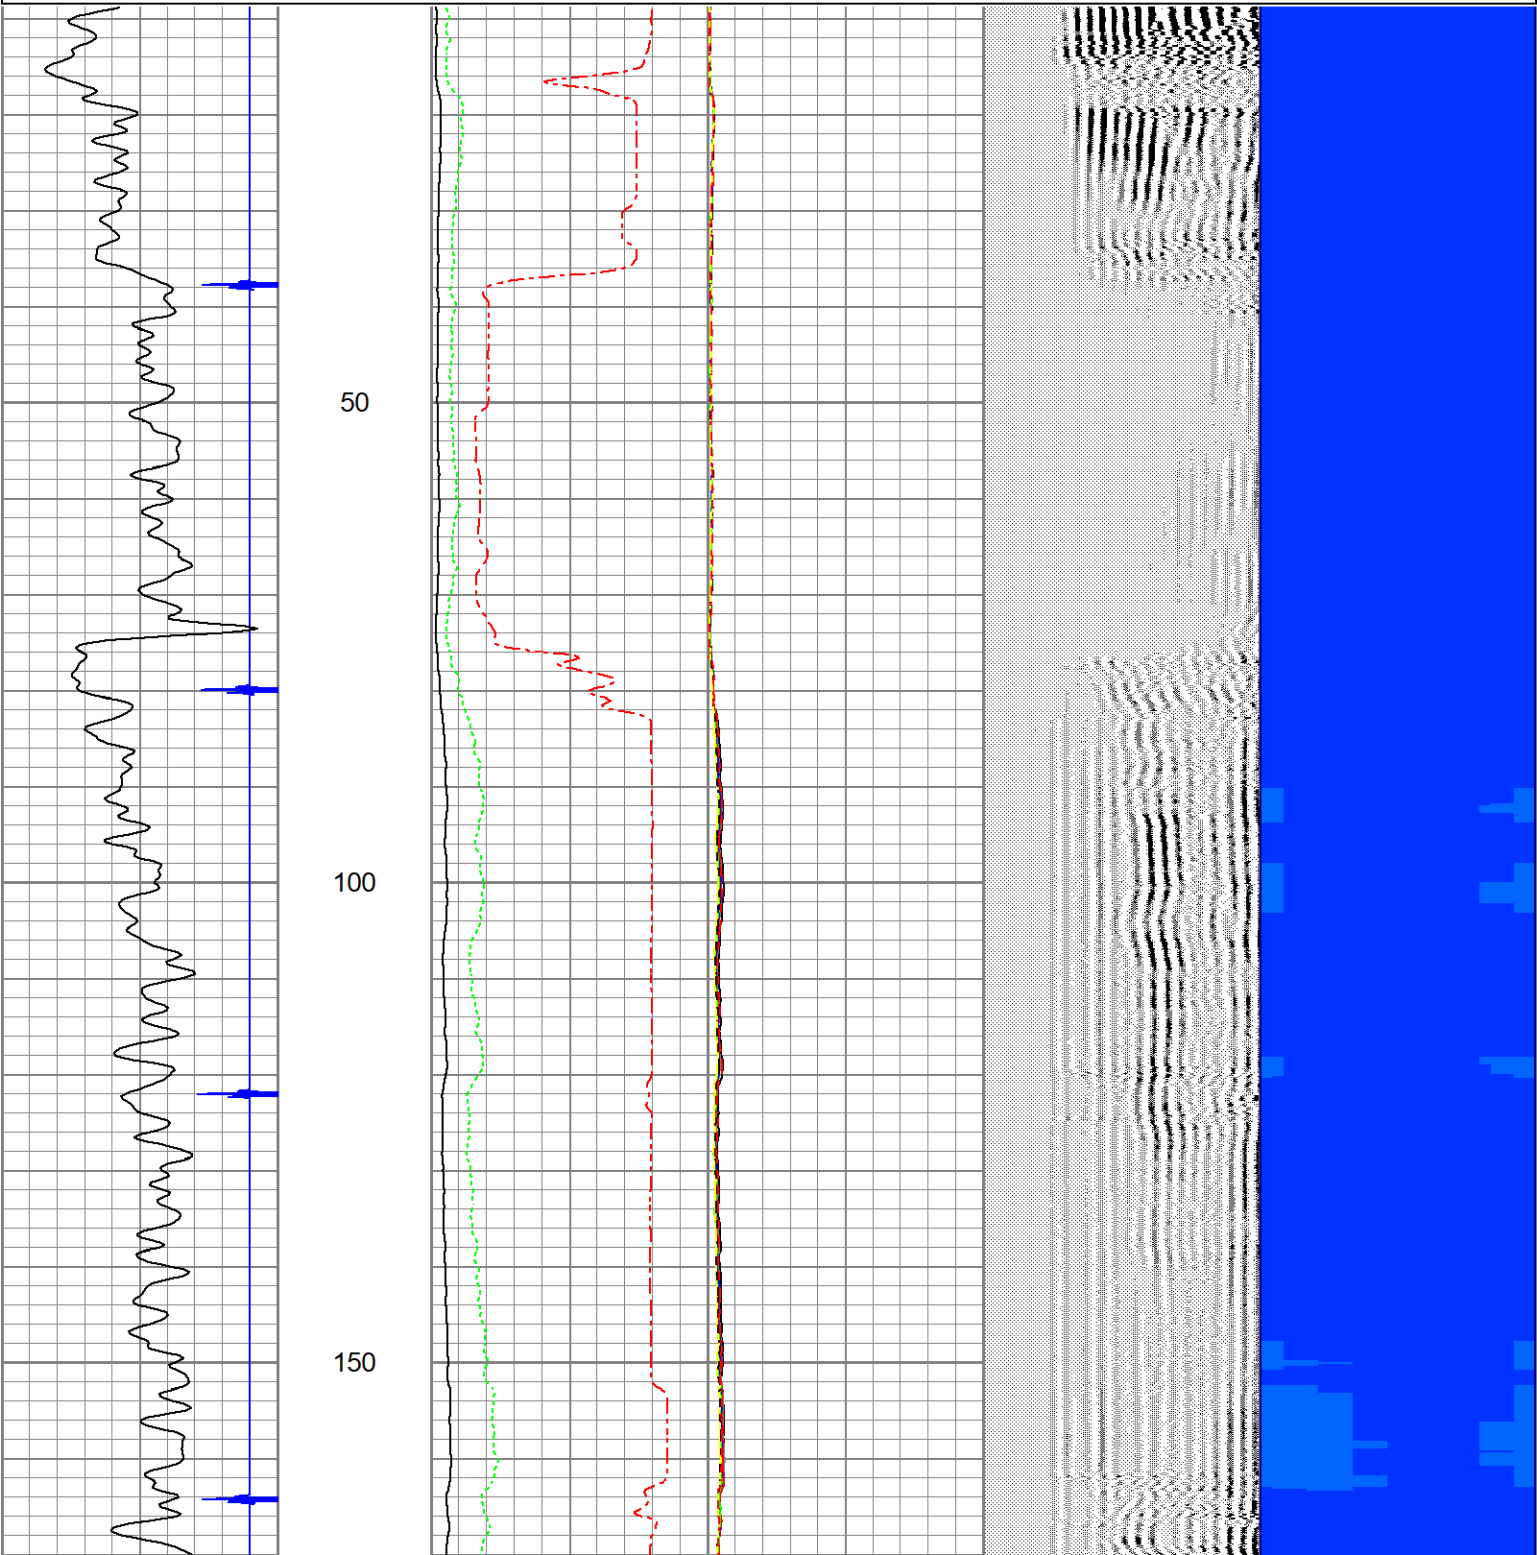

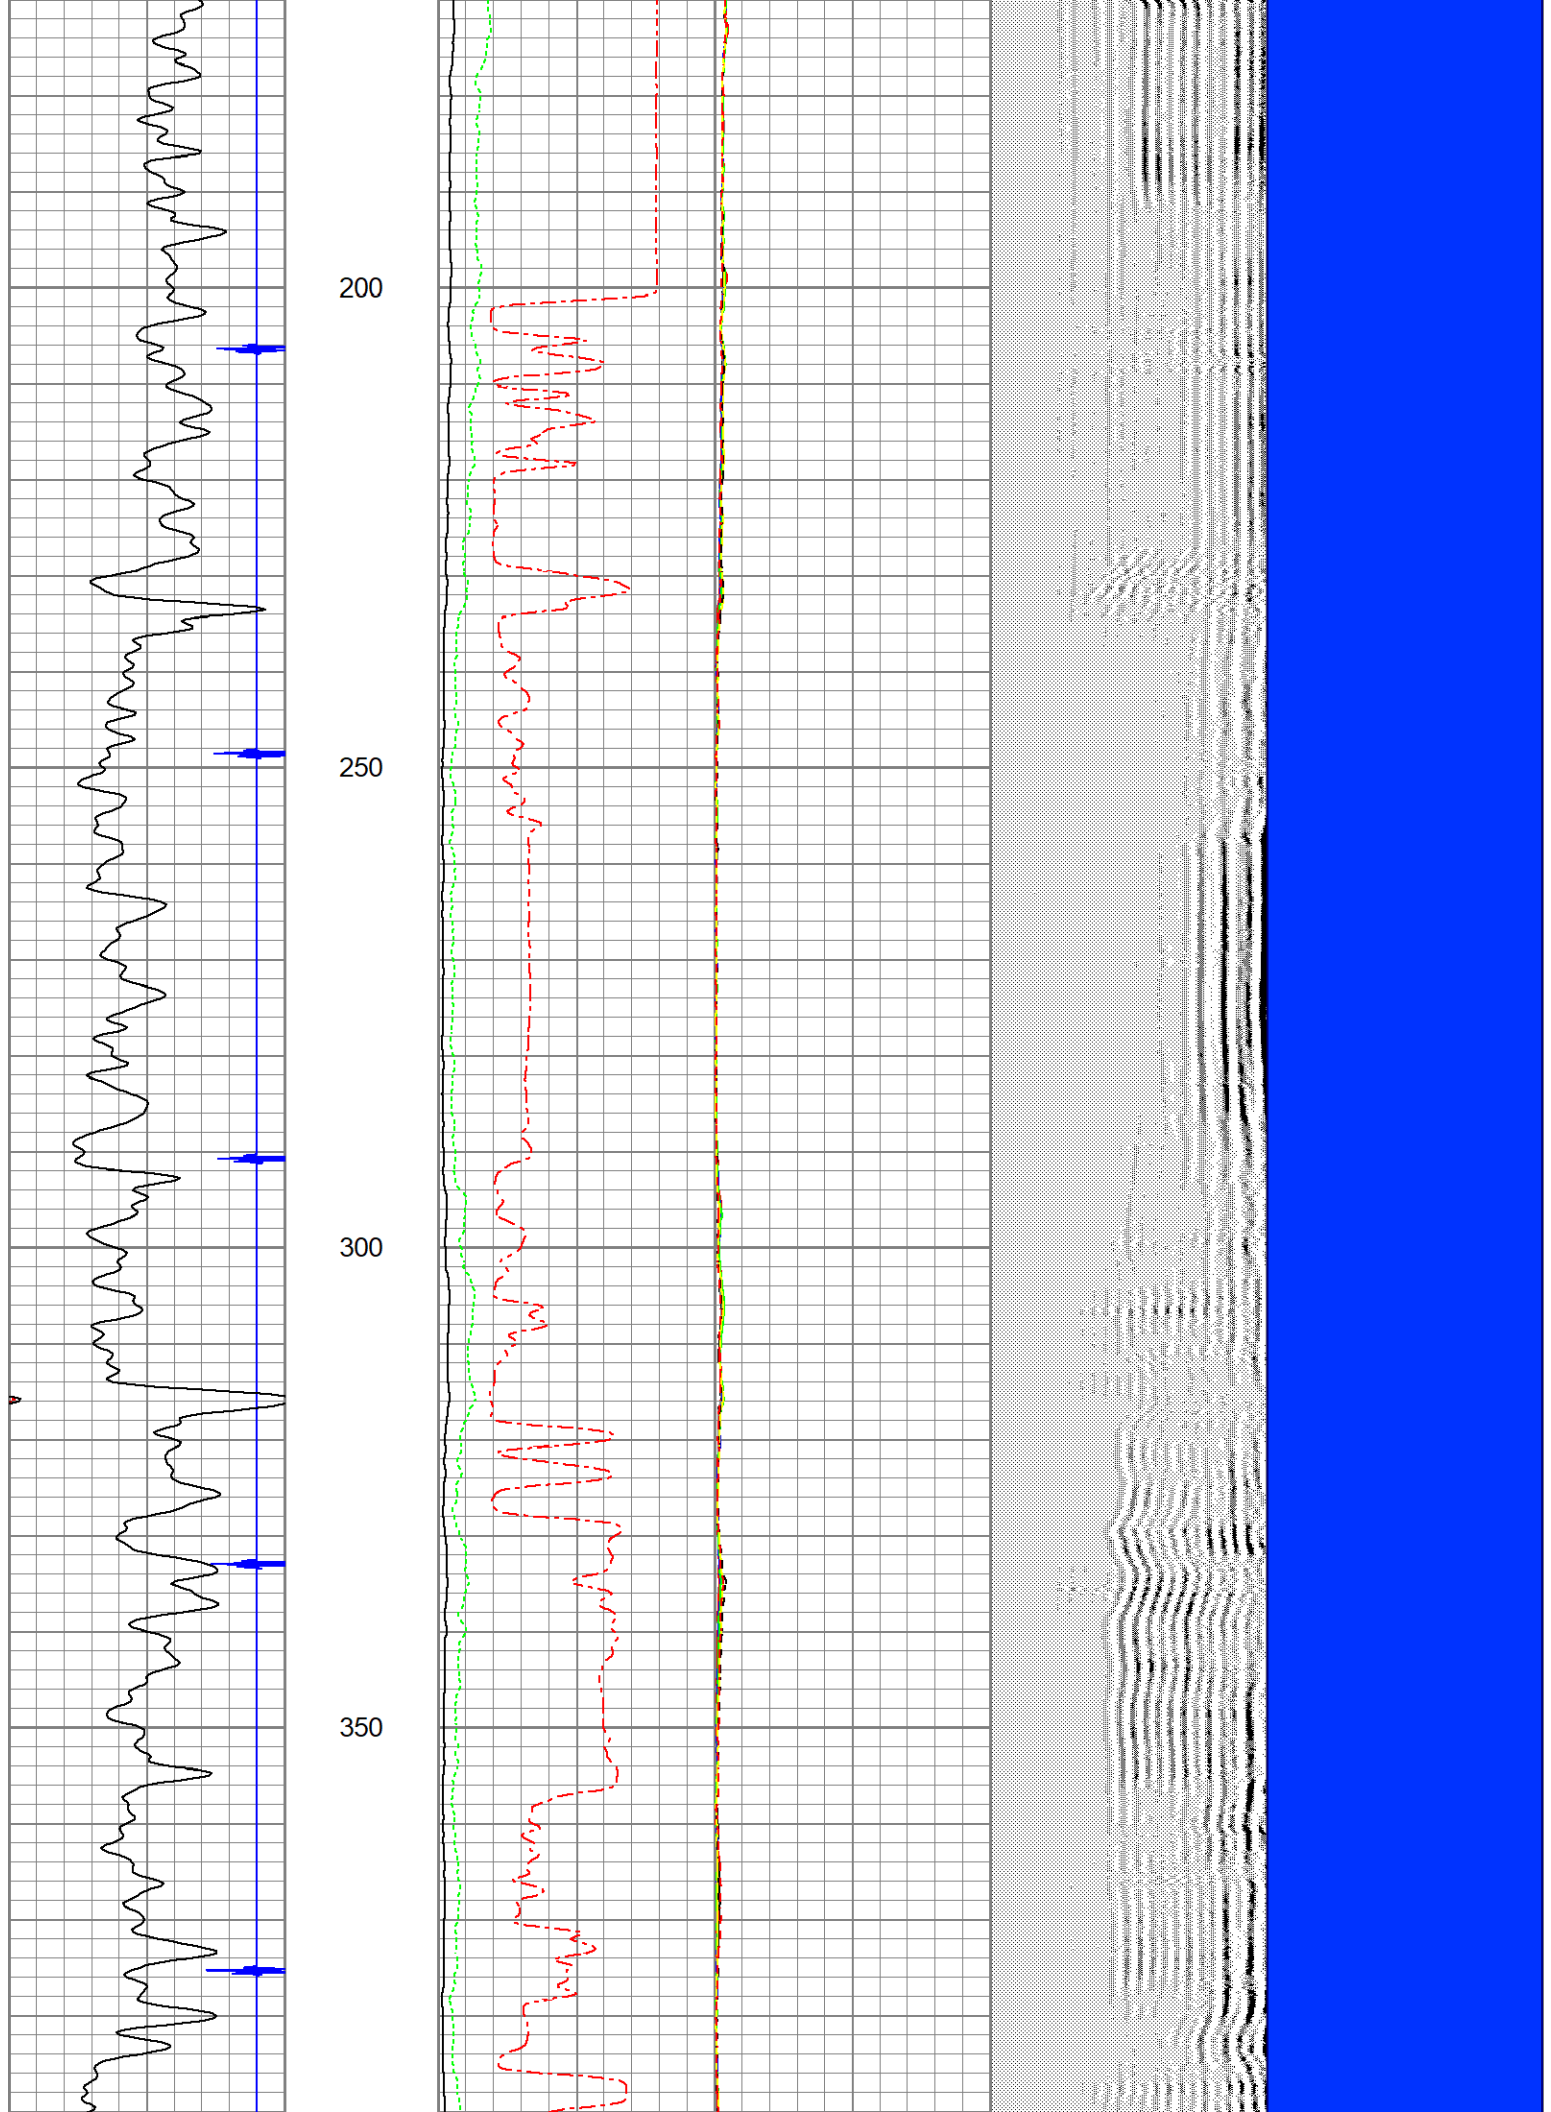

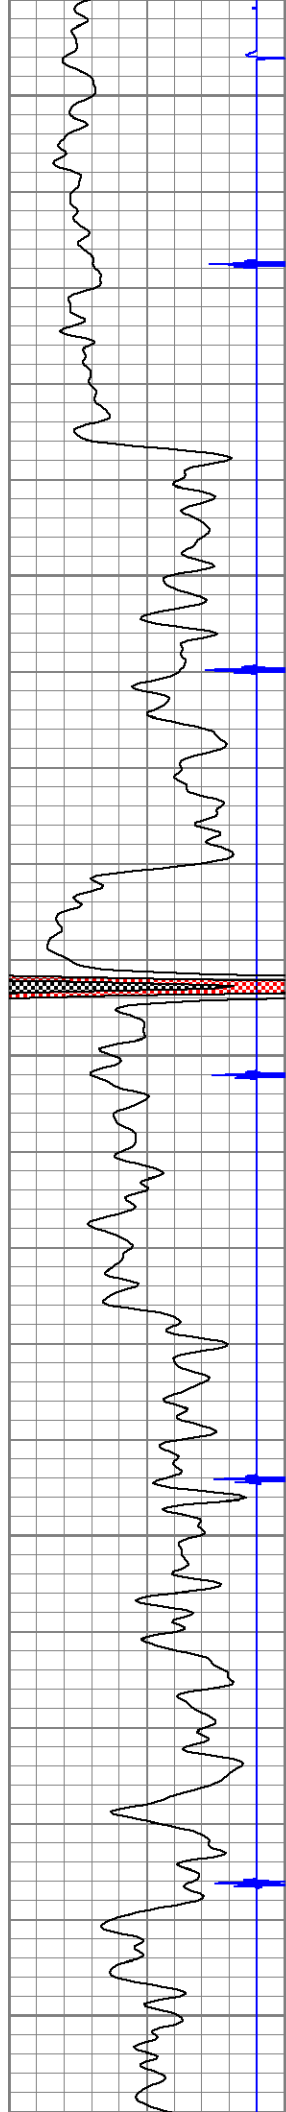




400


450

500

550

600

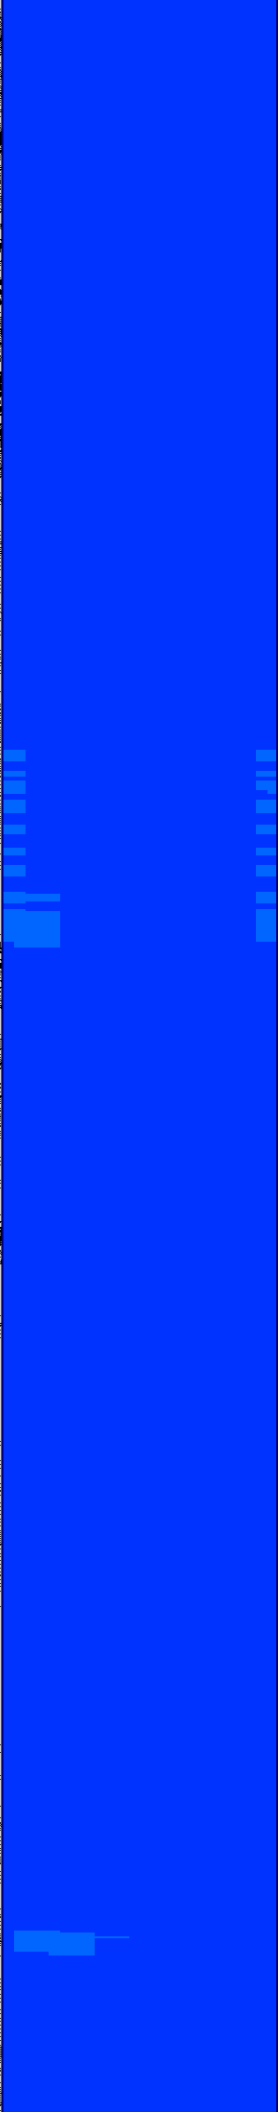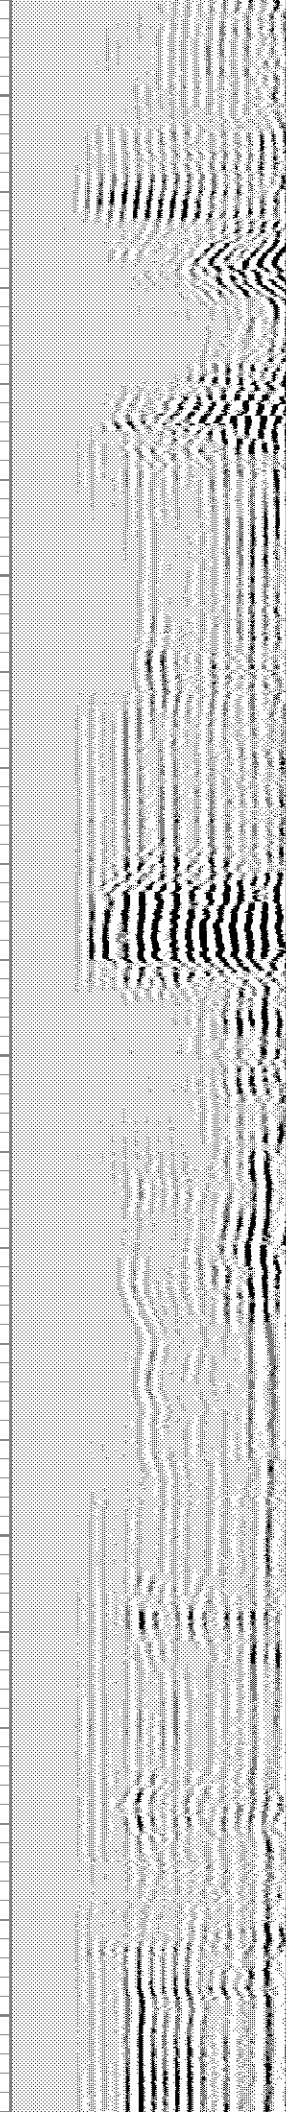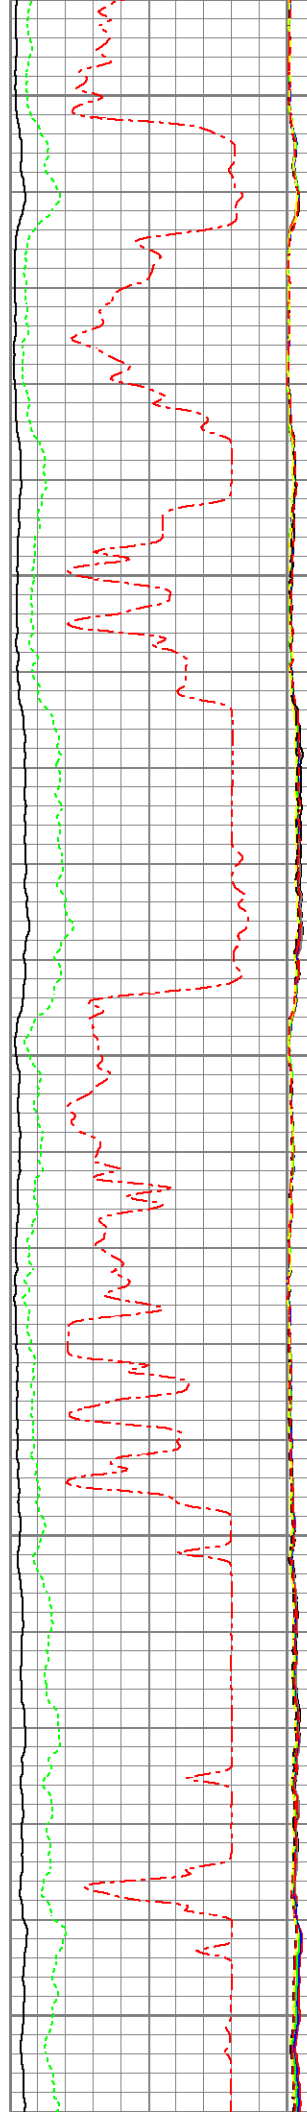


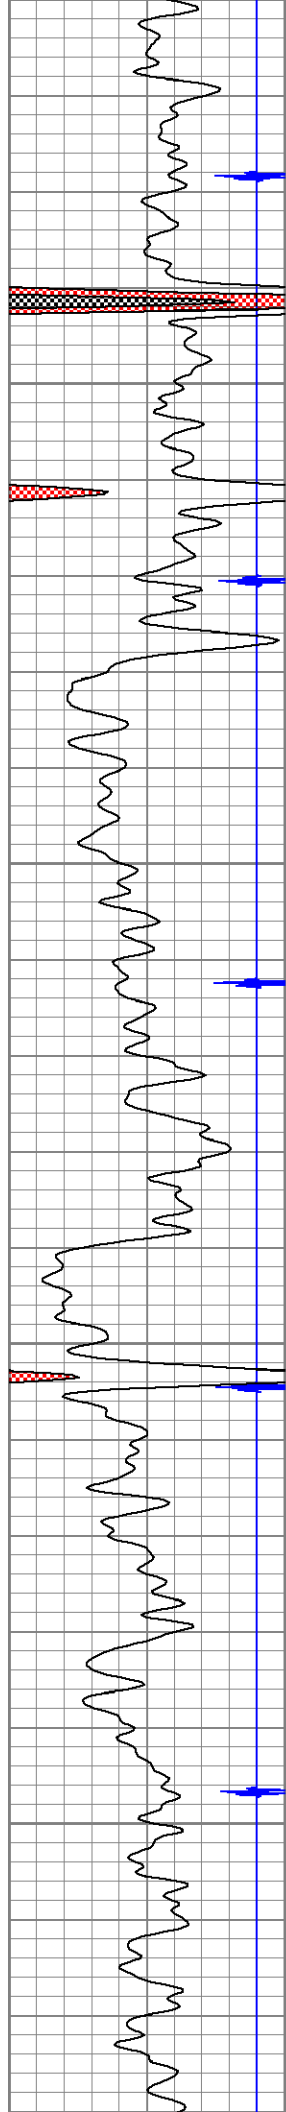



650

700

750

800

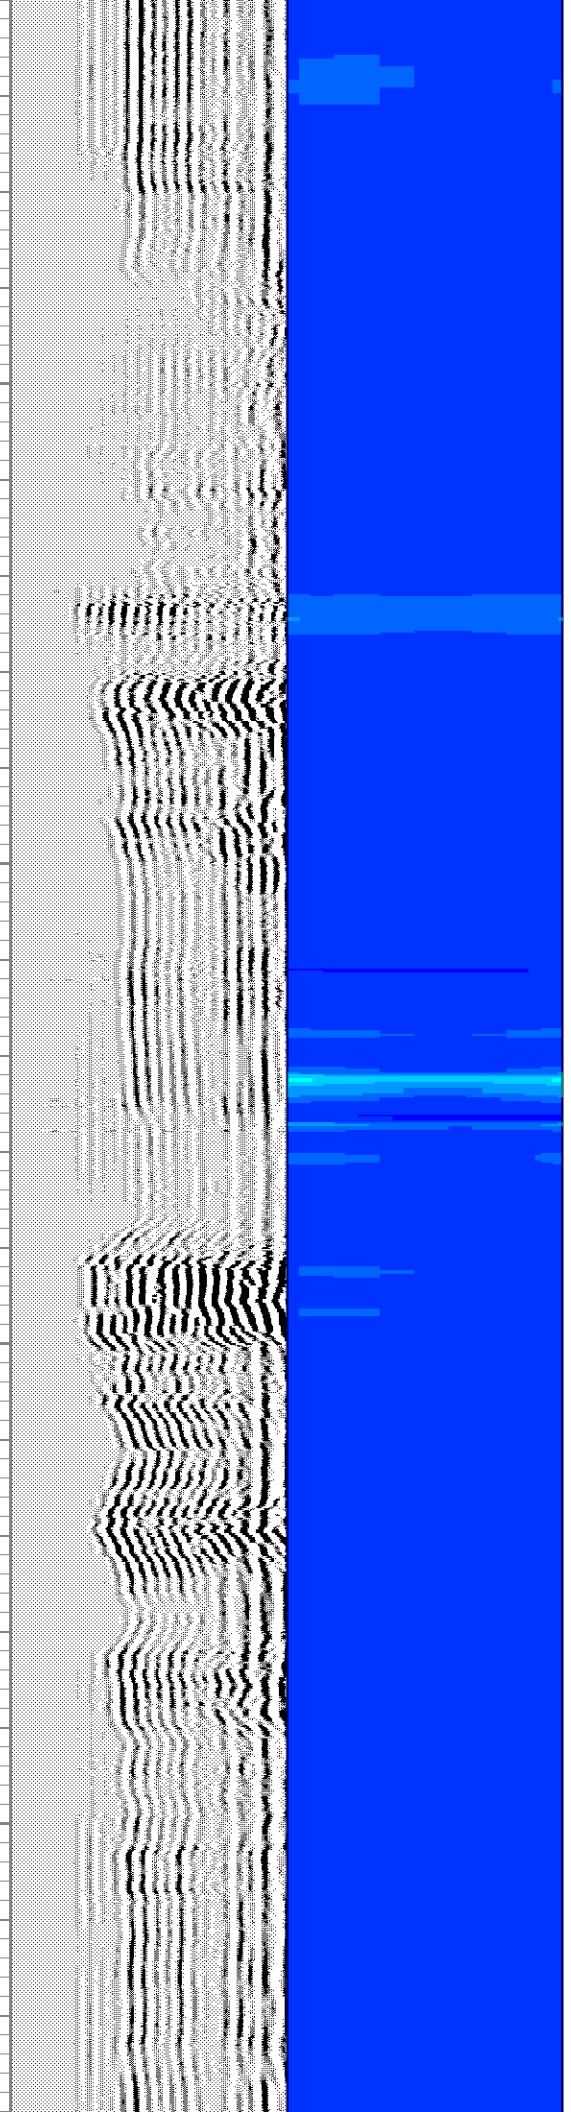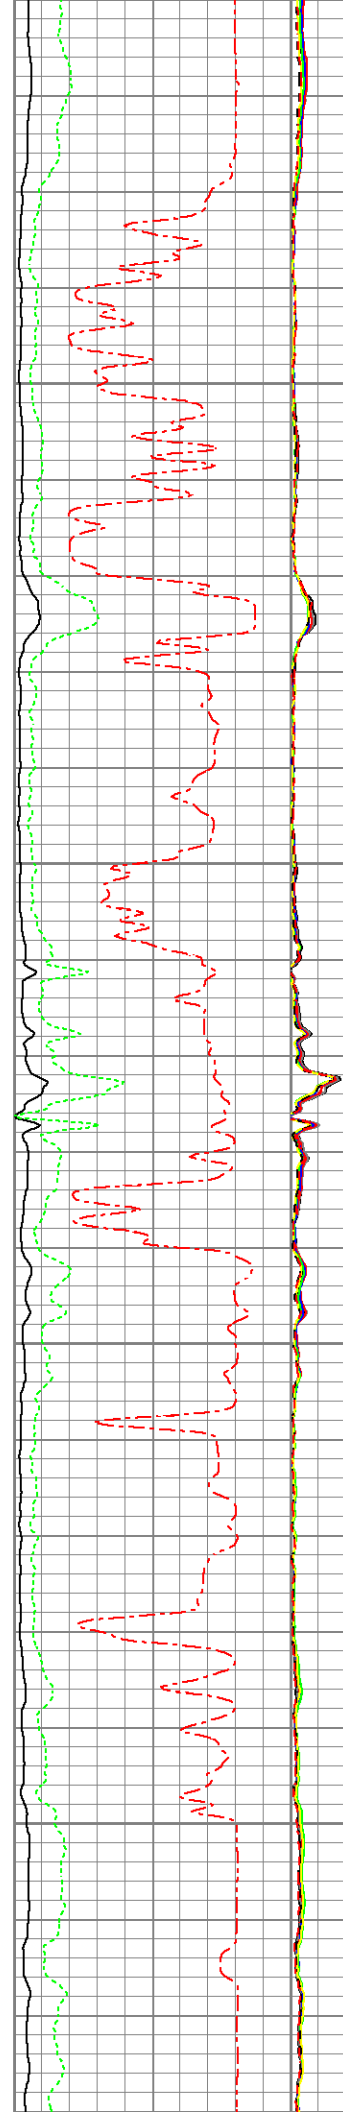

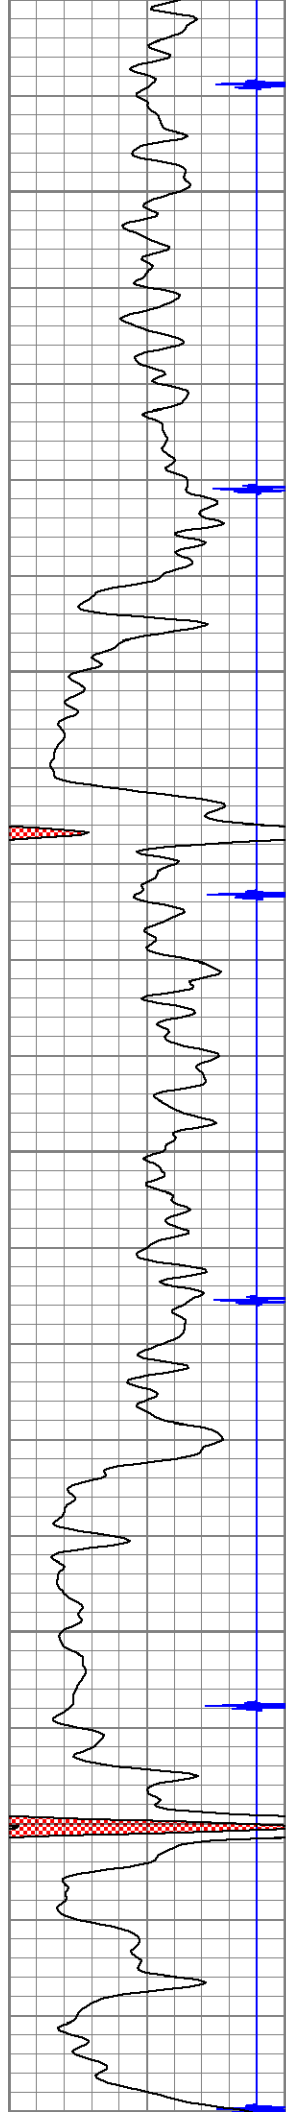


850

900

950

1000

1050

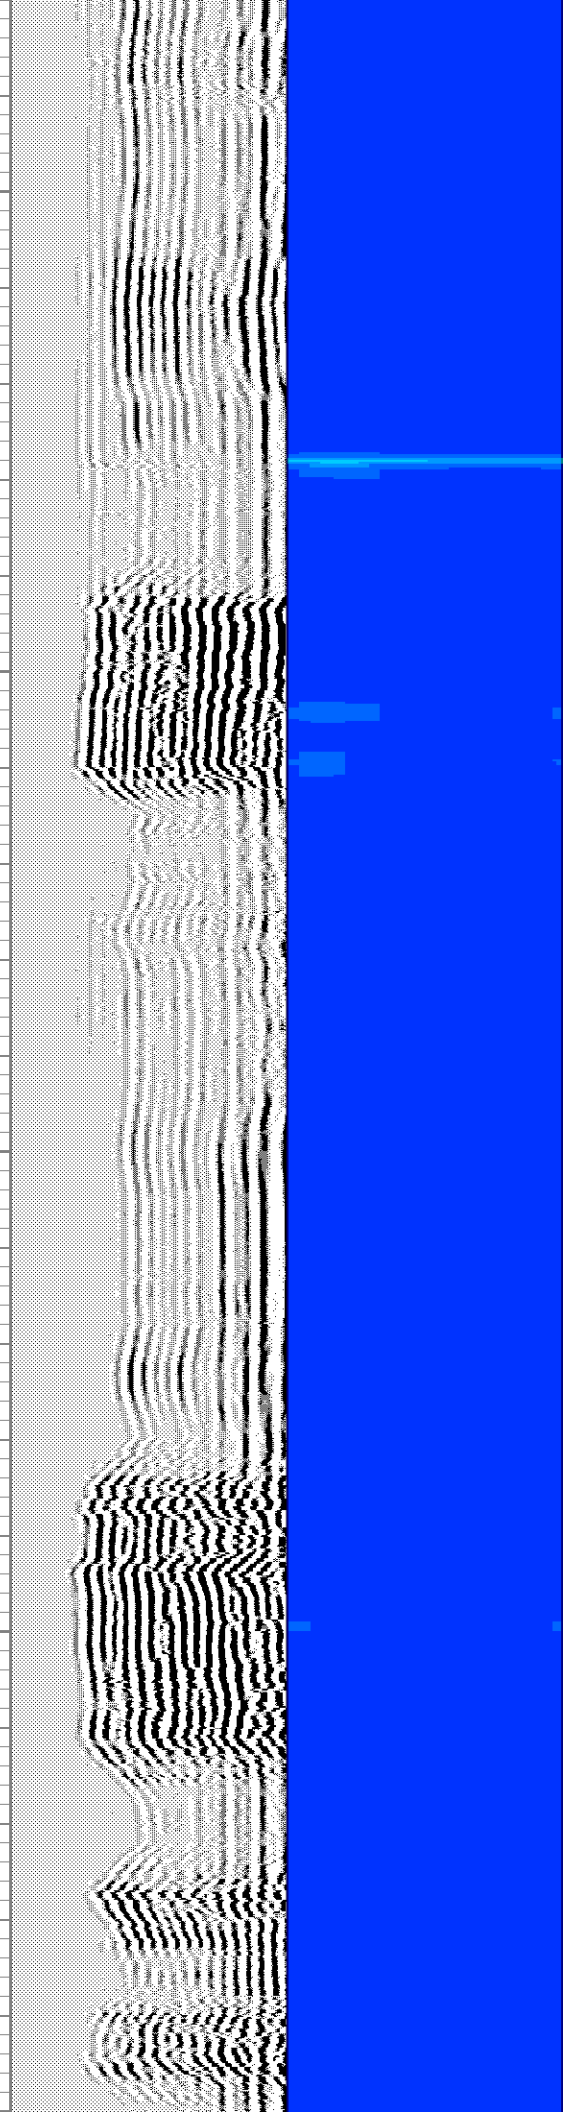


16 SHOTS


1100

1150




1200

1250

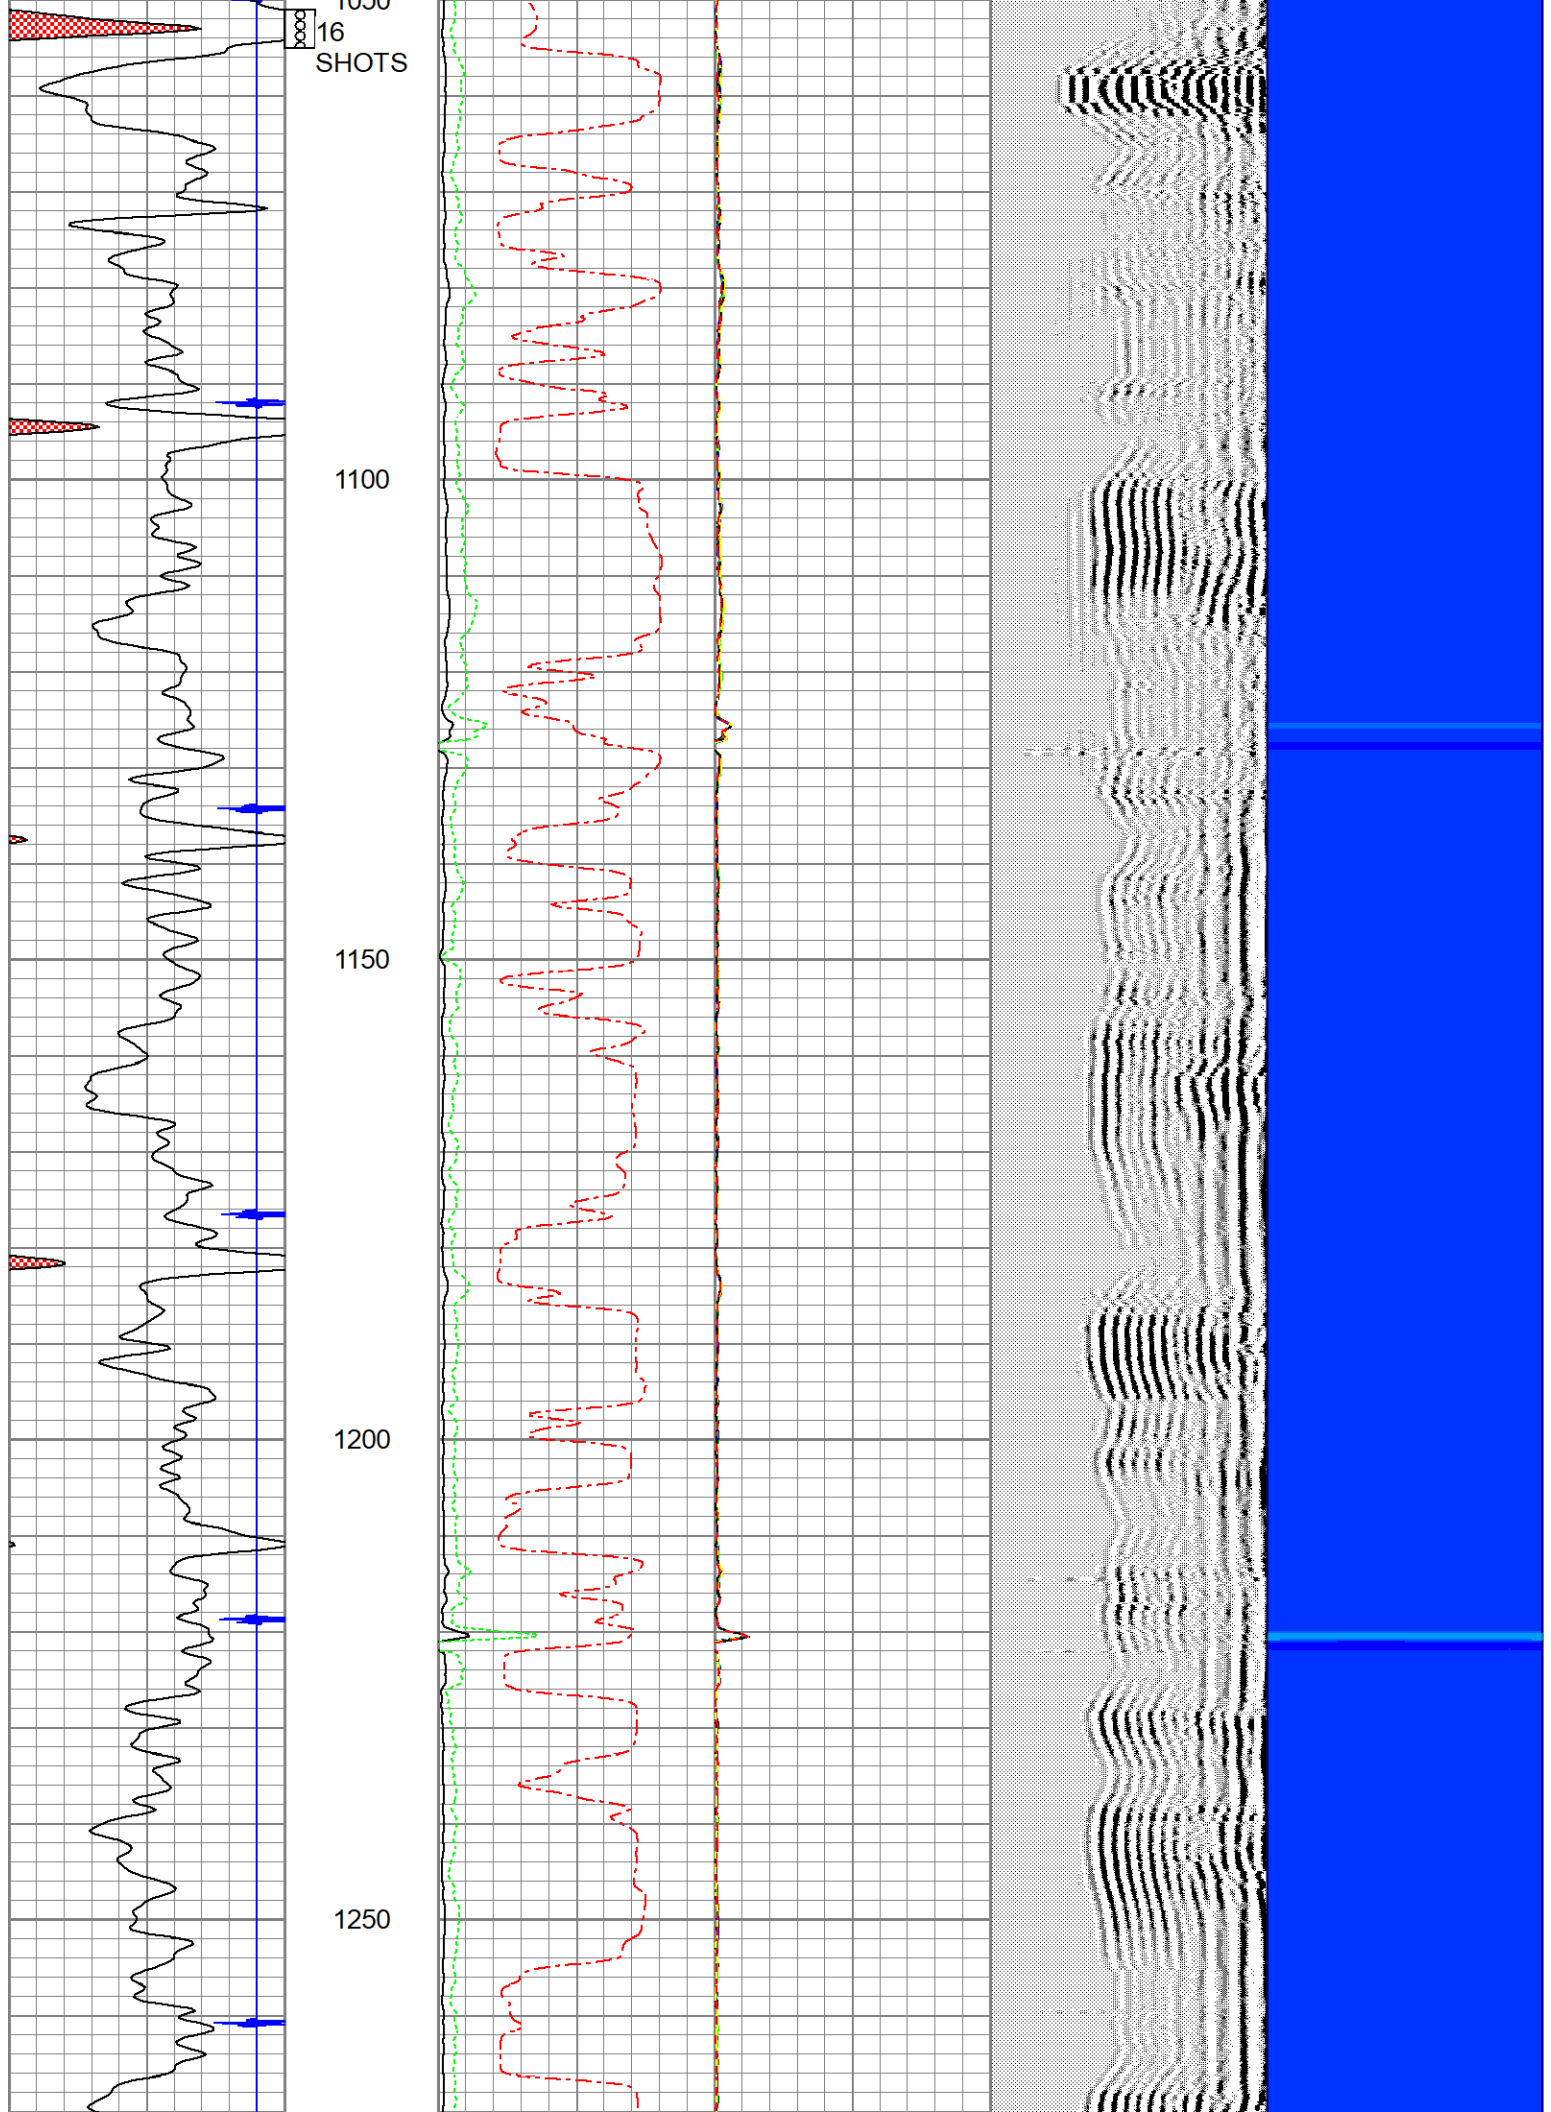

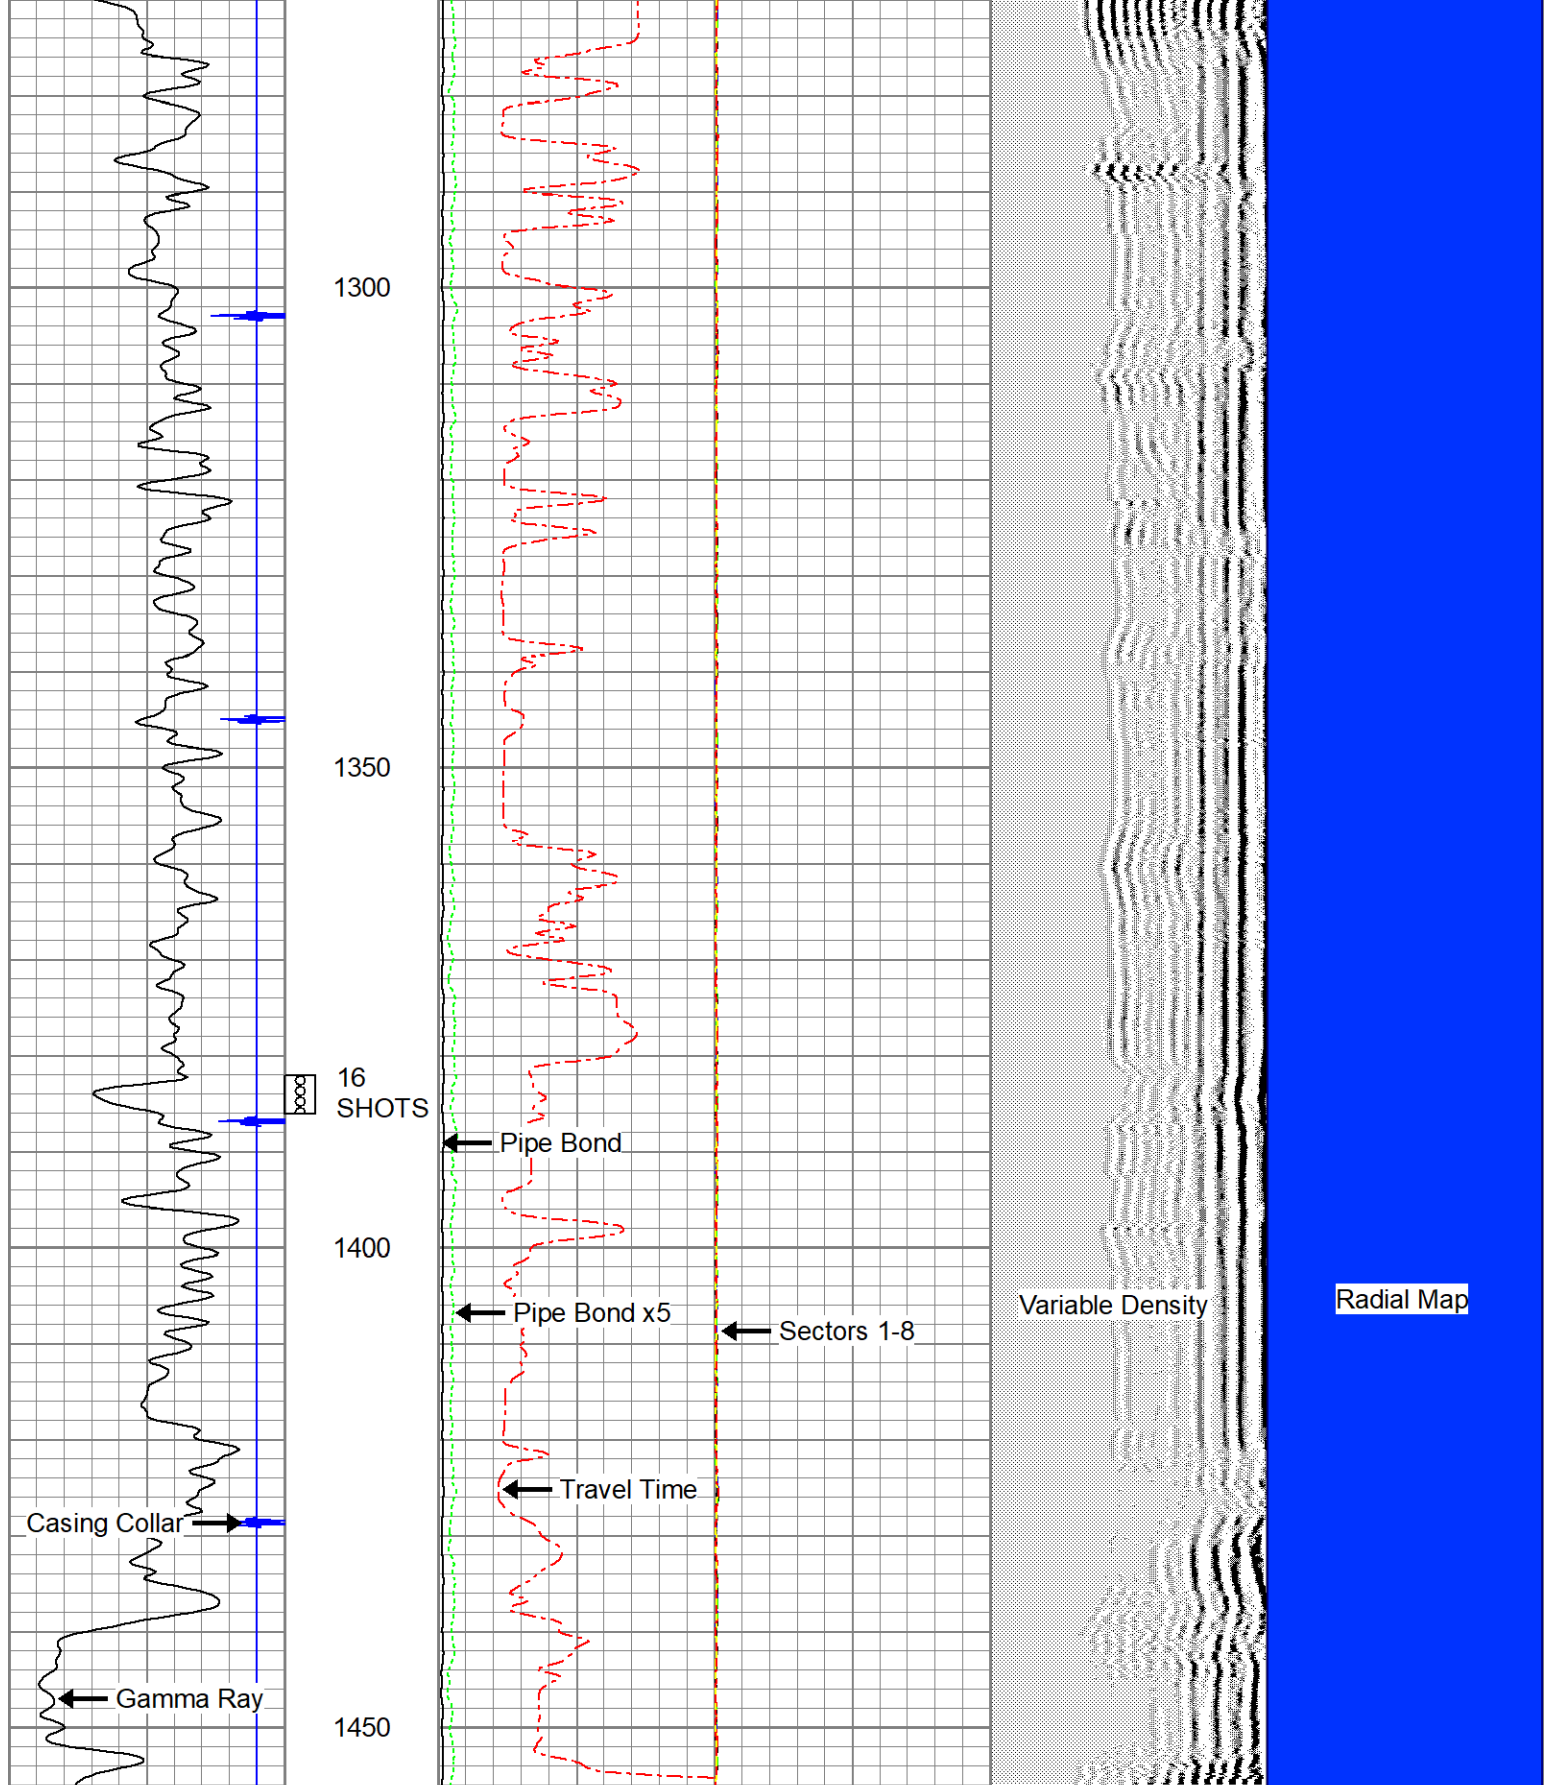

40	Casing Collar -4.5	Pipe Bond	0	Sector 1	100	Variable Density	1	Radial Map	8
	Gamma Ray	(mV)	100	Sector 2	100	200			
0	(GAPI)	Pipe Bond x5	0	Sector 3	100	(usec)			
		(mV)	30	Sector 4	100				
		Travel Time	0	Sector 5	100				

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb)
			CENT-SDSCENT Centralizer	3.00	3.25	20.00
			CHD-STNDRD Standard Cable Head	1.00	1.69	10.00
			RBT-Probe (070566) Prototype Probe Radii Bond Tool with Digital Telemetry	8.75	2.75	90.00
WVFS8	11.97					
WVFS7	11.97					
WVFS6	11.97					
WVFS5	11.97					
WVFS4	11.97					
WVFS3	11.97					
WVFS2	11.97					
WVFS1	11.97					
WVFCAL	11.97					
WVF3FT	11.97					
WVF5FT	10.97		CENT-SDSCENT Centralizer	3.00	3.25	20.00
						
CCL	3.88					
GR	2.54		GR_CCL-PRBSIXPINOLDSTYLE (970904) PROBE 2 3/4" GR/CCL OLD STYLE SIX PIN(RUN W/NEUTRON)	4.78	2.75	57.00
						
Dataset: 6012 rbl ow3 redbud oil & gas sullivan d2-35.db: field/well/run1/pass1 Total length: 20.53 ft Total weight: 197.00 lb O.D.: 3.25 in						