



DUAL INDUCTION LOG

Company	STELBAR OIL CORPORATION, INC.
Well	WILLOWAY FARMS #1-21
Field	UNAMED
County	WALLACE
State	KANSAS
Location:	API # : 15-199-20455-0000 1458' FSL & 1170' FEL
Permanent Datum	SEC 21 TWP 14S RGE 41W
Log Measured From	GROUND LEVEL Elevation 3718 KELLY BUSHING 8' A.G.L
Drilling Measured From	KELLY BUSHING
Other Services CDL/CNL/PE MEL/SON	Elevation K.B. 3726 D.F. 3724 G.L. 3718
Date	1/13/21
Run Number	ONE
Depth Driller	5240
Depth Logger	5240
Bottom Logged Interval	5238
Top Log Interval	00
Casing Driller	8 5/8" @ 551
Casing Logger	551
Bit Size	7 7/8
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.4/60
pH / Fluid Loss	10.0/9.6
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.75 @ 60F
Rmf @ Meas. Temp	.56 @ 60F
Rmc @ Meas. Temp	.90 @ 60F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	.35 @ 127F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	////
Maximum Recorded Temperature	127F
Equipment Number	3802
Location	HAYS, KANSAS
Recorded By	JASON CAPPELLUCCI
Witnessed By	LARRY FRIEND

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments



THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
SHARON SPRINGS, KS. - 6 SOUTH TO IRONHORSE RD. - 7 WEST - NORTH & WEST INTO




MAIN SECTION


0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
-----			0	Deep Induction (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500



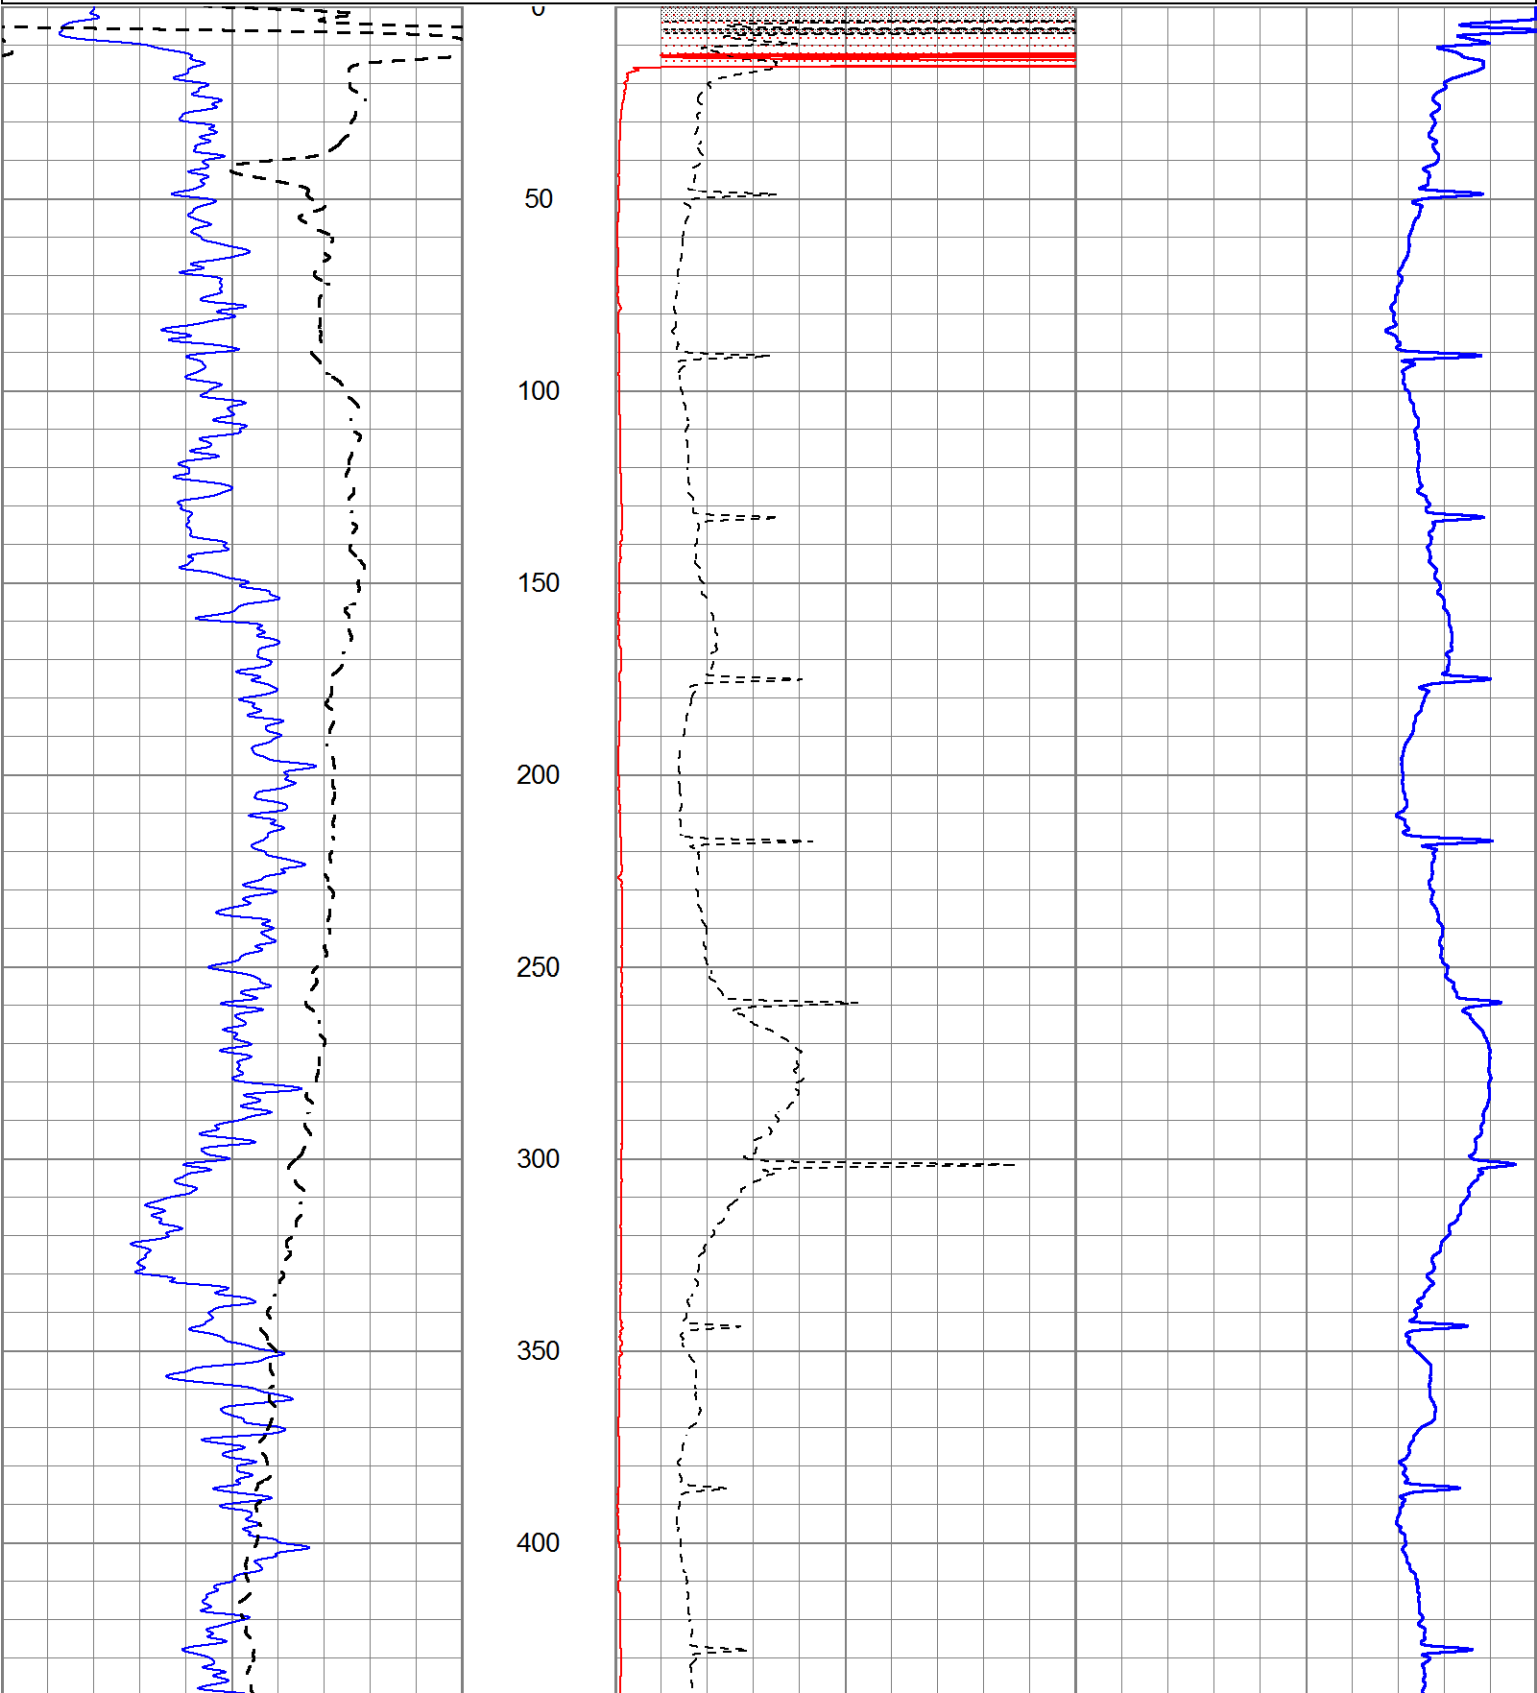


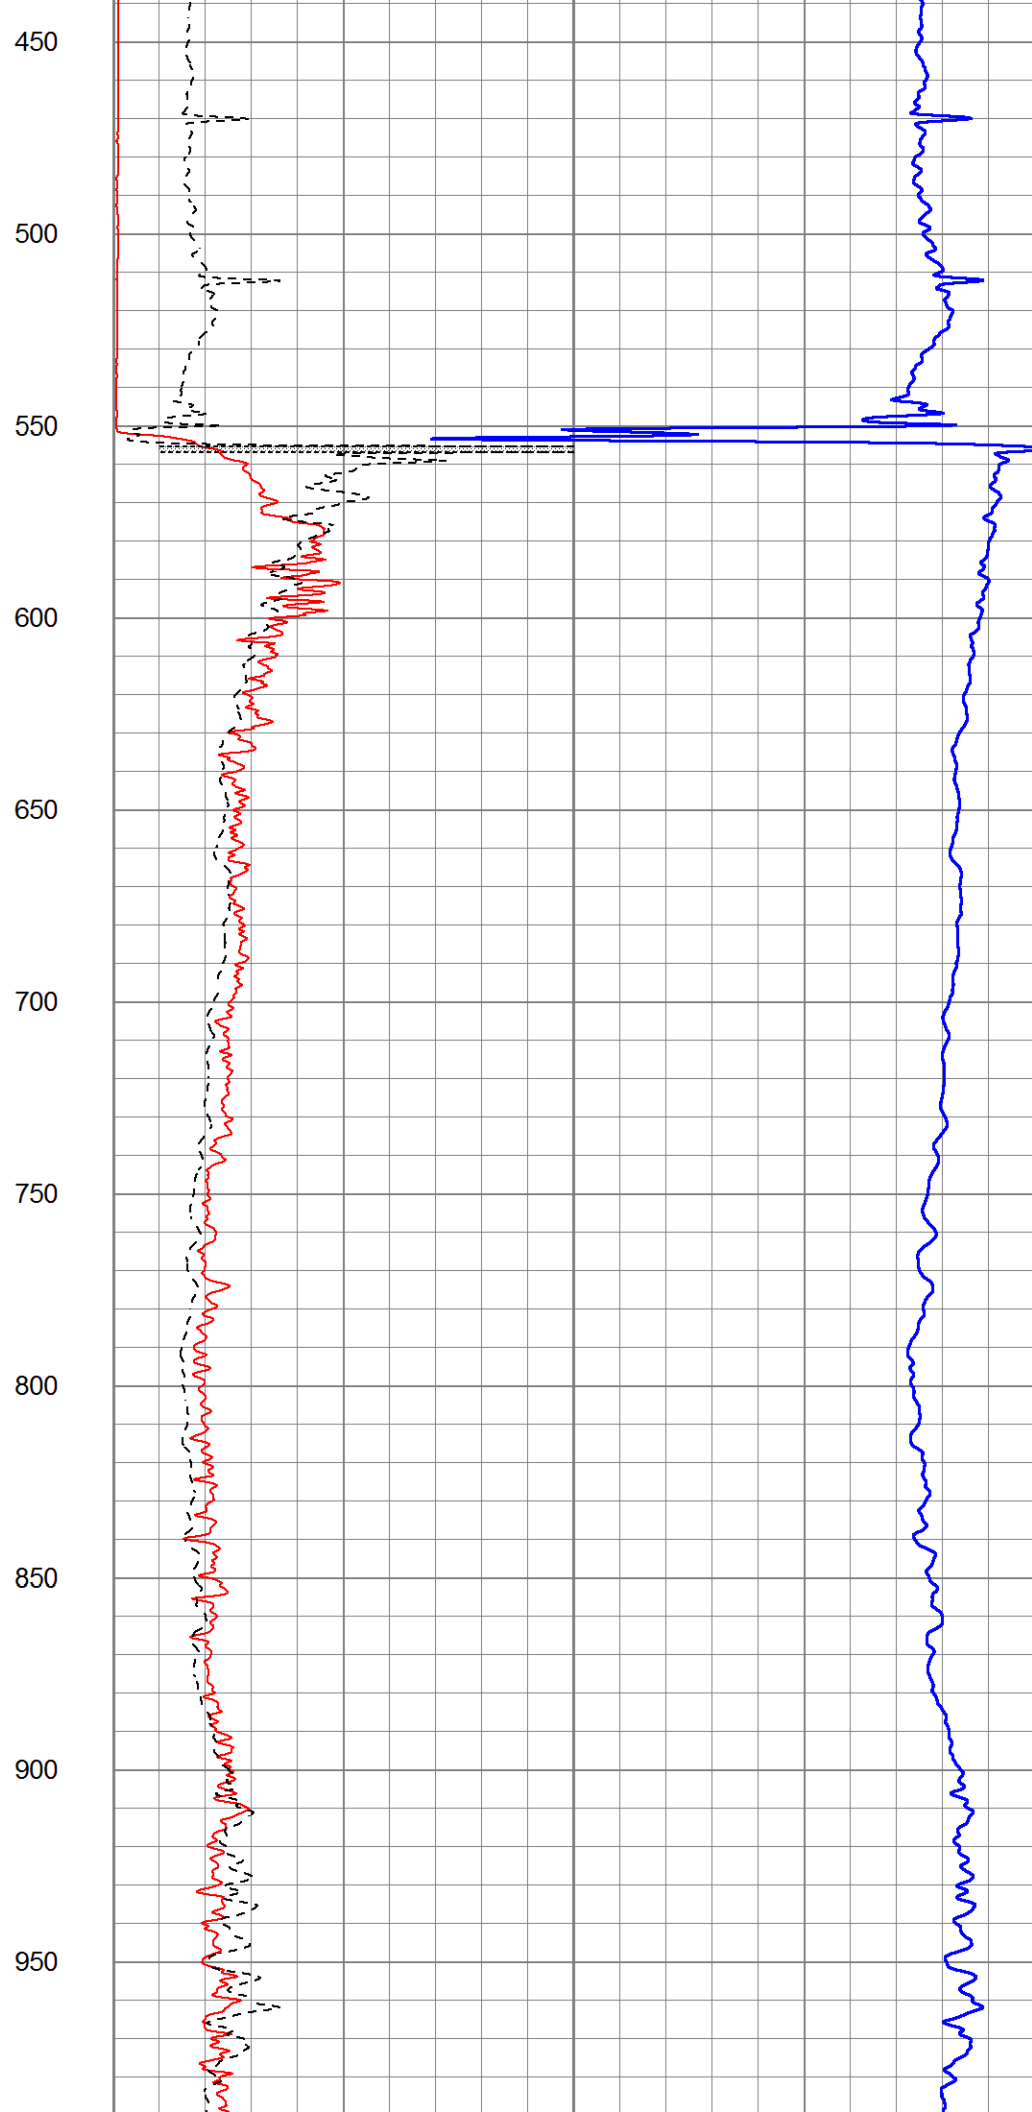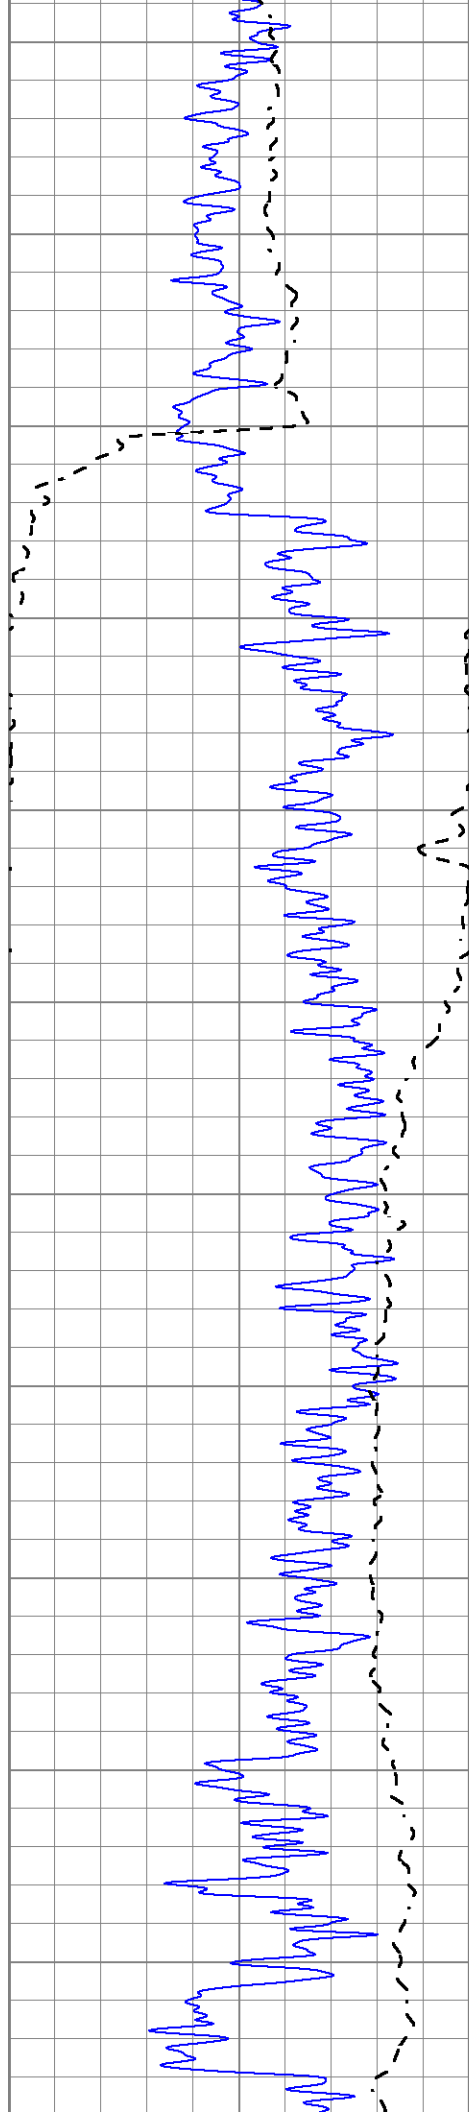


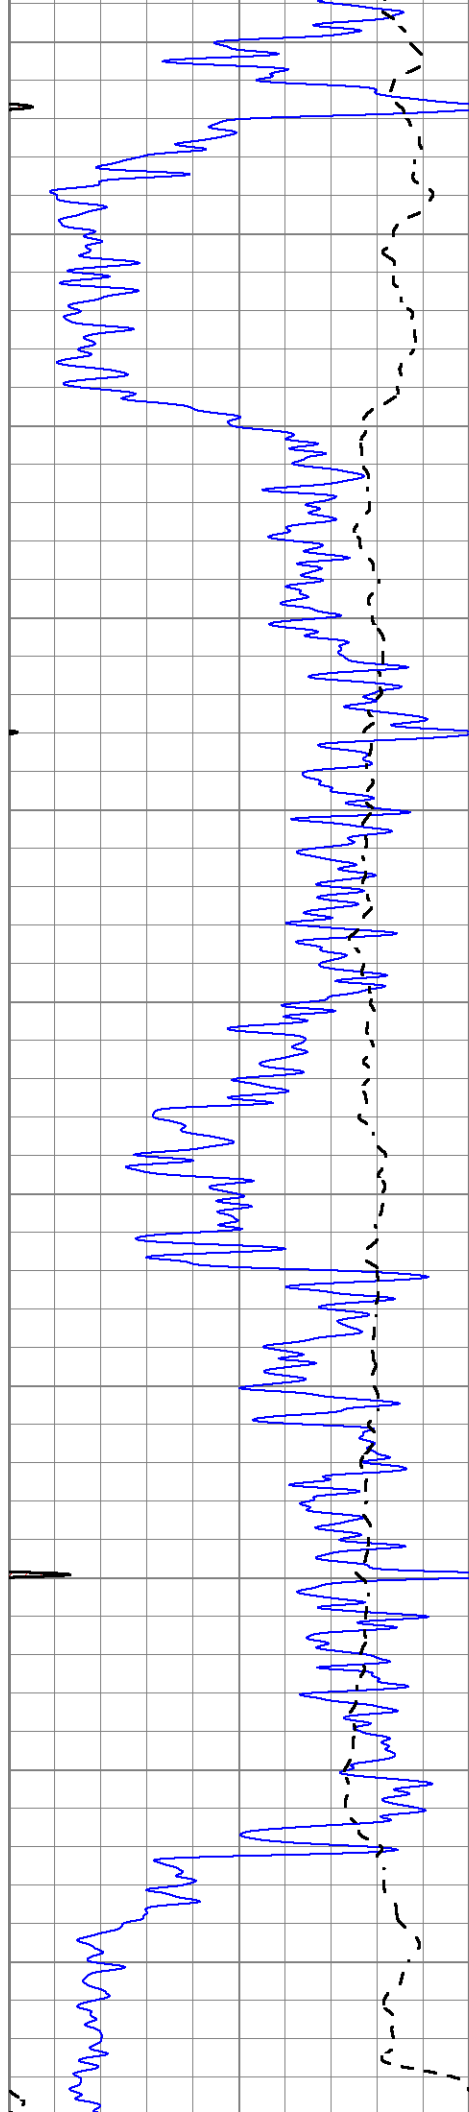

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

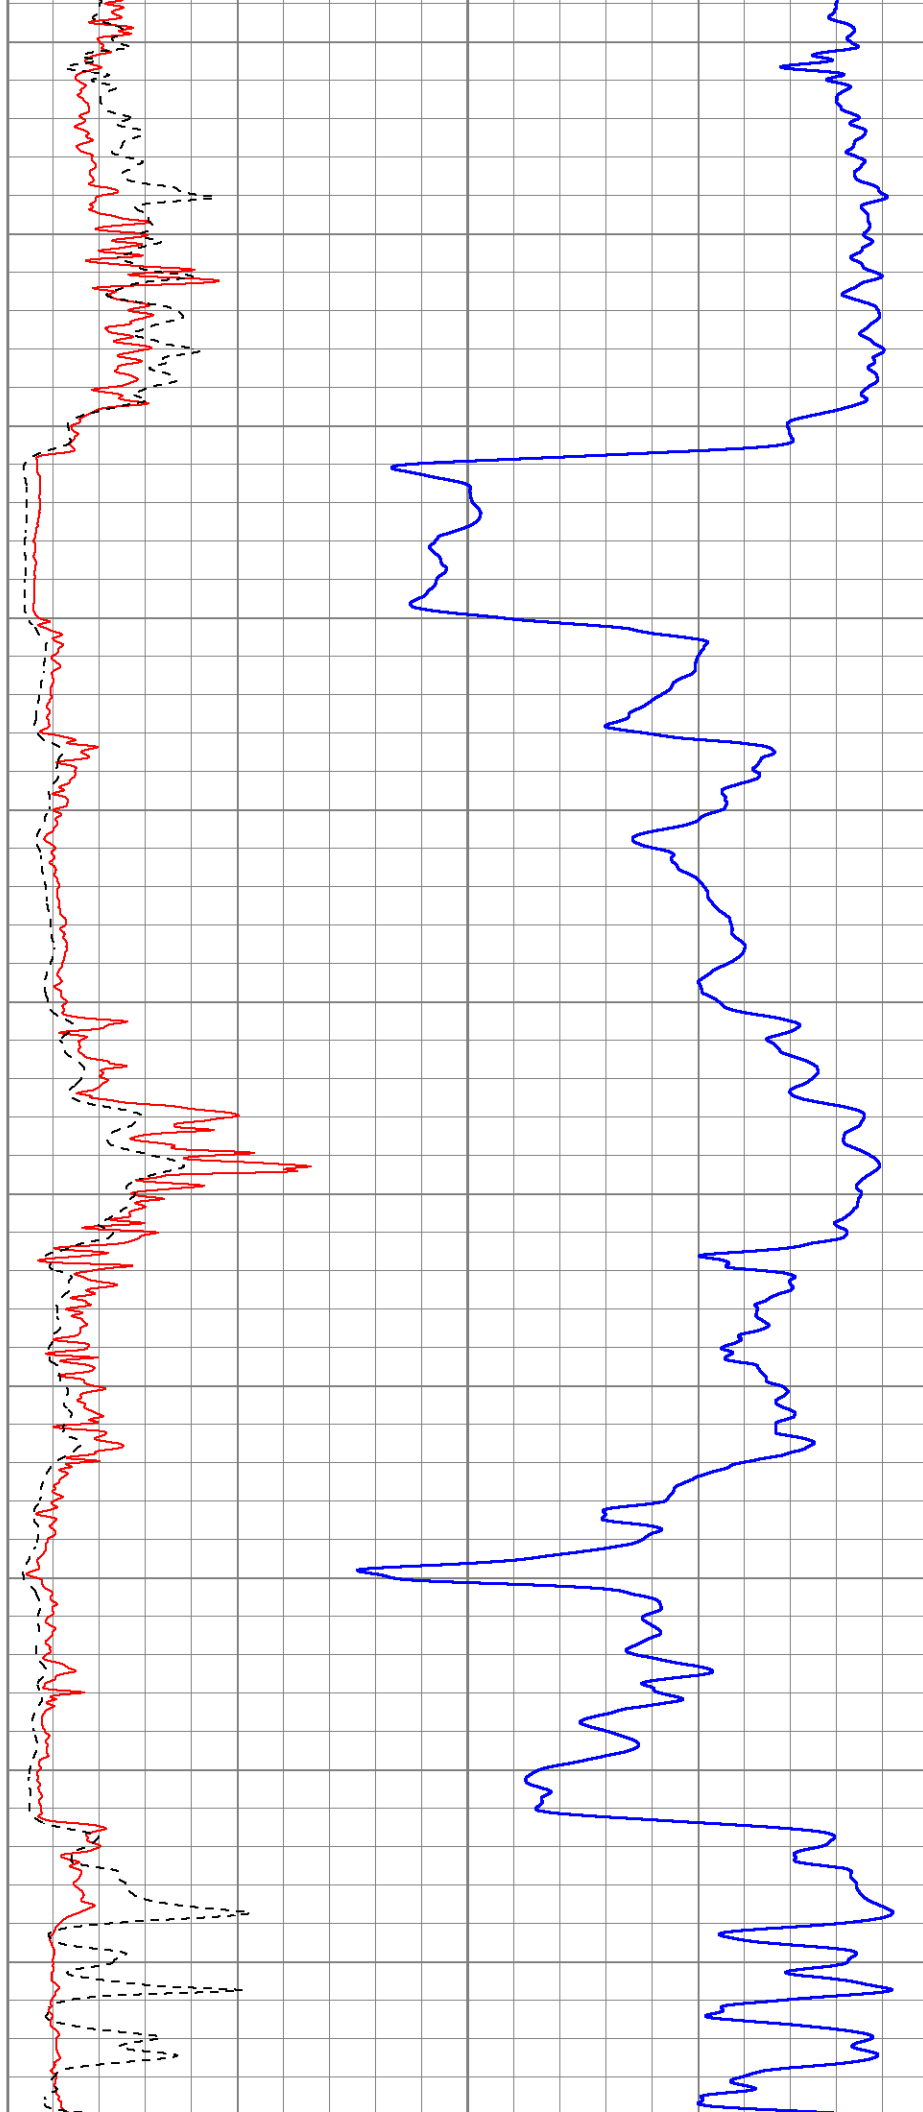

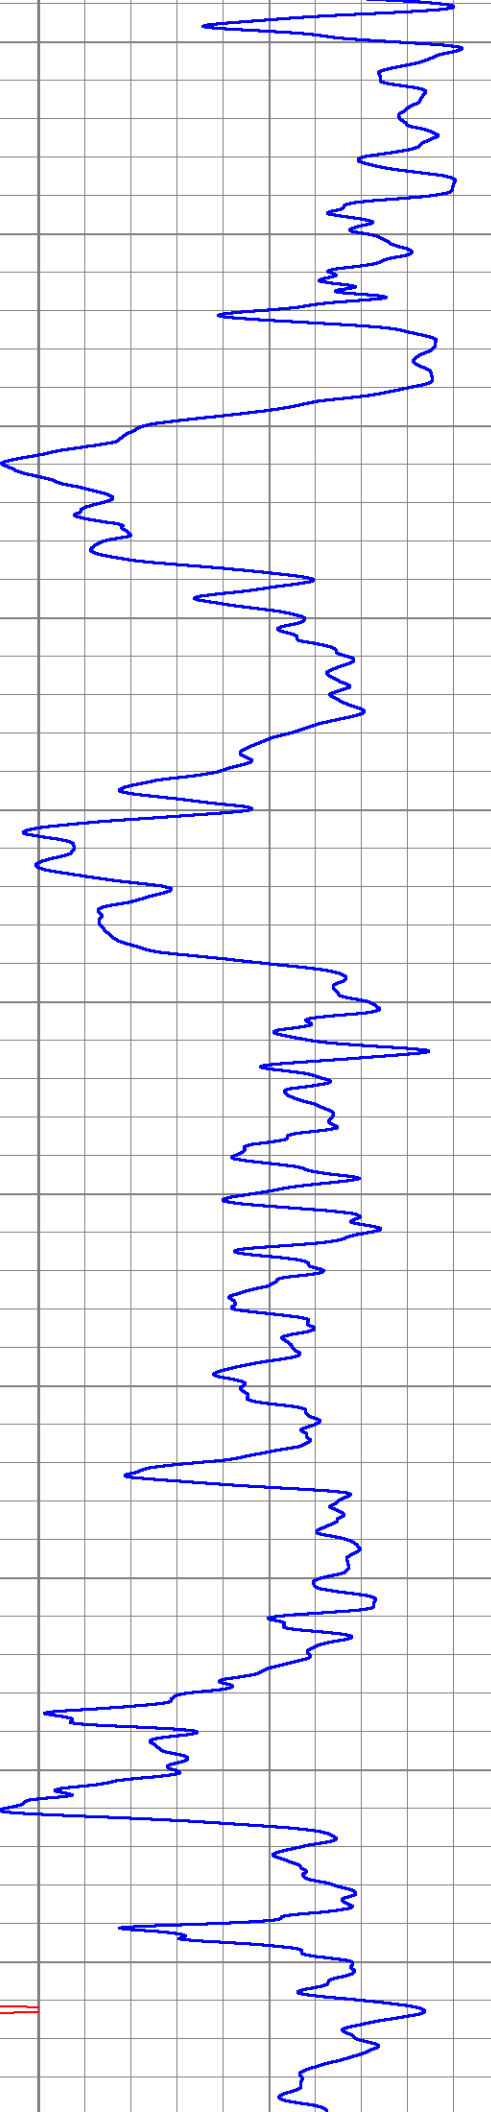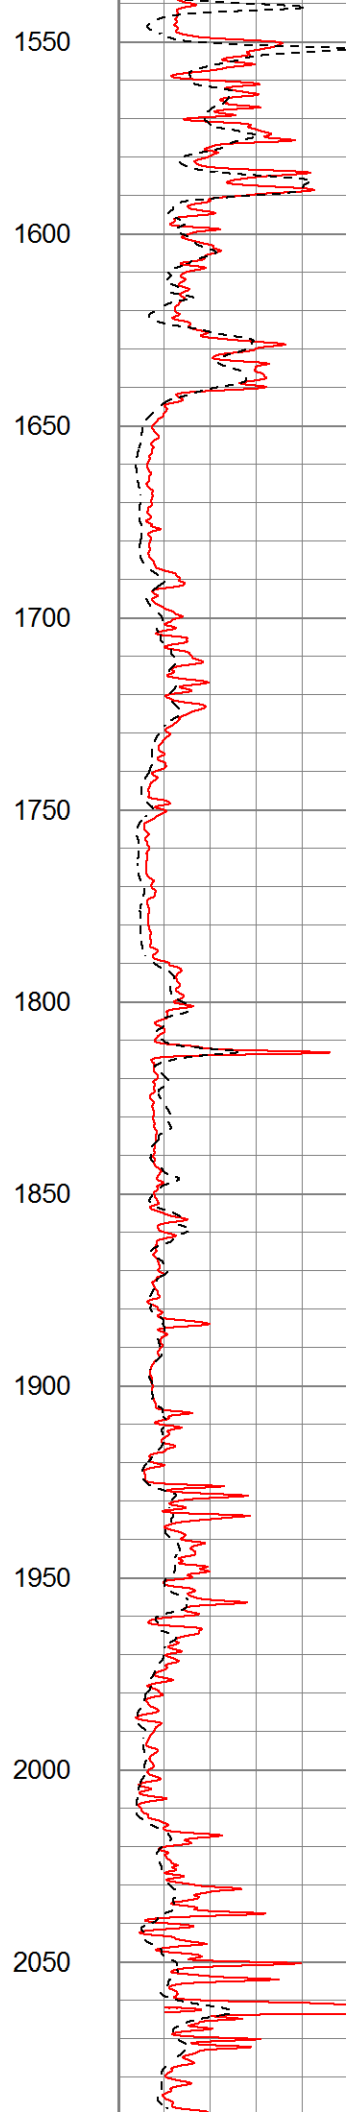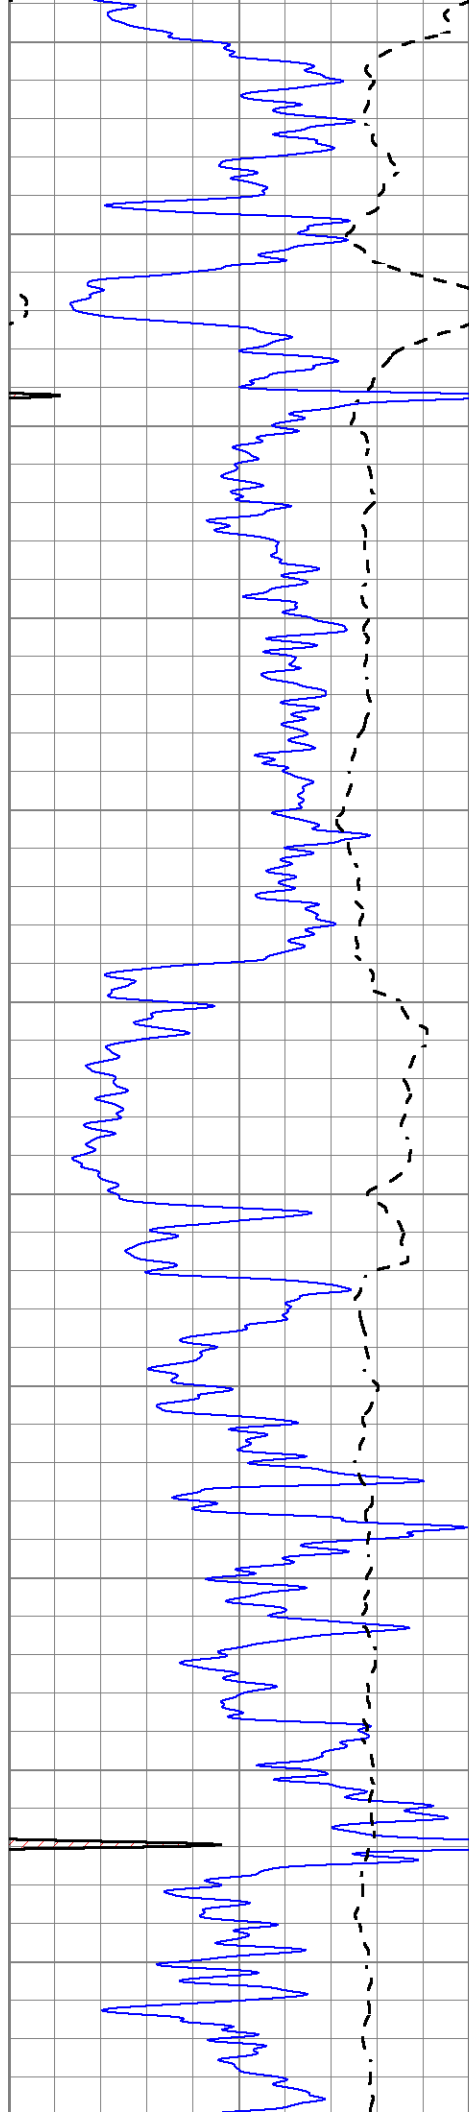

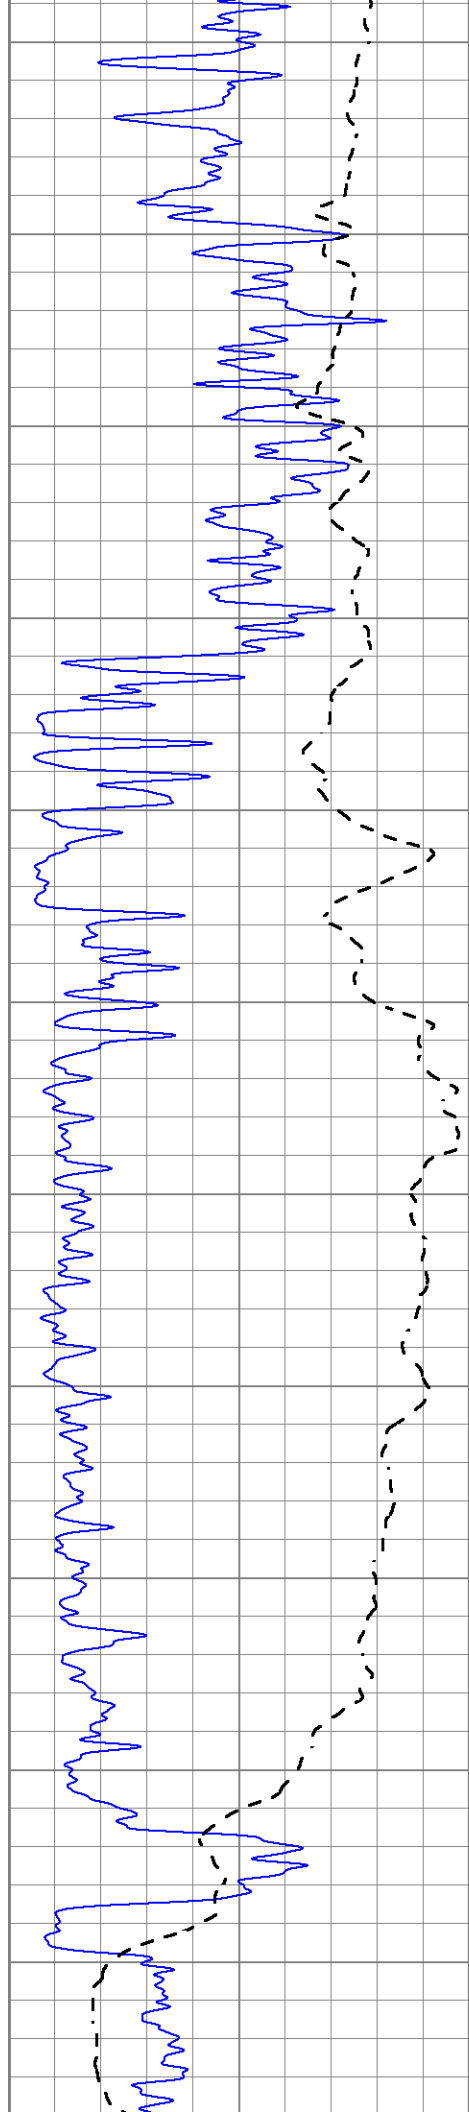

2100

2150

2200

2250

2300

2350


2400



2450



2500


2550

2600

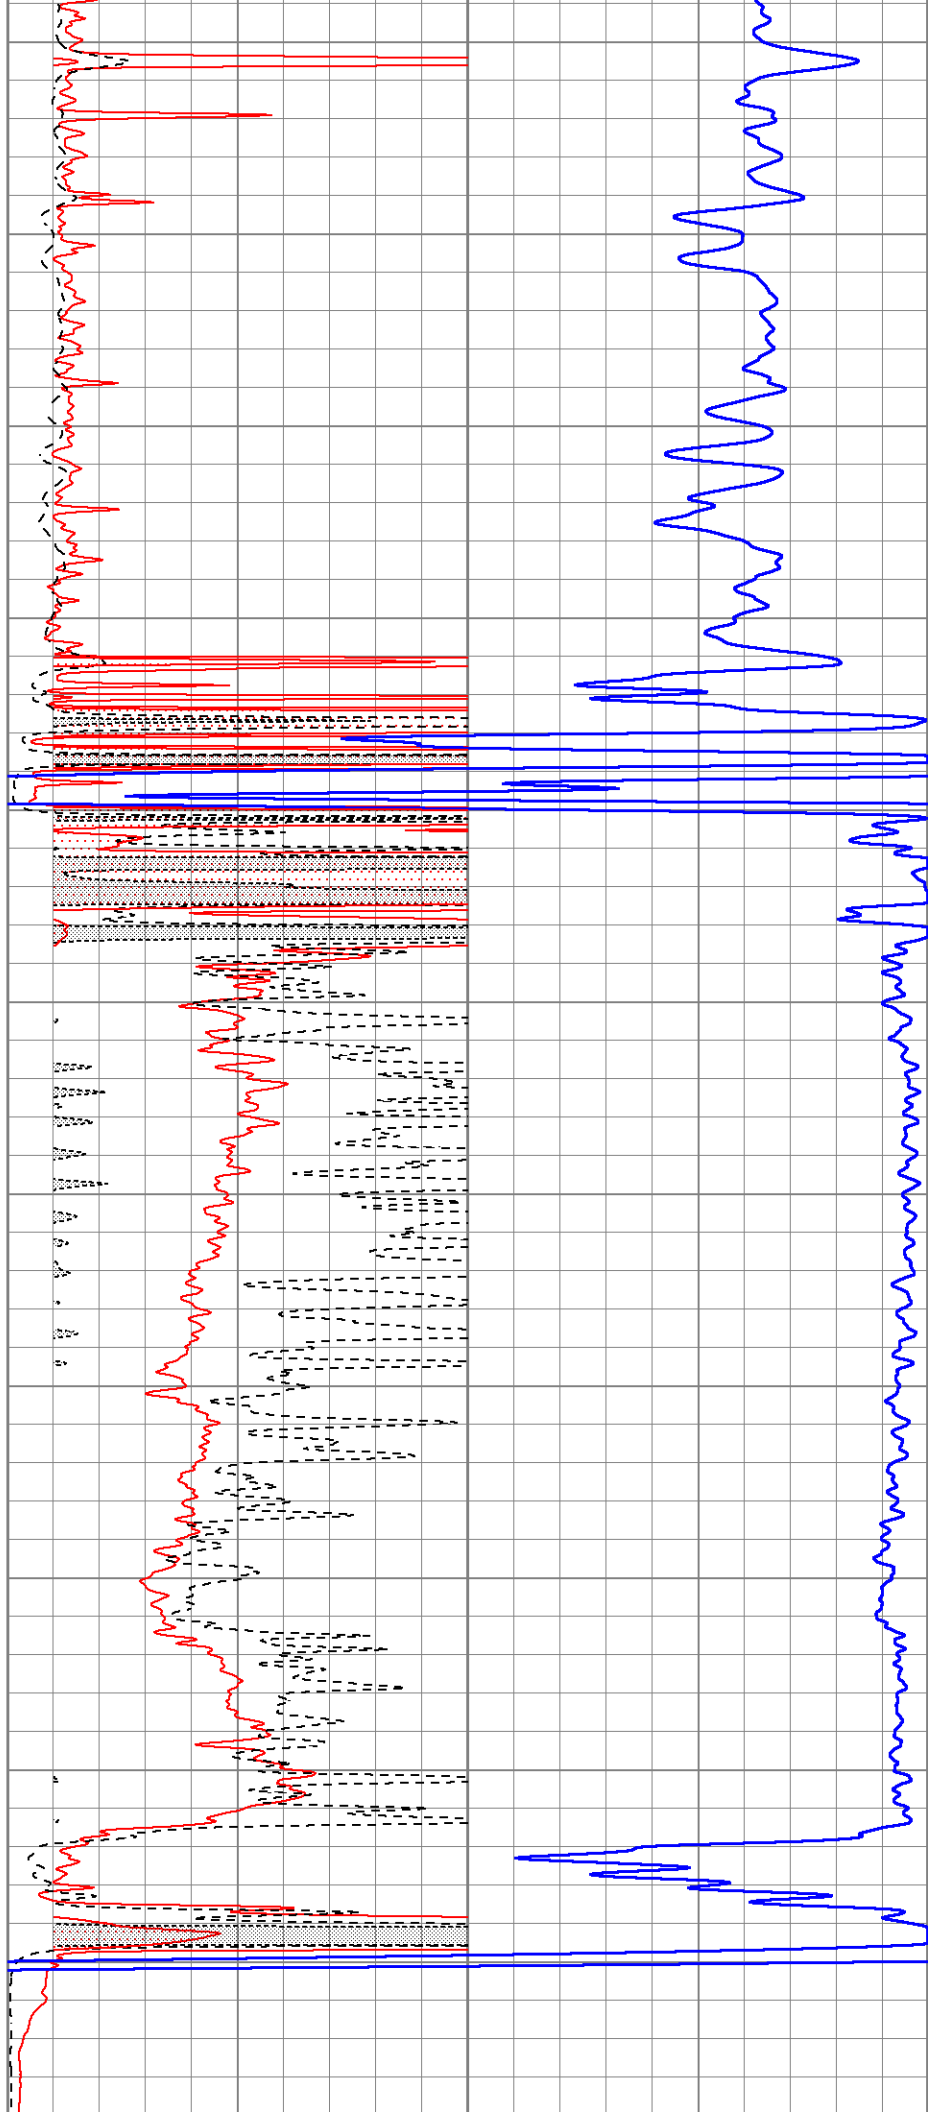

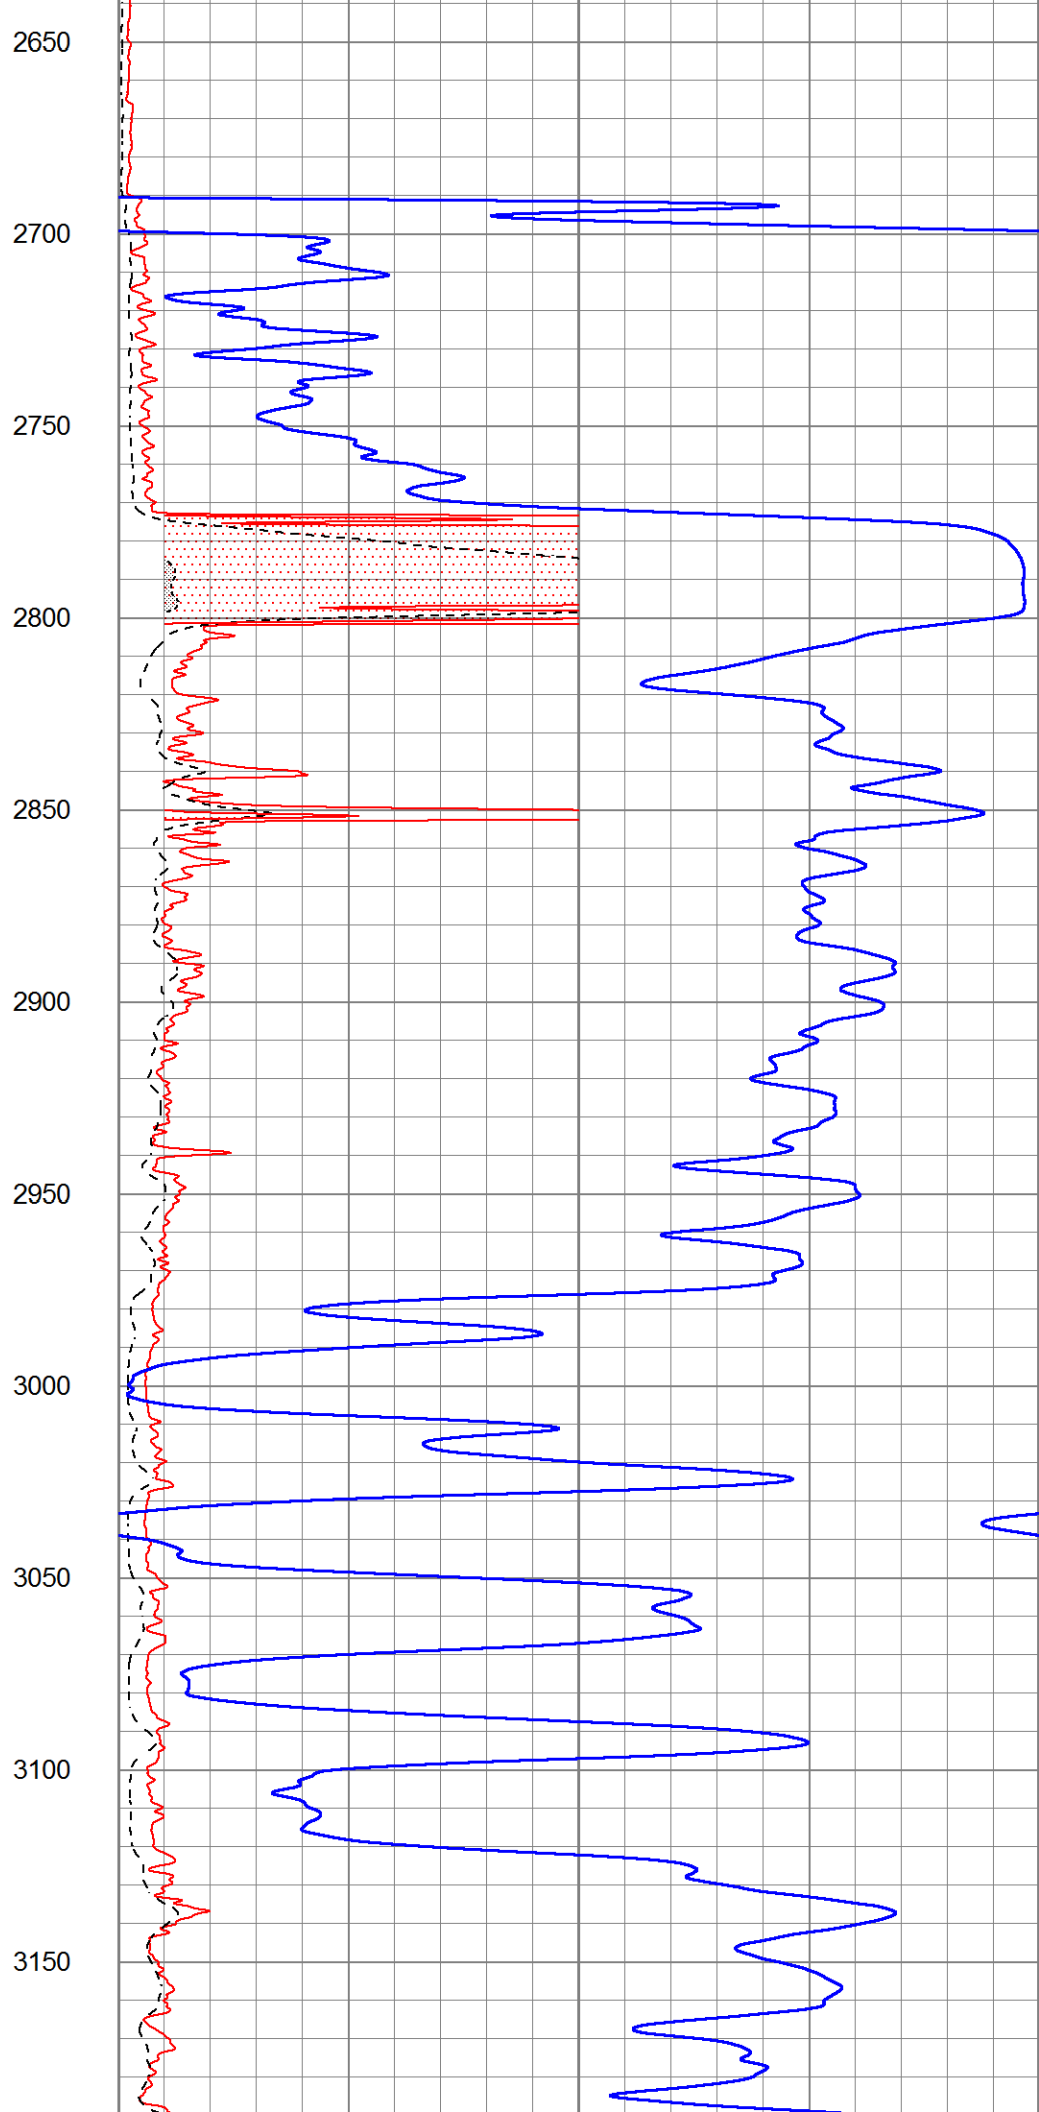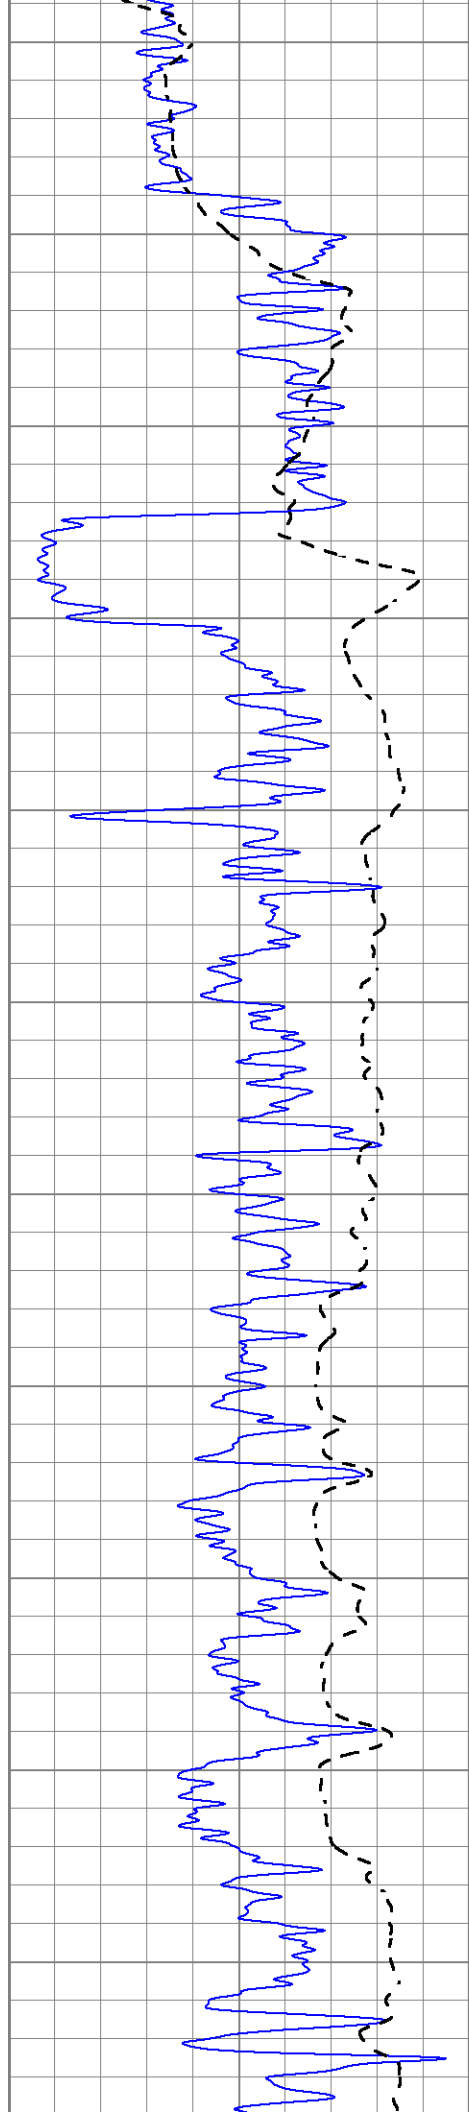

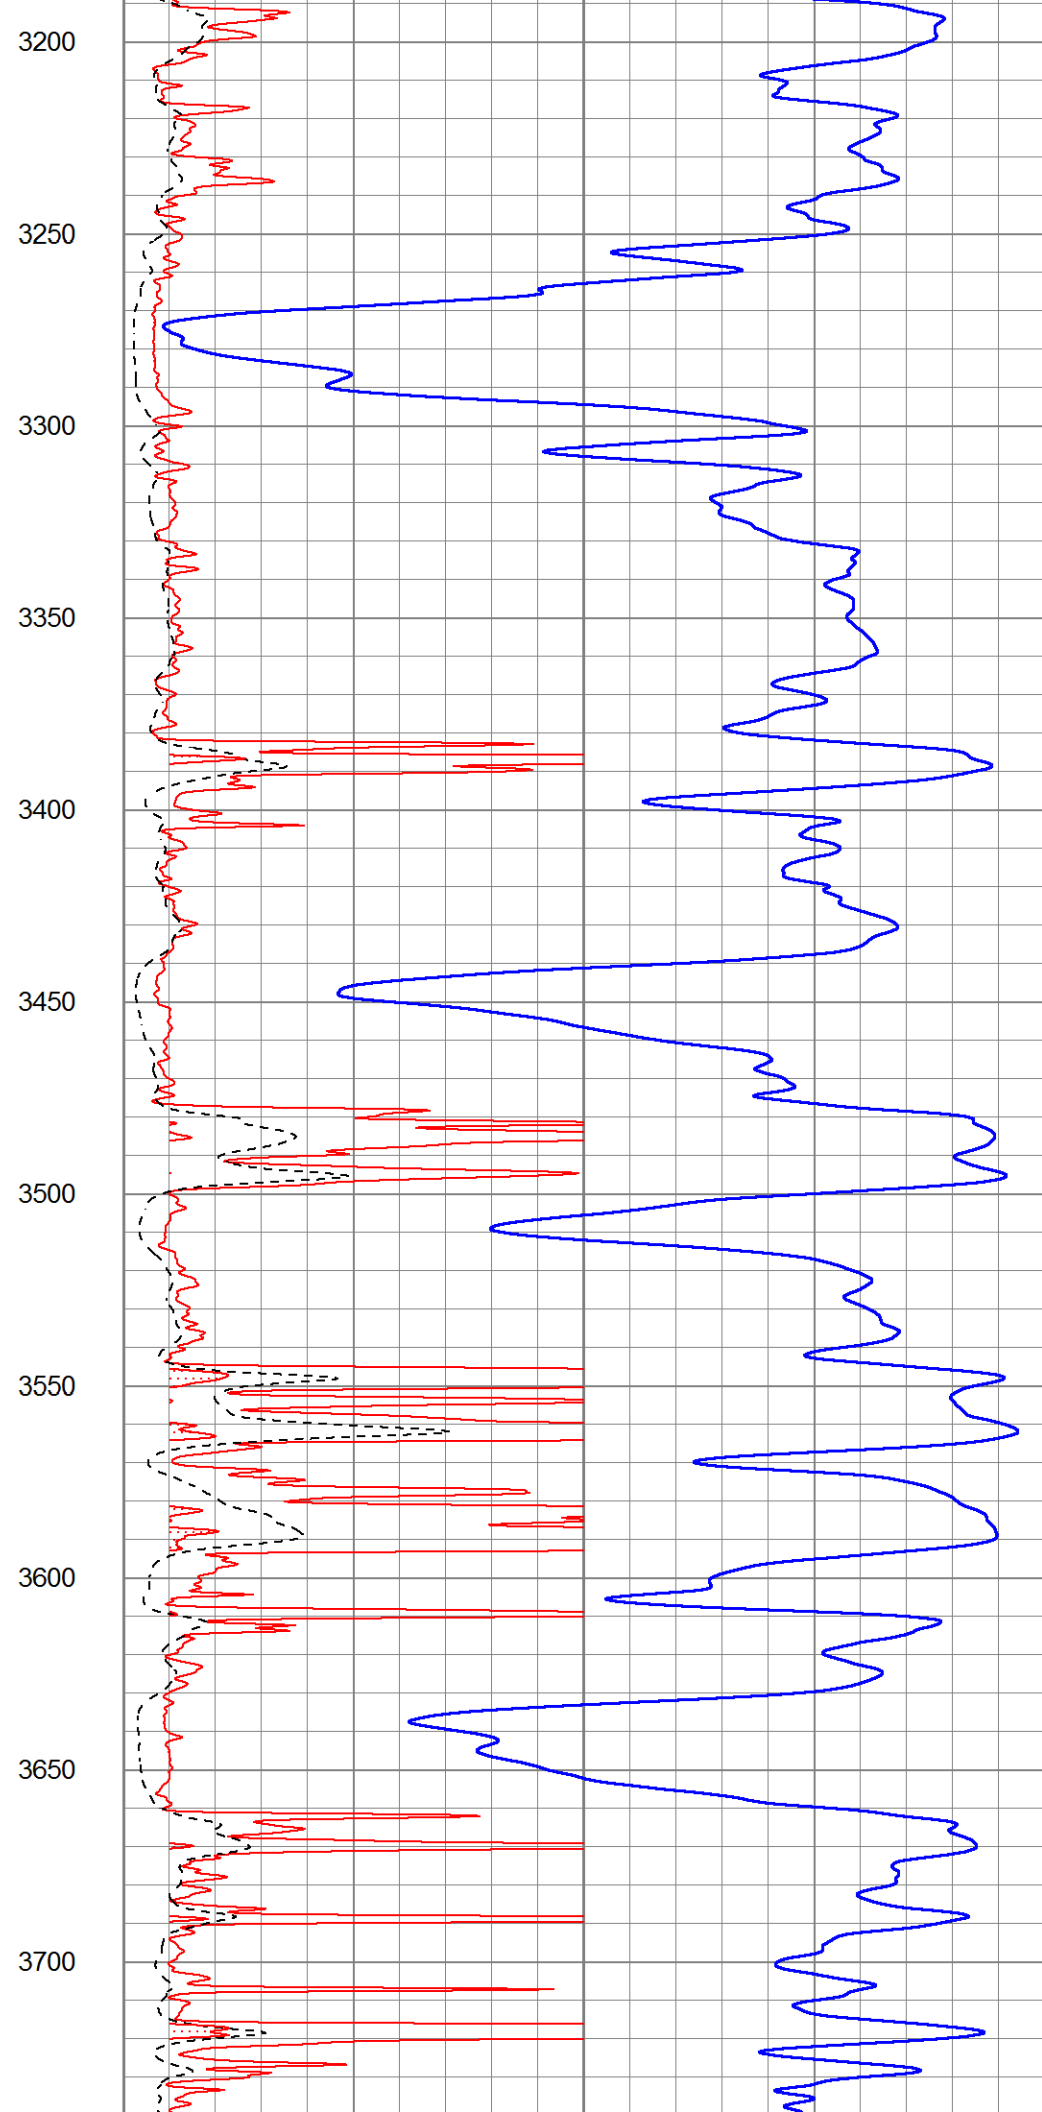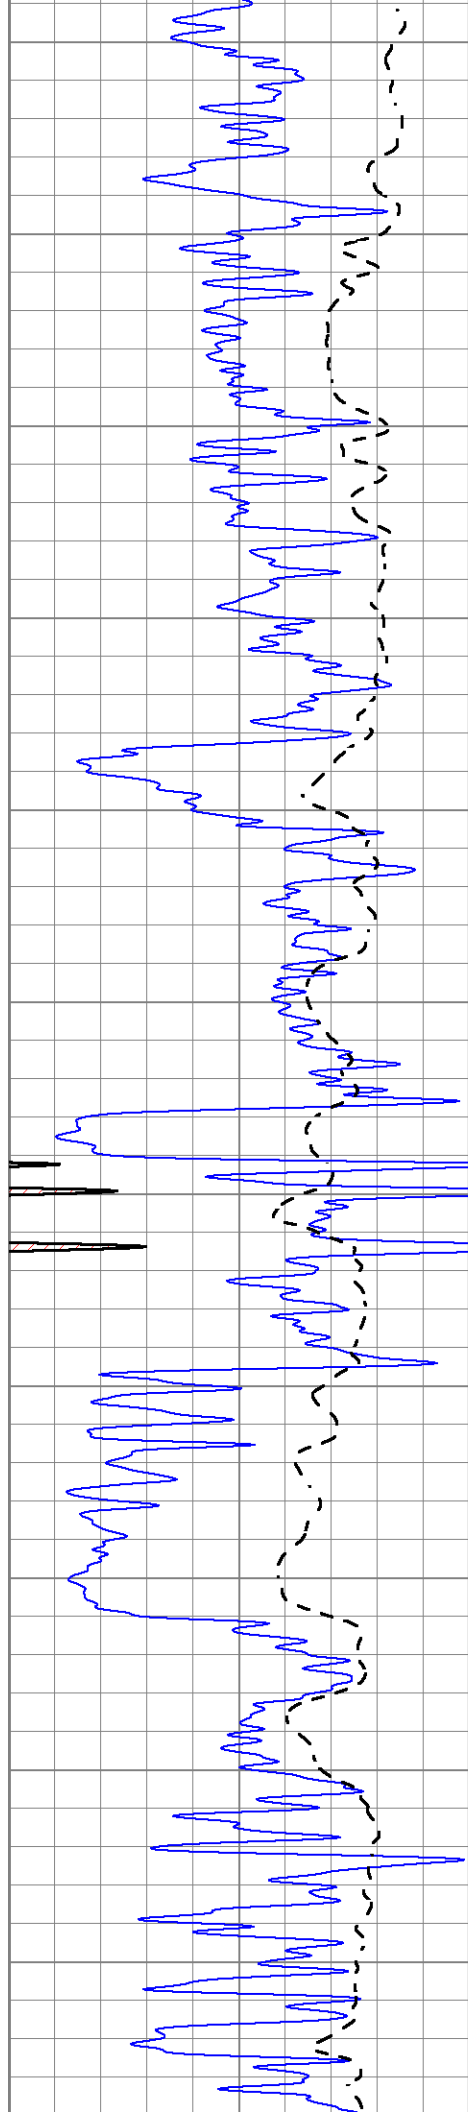

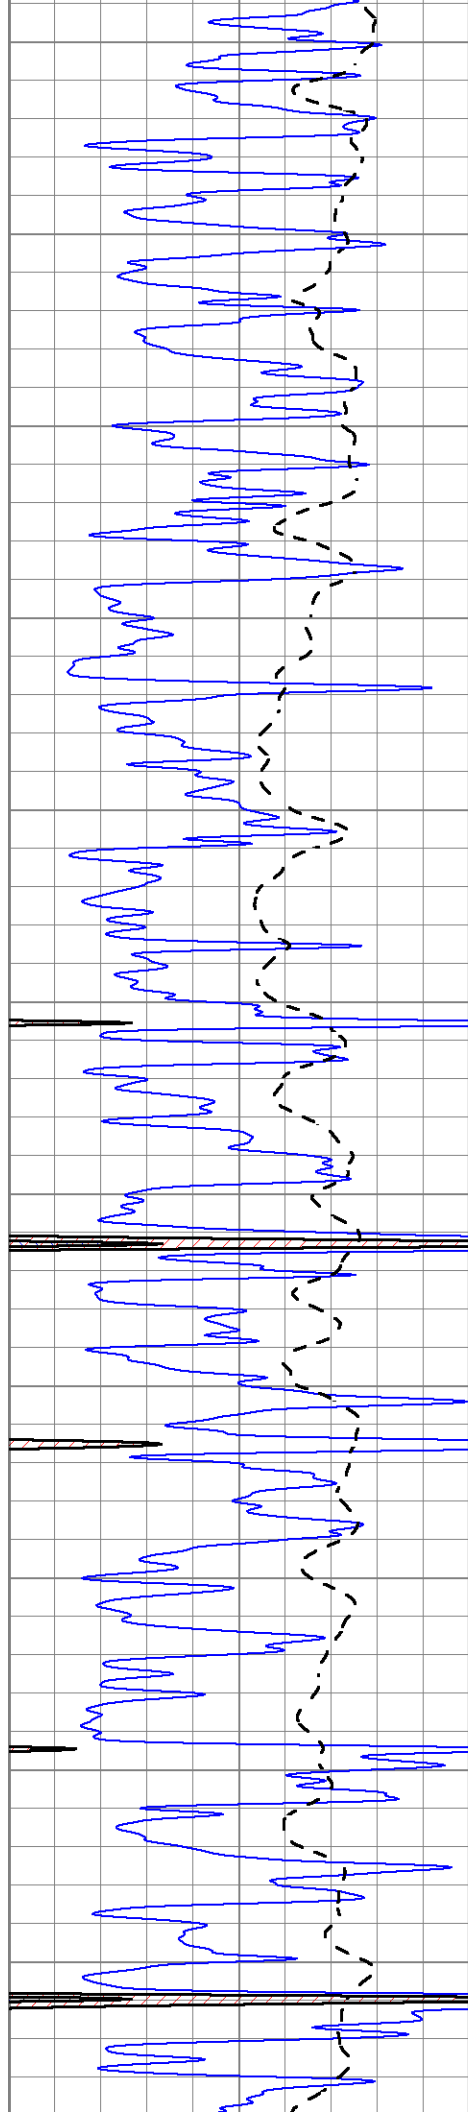

3750

3800

3850

3900

3950

4000



4050




4100


4150

4200

4250

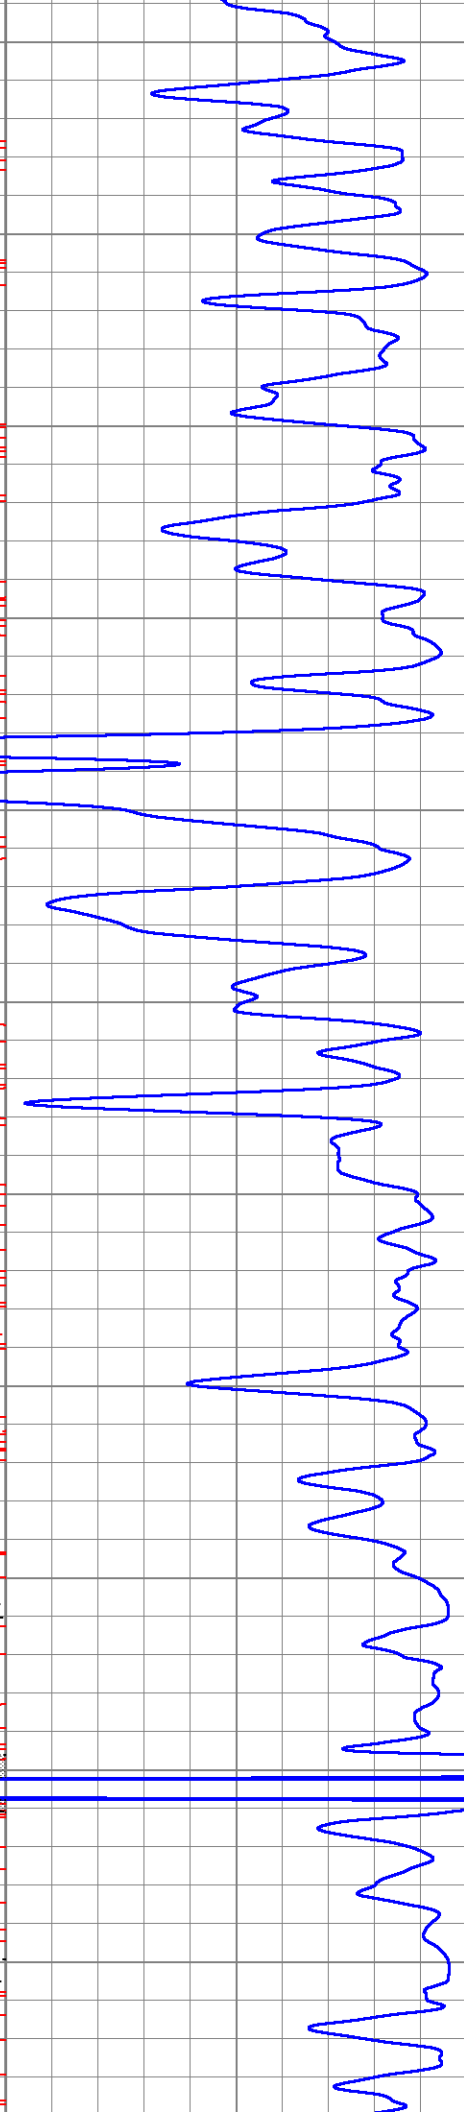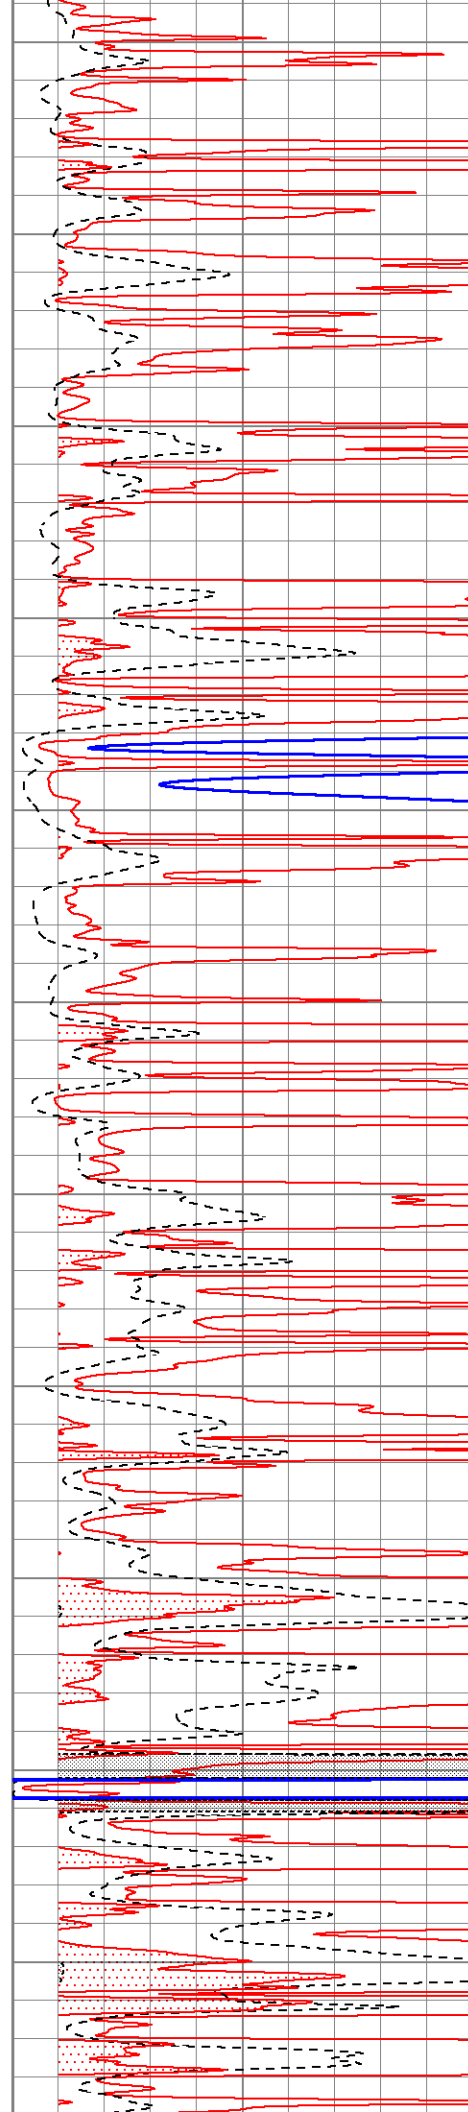


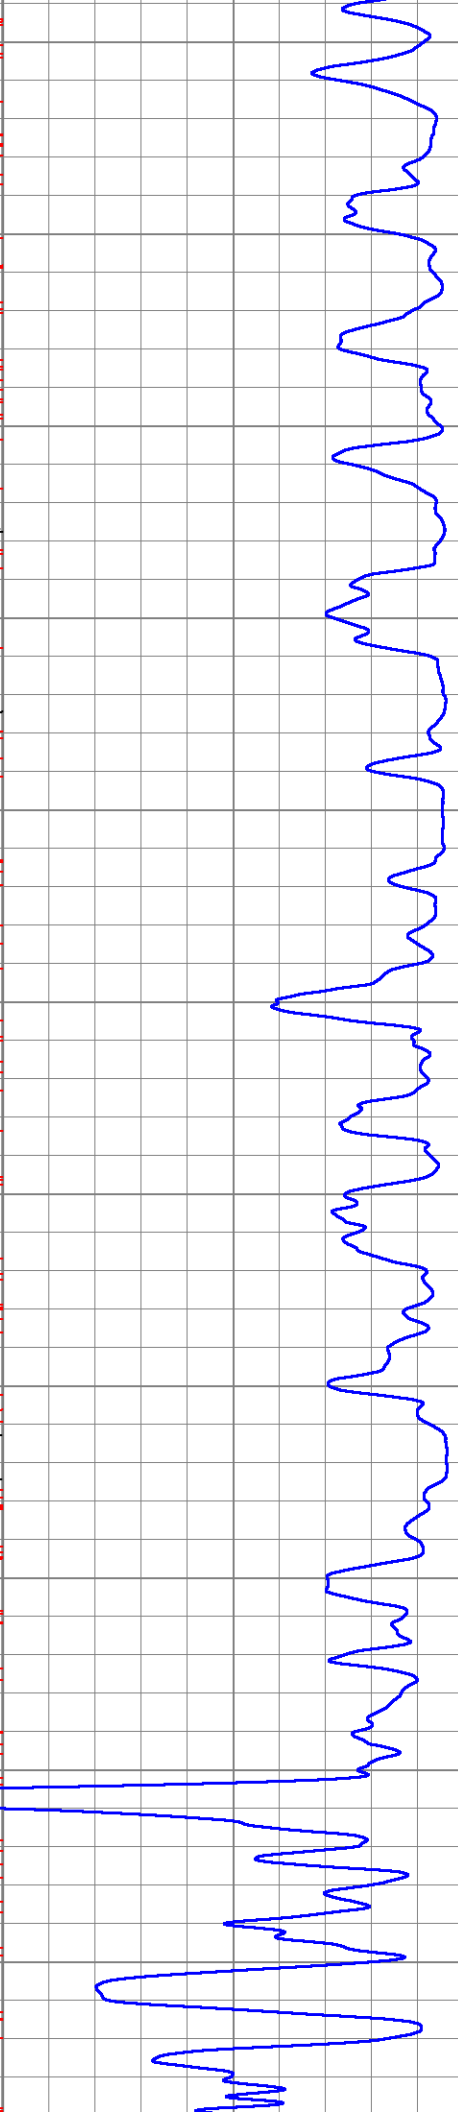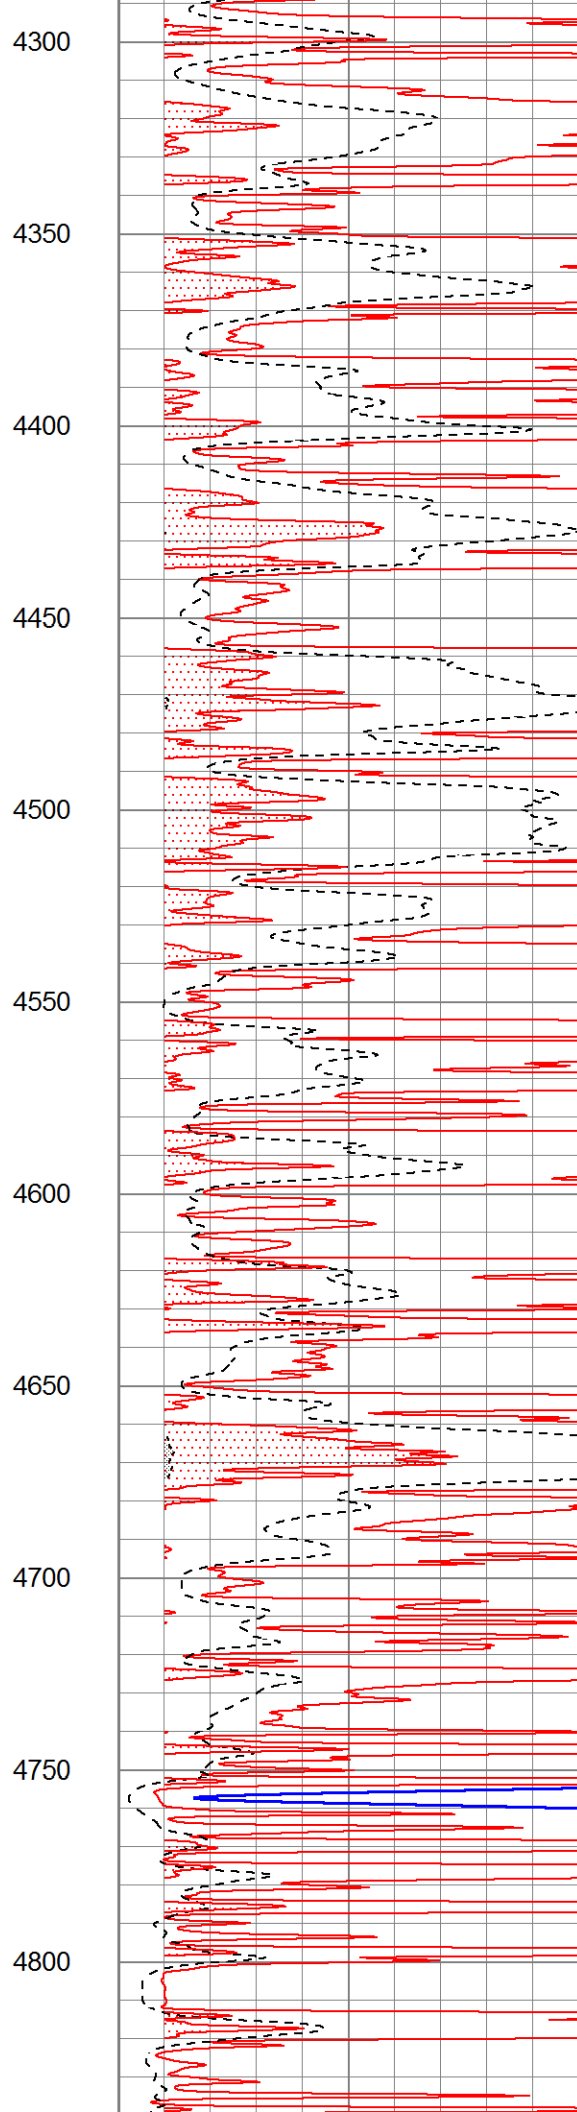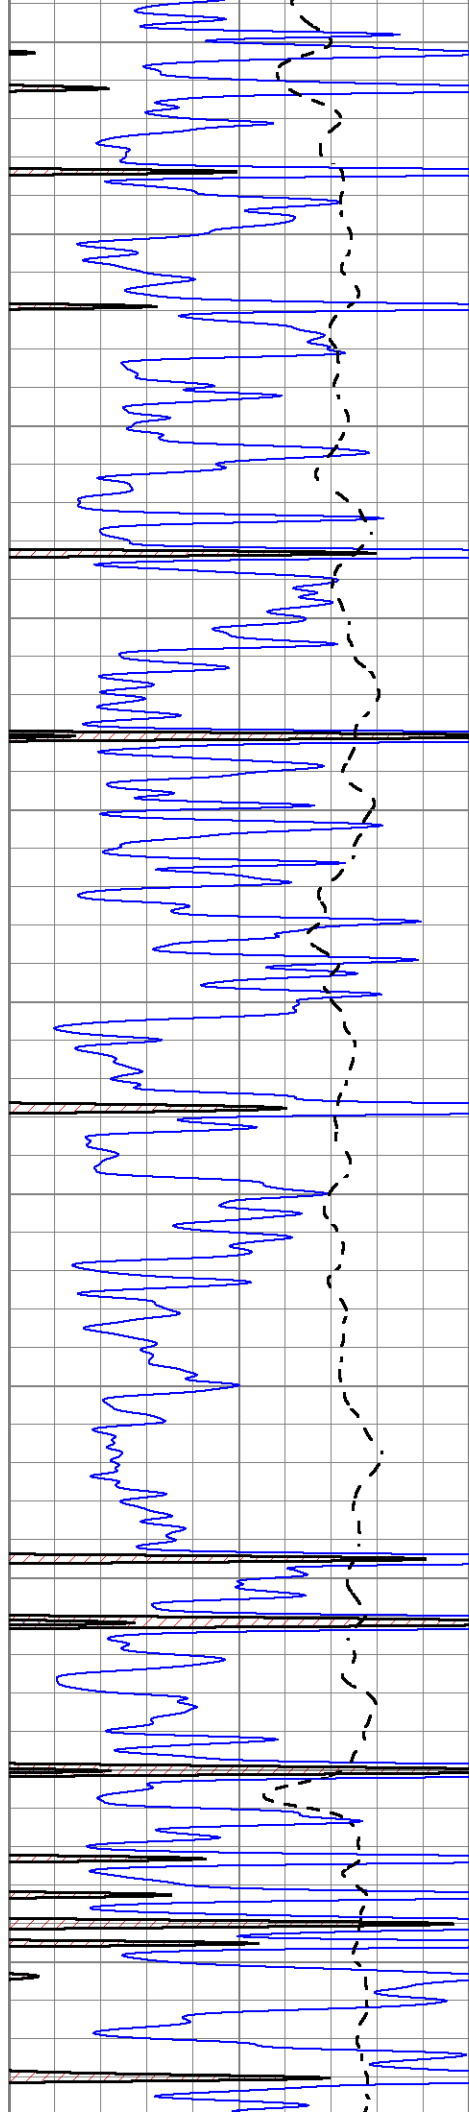


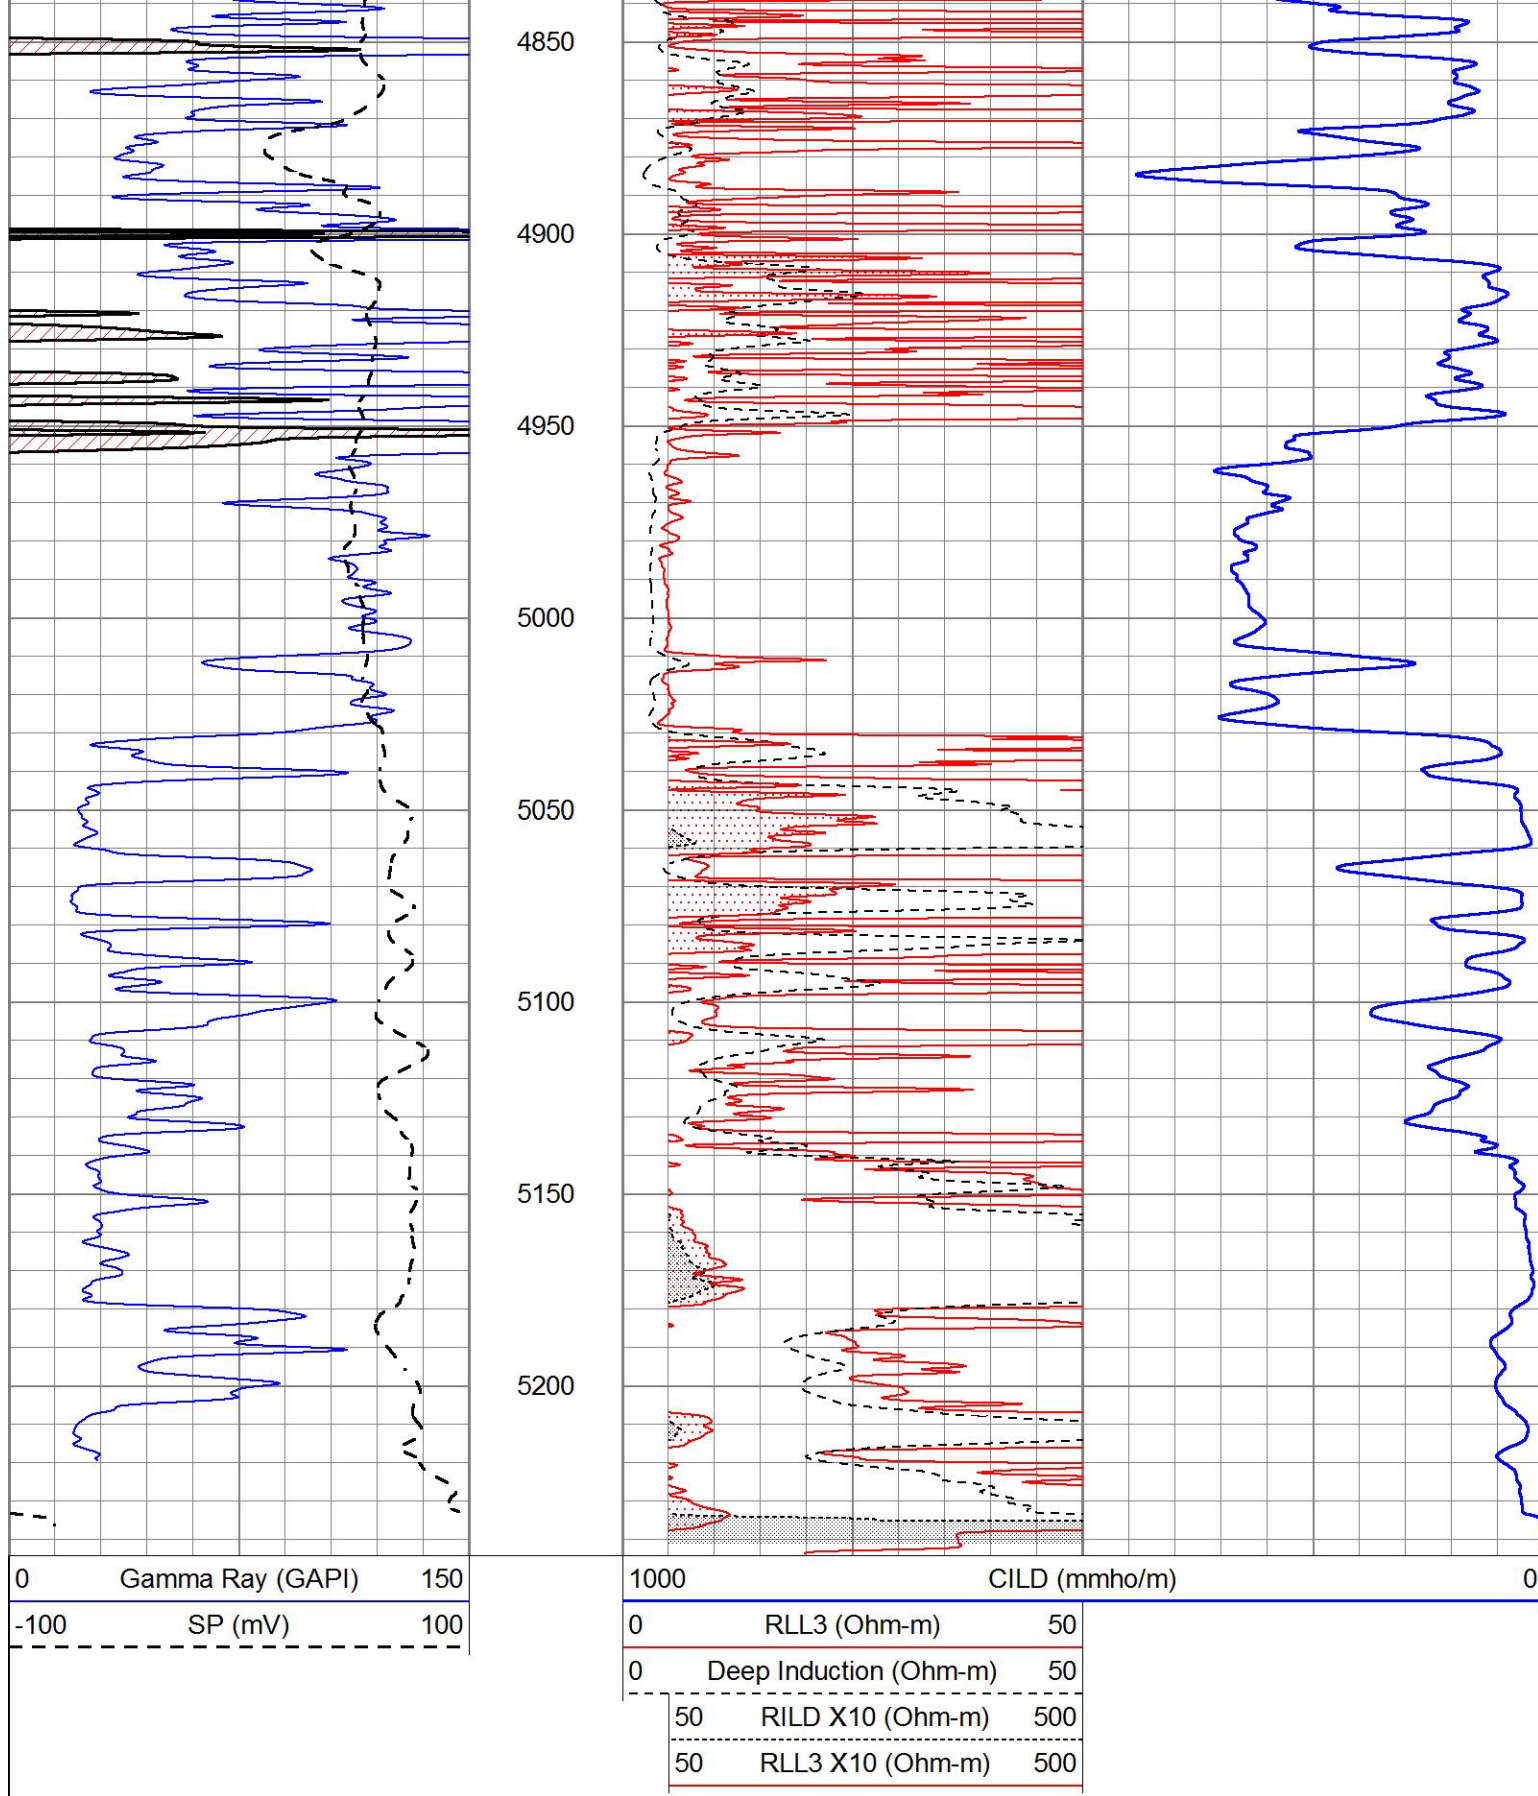

MAIN SECTION

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	DEEP INDUCTION (Ohm-m)	2000

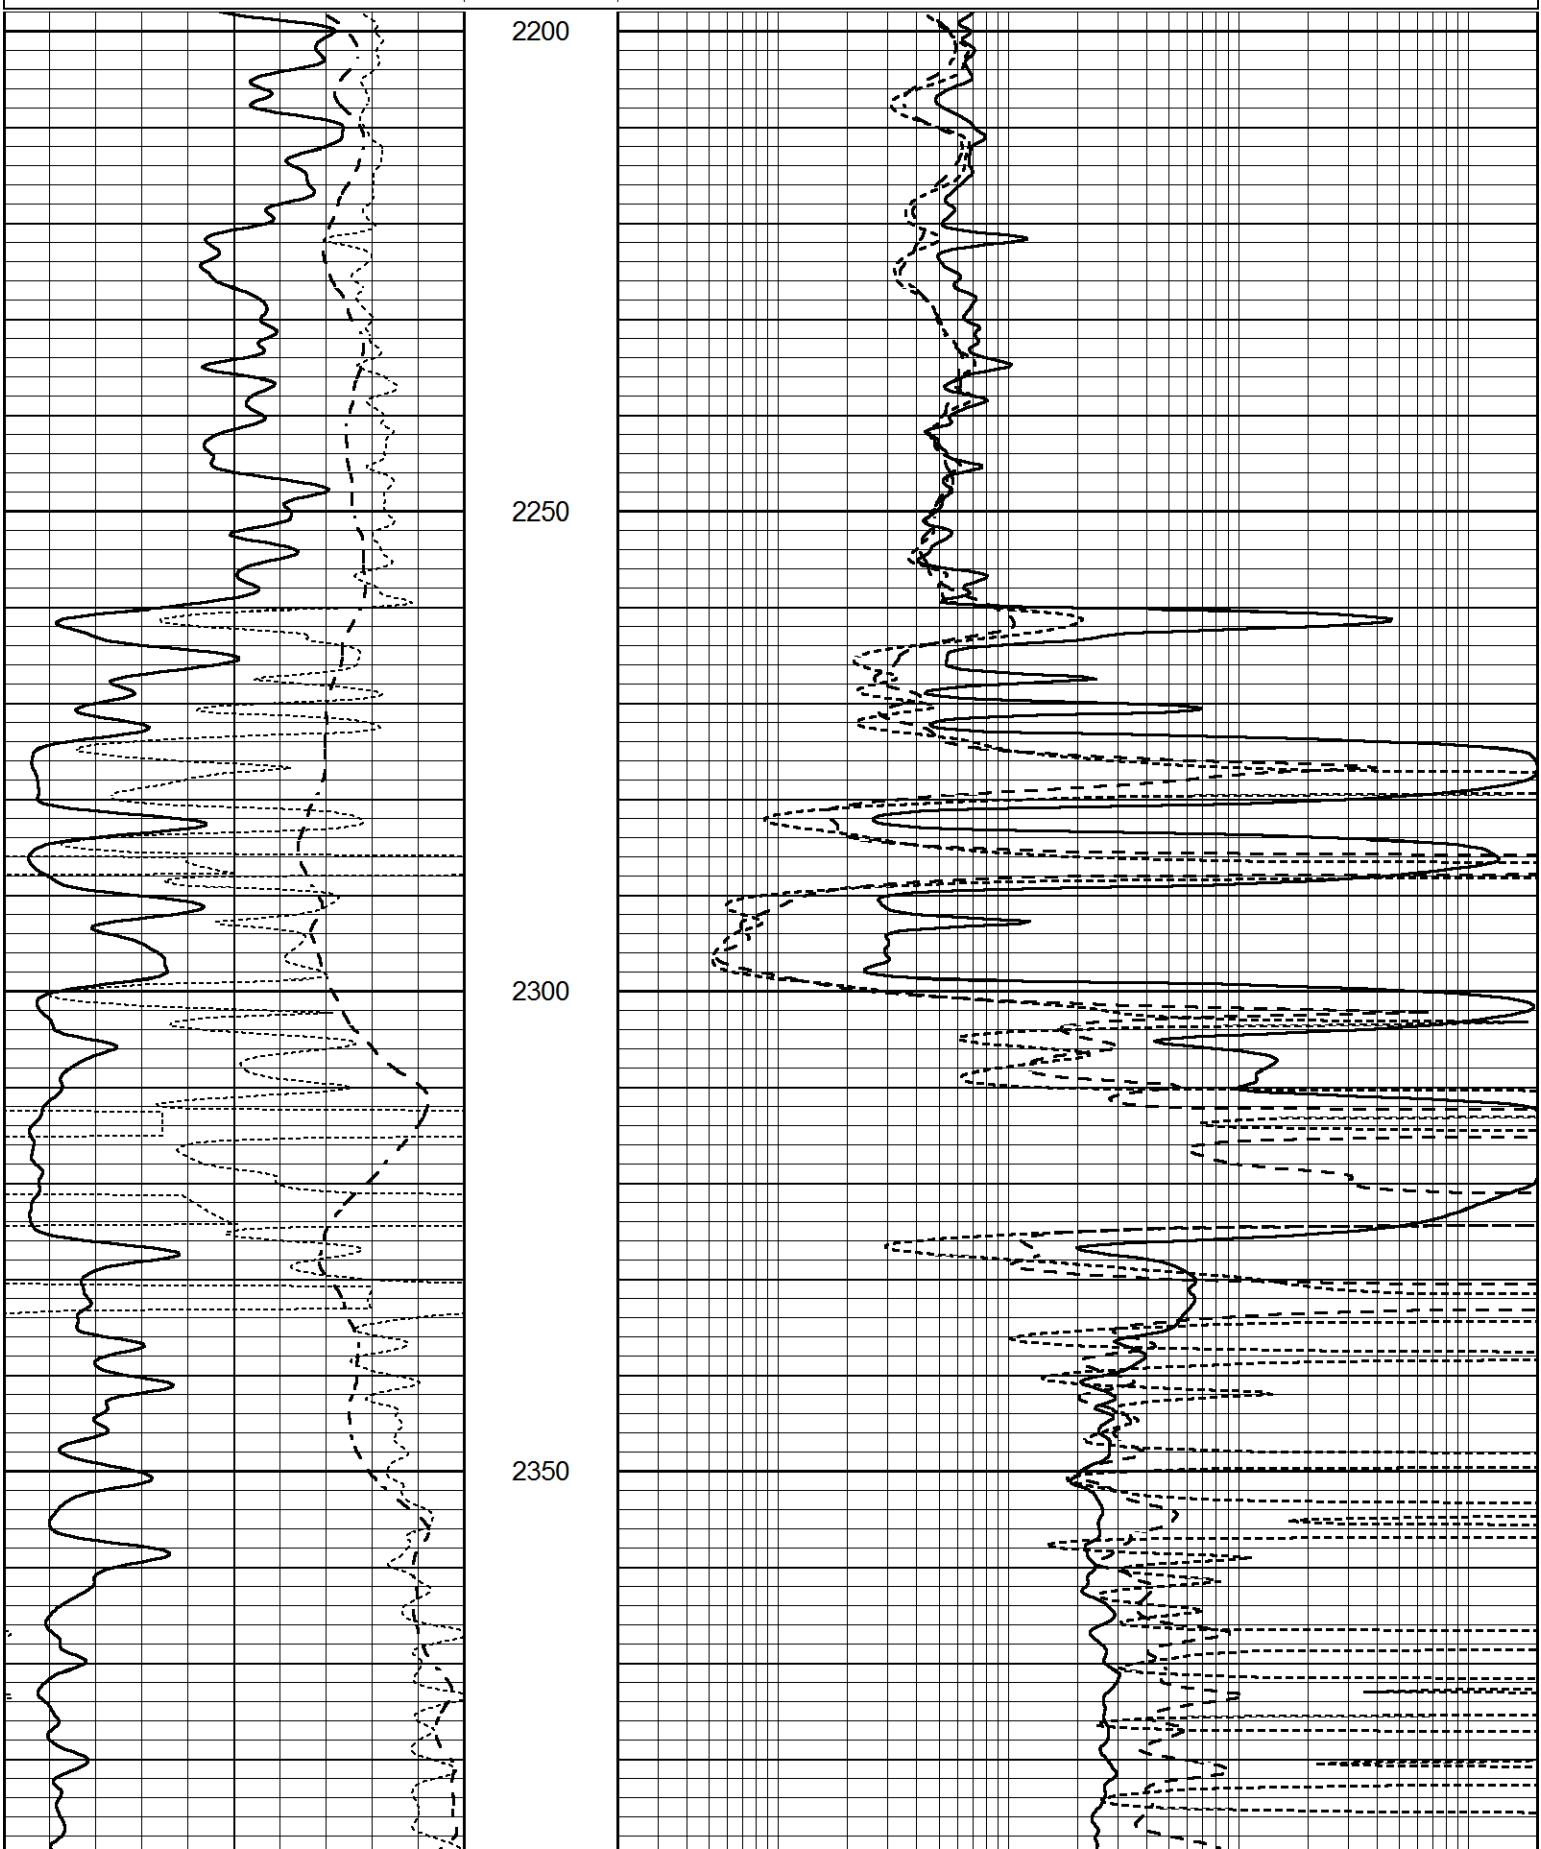

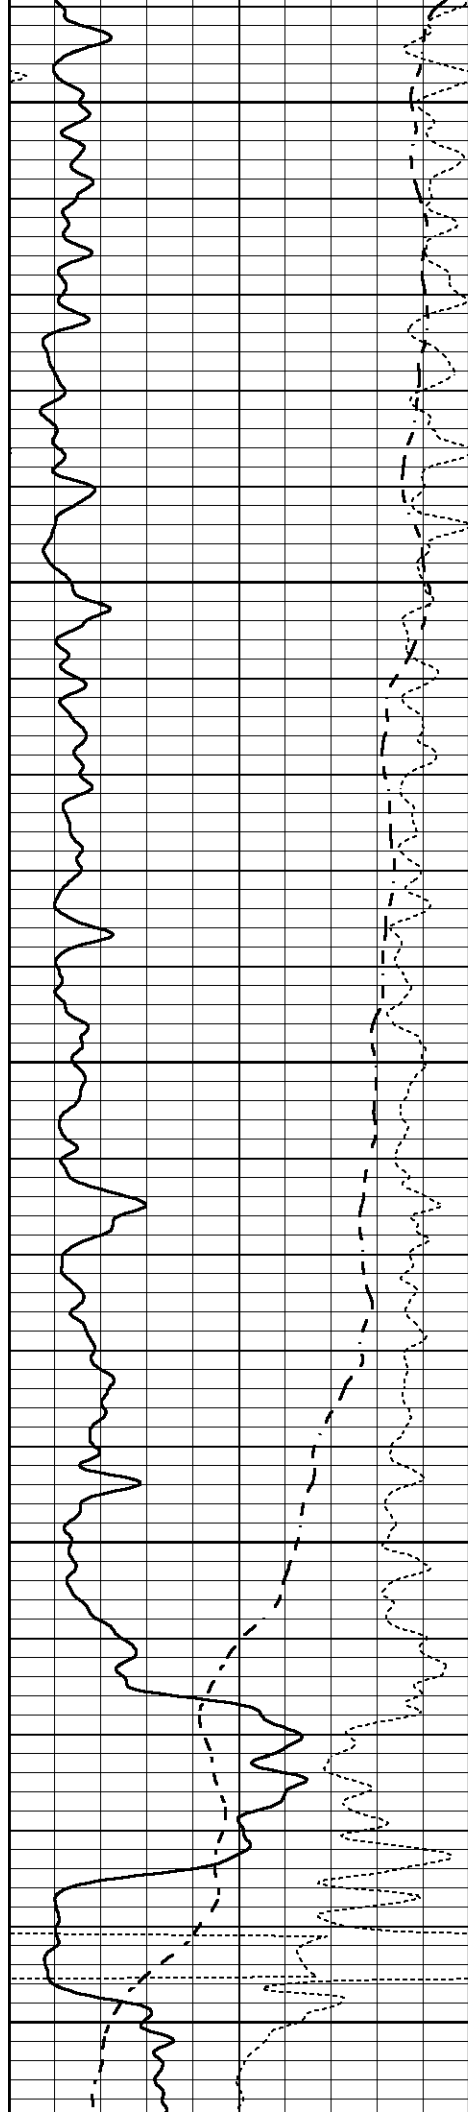


2400


2450

2500

2550

2600

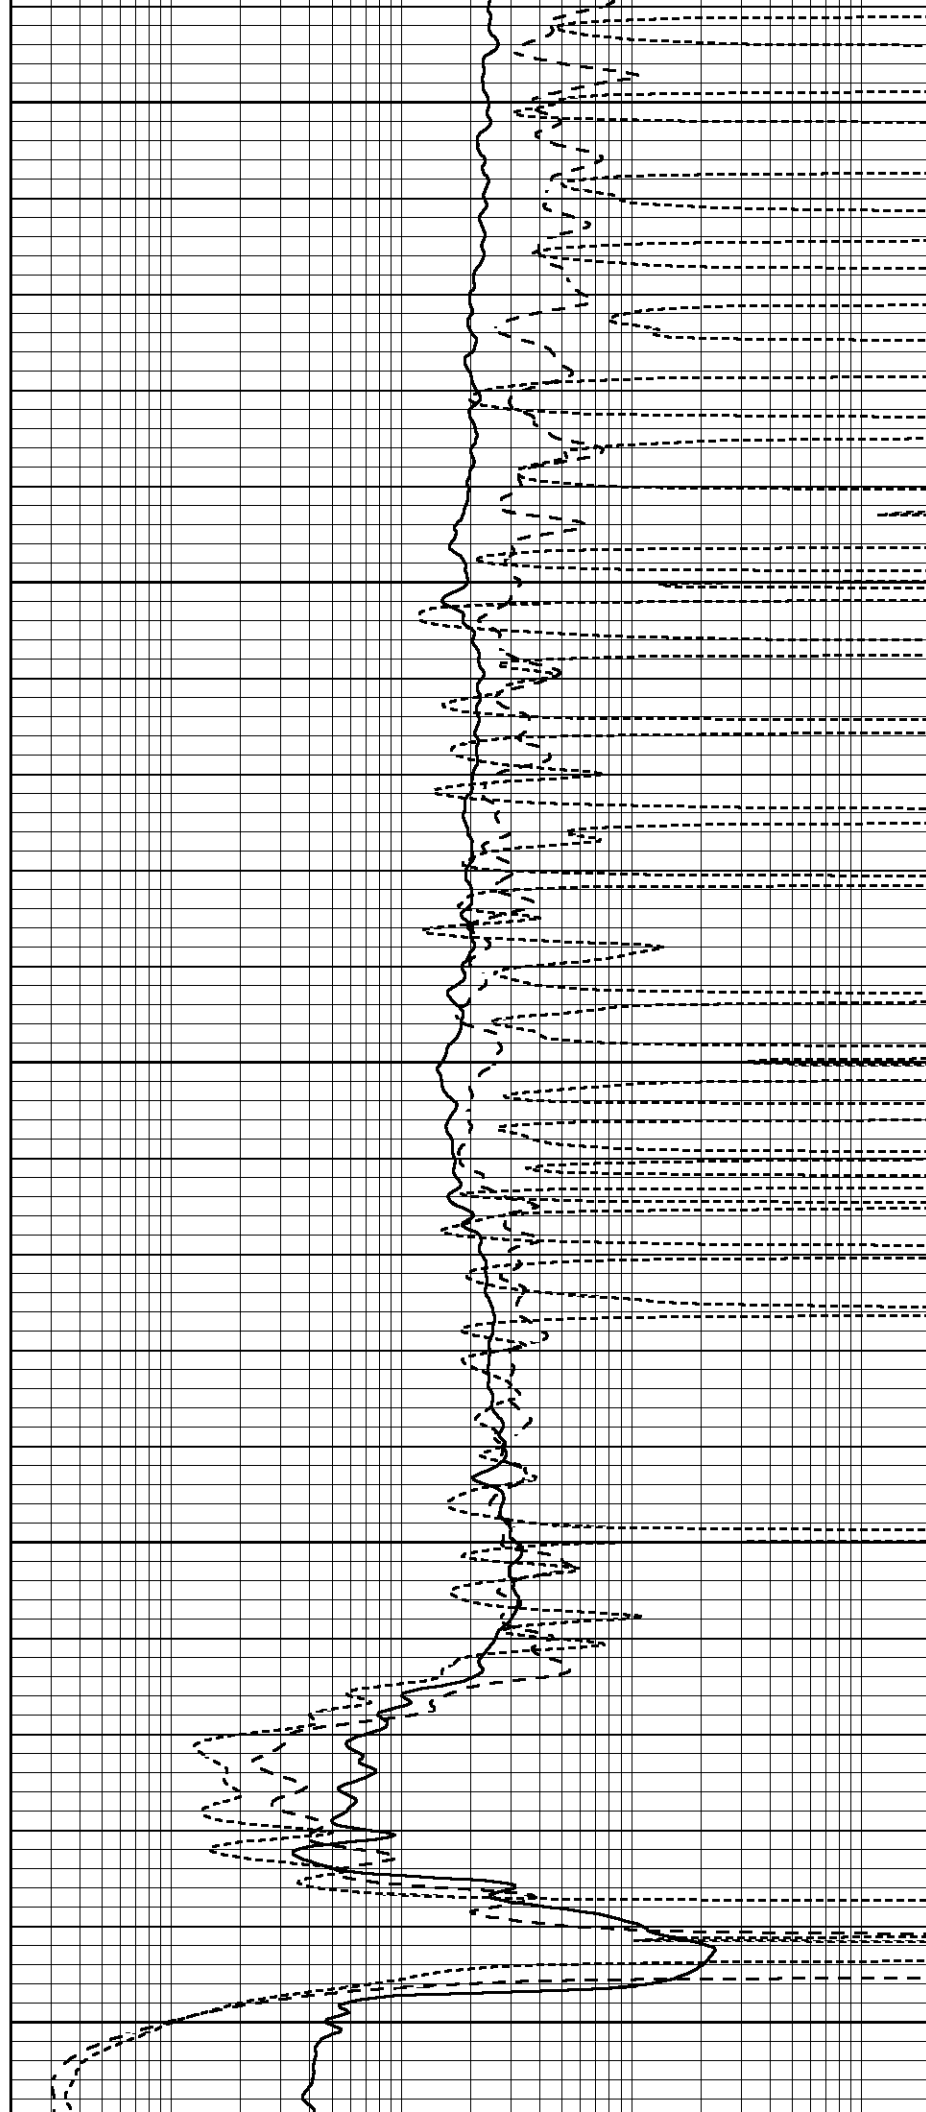

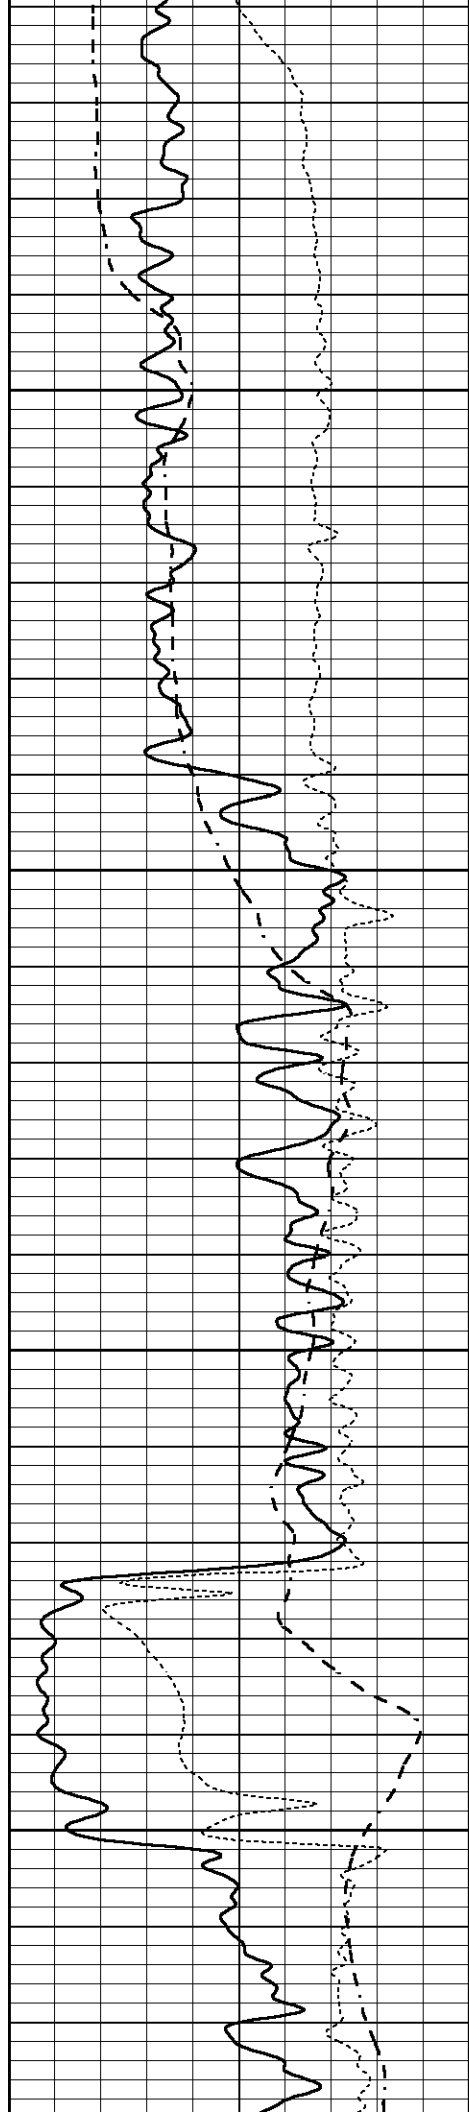



2650

2700

2750

2800

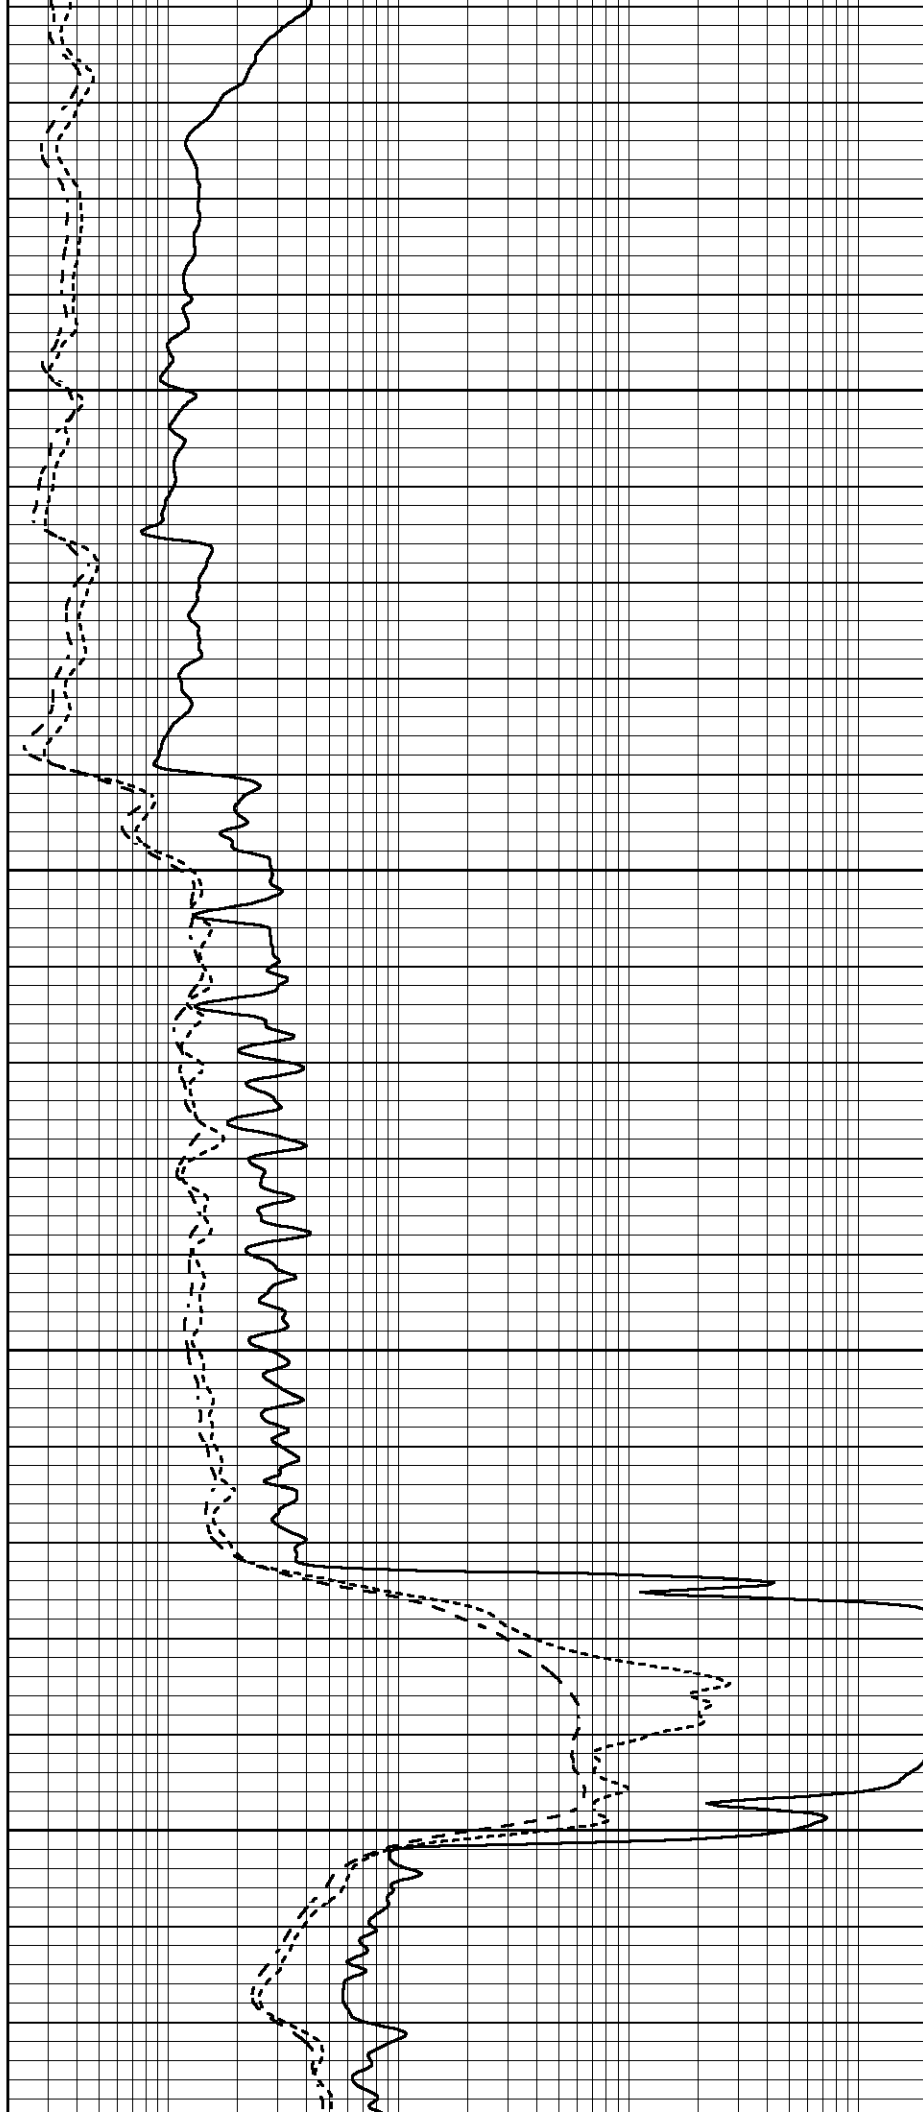

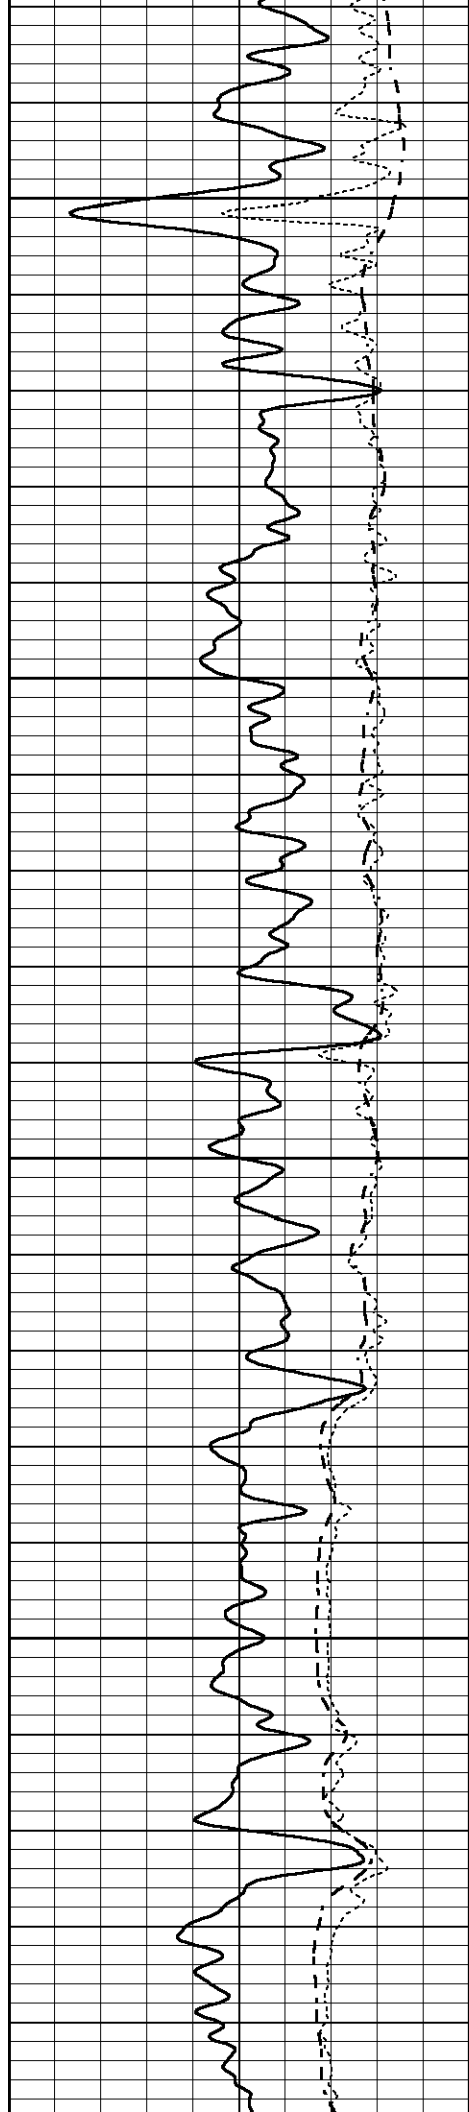


2850


2900

2950

3000

3050

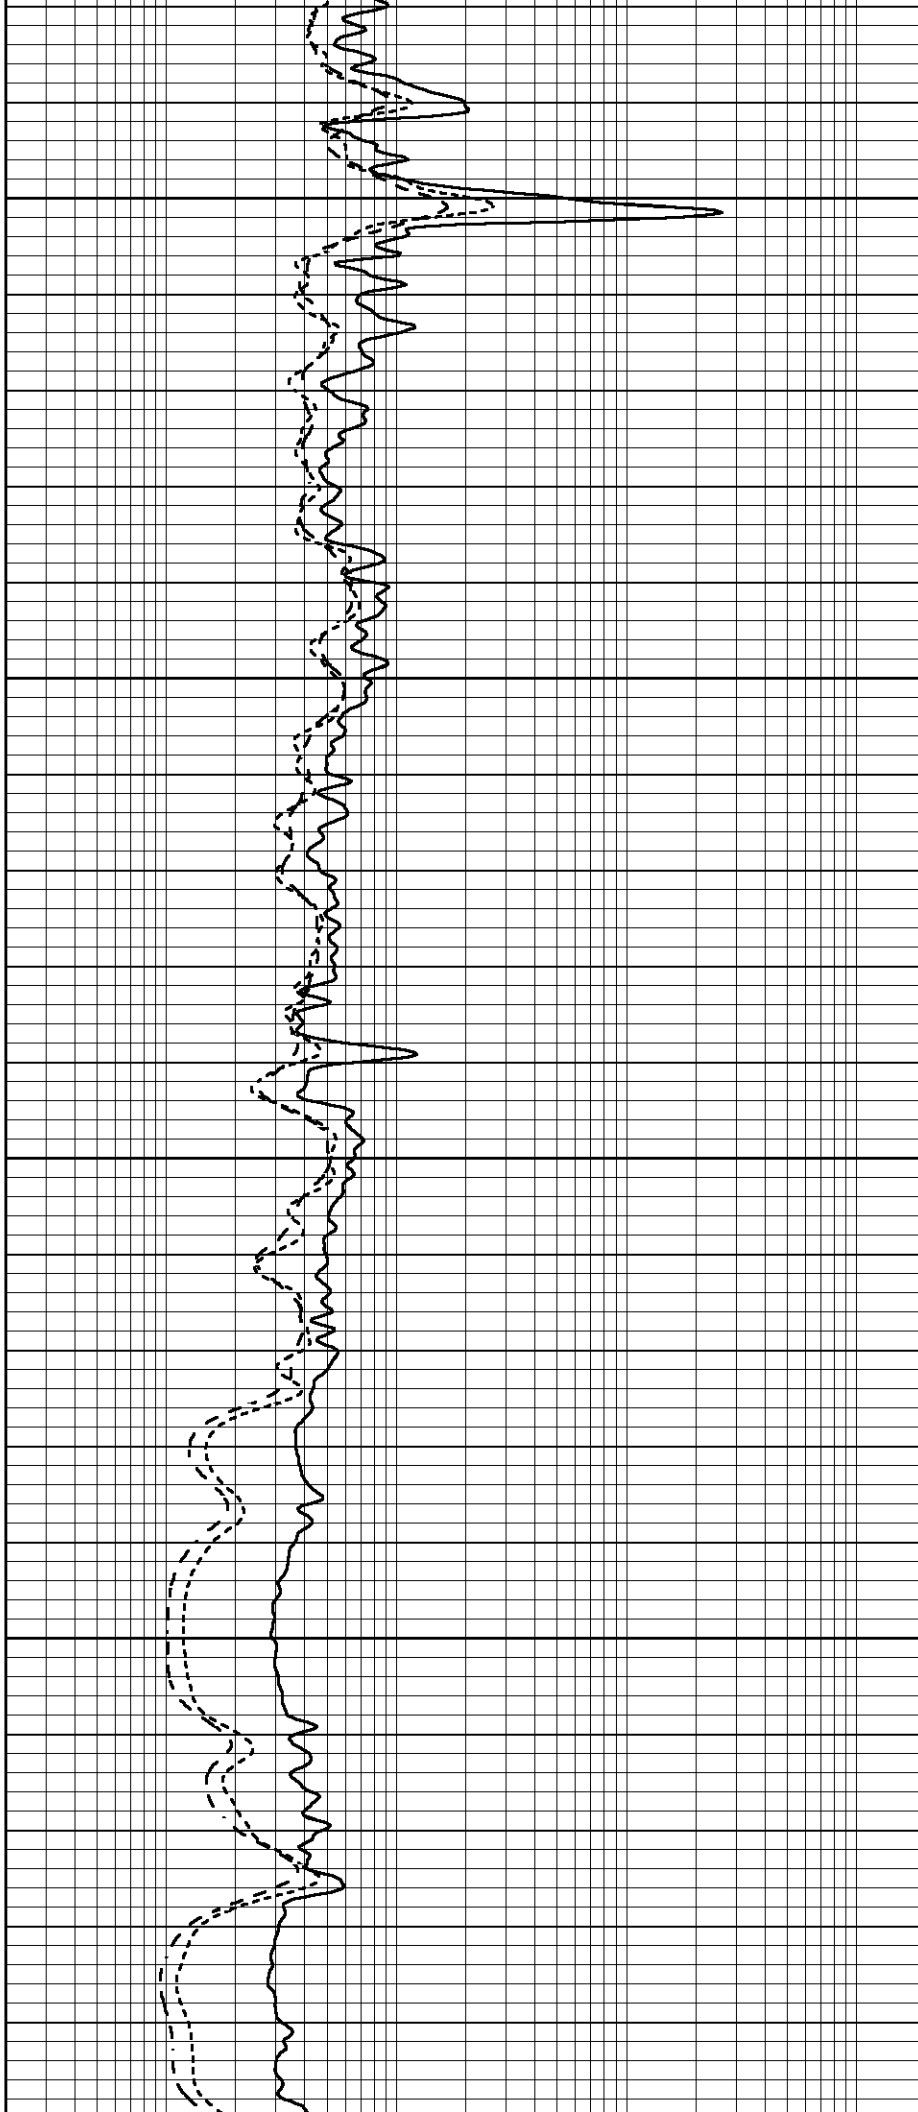

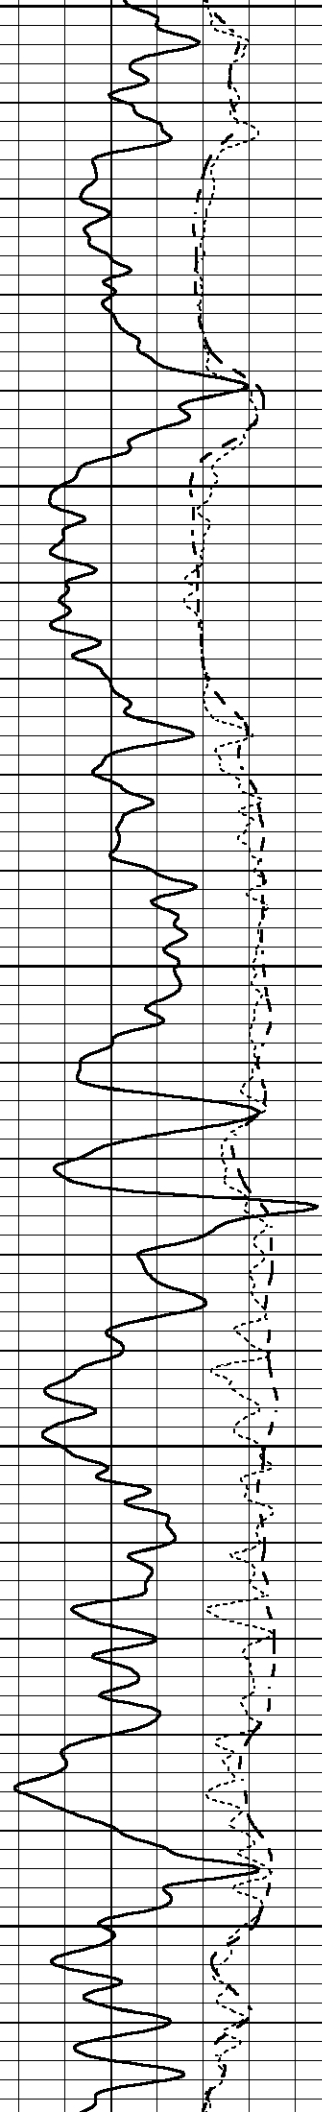


3050


3100

3150

3200

3250

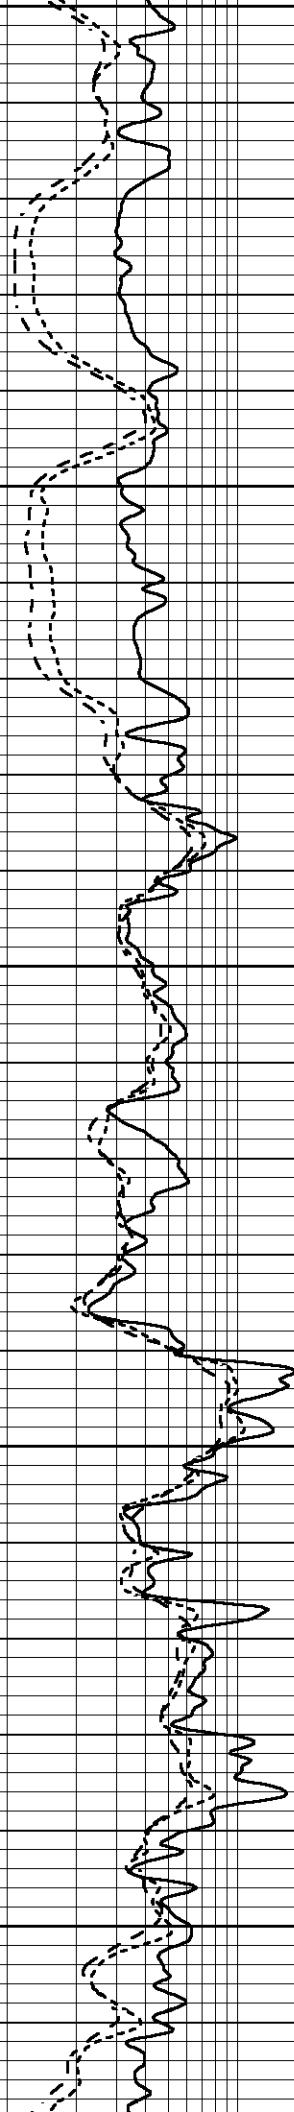

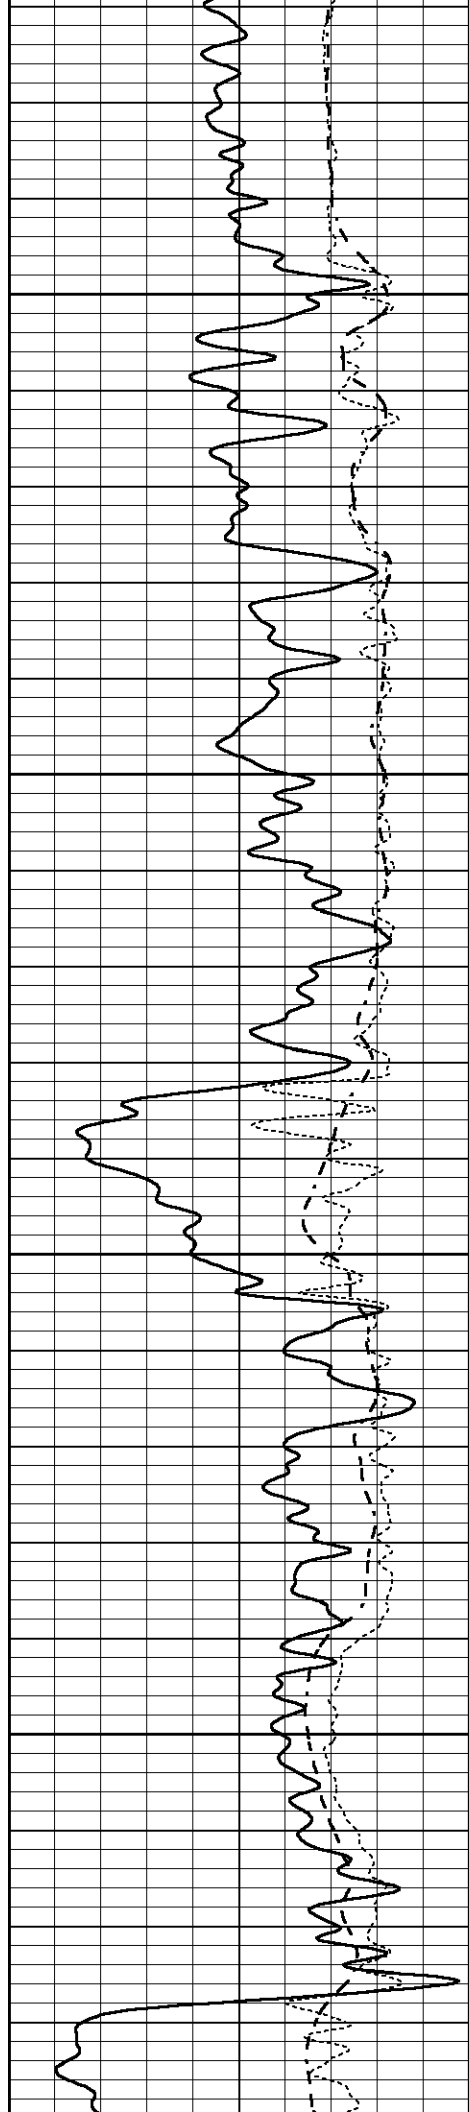



3300

3350

3400

3450

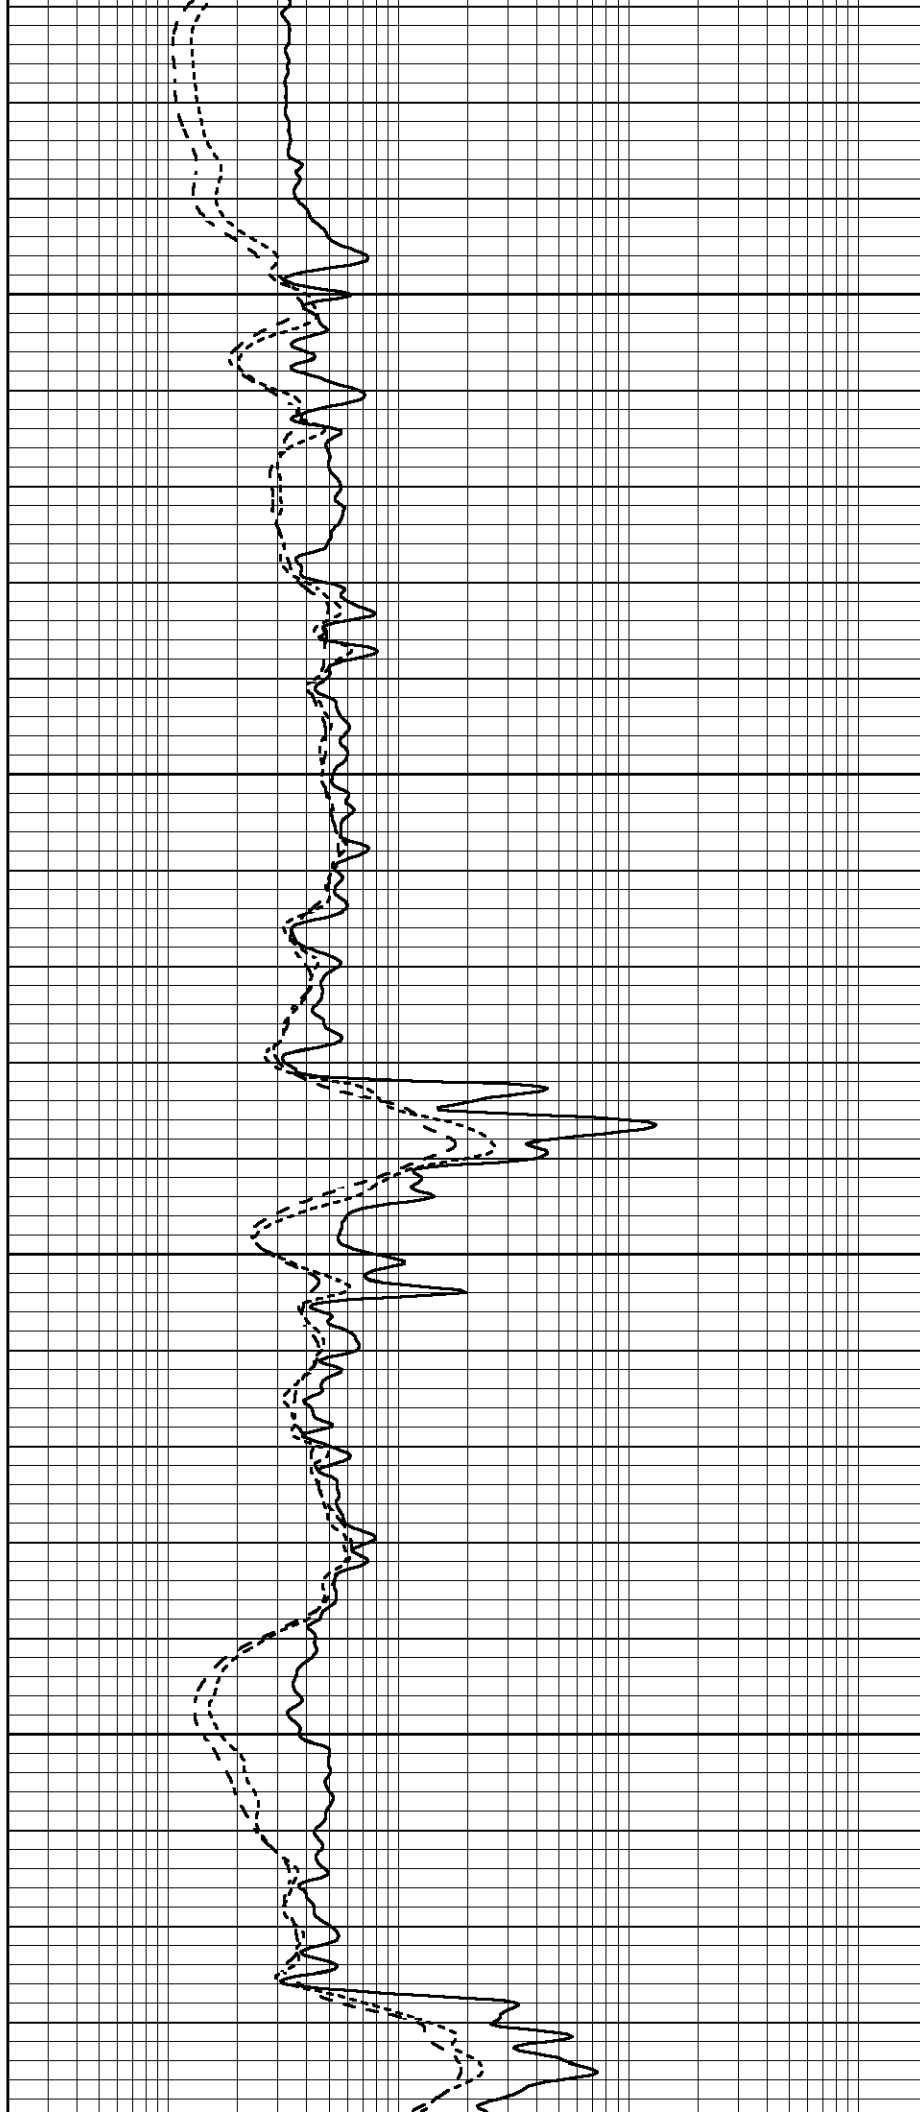

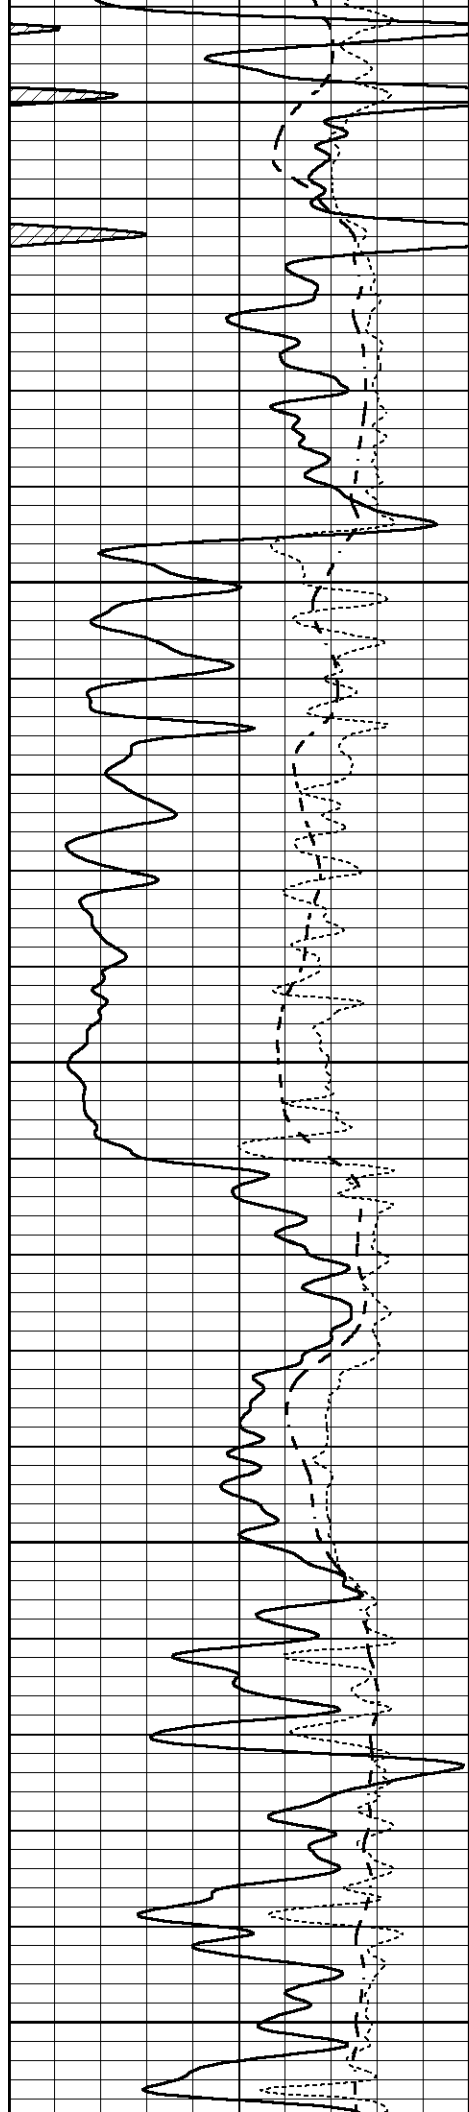


3500


3550

3600

3650

3700

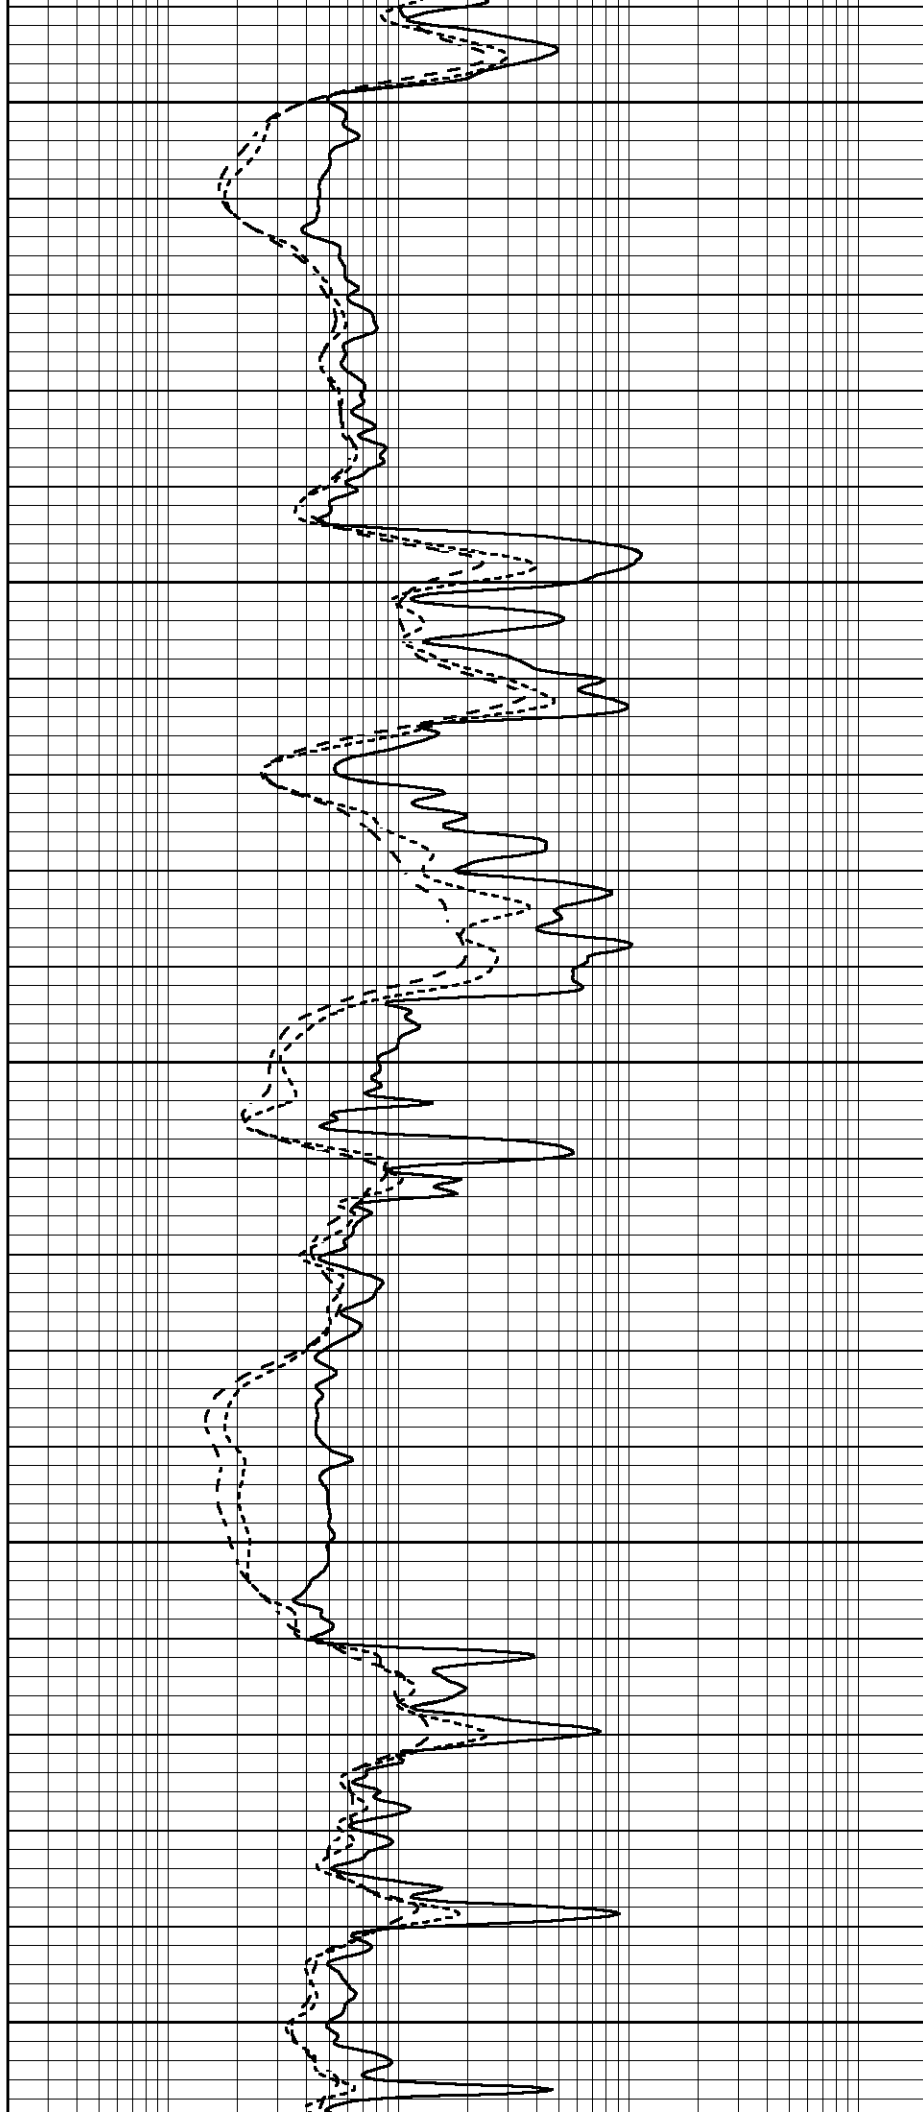

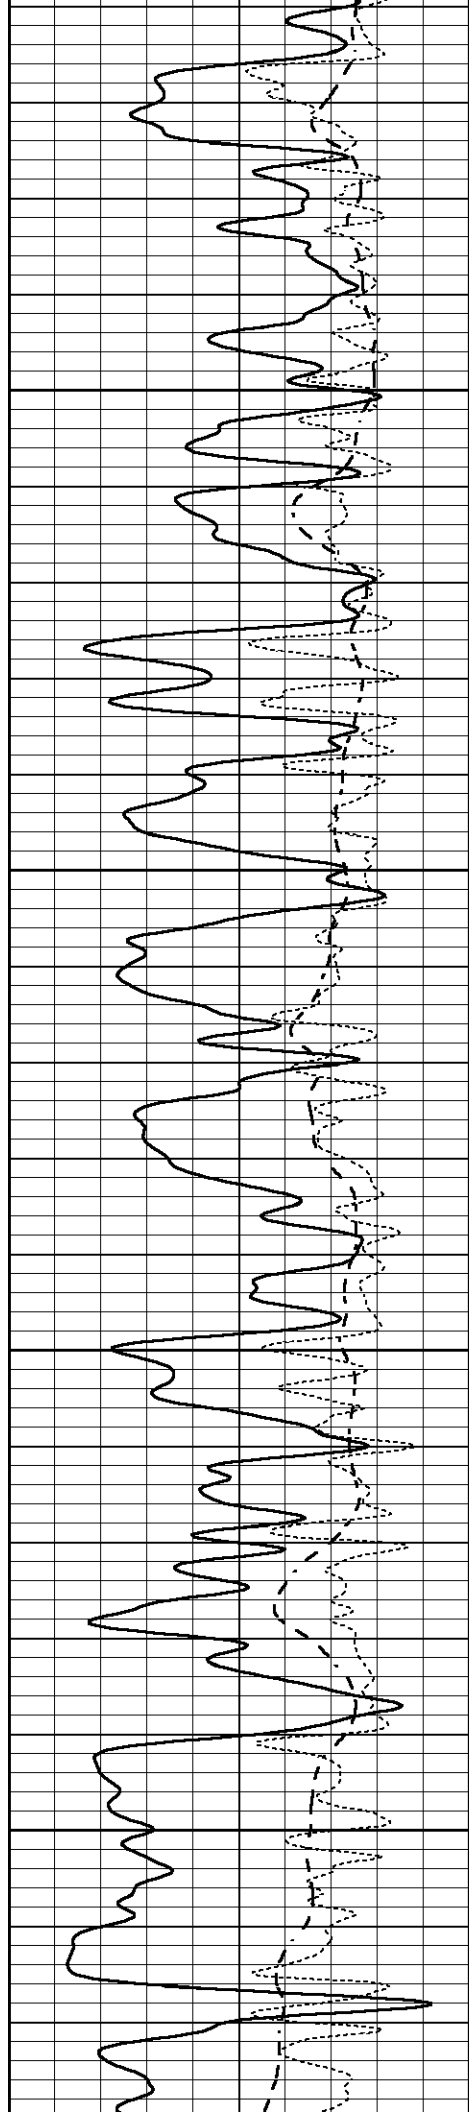



3750

3800

3850

3900

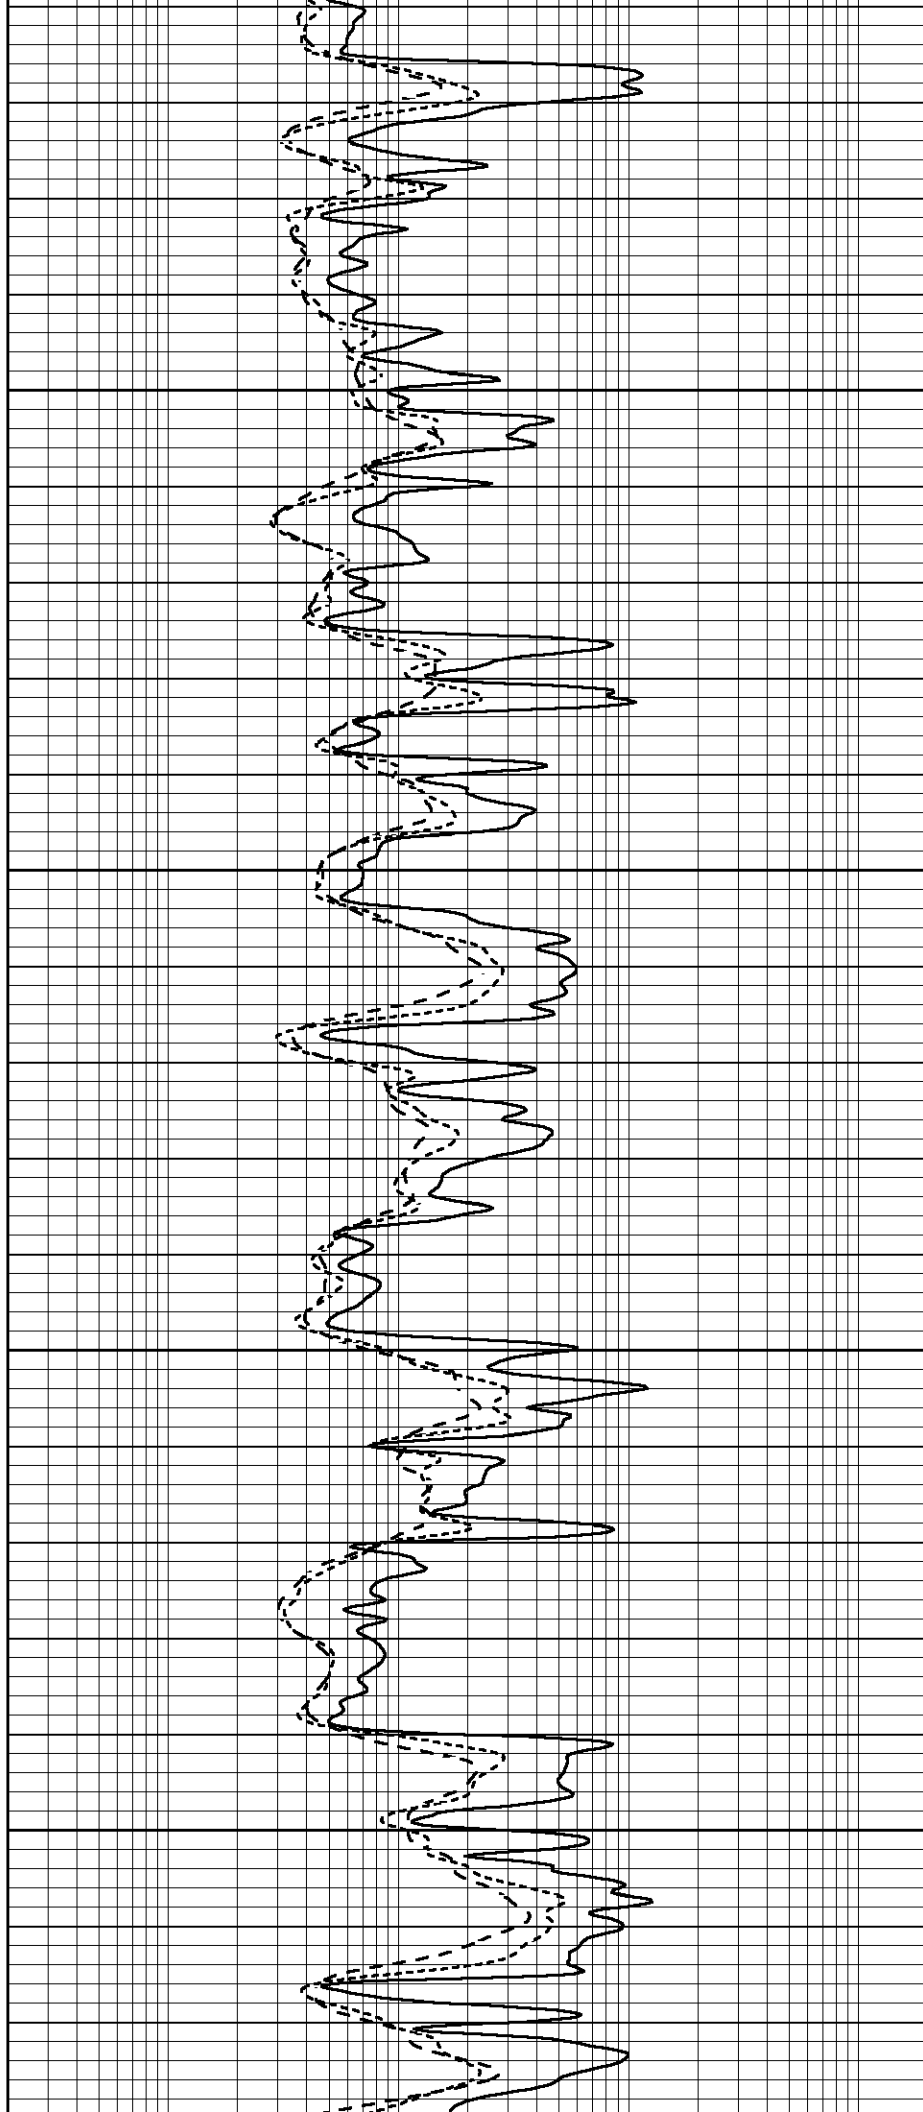

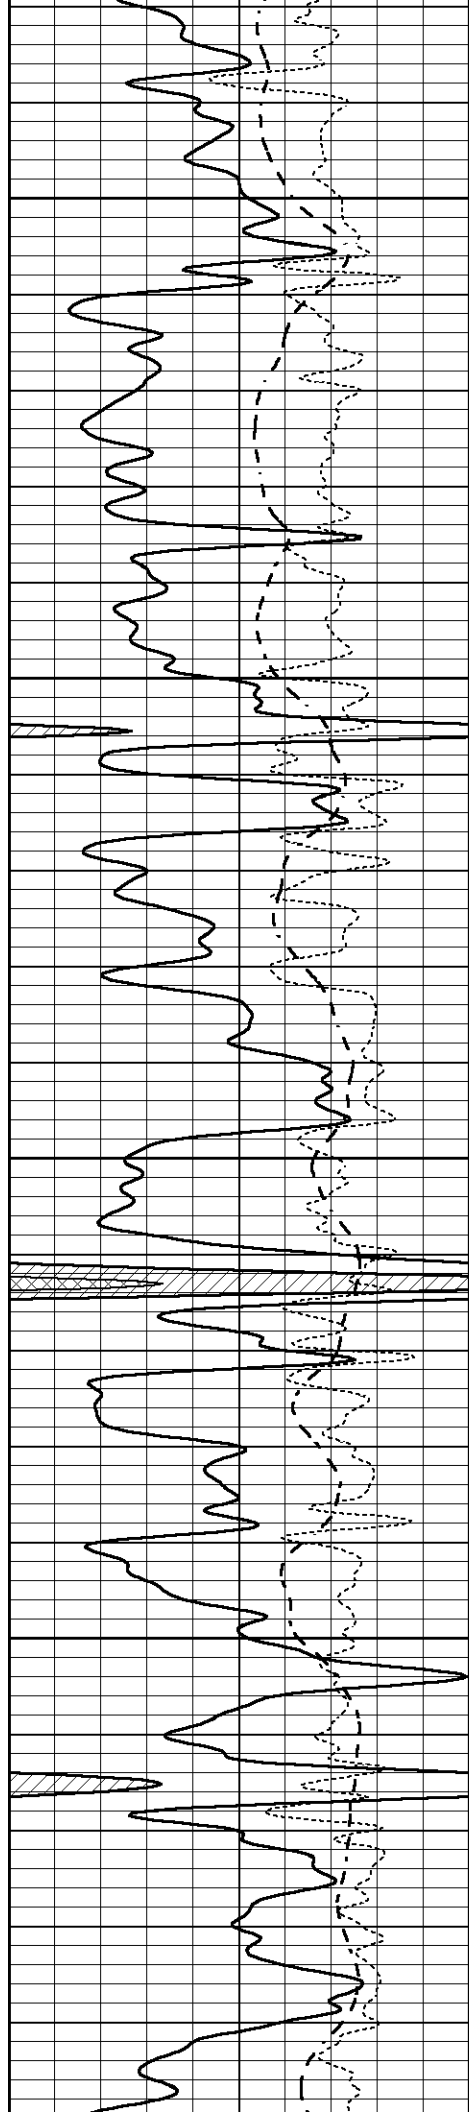


3950


4000

4050

4100

4150

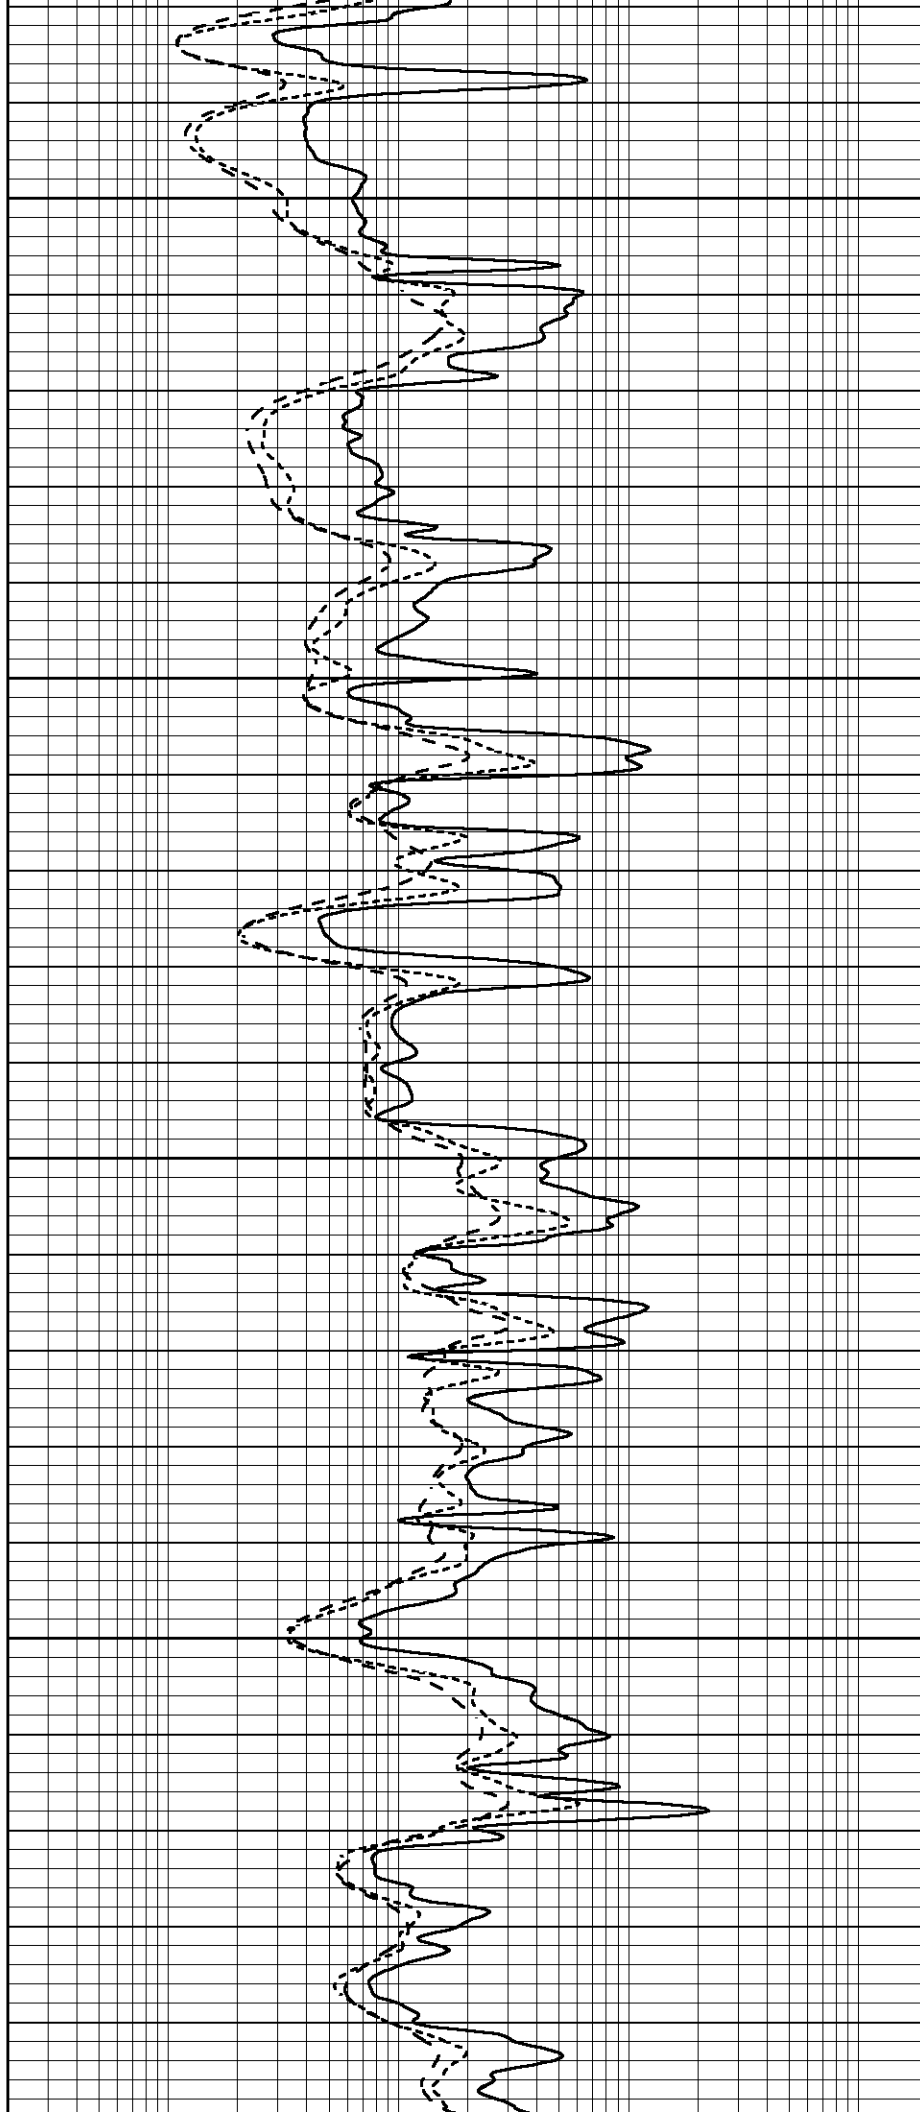

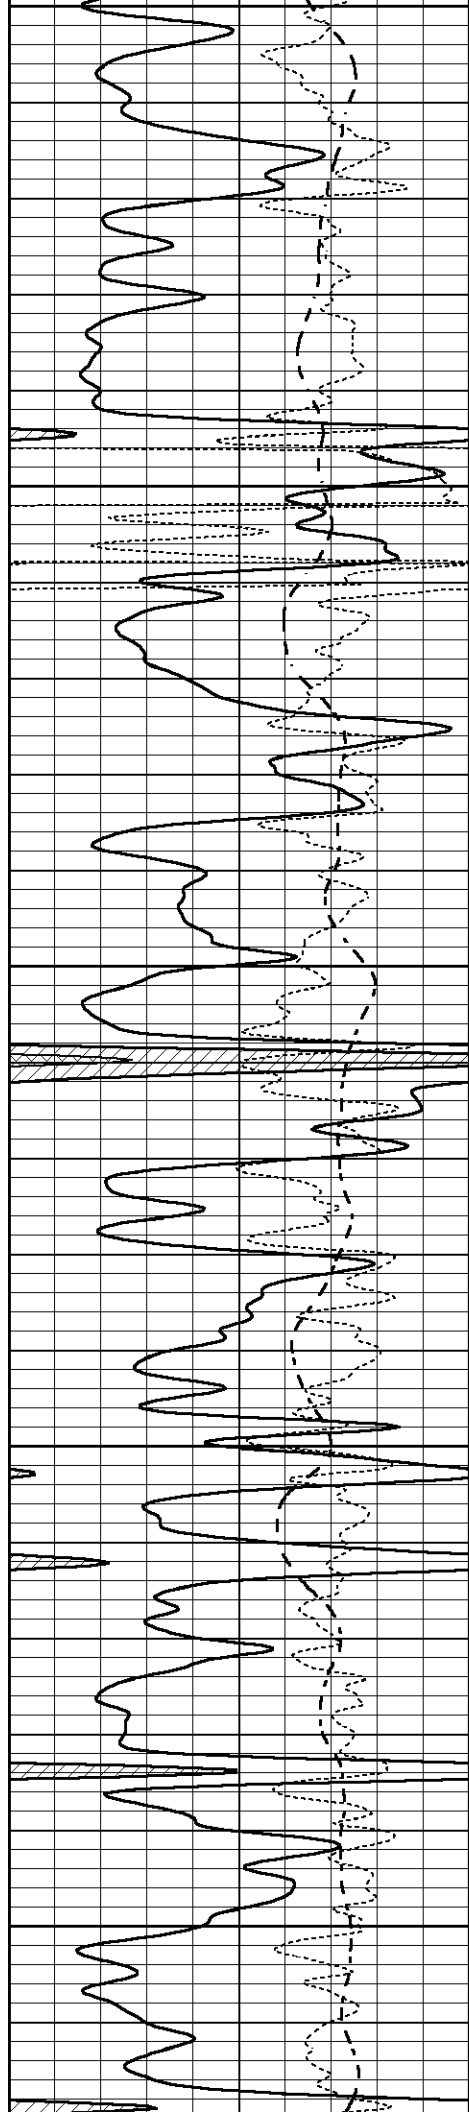


4150


4200

4250

4300

4350

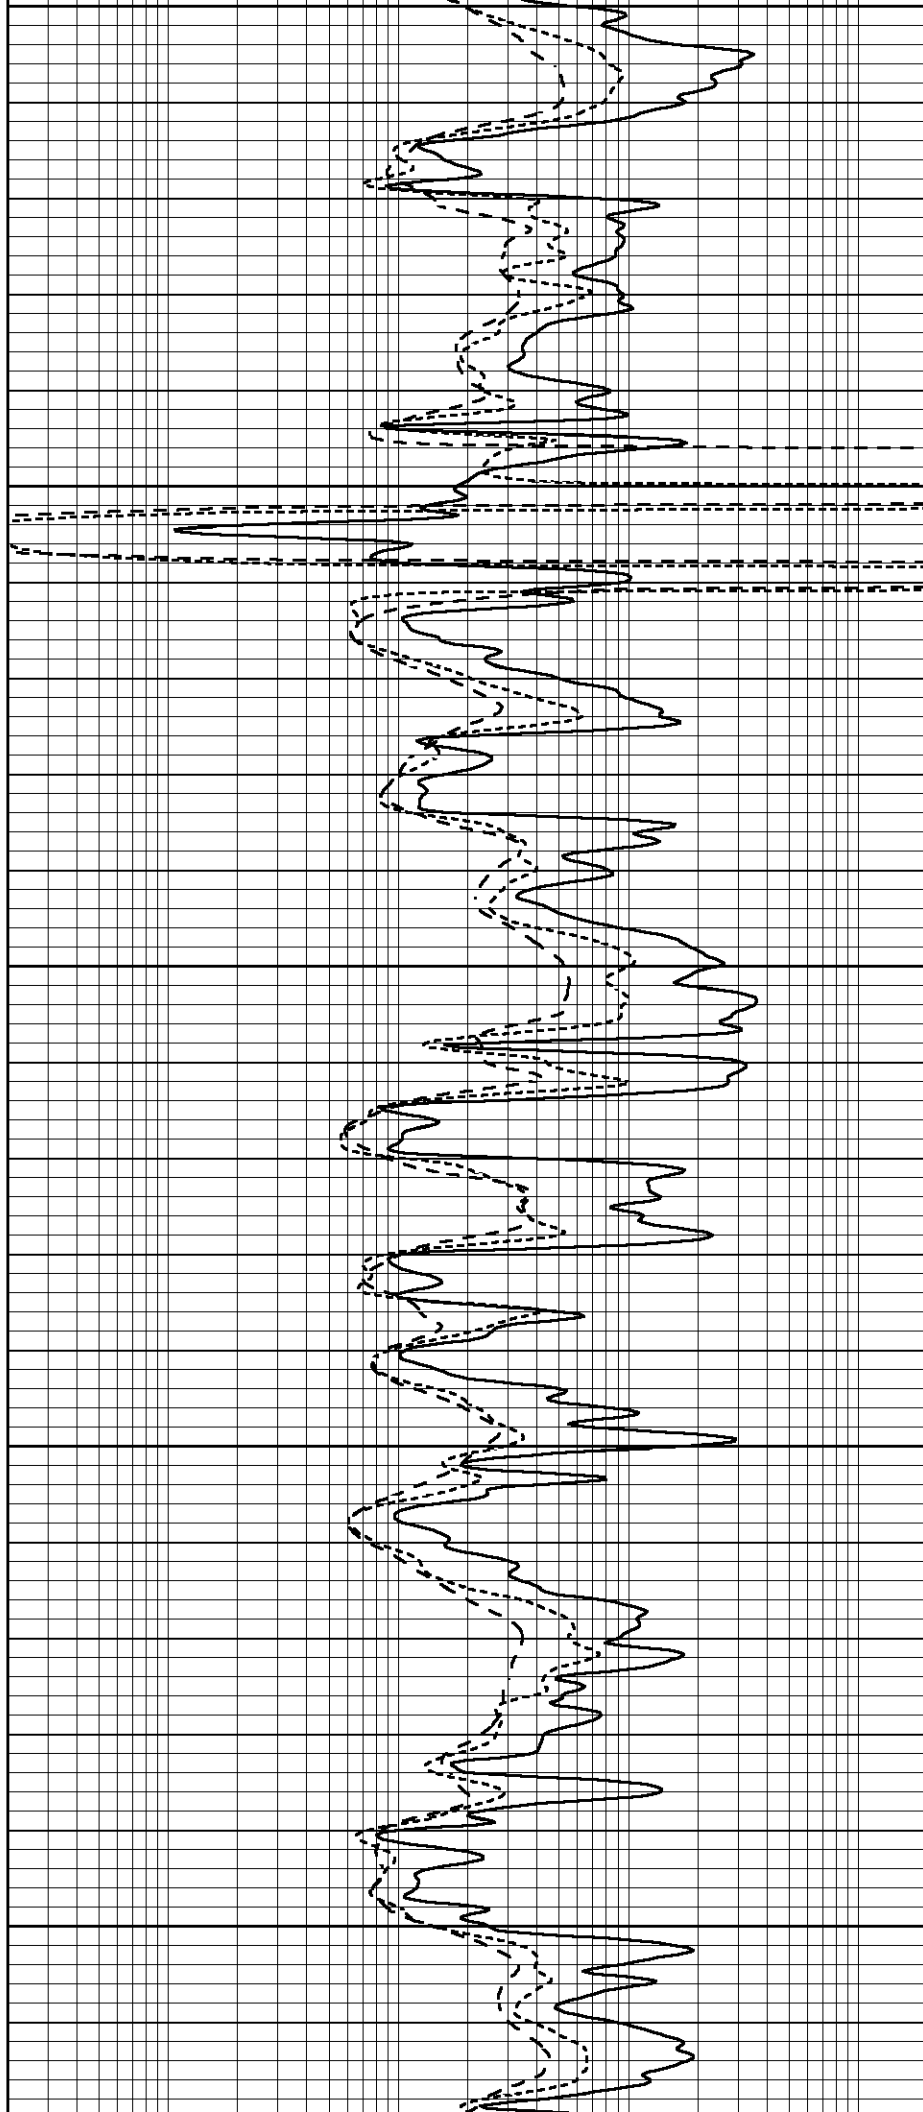

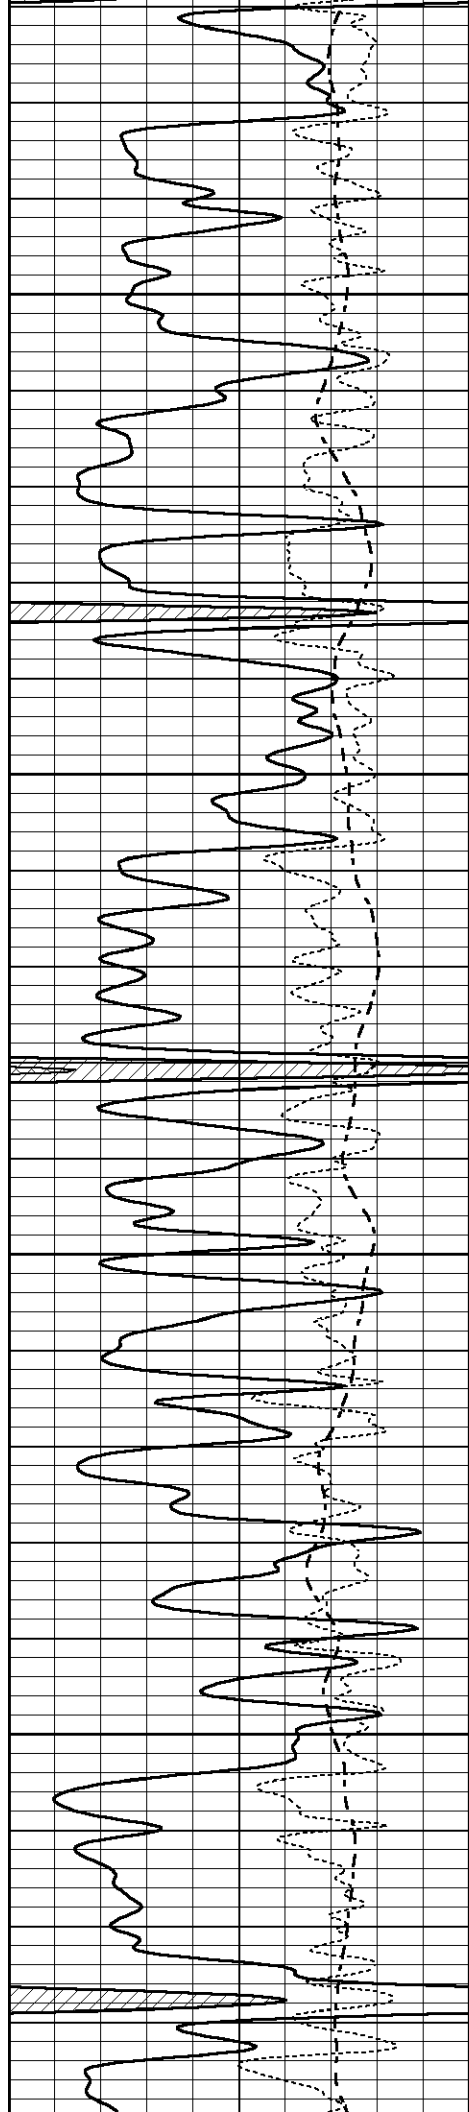



4400

4450

4500

4550

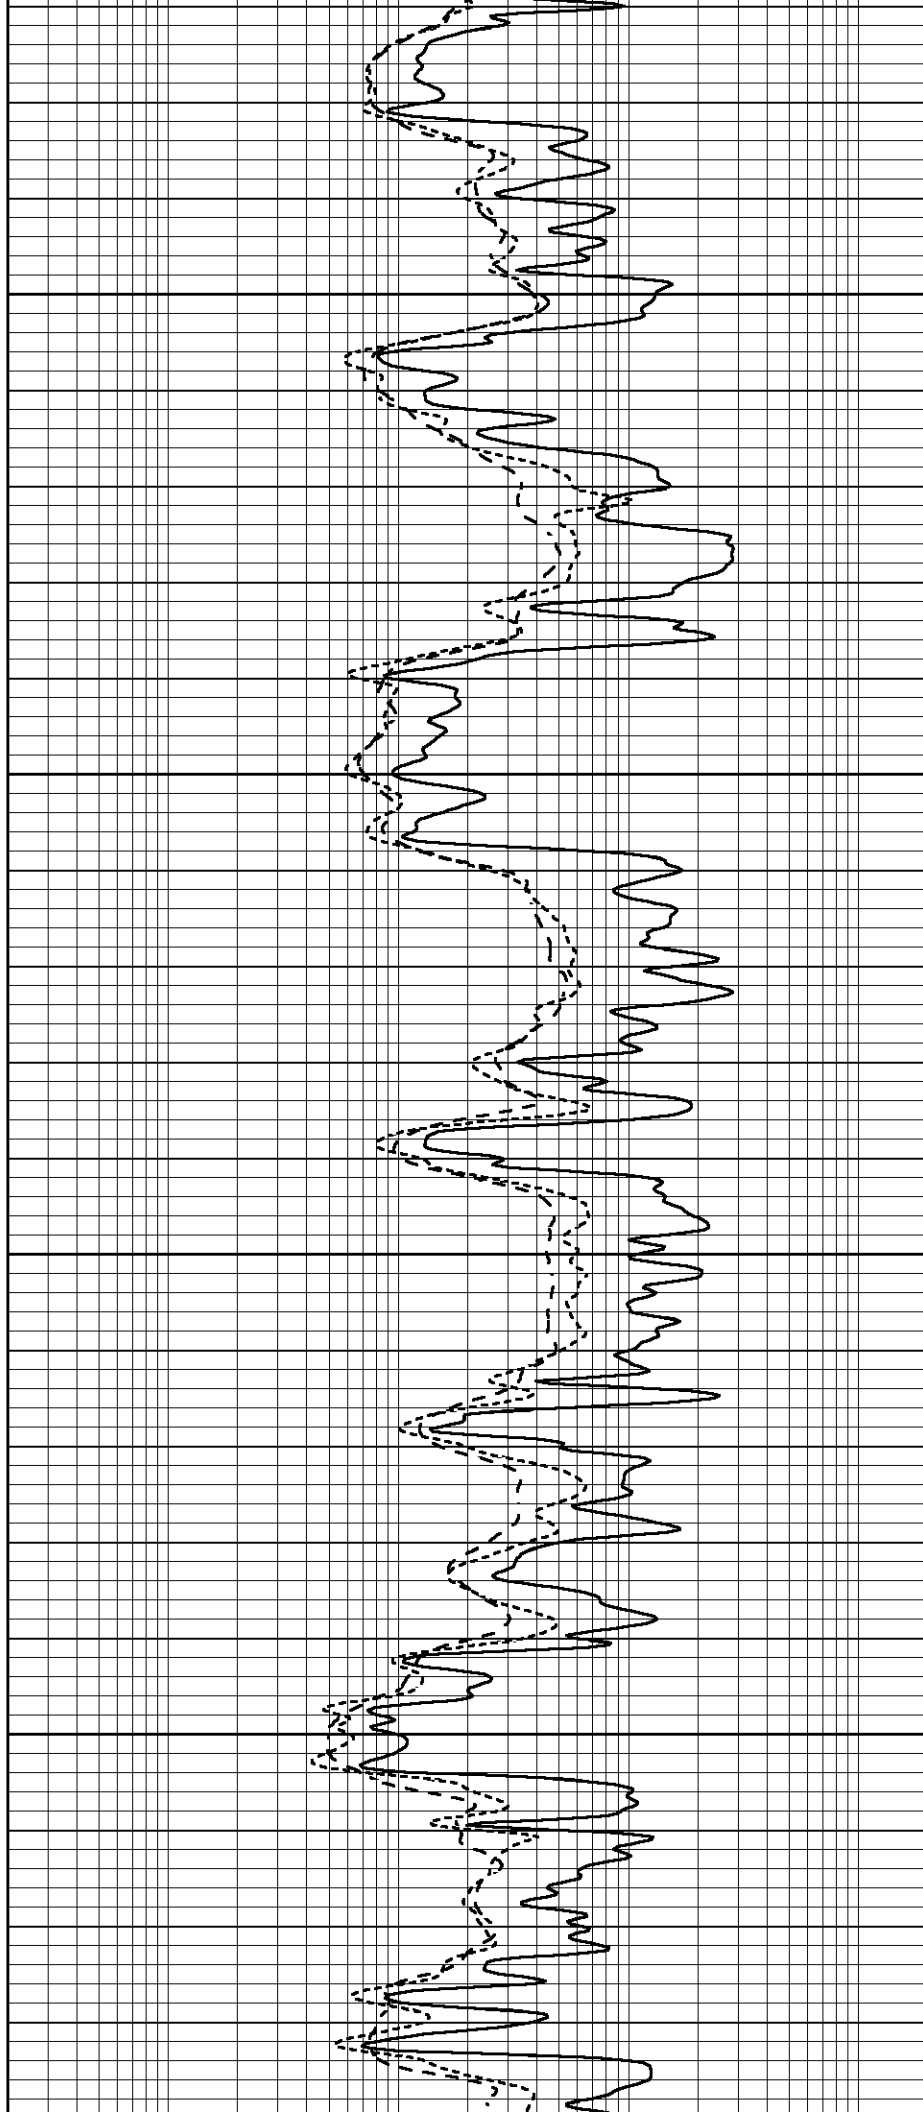

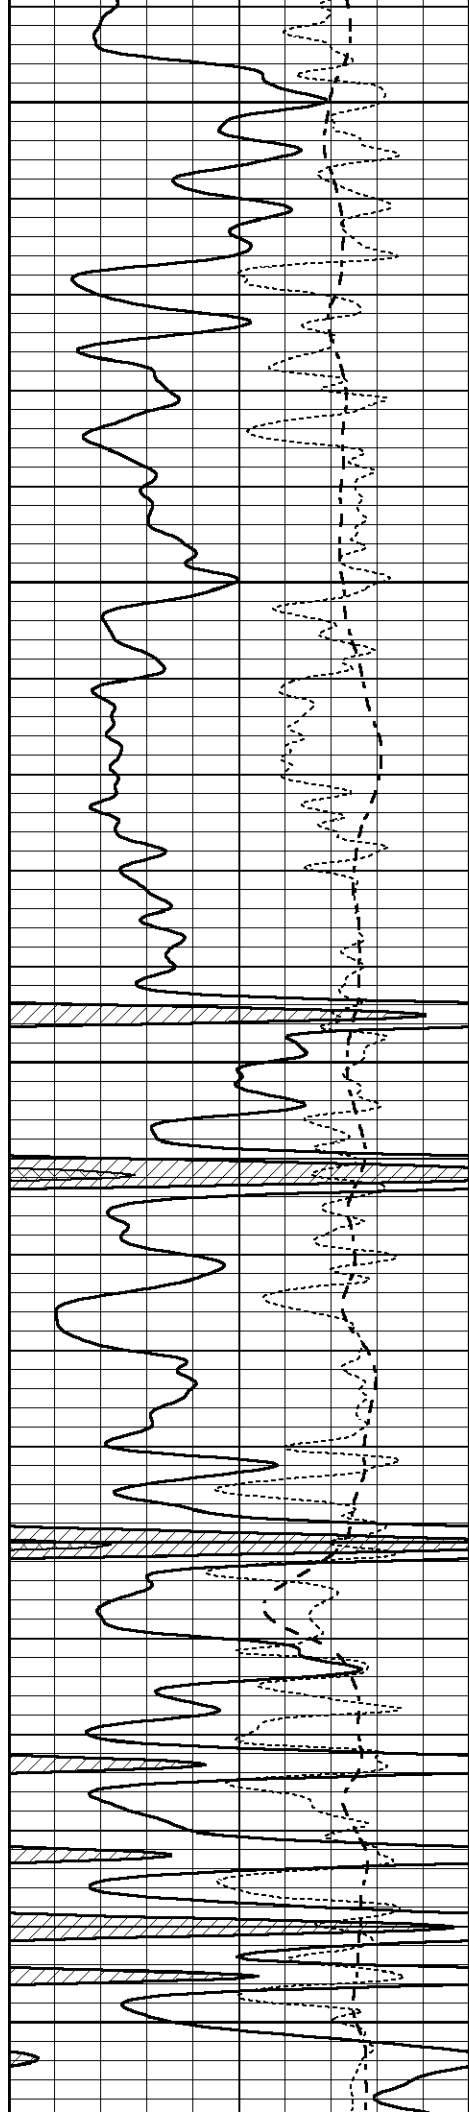


4600


4650

4700

4750

4800

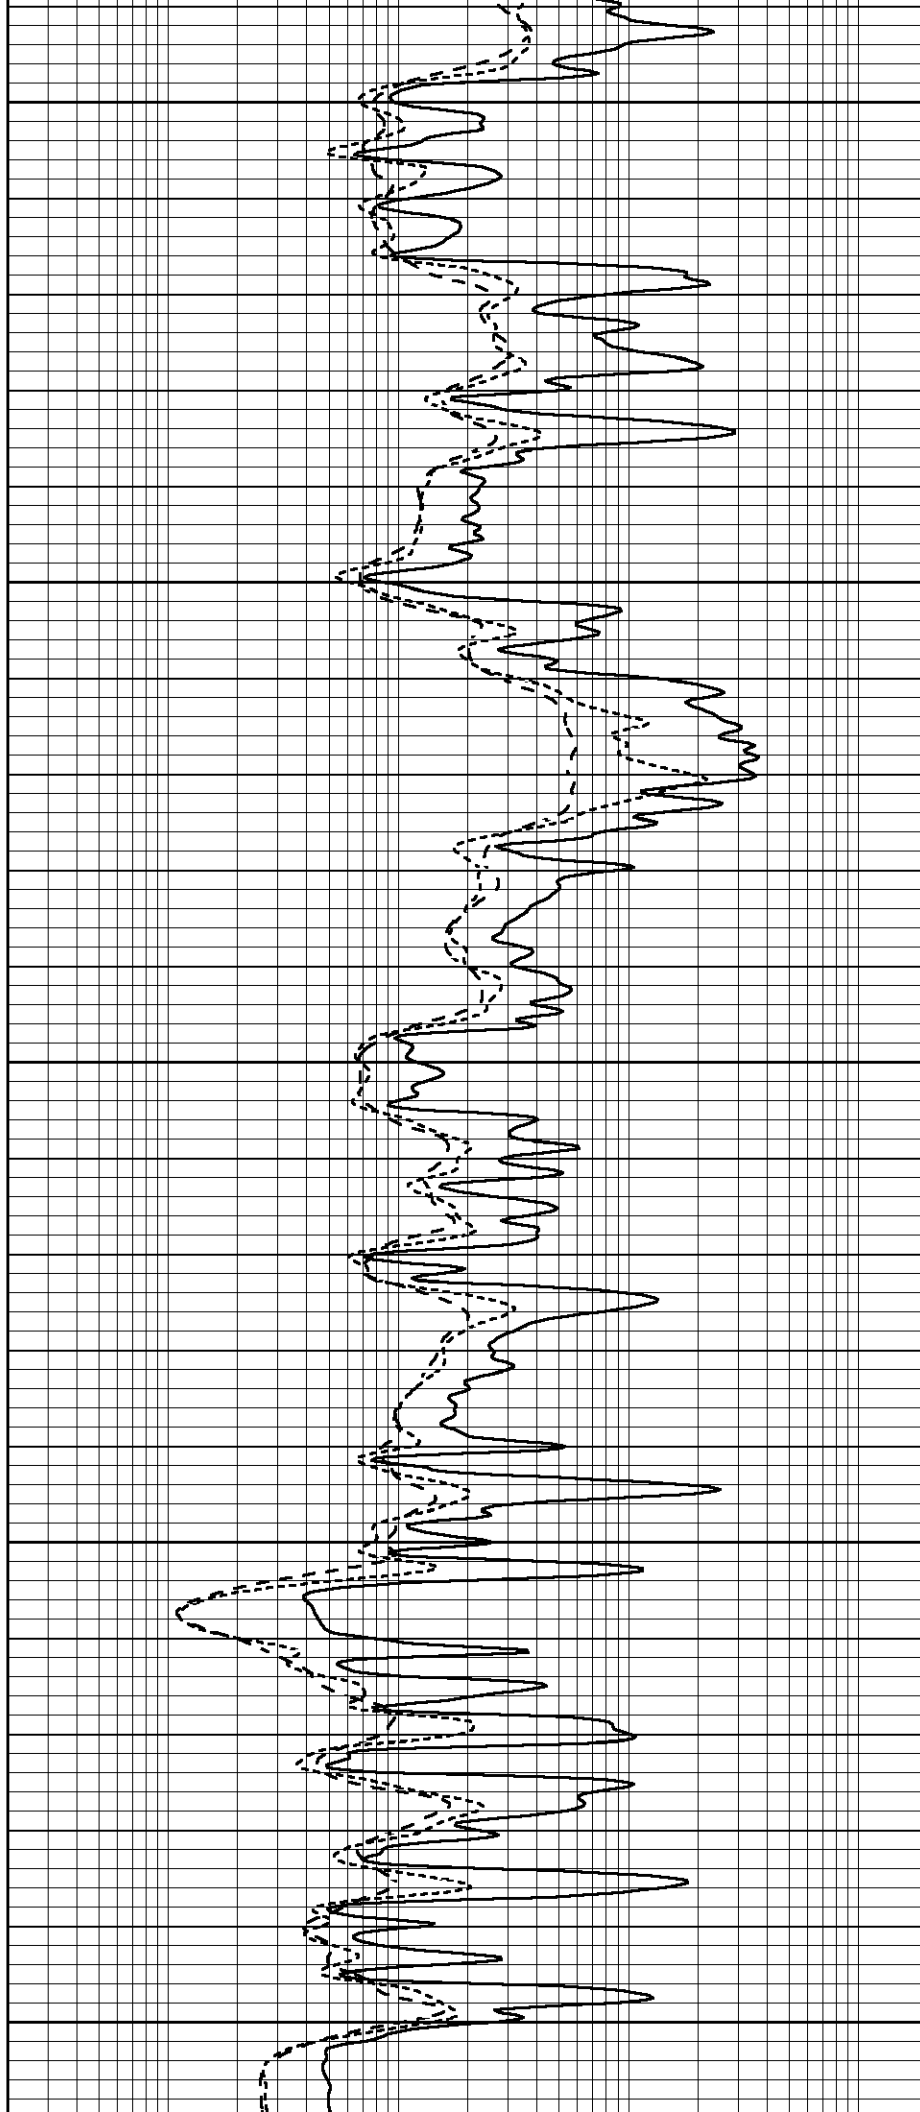

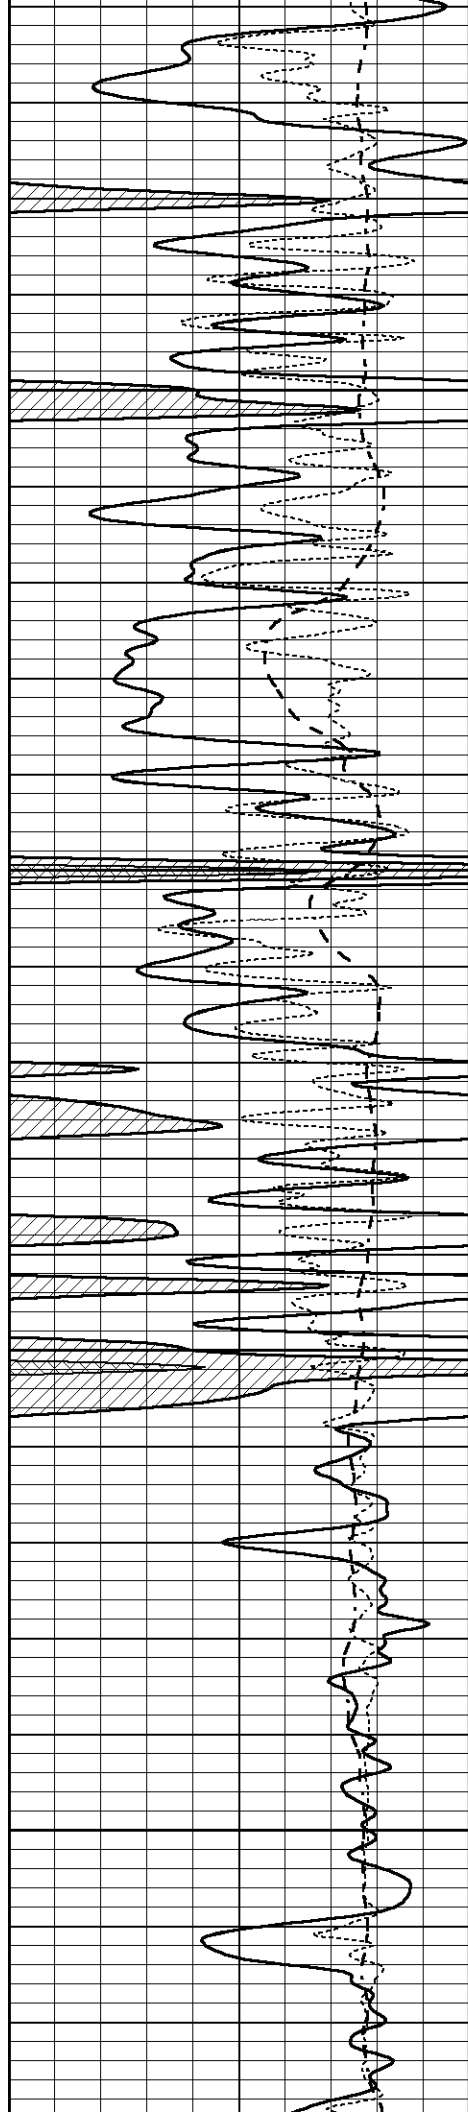




4850

4900

4950

5000

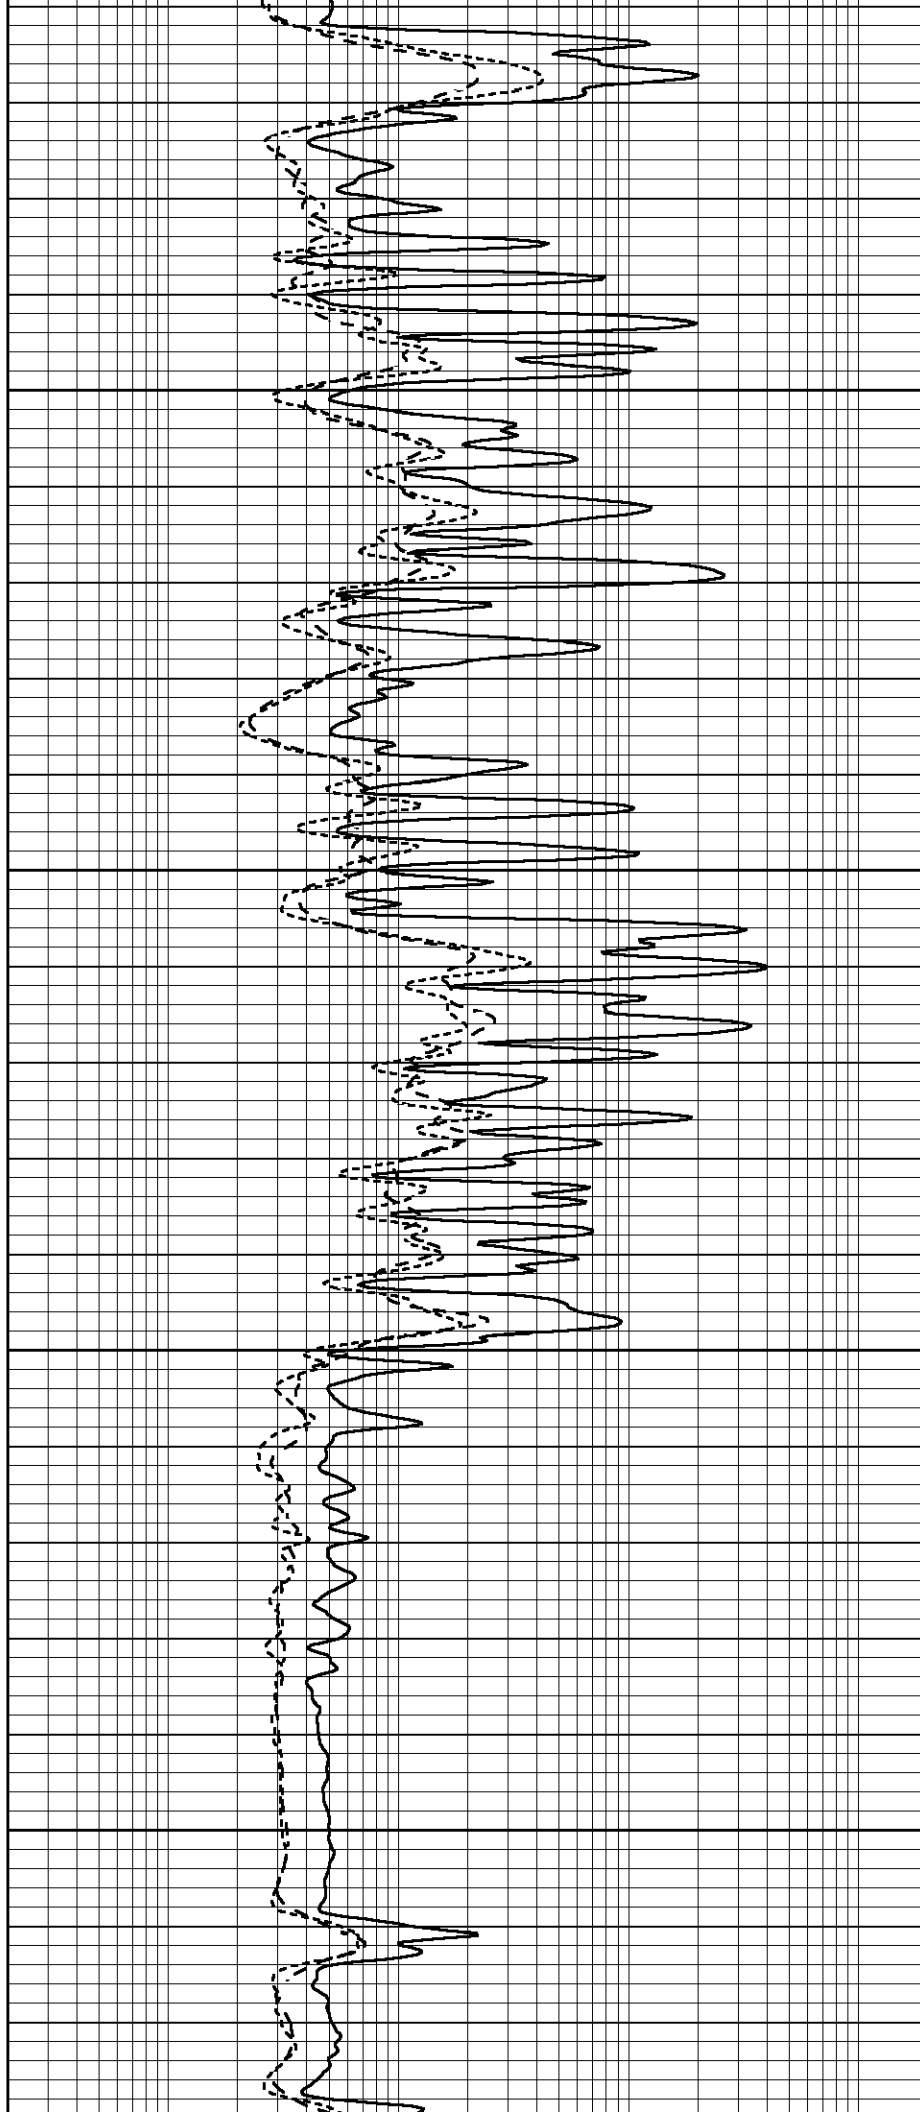

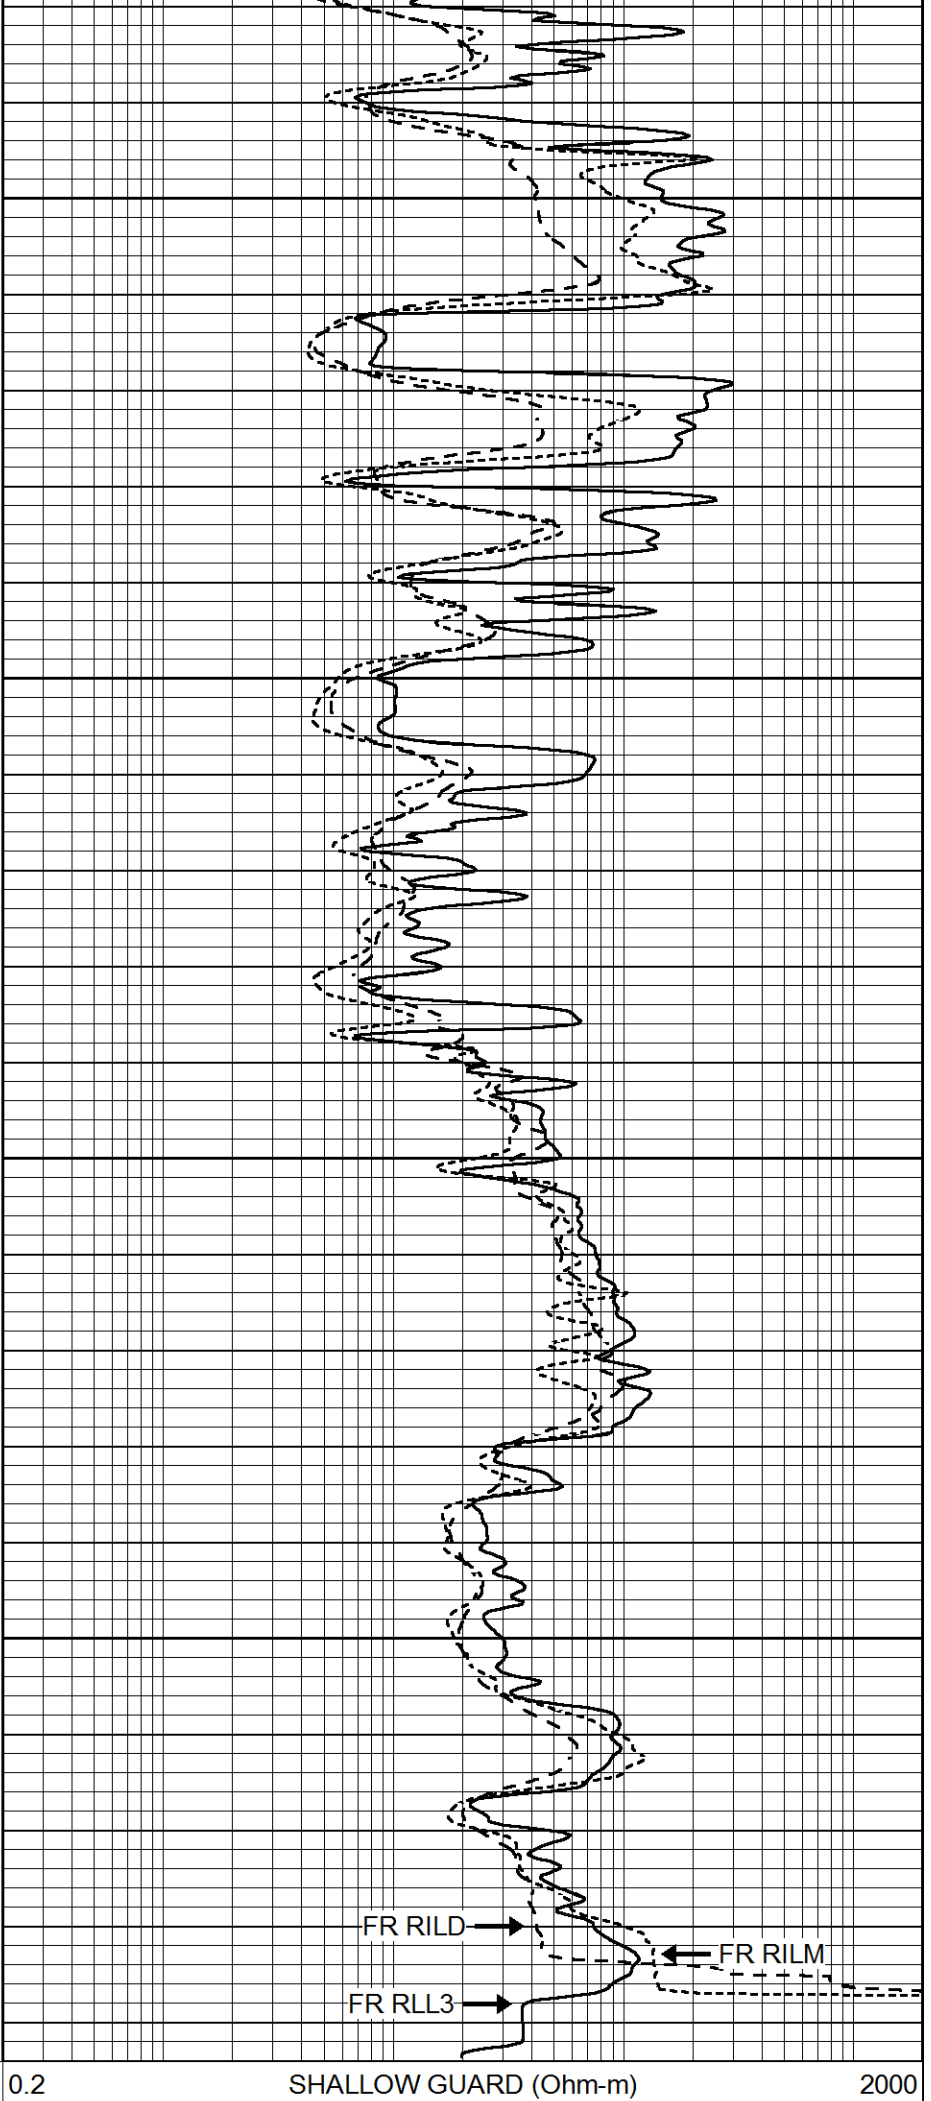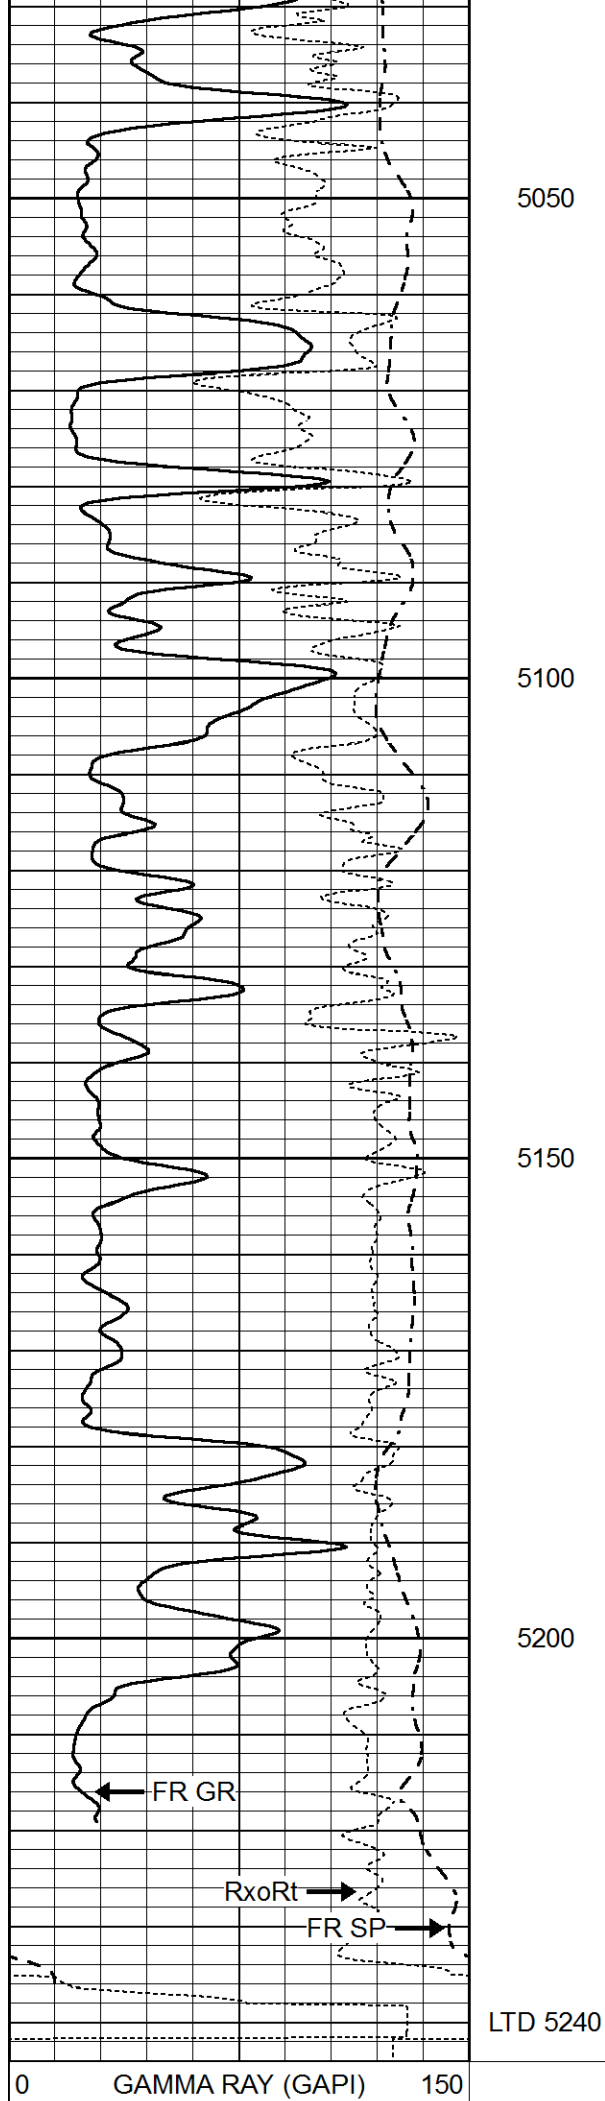

-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000




REPEAT SECTION

Database File 6227pe.db
 Dataset Pathname pass2.1
 Presentation Format _dil
 Dataset Creation Fri Jan 14 00:53:13 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

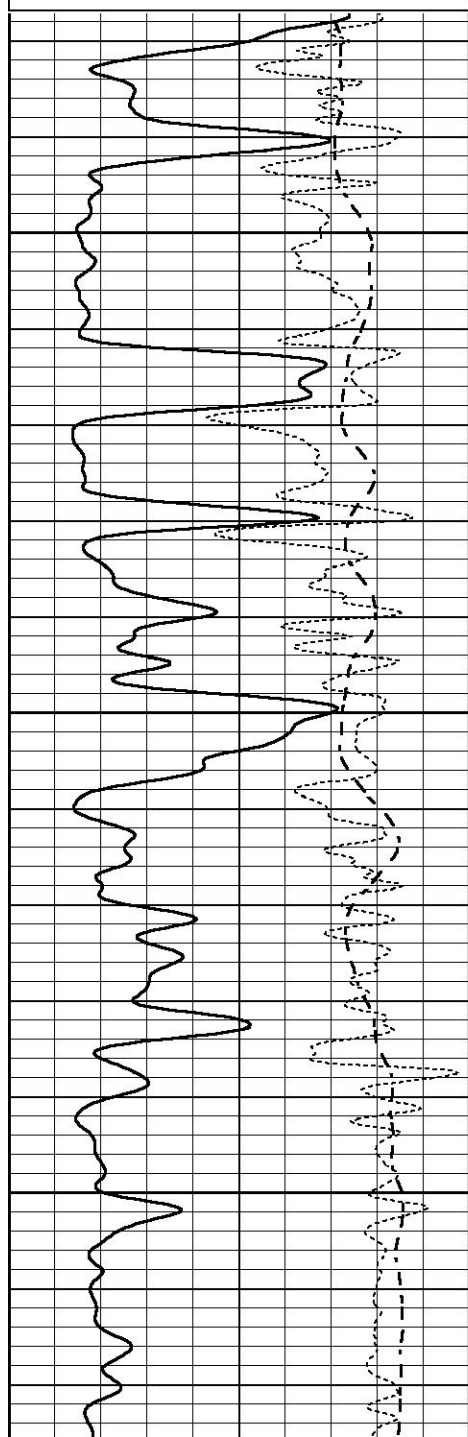


5050

5100

5150

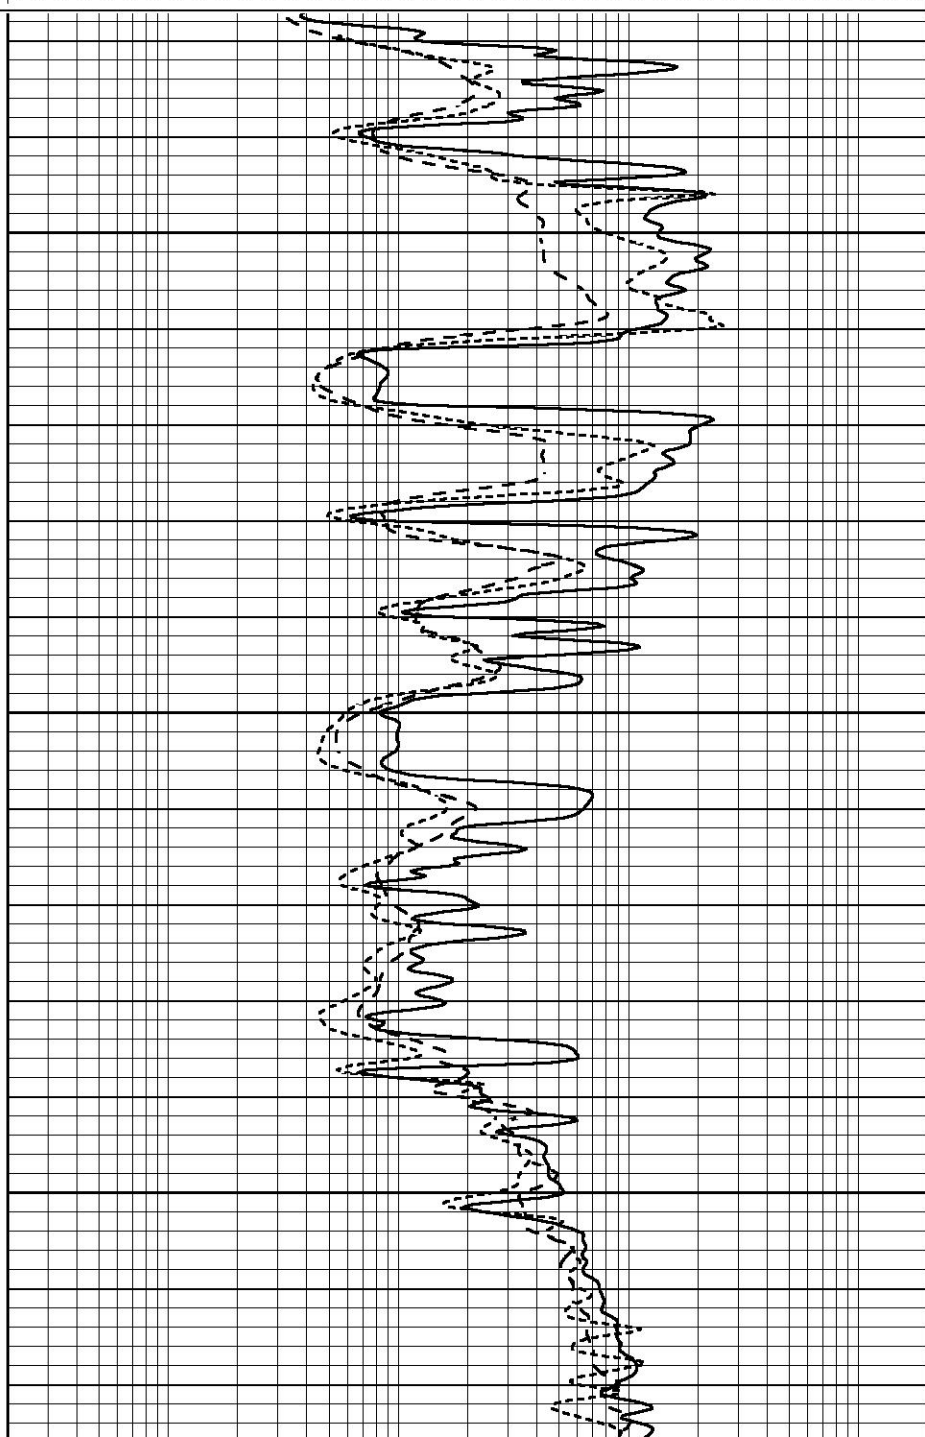

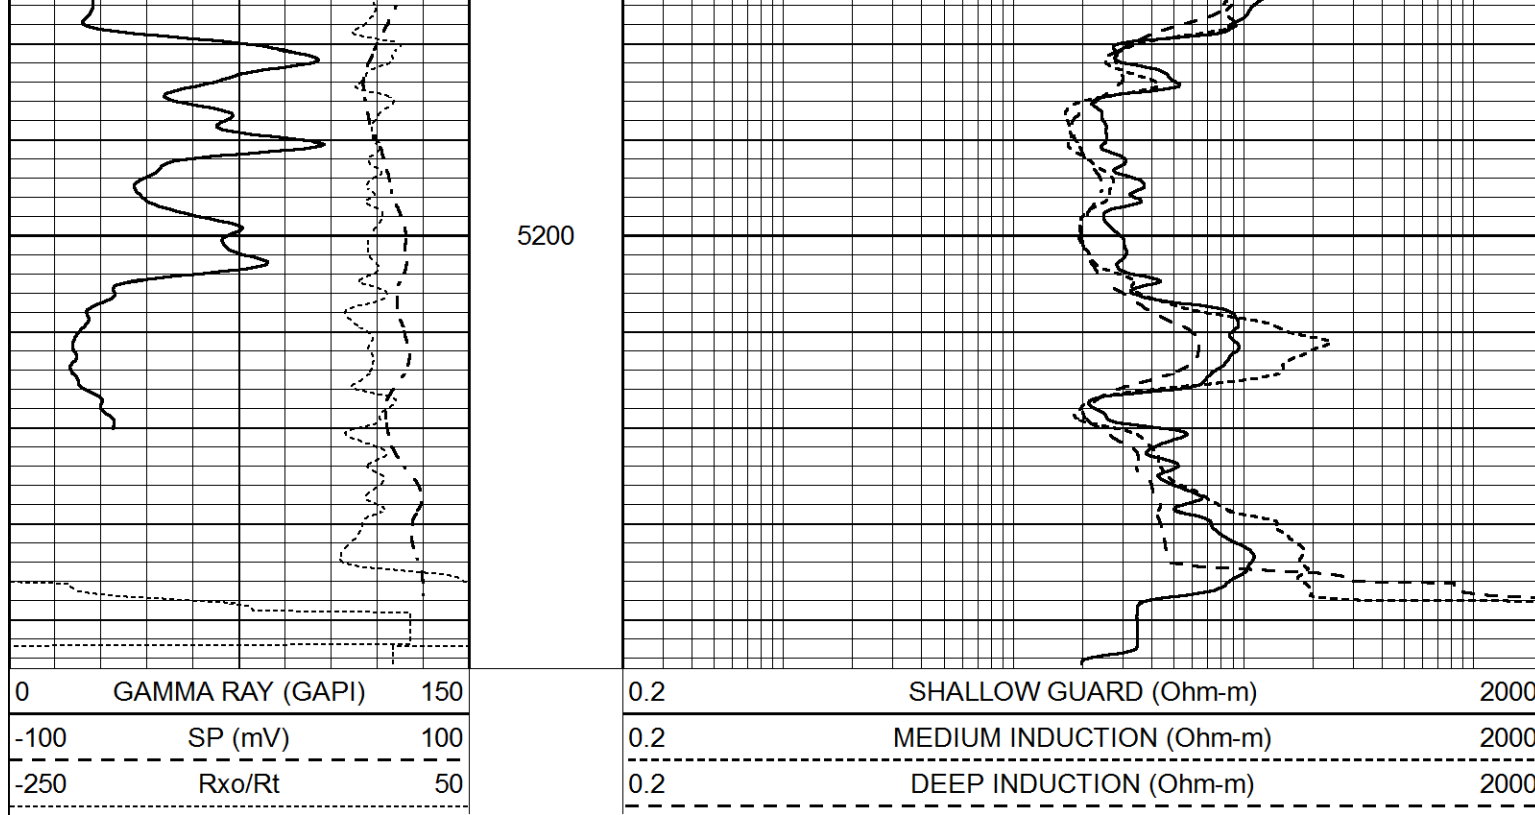

Calibration Report									
Database File	6227pe.db								
Dataset Pathname	pass2.1								
Dataset Creation	Fri Jan 14 00:53:13 2022								
Dual Induction Calibration Report									
Serial-Model:				FW1410-55-Probe					
Surface Cal Performed:				Tue Feb 19 11:44:18 2019					
Downhole Cal Performed:				Tue Feb 19 11:44:24 2019					
After Survey Verification Performed:				Tue Feb 19 11:44:27 2019					
Surface Calibration									
		Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b	
Deep	0.011	0.656	V	1.000	400.000	mmho/m	618.595	-5.524	
Medium	-0.000	0.731	V	1.000	464.000	mmho/m	632.856	1.197	
Internal:	Zero	Cal		Zero	Cal		m	b	
Deep	0.007	0.649	V	0.000	400.000	mmho/m	623.784	-4.595	
Medium	0.004	0.743	V	0.000	464.000	mmho/m	627.284	-2.251	
Downhole Calibration									
		Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'	
Deep	-0.824	395.917	mmho/m	-0.976	397.550	mmho/m	1.004	-0.149	
Medium	3.565	471.327	mmho/m	3.468	471.590	mmho/m	1.001	-0.099	
LL3		7.503	V		1500.000	Ohm-m			
		0.001	V		20.000	Ohm-m			
		-7.481	V		3745.000	mmho-m			
After Survey Verification									
		Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'	

Deep	0.000	0.000	mmho/m	-0.824	395.917	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	3.565	471.327	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		3745.000	mmho-m		

Gamma Ray Calibration Report								
Serial Number:	7							
Tool Model:	Probe1							
Performed:	Tue Jan 19 17:50:08 2021							
Calibrator Value:	1.0			GAPI				
Background Reading:	0.0			cps				
Calibrator Reading:	1.0			cps				
Sensitivity:	0.5300			GAPI/cps				