

15-163-03494-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rooks County, Sec. 6 Twp. 9 Rge. 18 (E) (W) W

Location as "NE/CNW/SW" or footage from lines C NE NE SE

Lease Owner Jenkins-Ray Supply

Lease Name W.J. Gilbert Well No. 1

Office Address Box 967, Ponca City, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 7-10-47 19

Application for plugging filed 2-25- 19 66

Application for plugging approved 19

Plugging commenced 4-6-66 19


Plugging completed 4-8-66 19

Reason for abandonment of well or producing formation

Depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

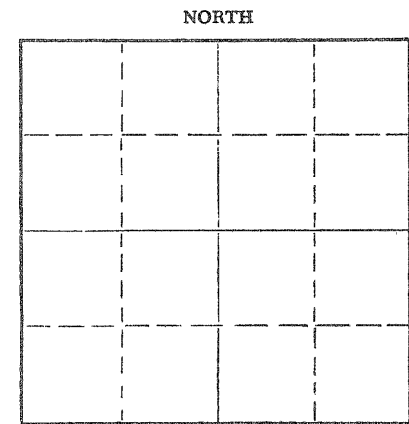

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 10 3/4 | 200 | None |
| | | | | 6" | 3517 | 960' |
| | | | | | 3489 | |
| | | | | | KC-AP | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped Sand from 3519 to 3485 - Dumped cement from 3485' to 3473' and cemented from 3473' to 3462' - Set bridge at 2008-bailed hole-filled surface pipe with 4 yads redi-mix cement

RECEIVED
STATE CORPORATION COMMISSION
5/17/66
MAY 17 1966

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Albert Leach

Address Sterling Colorado

STATE OF Oklahoma COUNTY OF Kay, ss. C.C. Jenkins

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jenkins-Ray Supply Partner

Box 967, Ponca City, Oklahoma

(Address)

SUBSCRIBED AND SWORN TO before me this 16 day of May, 19 66

Notary Public Signature

My commission expires 8-3-67



Gilbert # 1

Location: NE 1/4 of NE 1/4 of SE 1/4 of Section 6, T9S, R18W, Rooks County, Kansas.

FORMATION LOG

| <u>From</u> | <u>To</u> | <u>Formation</u> | <u>From</u> | <u>To</u> | <u>Formation</u> |
|-------------|-----------|------------------|-------------|-----------|------------------|
| 0 | 40 | Surface clay | 2200 | 2314 | Broken lime |
| 40 | 342 | Shale | 2314 | 2364 | Lime |
| 342 | 983 | Shale and shells | 2364 | 2500 | Shale and shells |
| 983 | 1450 | Sand and shale | 2500 | 2745 | Broken lime |
| 1450 | 1473 | Sand | 2745 | 2936 | Lime |
| 1473 | 1515 | Lime | 2936 | 3018 | Broken lime |
| 1515 | 1893 | Shale and shells | 3018 | 3123 | Lime |
| 1893 | 2055 | Broken lime | 3123 | 3232 | Broken lime |
| 2055 | 2092 | Lime | 3232 | 3487 | Lime |
| 2092 | 2200 | Shale and shells | 3487 | 3498 | Arbuckle lime |

TO WHOM IT MAY CONCERN:

I, the undersigned, being first duly sworn upon oath, state that this Well Record covering the W. J. Gilbert Well No. 1, is true, correct, and complete according to the records of this office and to the best of my knowledge and belief.

District Superintendent

Subscribed and sworn to before me this _____ day of _____, 1947.

Notary Public

License expires October 21, 1948.