


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

15-163-01530-00-00  
WELL PLUGGING RECORD

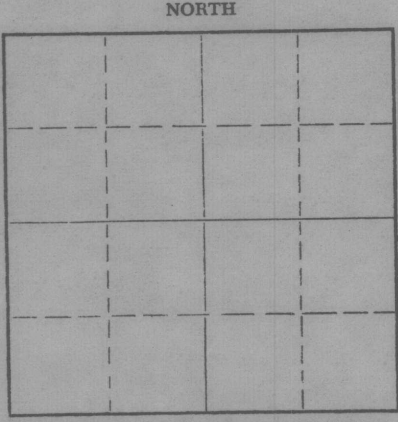

Locate well correctly on above  
Section Plat

ROOKS County, Sec. 6 Twp. 9 Rge. 18 (E) (W)

Location as "NE/CNW/SW" or footage from lines SW NW NE

Lease Owner MORGENSTERN & SPECTER

Lease Name E.A. THOMPSON Well No. 3

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 4-24-48 19

Application for plugging filed 7-24-61 19

Application for plugging approved 7-25-61 19

Plugging commenced August 3 1961 19

Plugging completed August 6 1961 19

Reason for abandonment of well or producing formation failure to produce profitably

If a producing well is abandoned, date of last production \_\_\_\_\_ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty Hays, Kansas

Producing formation arbuckle Depth to top 3477 Bottom 3478 Total Depth of Well 3486 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	204'	none
				6"	3478'	1835'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged back with sand to 2900 feet, Dumped 5 sacks - cement.  
Circulated Mud at 500 feet, Pumped 20 sacks cement.  
Pumped 20 sacks cement at 170 feet, Set a Rock-Bridge at 25 feet.  
Dumped ten sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
8/21/61  
AUG 21 1961  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor LYNCH CASING PULLING COMPANY NO. 457  
Address R.B.T. 4 GREAT BEND, KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.  
Morgenstern & Specter, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 15th day of August, 19 61

My commission expires Dec 1, 1964 [Signature] Notary Public.

WELL LOG BUREAU KANSAS GEOLOGICAL SOCIETY  
412 Union National Bk Bldg. Wichita, Kansas

COPY


Company - CONTINENTAL OIL COMPANY  
Farm - Thompson No. 3

SEC. 6 T. 9 R. 18W  
SW NE  
990' S & 330' E of NE Corner

Total Depth. 3486'  
Comm. 4-9-48 Comp. 4-24-48  
Shot or Treated.  
Contractor.  
Issued. 7-10-48

County. Rooks

KANSAS



Elevation. \_\_\_\_\_

Production. Pot. Depth. 3000 Oil  
no water

CASING:  
10-3/4" 204'  
6" 3478'

Figures indicate Bottom of Formations.

surface soil sand	218
sand, shales & shells	715
shale & sand	1160
shale & shells	1431
anhydrite	1484
shale & shells	1885
shale & lime	2019
shale & shells	2072
lime & shale	2251
shale & shells	2296
lime & shale	3071
lime	3175
lime & shale	3295
lime	3486
Total Depth	

Tops:  
Lansing 3226  
Arbuckle 3477

Potential test 4-13-48,  
Depthograph 3,000 FO,  
no wat. allowable 71 bbls.