



DUAL INDUCTION LOG

Company	MUSTANG ENERGY CORP.	Company	MUSTANG ENERGY CORPORATION
Well	WARREN #2-2	Well	WARREN #2-2
Field	WILDCAT	Field	WILDCAT
County	ELLIS	County	ELLIS
State	KANSAS	State	KANSAS
Location:	API # : 15-051-27022-0000	Other Services CDL/CNL MEL	
Permanent Datum	2235' FSL & 925' FWL	Elevation	
Log Measured From	SEC 2 TWP 12S RGE 20W	K.B. 2233	
Drilling Measured From	GROUND LEVEL	D.F. 2231	
	KELLY BUSHING 8' A.G.L.	G.L. 2225	
Date	3/11/22		
Run Number	ONE		
Depth Driller	3900		
Depth Logger	3900		
Bottom Logged Interval	3898		
Top Log Interval	00		
Casing Driller	8 5/8"@223'		
Casing Logger	223		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4.000 PPM	
Density / Viscosity	9.2/48		
pH / Fluid Loss	10.0/9.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.950@65F		
Rmf @ Meas. Temp	.713@65F		
Rmc @ Meas. Temp	1.14@65F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.537@115F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	5.30 A.M.		
Maximum Recorded Temperature	115F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	CAMERON BRIN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-051-27022-0000


Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
ELLIS, KS., N. TO "BUCKEYE RD.", 2E. TO "RD. 150", 1 3/4 N., W. INTO 1 1/2





MAIN SECTION



0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
0	RWA (Ohm-m)	1	0	RILD (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500


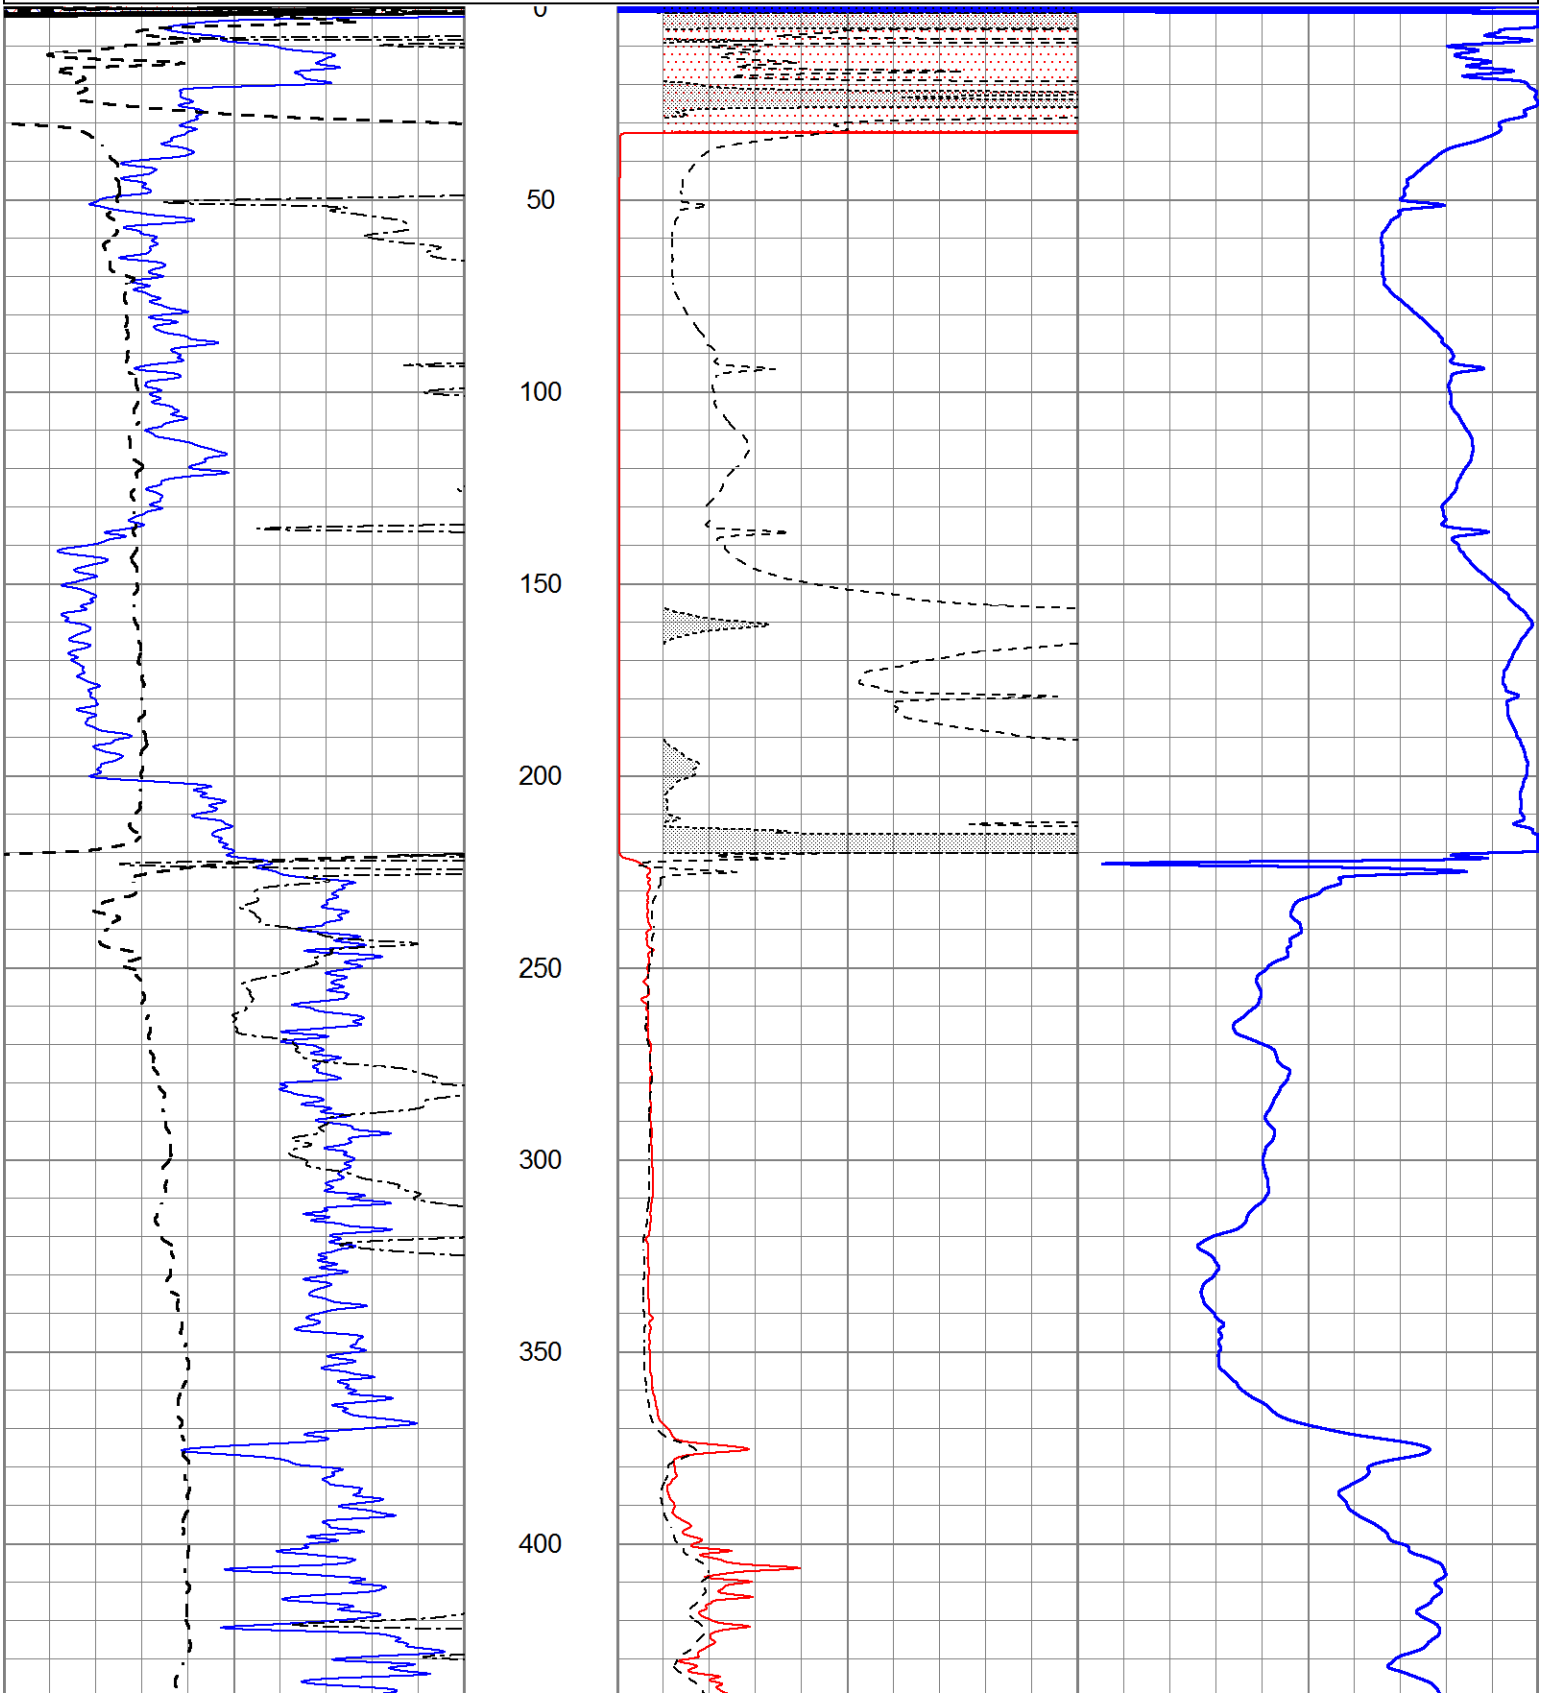




450
500
550
600
650
700
750
800
850
900
950

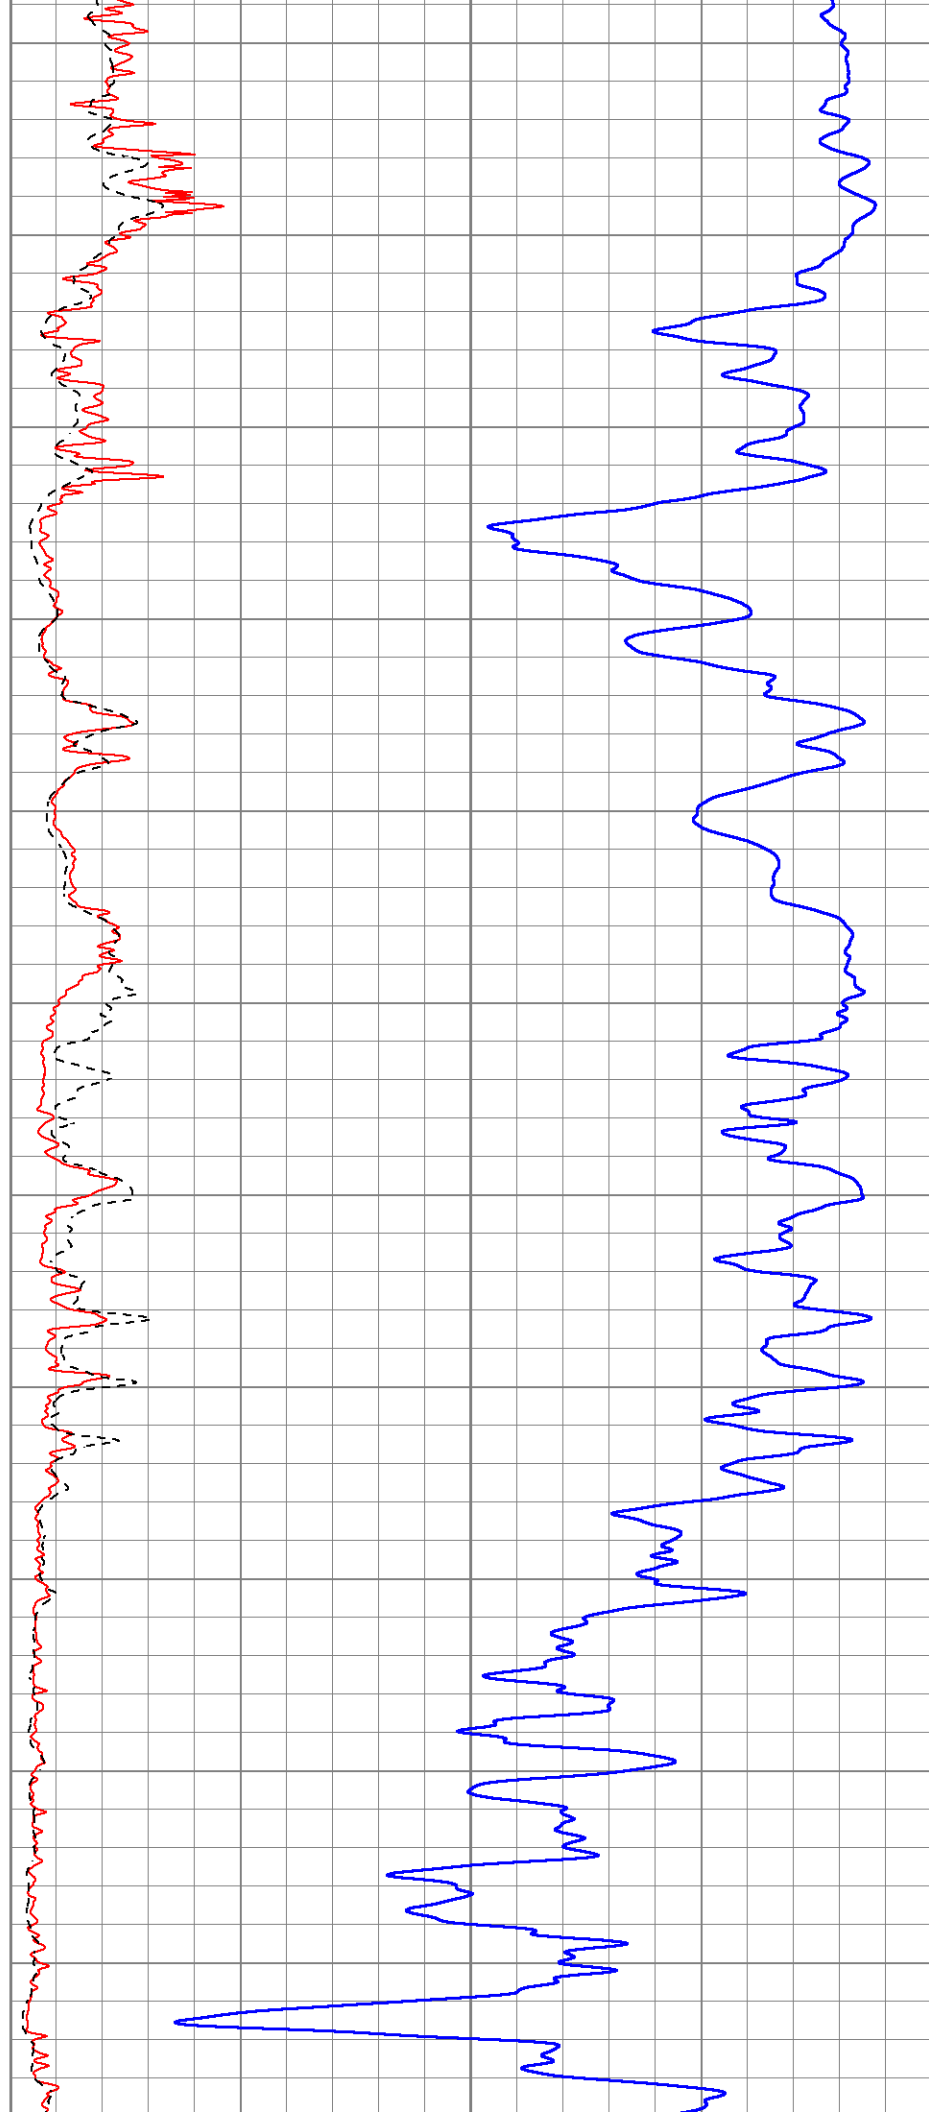
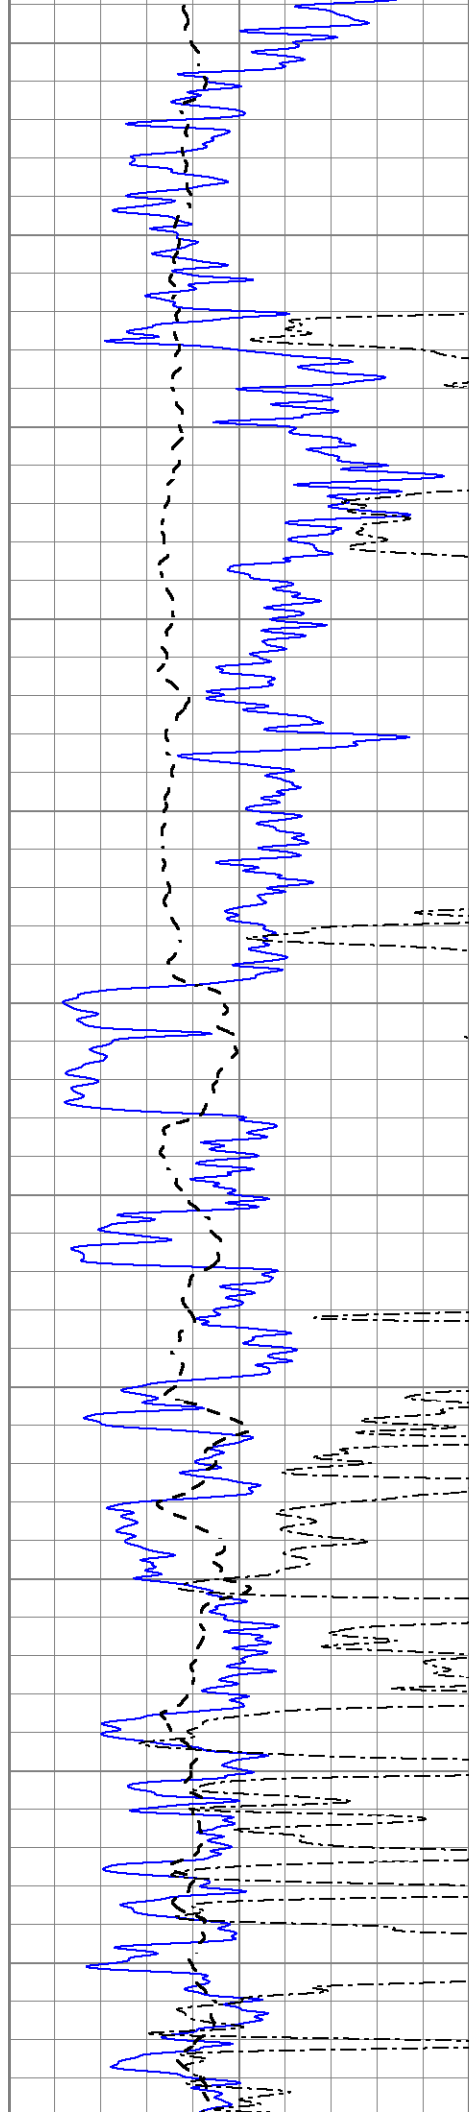




1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

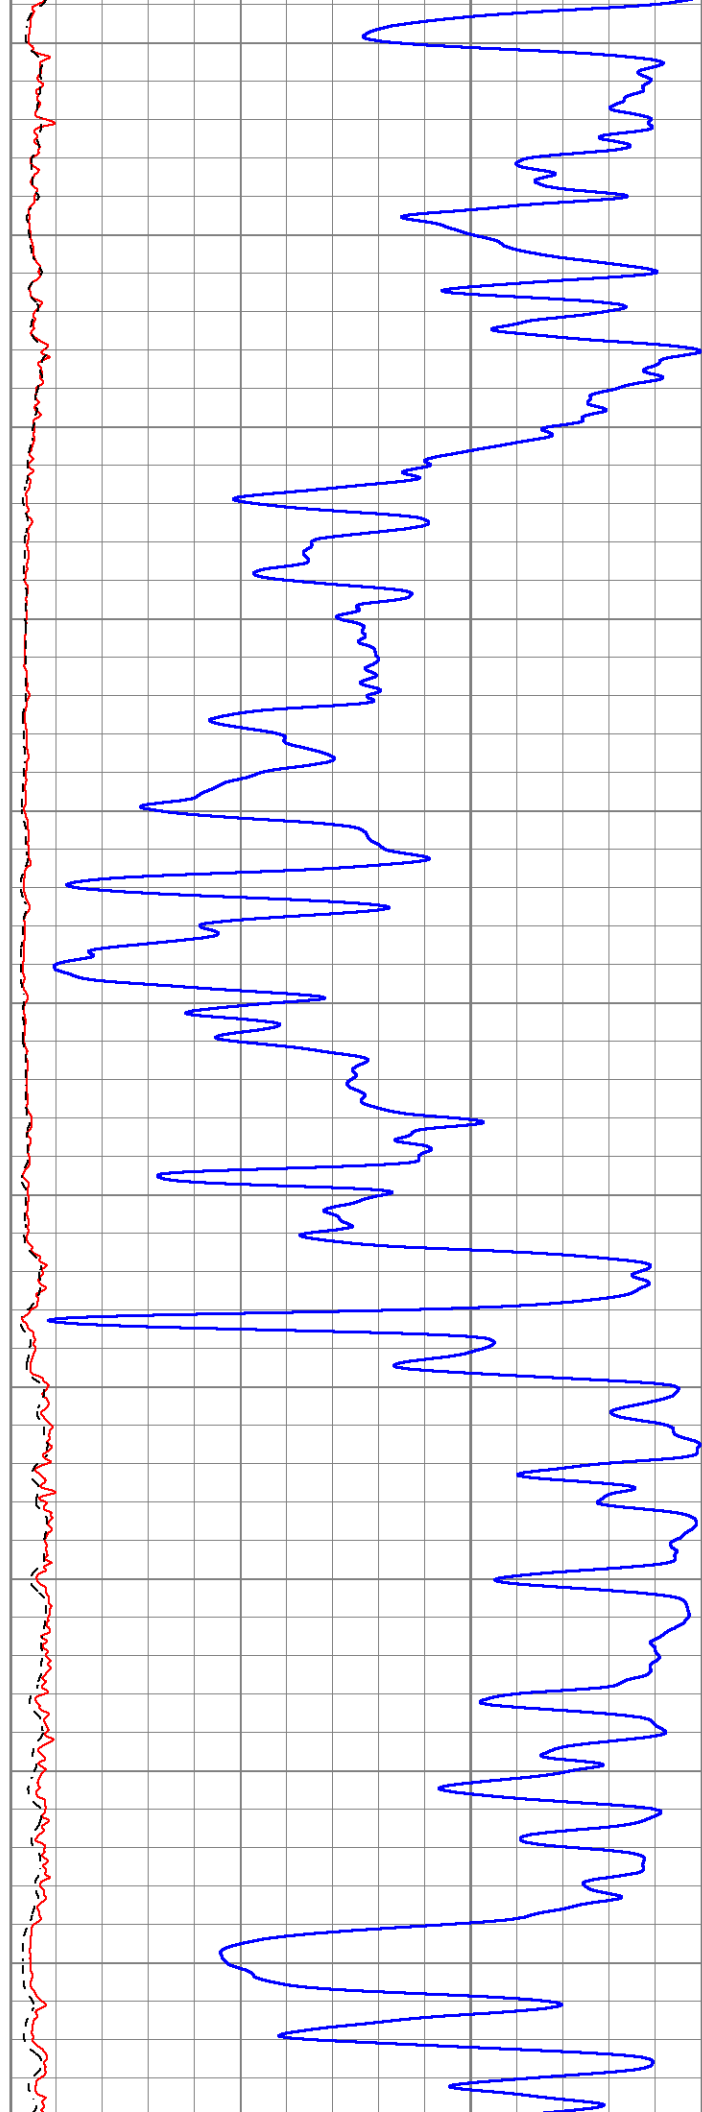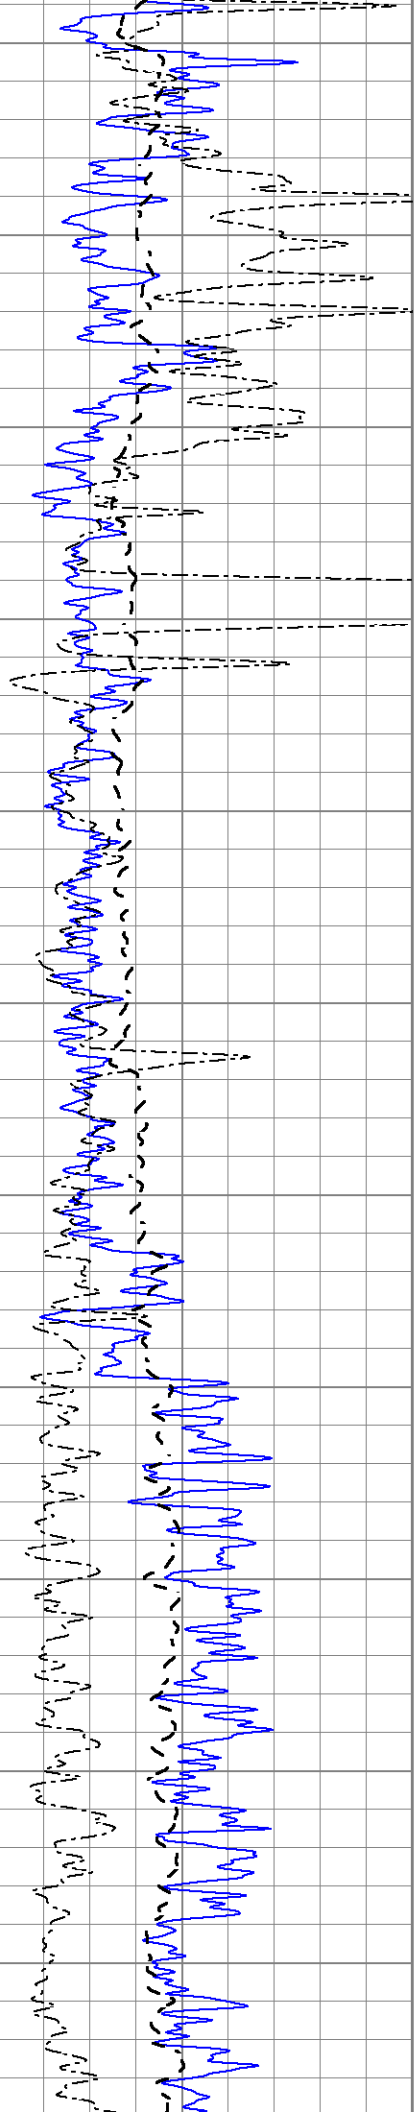


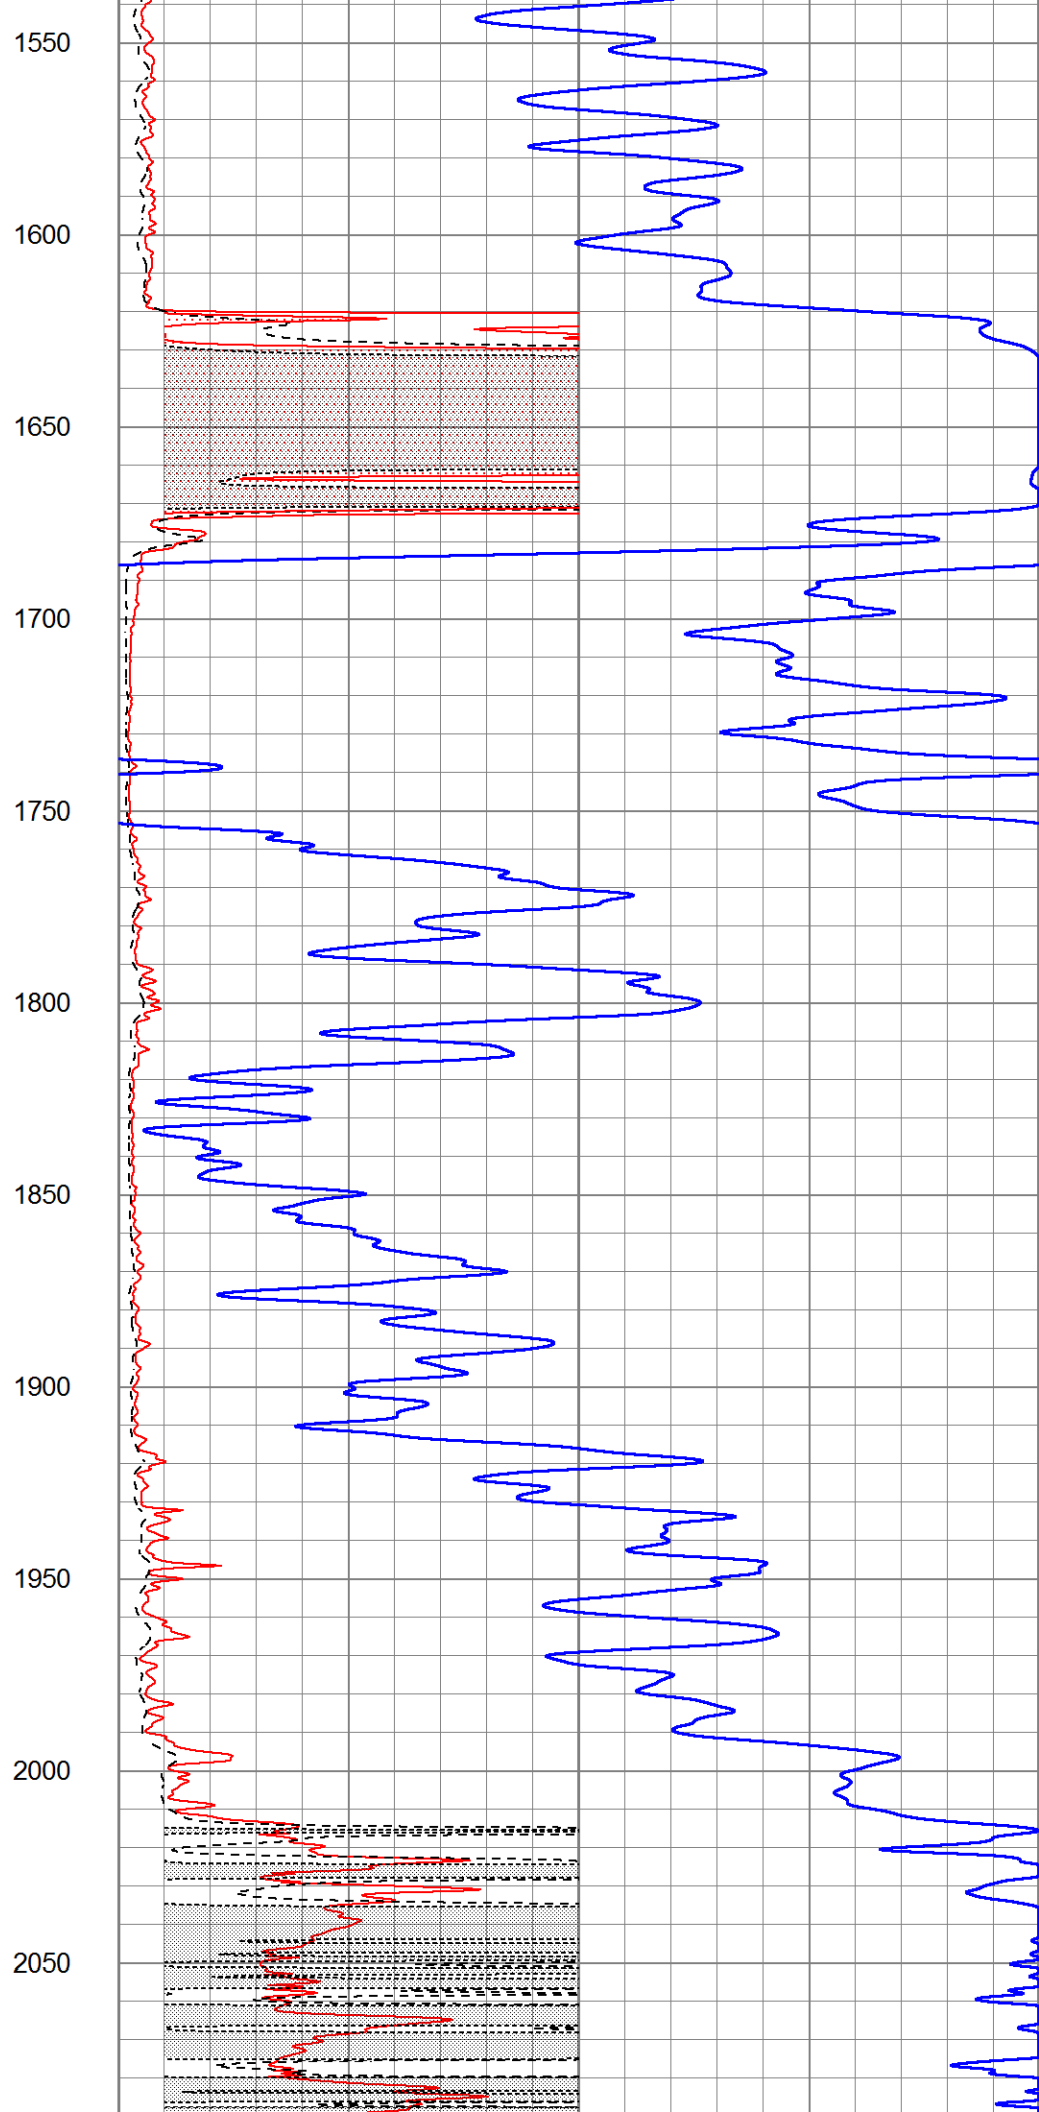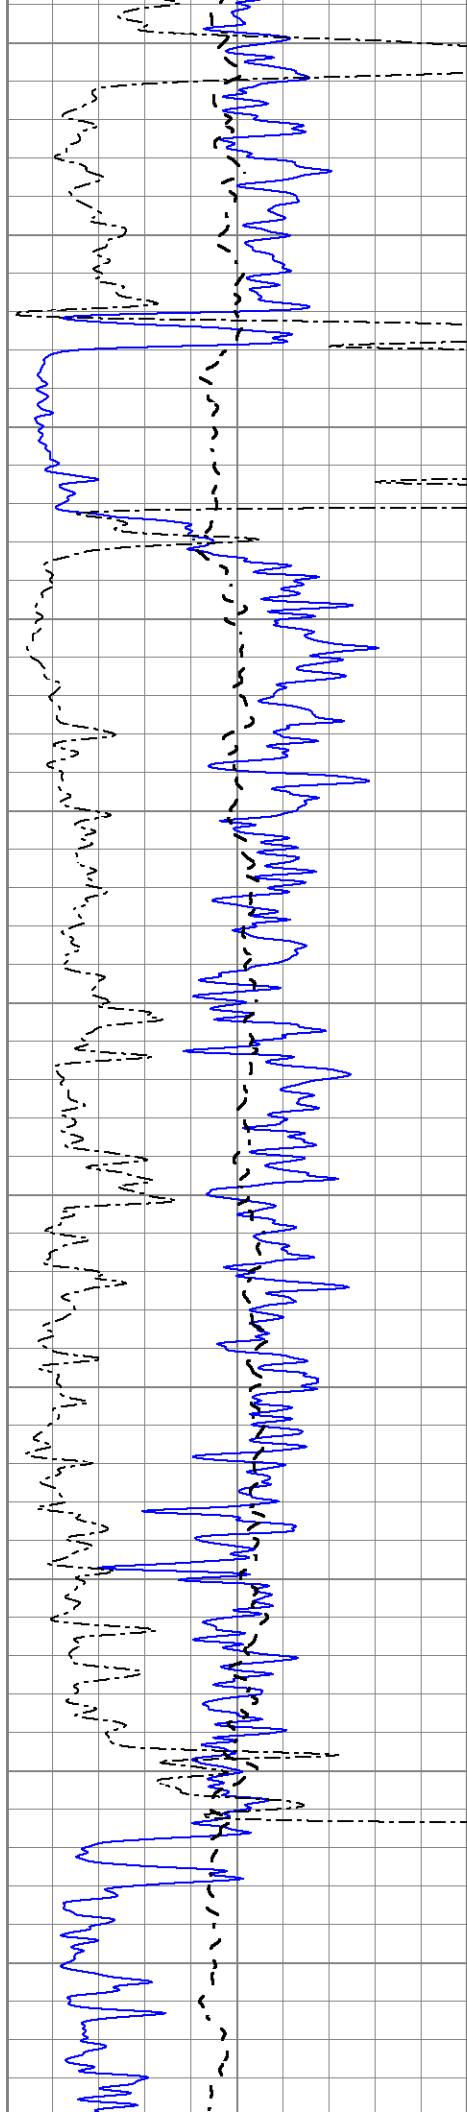

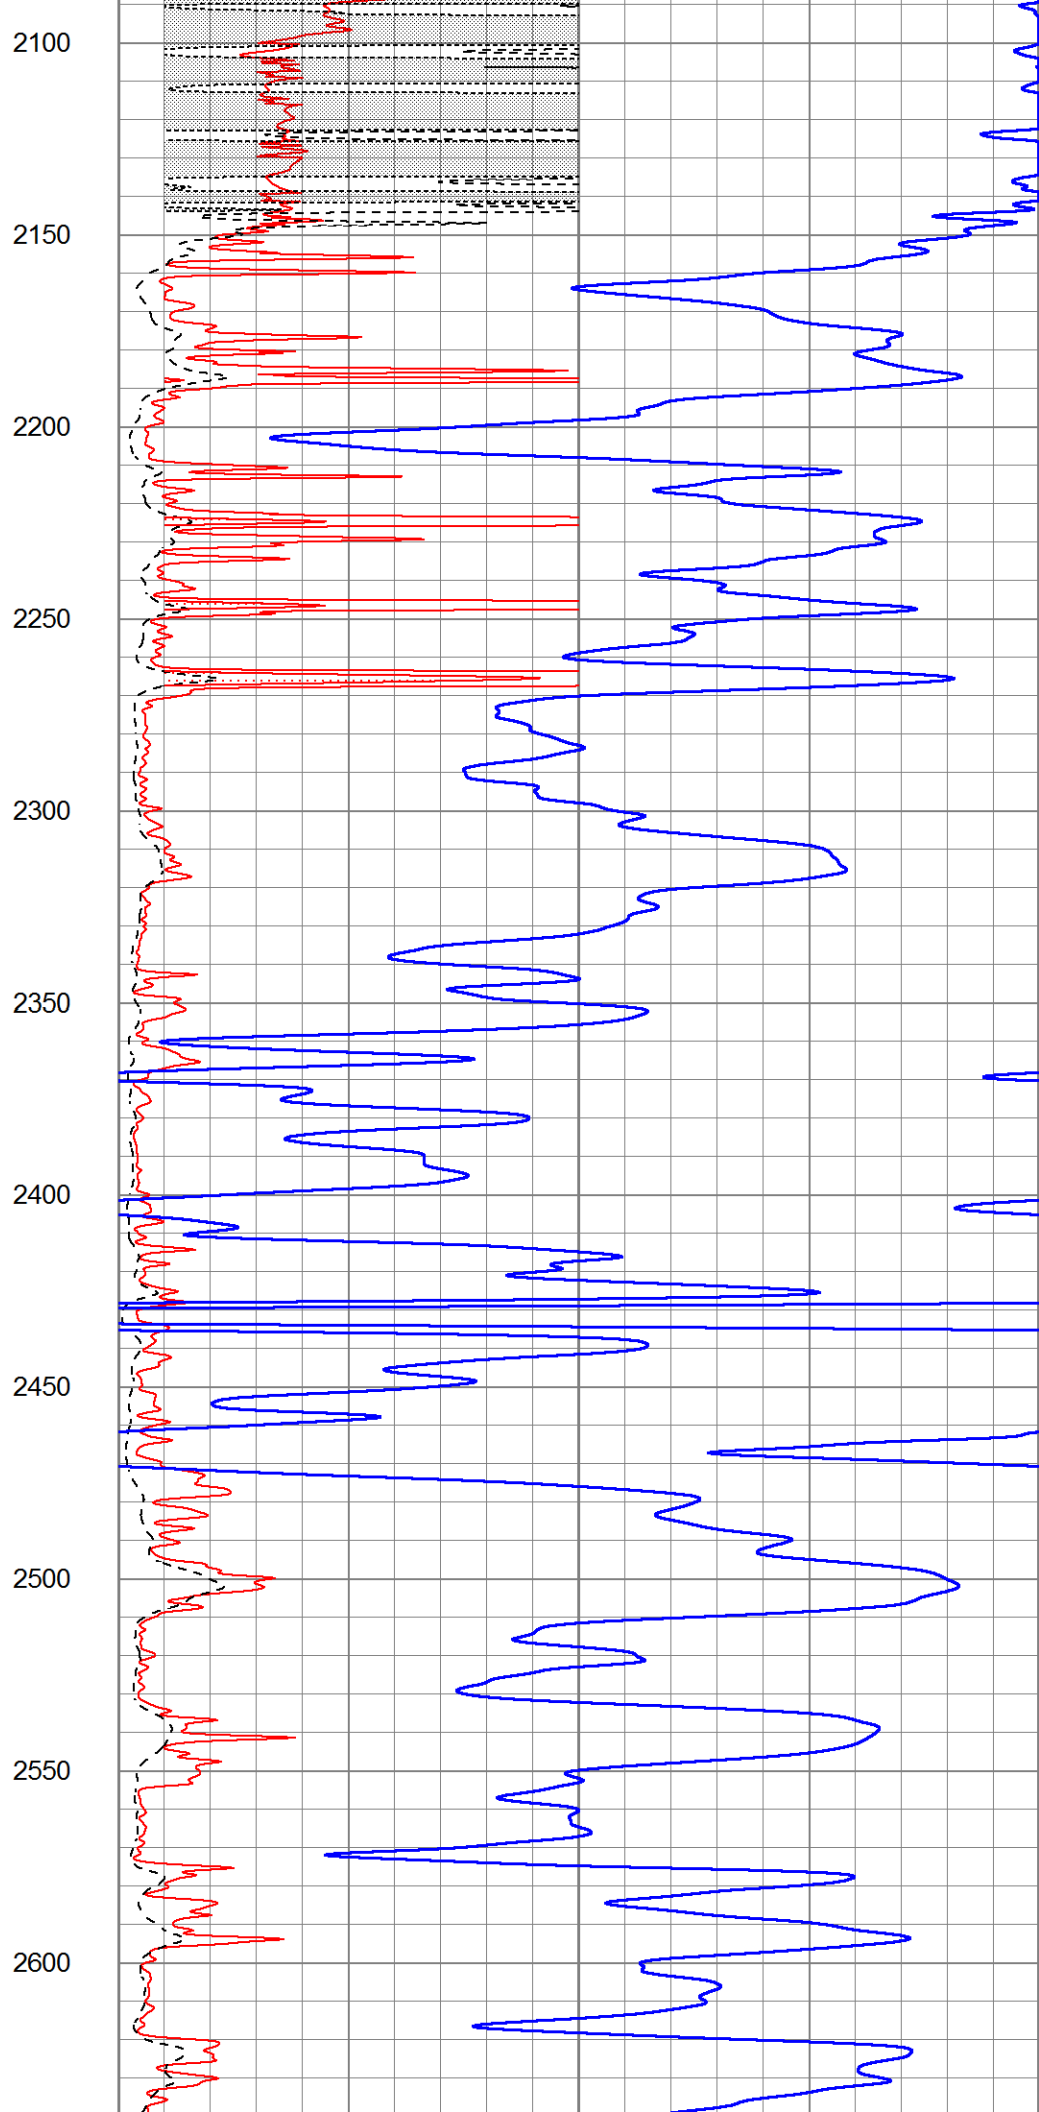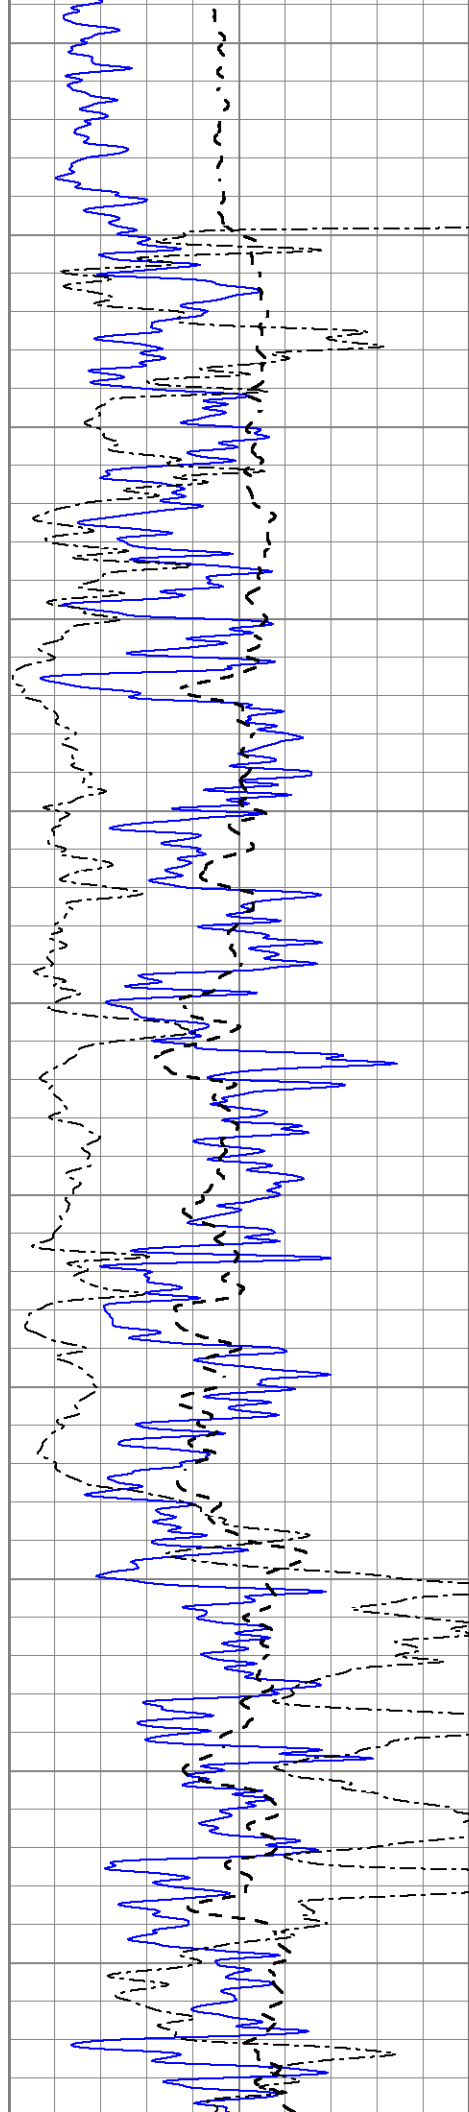

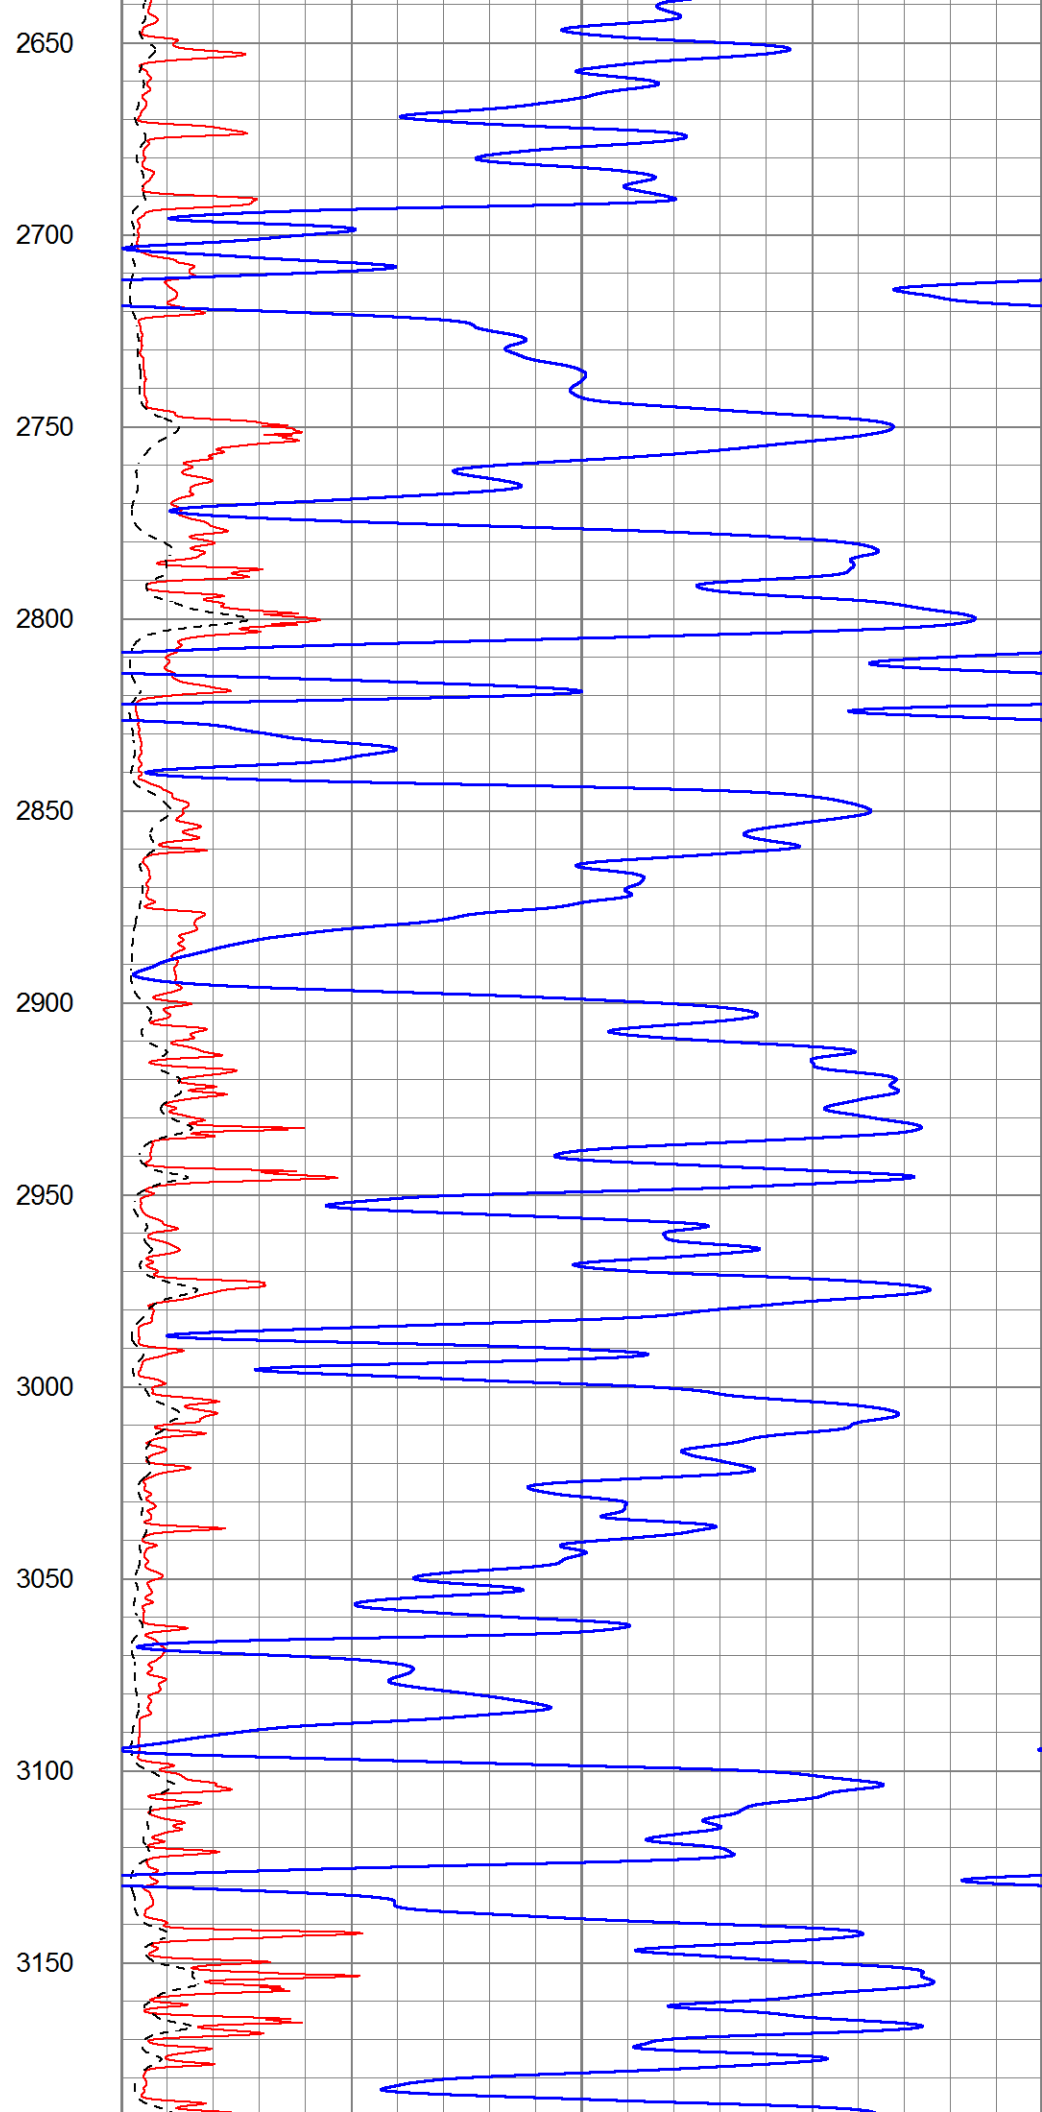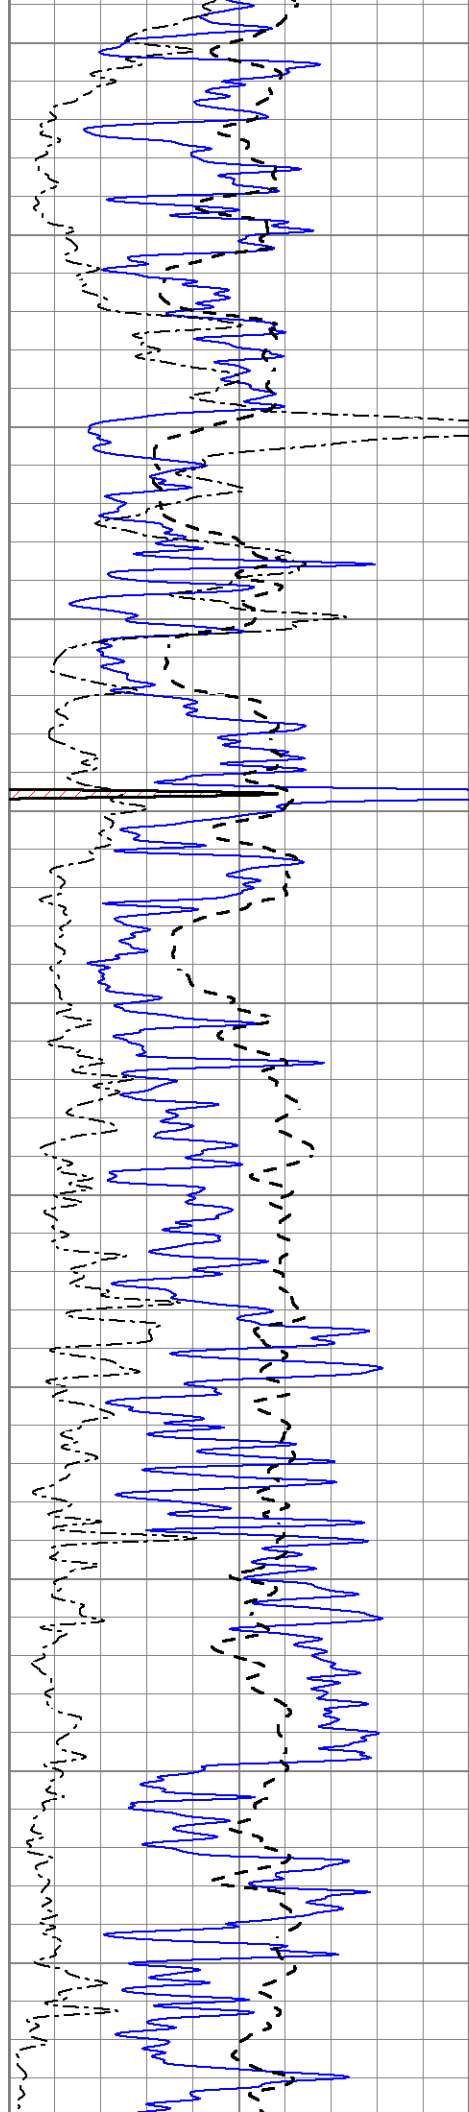

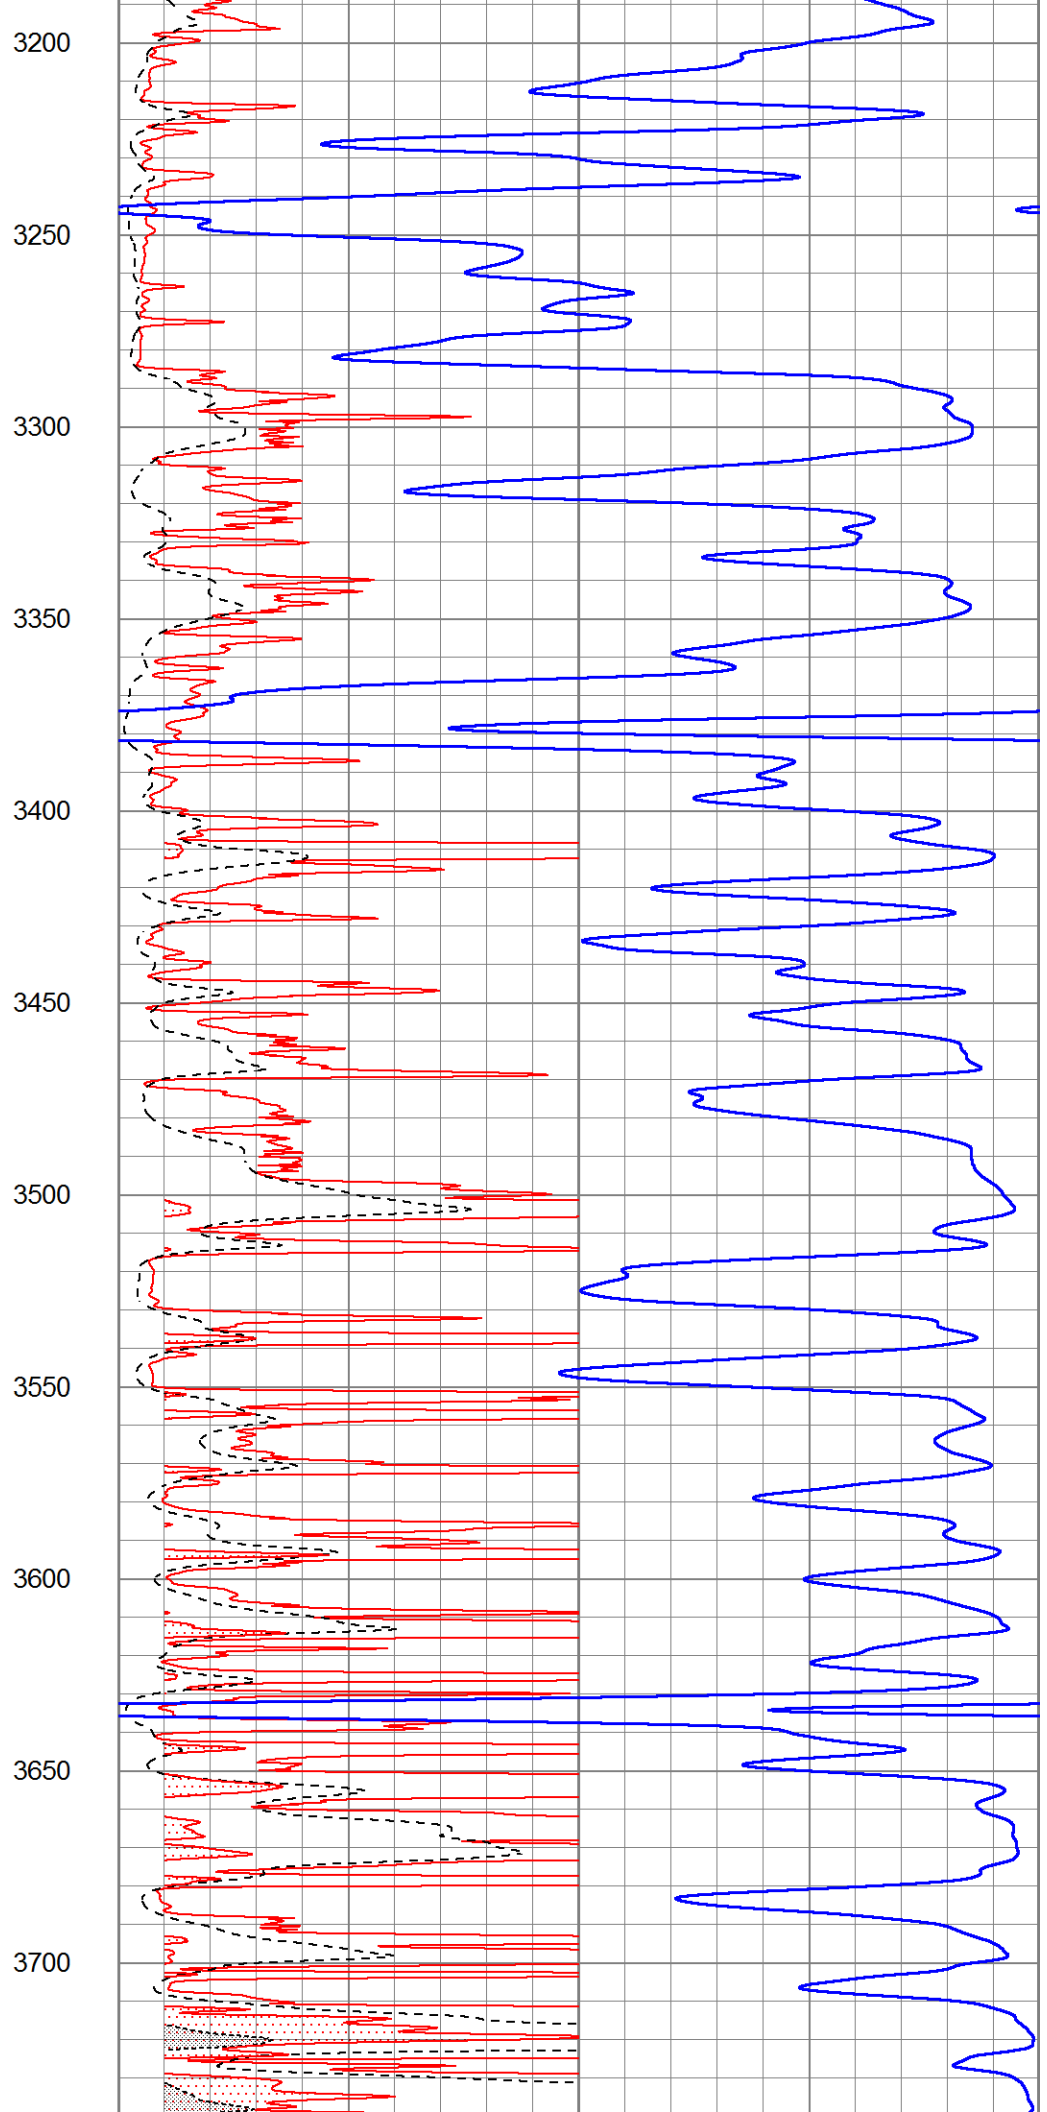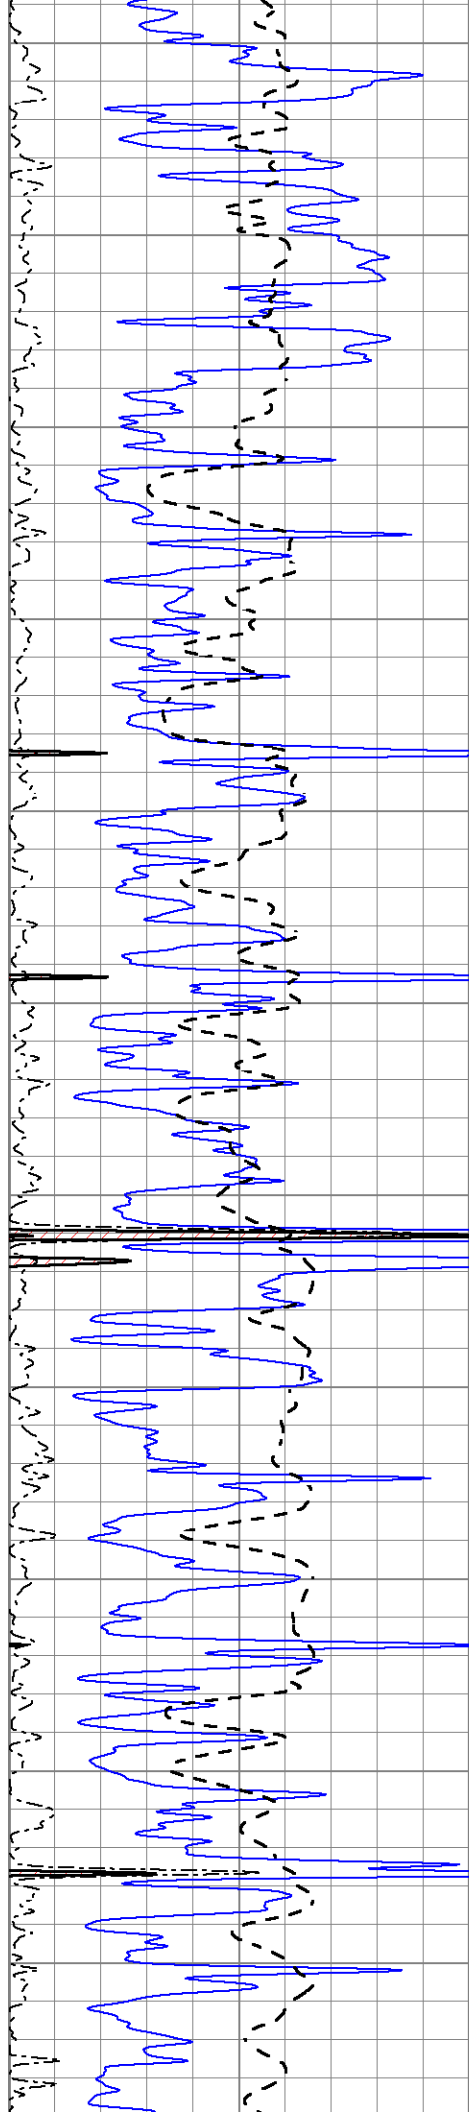


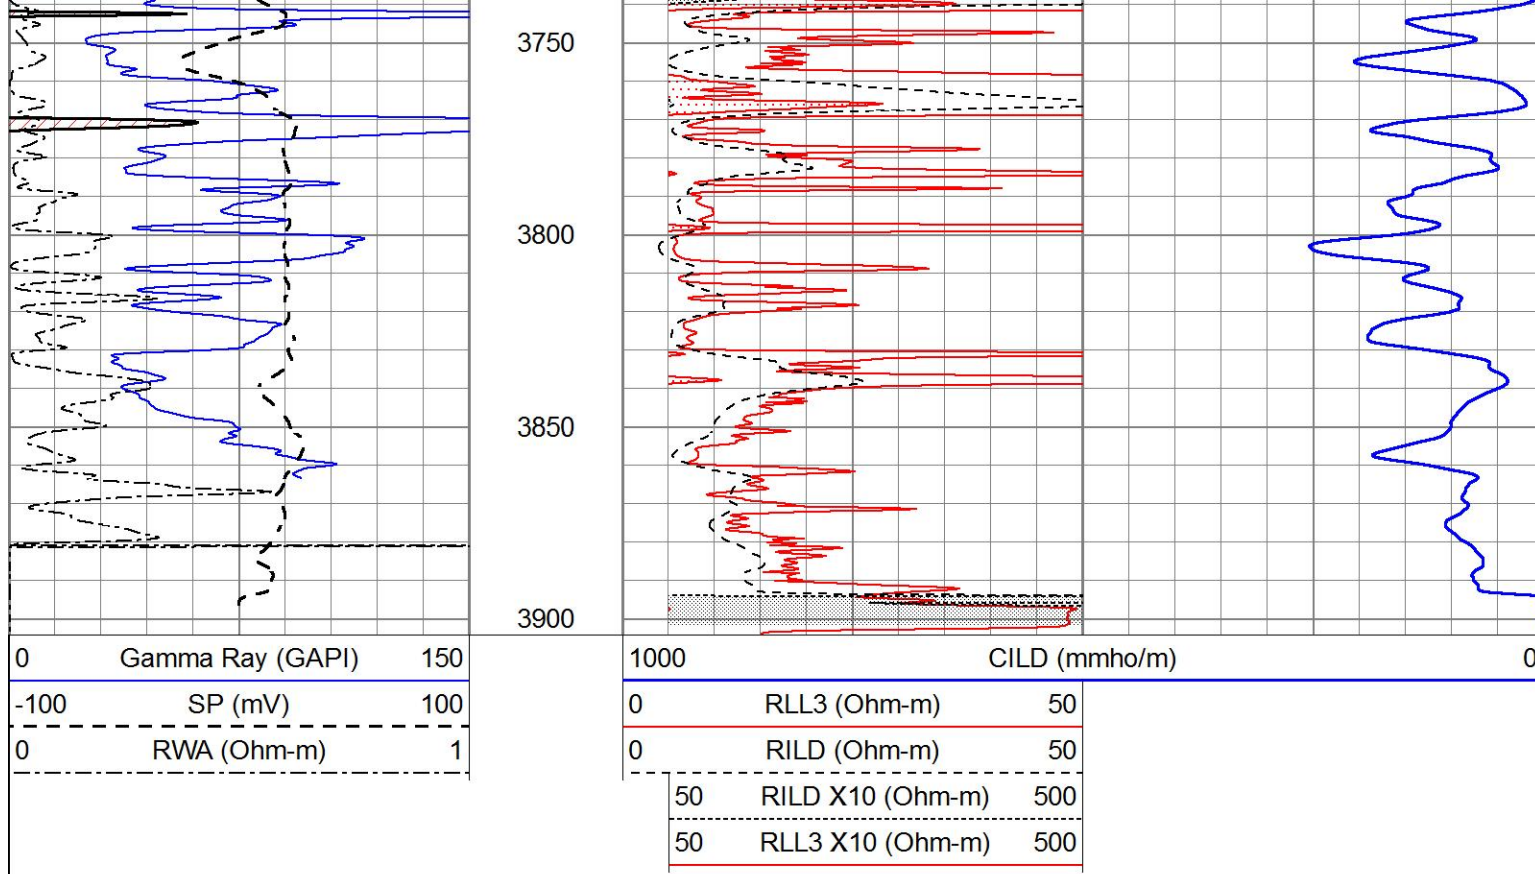


ANHYDRITE

Database File 6261ddn.db
 Dataset Pathname pass3.1A
 Presentation Format _dil
 Dataset Creation Fri Mar 11 06:39:45 2022
 Charted by Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

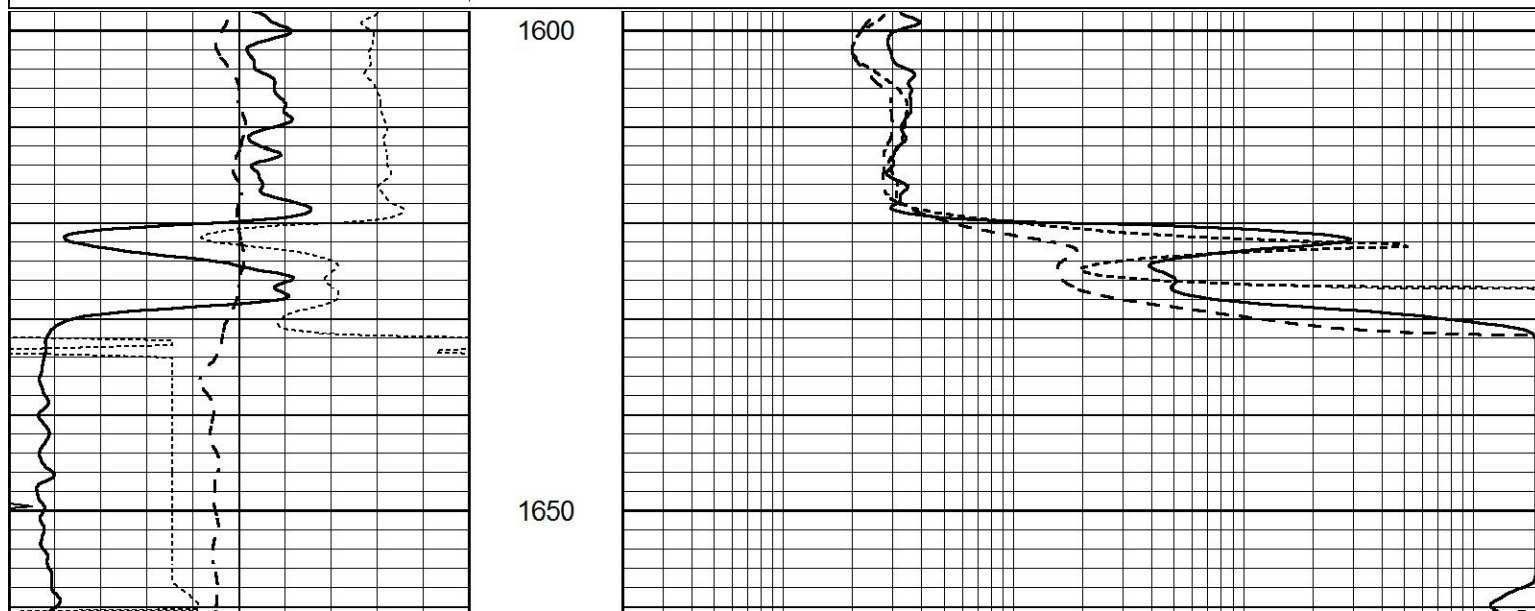

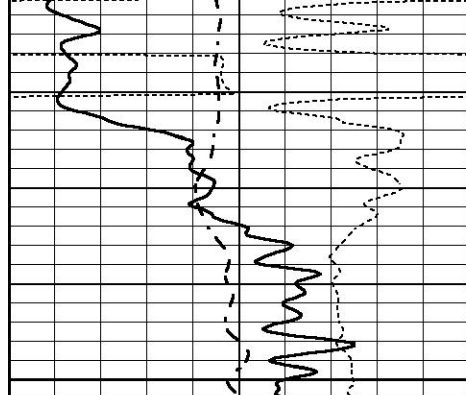

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

1700

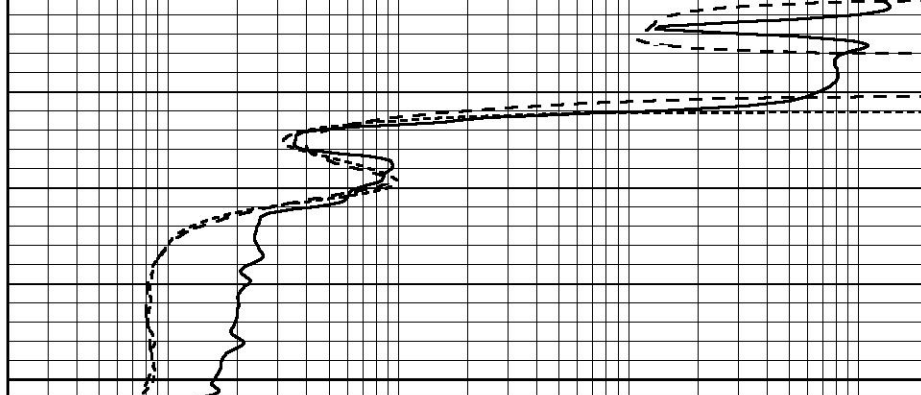

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




MAIN SECTION

Database File 6261ddn.db
 Dataset Pathname pass3.1M
 Presentation Format _dil
 Dataset Creation Fri Mar 11 06:39:21 2022
 Charted by Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

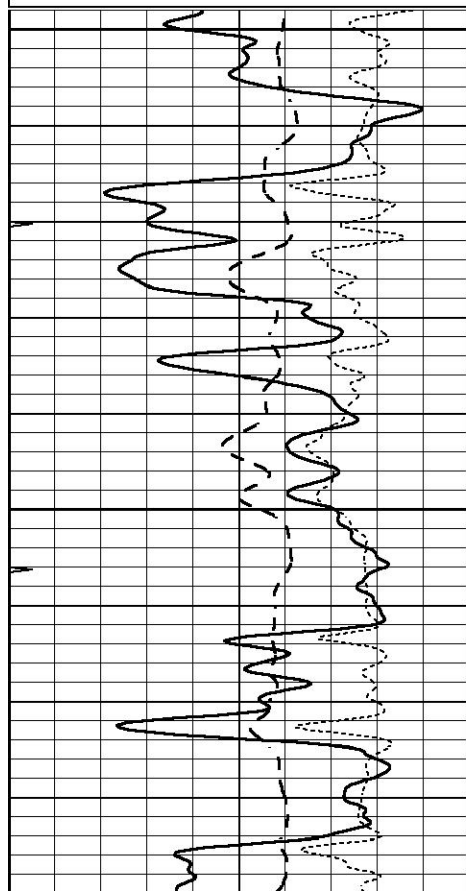

3200

3250

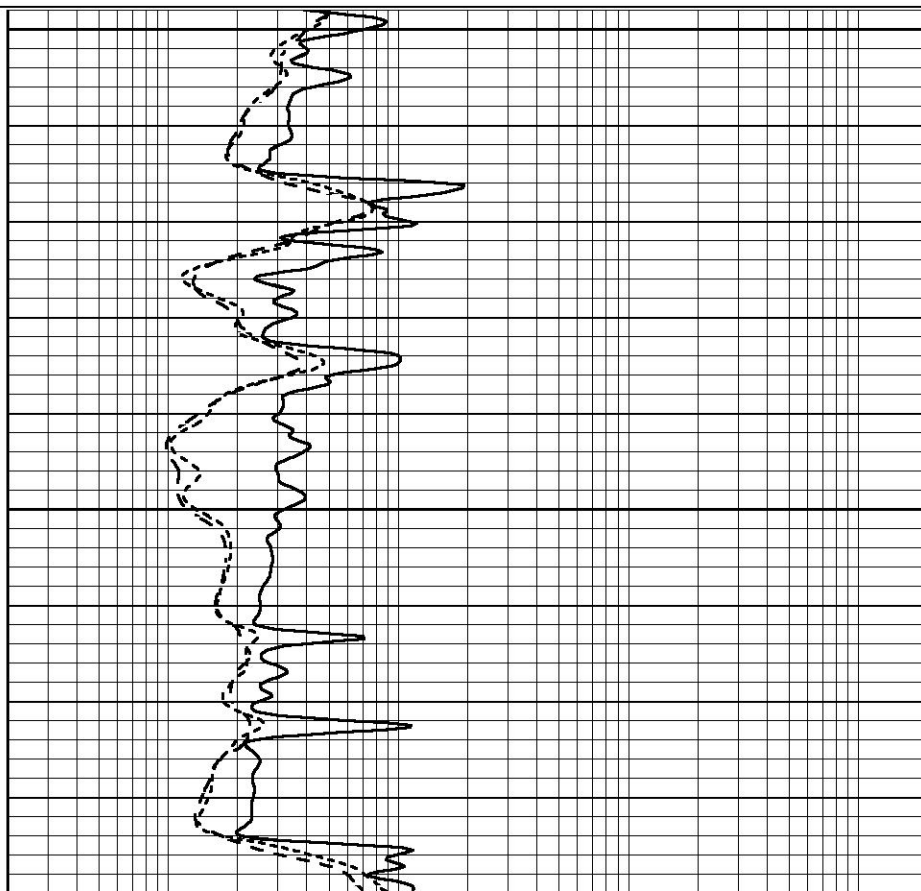

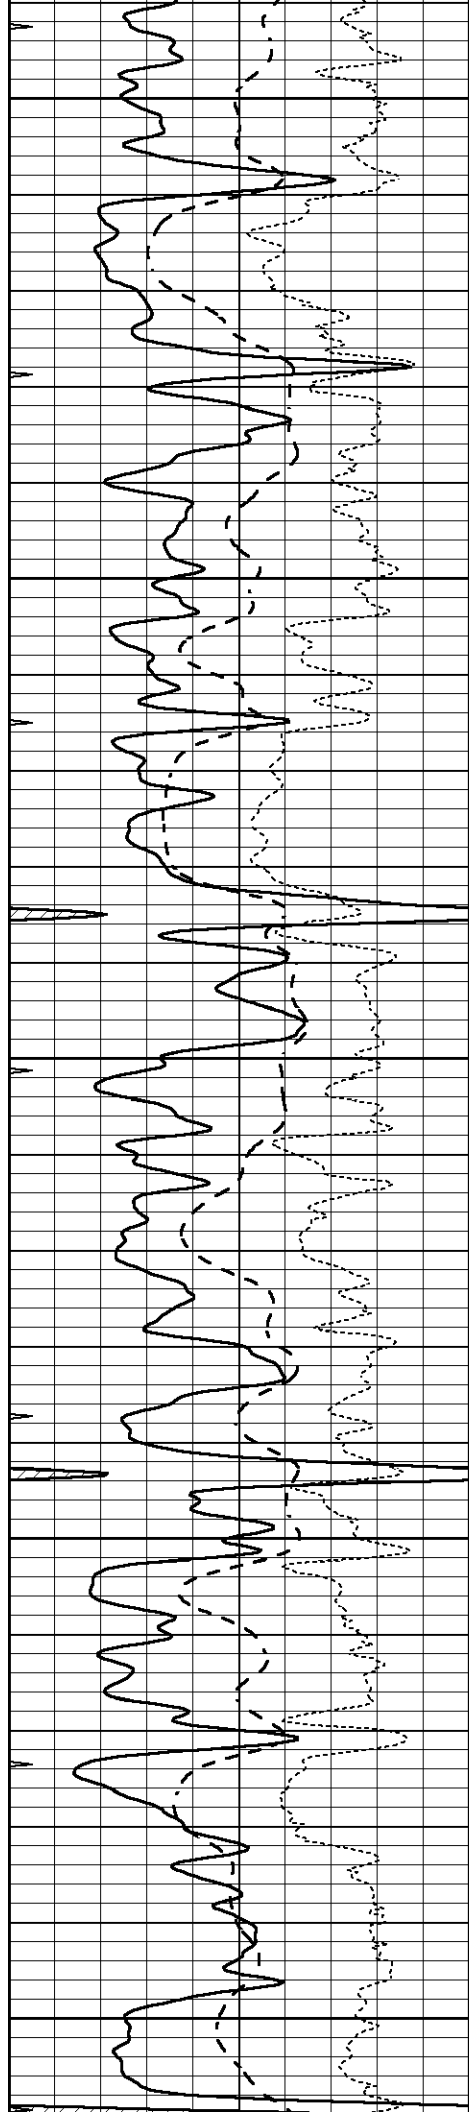


3300


3350

3400

3450

3500

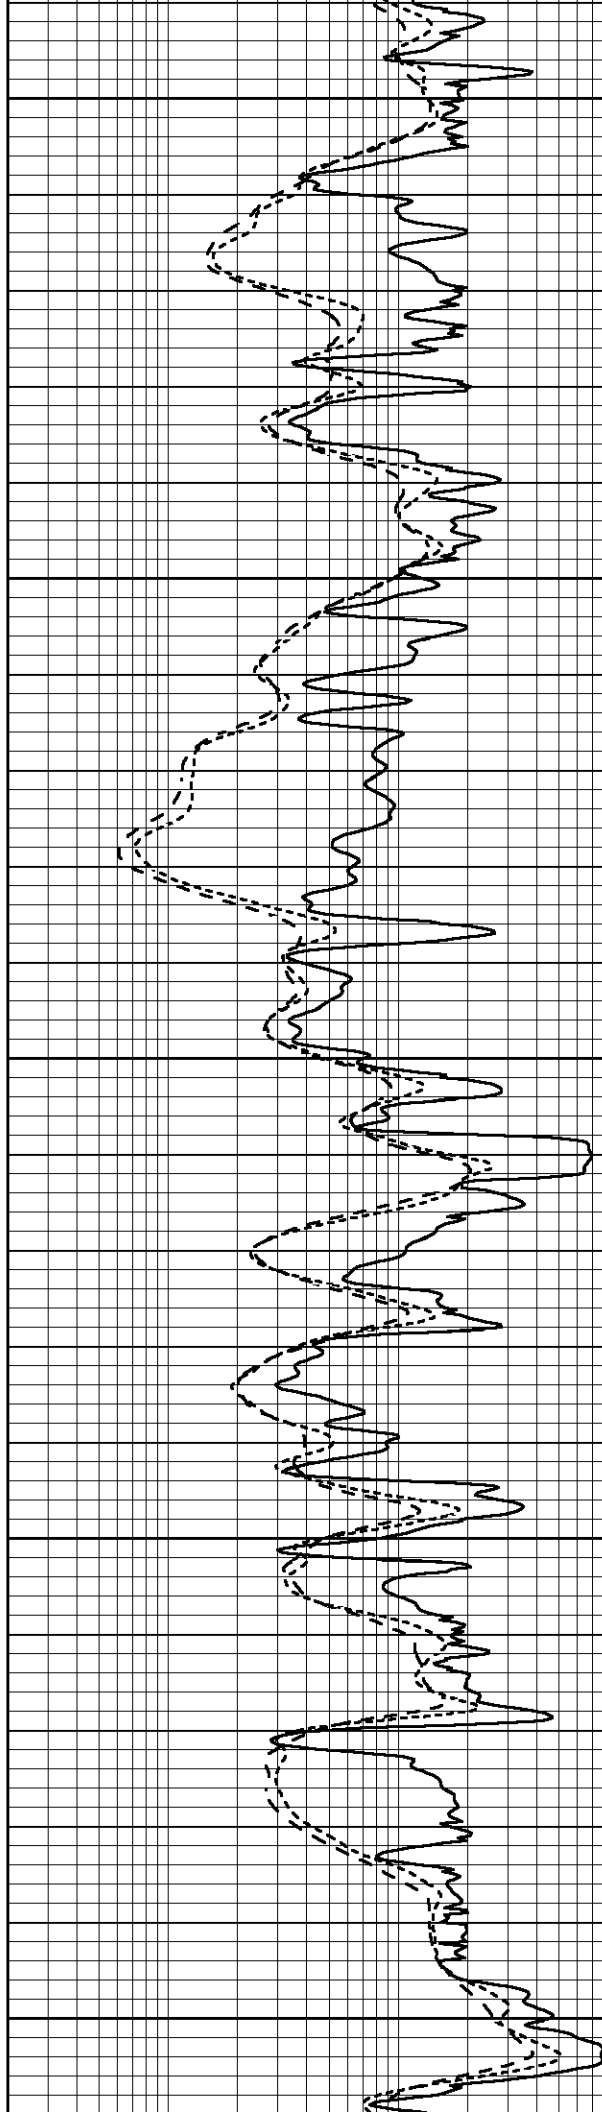

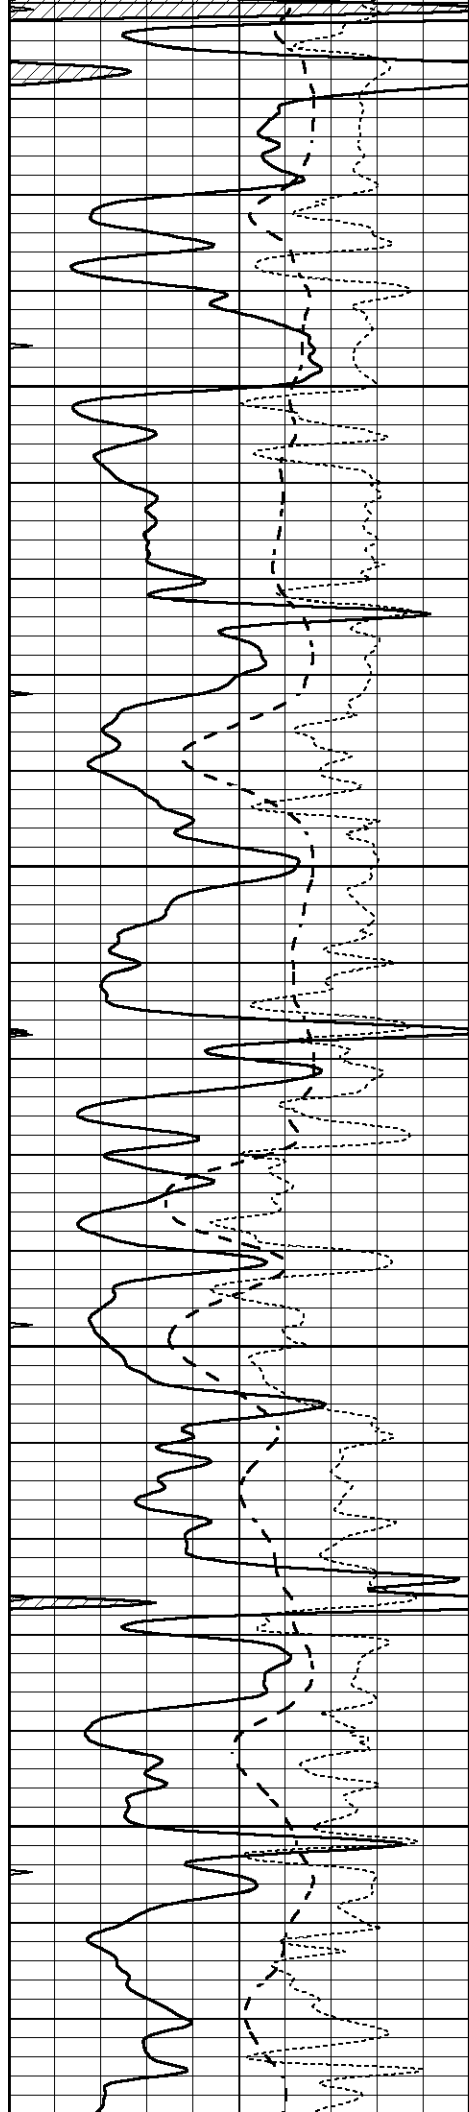



3550

3600

3650

3700

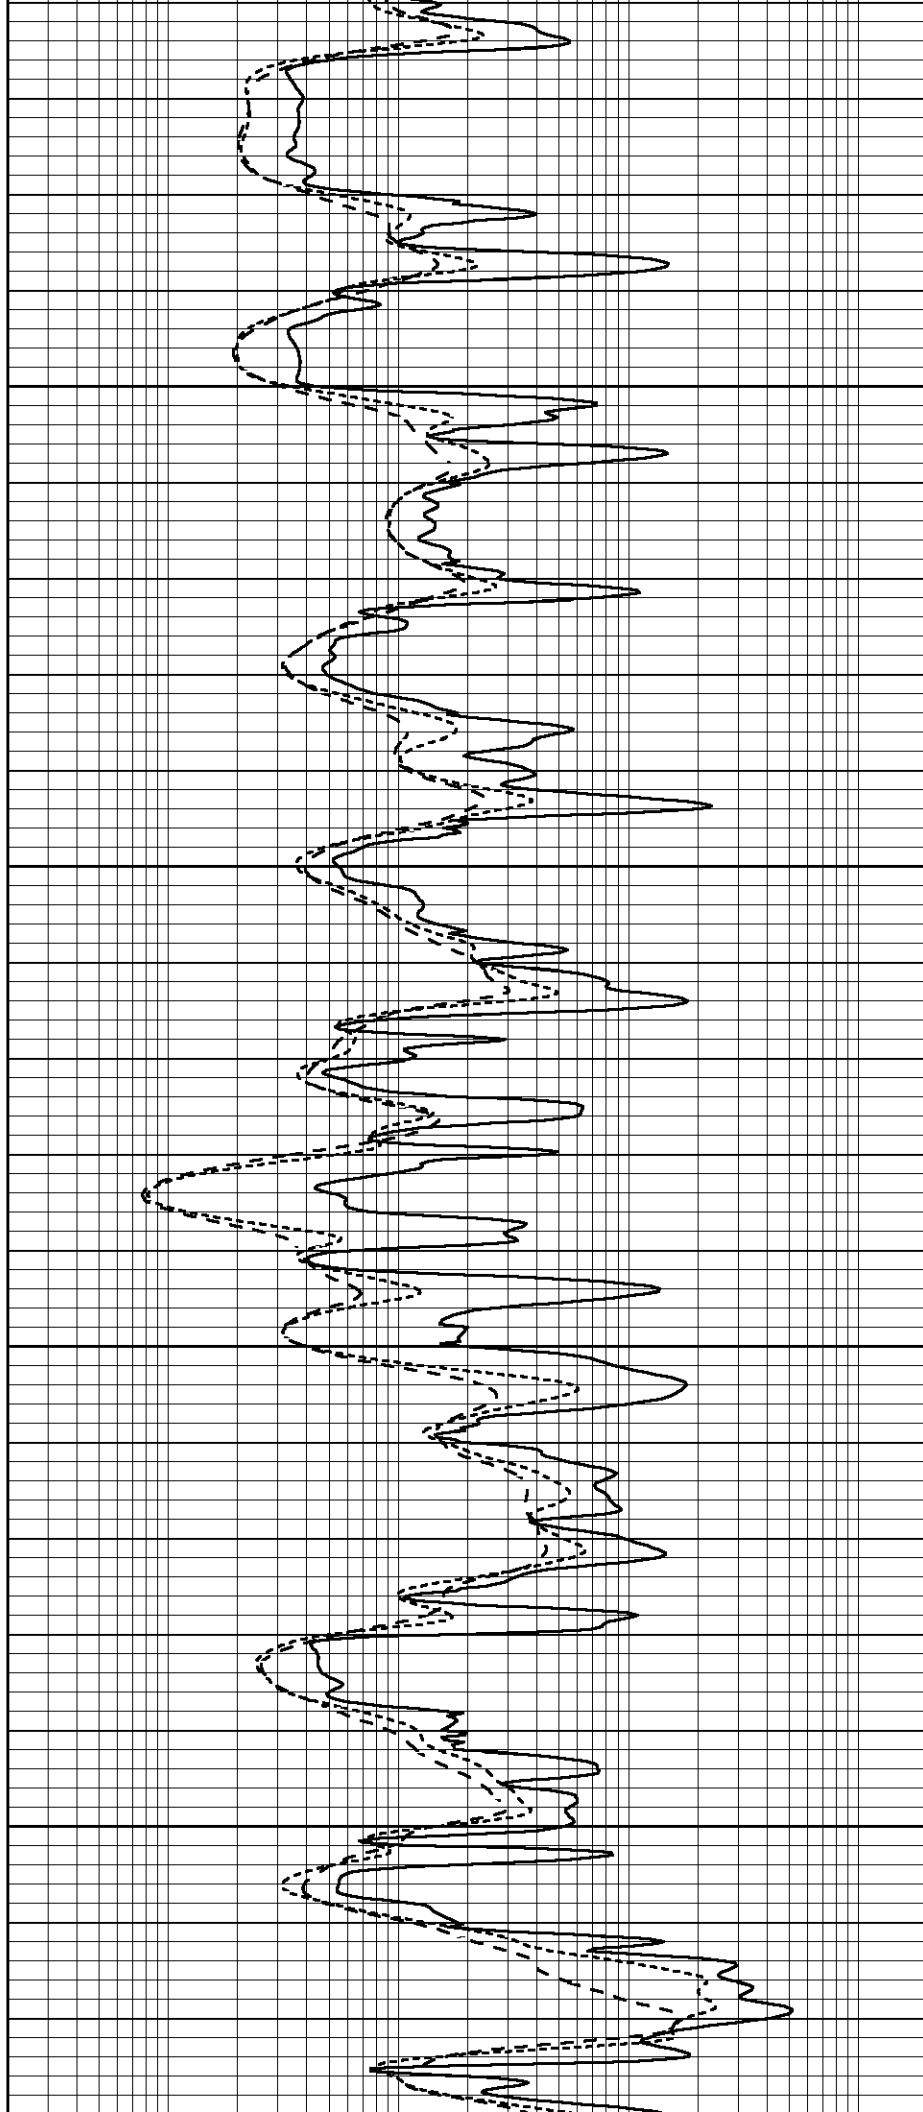

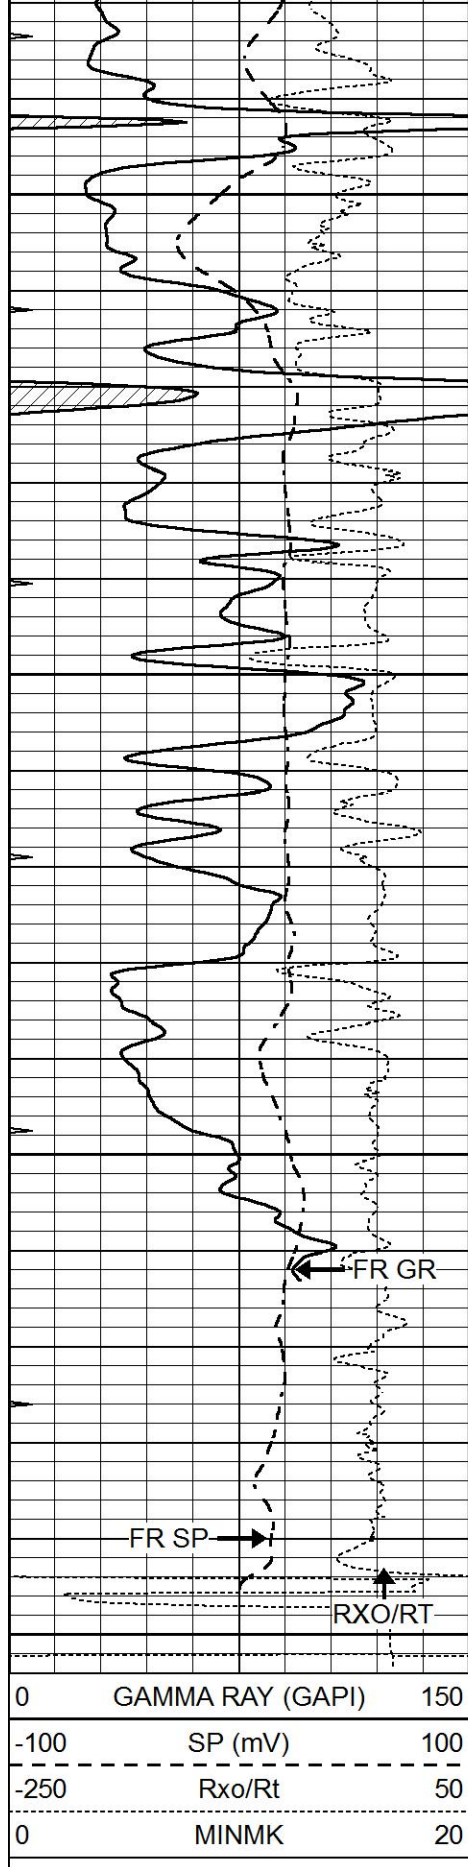


3750

3800

3850

3900

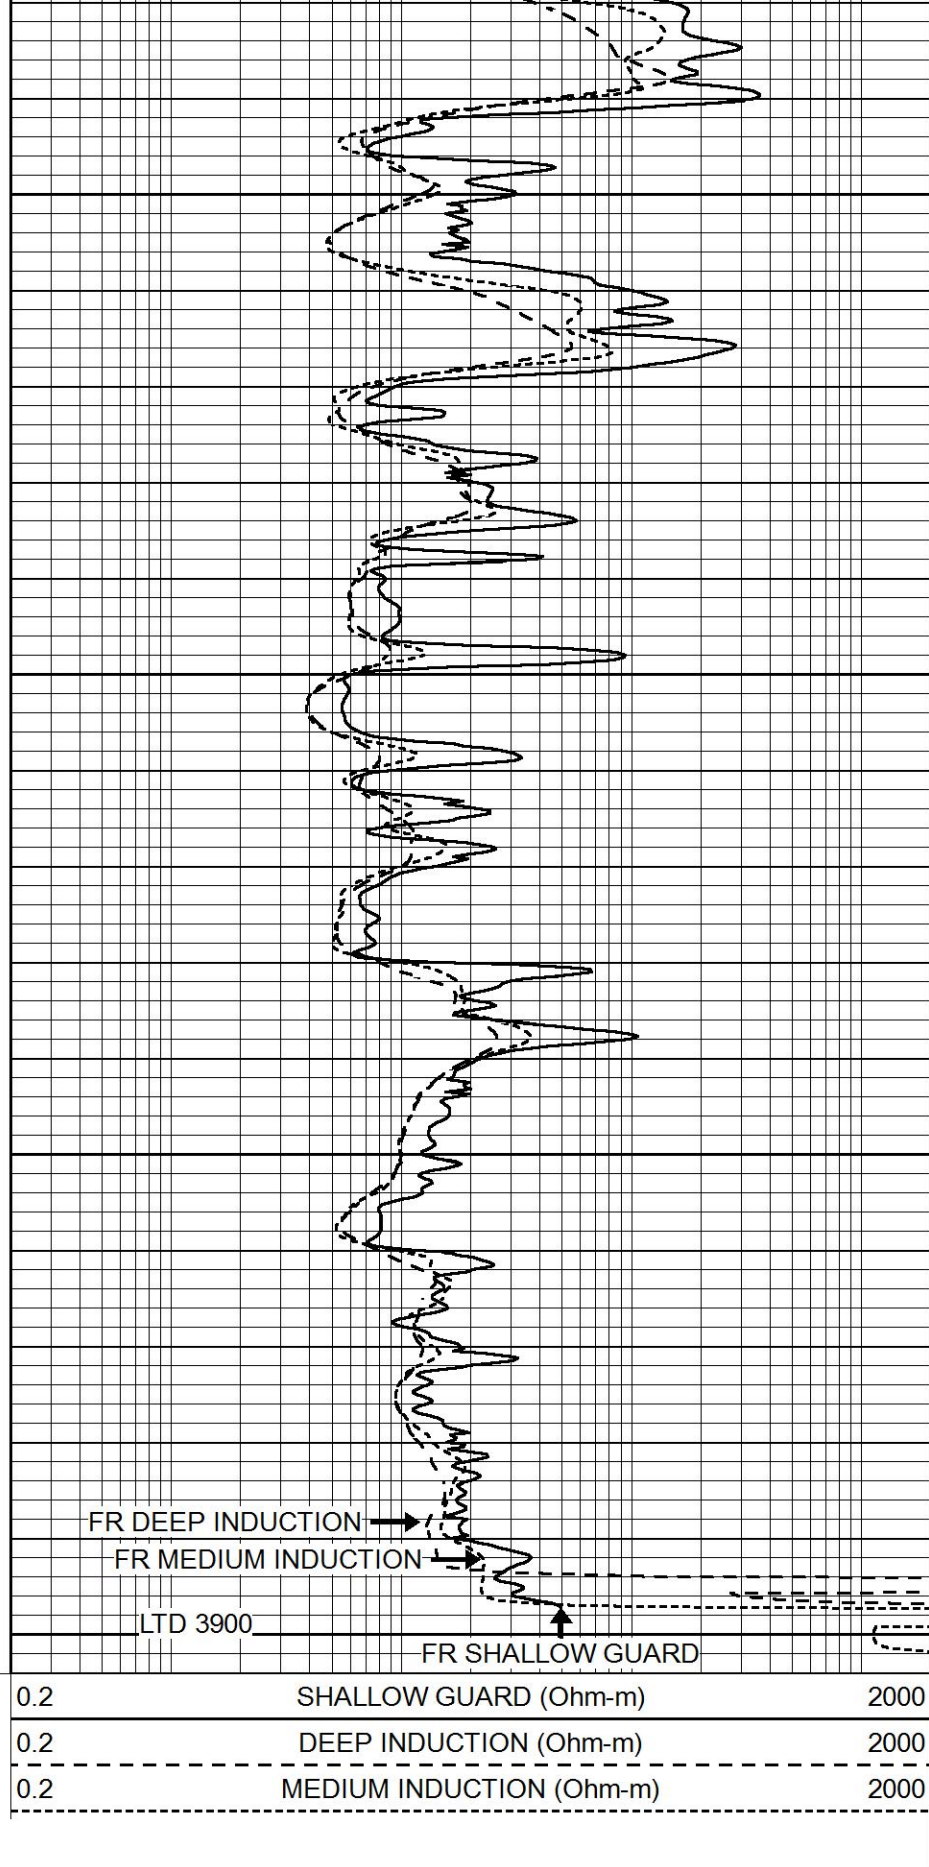


REPEAT SECTION

Database File	6261ddn.db
Dataset Pathname	pass2.1R
Presentation Format	_dil
Dataset Creation	Fri Mar 11 06:04:54 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

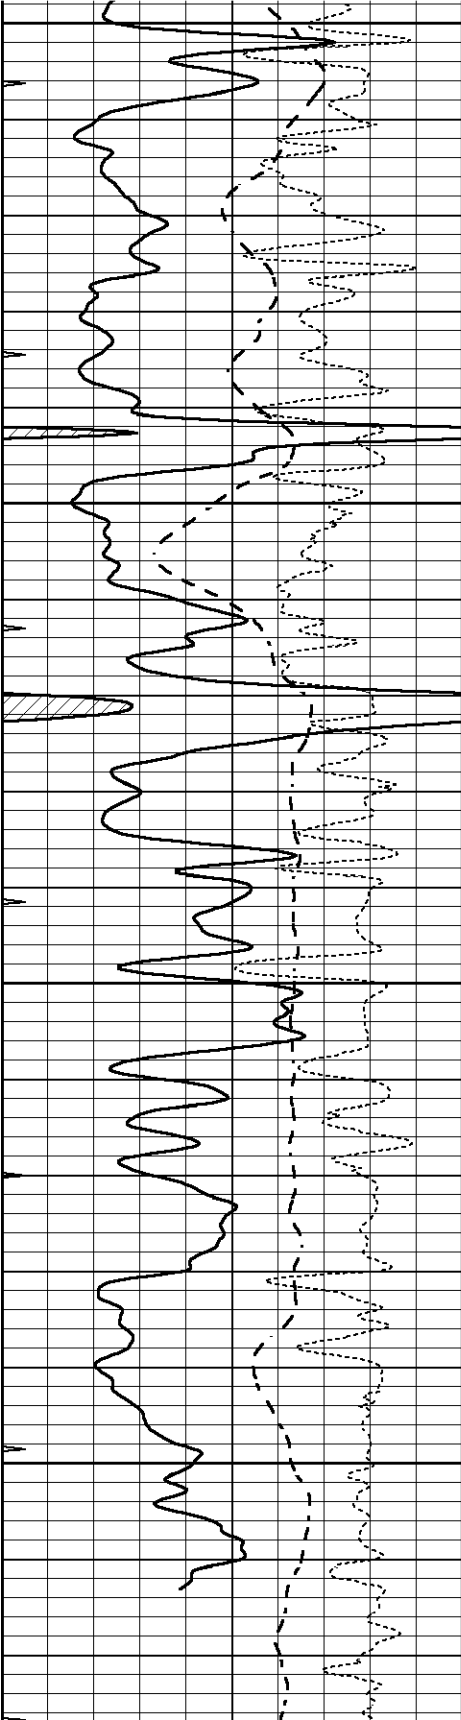



3700

3750

3800

3850

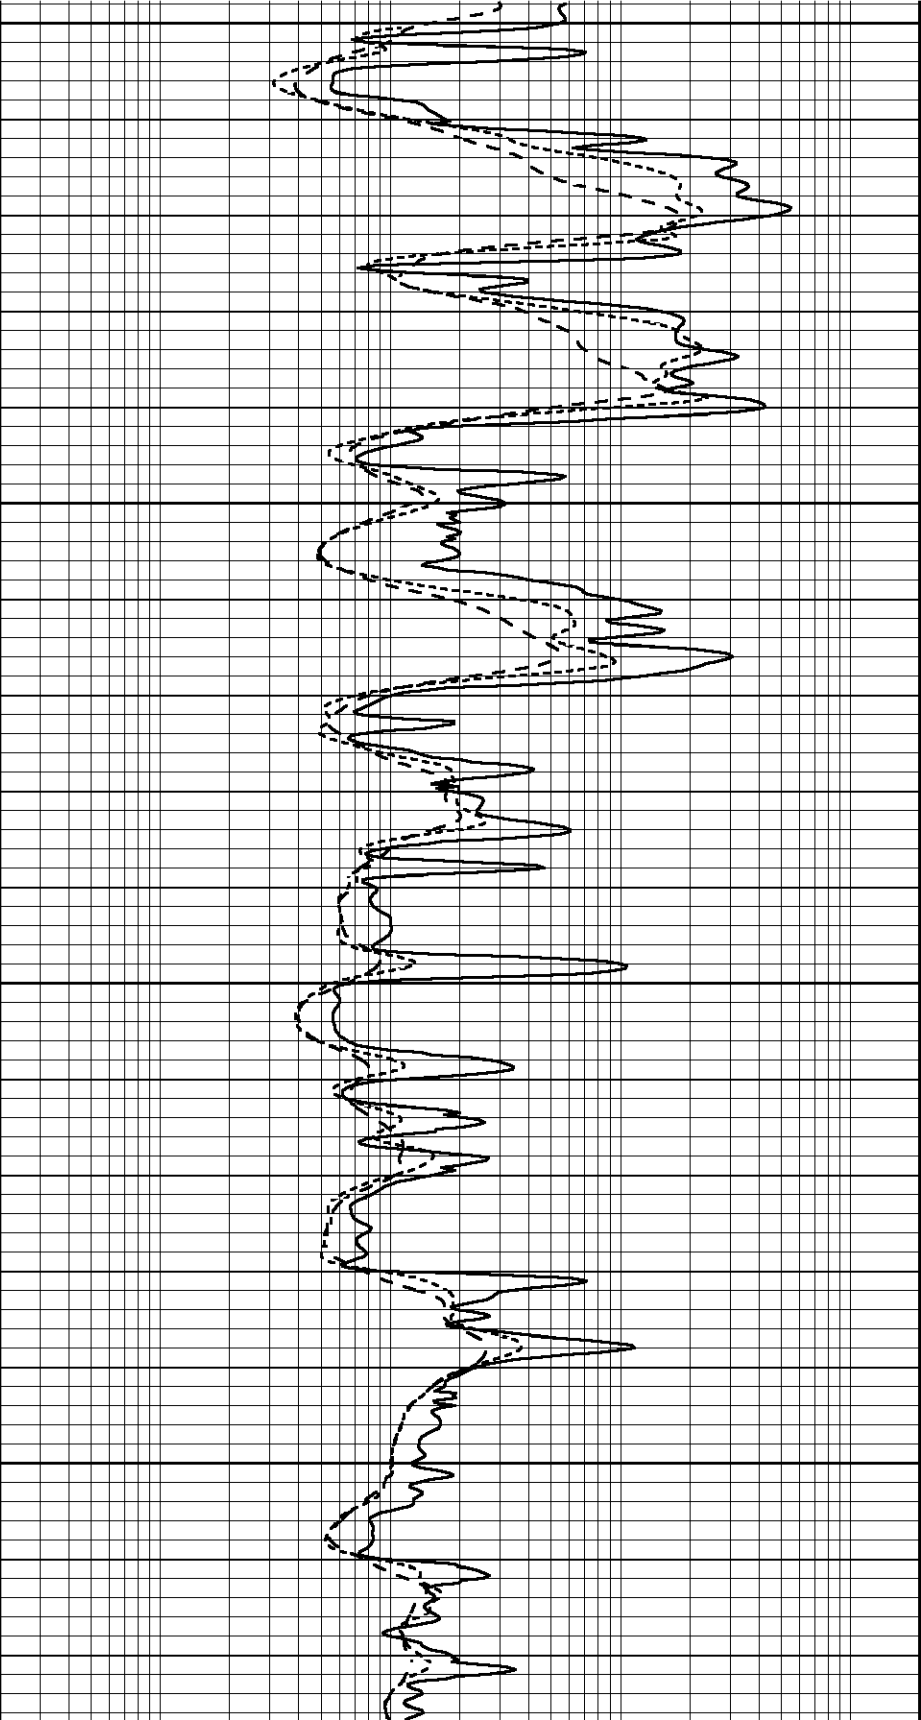

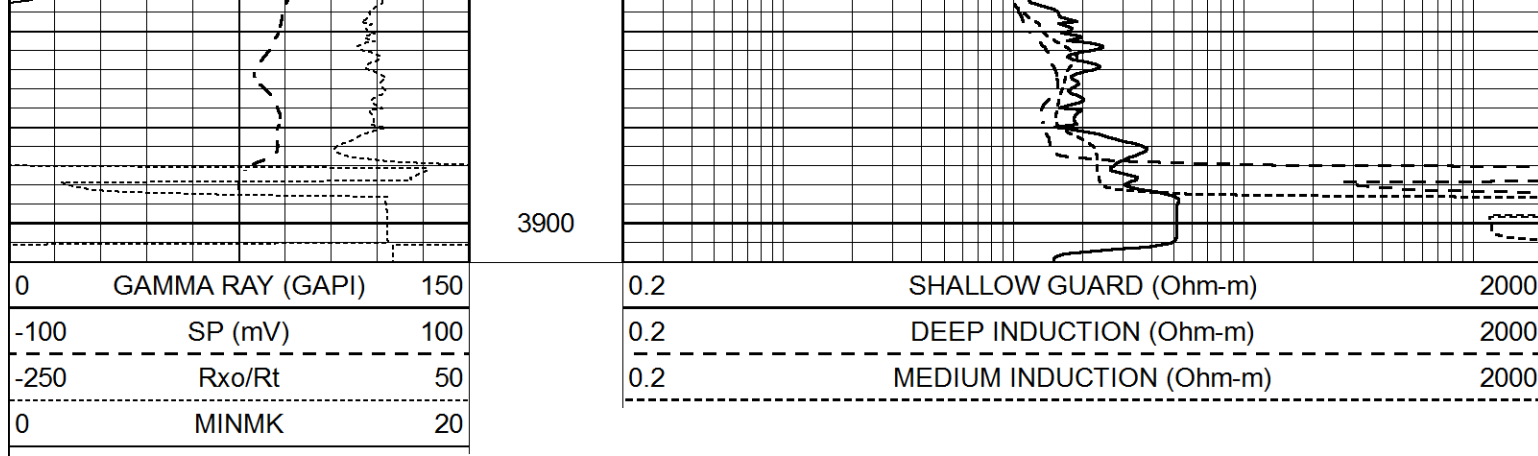

Calibration Report									
Database File	6261ddn.db								
Dataset Pathname	pass3.1M								
Dataset Creation	Fri Mar 11 06:39:21 2022								
Dual Induction Calibration Report									
Serial-Model:				PROBE9-DILG					
Surface Cal Performed:				Fri Mar 11 05:30:58 2022					
Downhole Cal Performed:				Wed Mar 11 11:31:19 2020					
After Survey Verification Performed:				Wed Mar 11 11:31:22 2020					
Surface Calibration									
Readings				References			Results		
Loop:	Air	Loop		Air	Loop		m	b	
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	720.000	-15.000	
Medium	0.039	0.728	V	0.000	464.000	mmho/m	720.000	-24.000	
Internal:	Zero	Cal		Zero	Cal		m	b	
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256	
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102	
Downhole Calibration									
Readings				References			Results		
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000	
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000	
LL3		7.500	V		1400.000	Ohm-m			
		0.000	V		20.000	Ohm-m			
		-7.200	V		4000.000	mmho-m			
After Survey Verification									
Readings				Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
LL3		1.000	Ohm-m		1.000	Ohm-m			
		0.000	Ohm-m		0.000	Ohm-m			
		1.000	mmho-m		1.000	mmho-m			
Litho Density Calibration Report									
Serial: 004				Model: PRB					
Master Calibration					Performed Tue May 18 11:02:48 2021				

	Background	Magnesium	Aluminum	Aluminum+Fe	
Window 1	1187.1	10004.0	3142.5	2810.8	cps
Window 2	1084.9	8556.6	2749.3	2502.4	cps
Window 3	923.1	5129.8	1819.8	1719.3	cps
Window 4	263.5	263.6	259.7	262.8	cps
Long Space	0.0	7471.7	1664.4	1417.5	cps
Short Space	1.5	984.9	645.6	561.2	cps
Rho		1.7100	2.5900	0.0000	g/cc
Pe		2.0000	2.7500	5.7900	
Rib Angle	: 44.3	Rib Slope	: 0.976	Density/Spine Ratio	: 0.564
Spine Angle	: 74.3	Spine Slope	: 3.555	Spine Intercept	: -15.6

Before Survey Verification		Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification		Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report				
Serial Number:		070808PMC		
Tool Model:		NABORS		
PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
Gamma Ray Calibration Report				

Tool Model:	OPEN_GR
Performed:	Wed Mar 02 14:49:46 2022

Calibrator Value:	1.0	GAPI
-------------------	-----	------

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity:	0.2800	GAPI/cps
--------------	--------	----------