



MICRO LOG

Company	MUSTANG ENERGY CORP.	Company	MUSTANG ENERGY CORPORATION
Well	WARREN #2-2	Well	WARREN #2-2
Field	WILDCAT	Field	WILDCAT
County	ELLIS	County	ELLIS
State	KANSAS	State	KANSAS
Location:	API # : 15-051-27022-0000	Other Services CDL/CNL DIL	
Permanent Datum	GROUND LEVEL	Elevation	2225
Log Measured From	2235' FSL & 925' FWL SW - NE - NW - SW		
Drilling Measured From	SEC 2 TWP 12S RGE 20W KELLY BUSHING		
Date	3/11/22		
Run Number	TWO		
Depth Driller	3900		
Depth Logger	3900		
Bottom Logged Interval	3898		
Top Log Interval	3200		
Casing Driller	8 5/8"@223'		
Casing Logger	223		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4.000 PPM	
Density / Viscosity	9.2/48		
pH / Fluid Loss	10.0/9.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.950@65F		
Rmf @ Meas. Temp	.713@65F		
Rmc @ Meas. Temp	1.14@65F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.537@115F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	7:30 A.M.		
Maximum Recorded Temperature	115F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	CAMERON BRIN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-051-27022-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
ELLIS, KS., N. TO "BUCKEYE RD.", 2E. TO "RD. 150", 1 3/4 N., W. INTO 1 1/2




MAIN SECTION

Database File	6261ddn.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Fri Mar 11 07:50:54 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

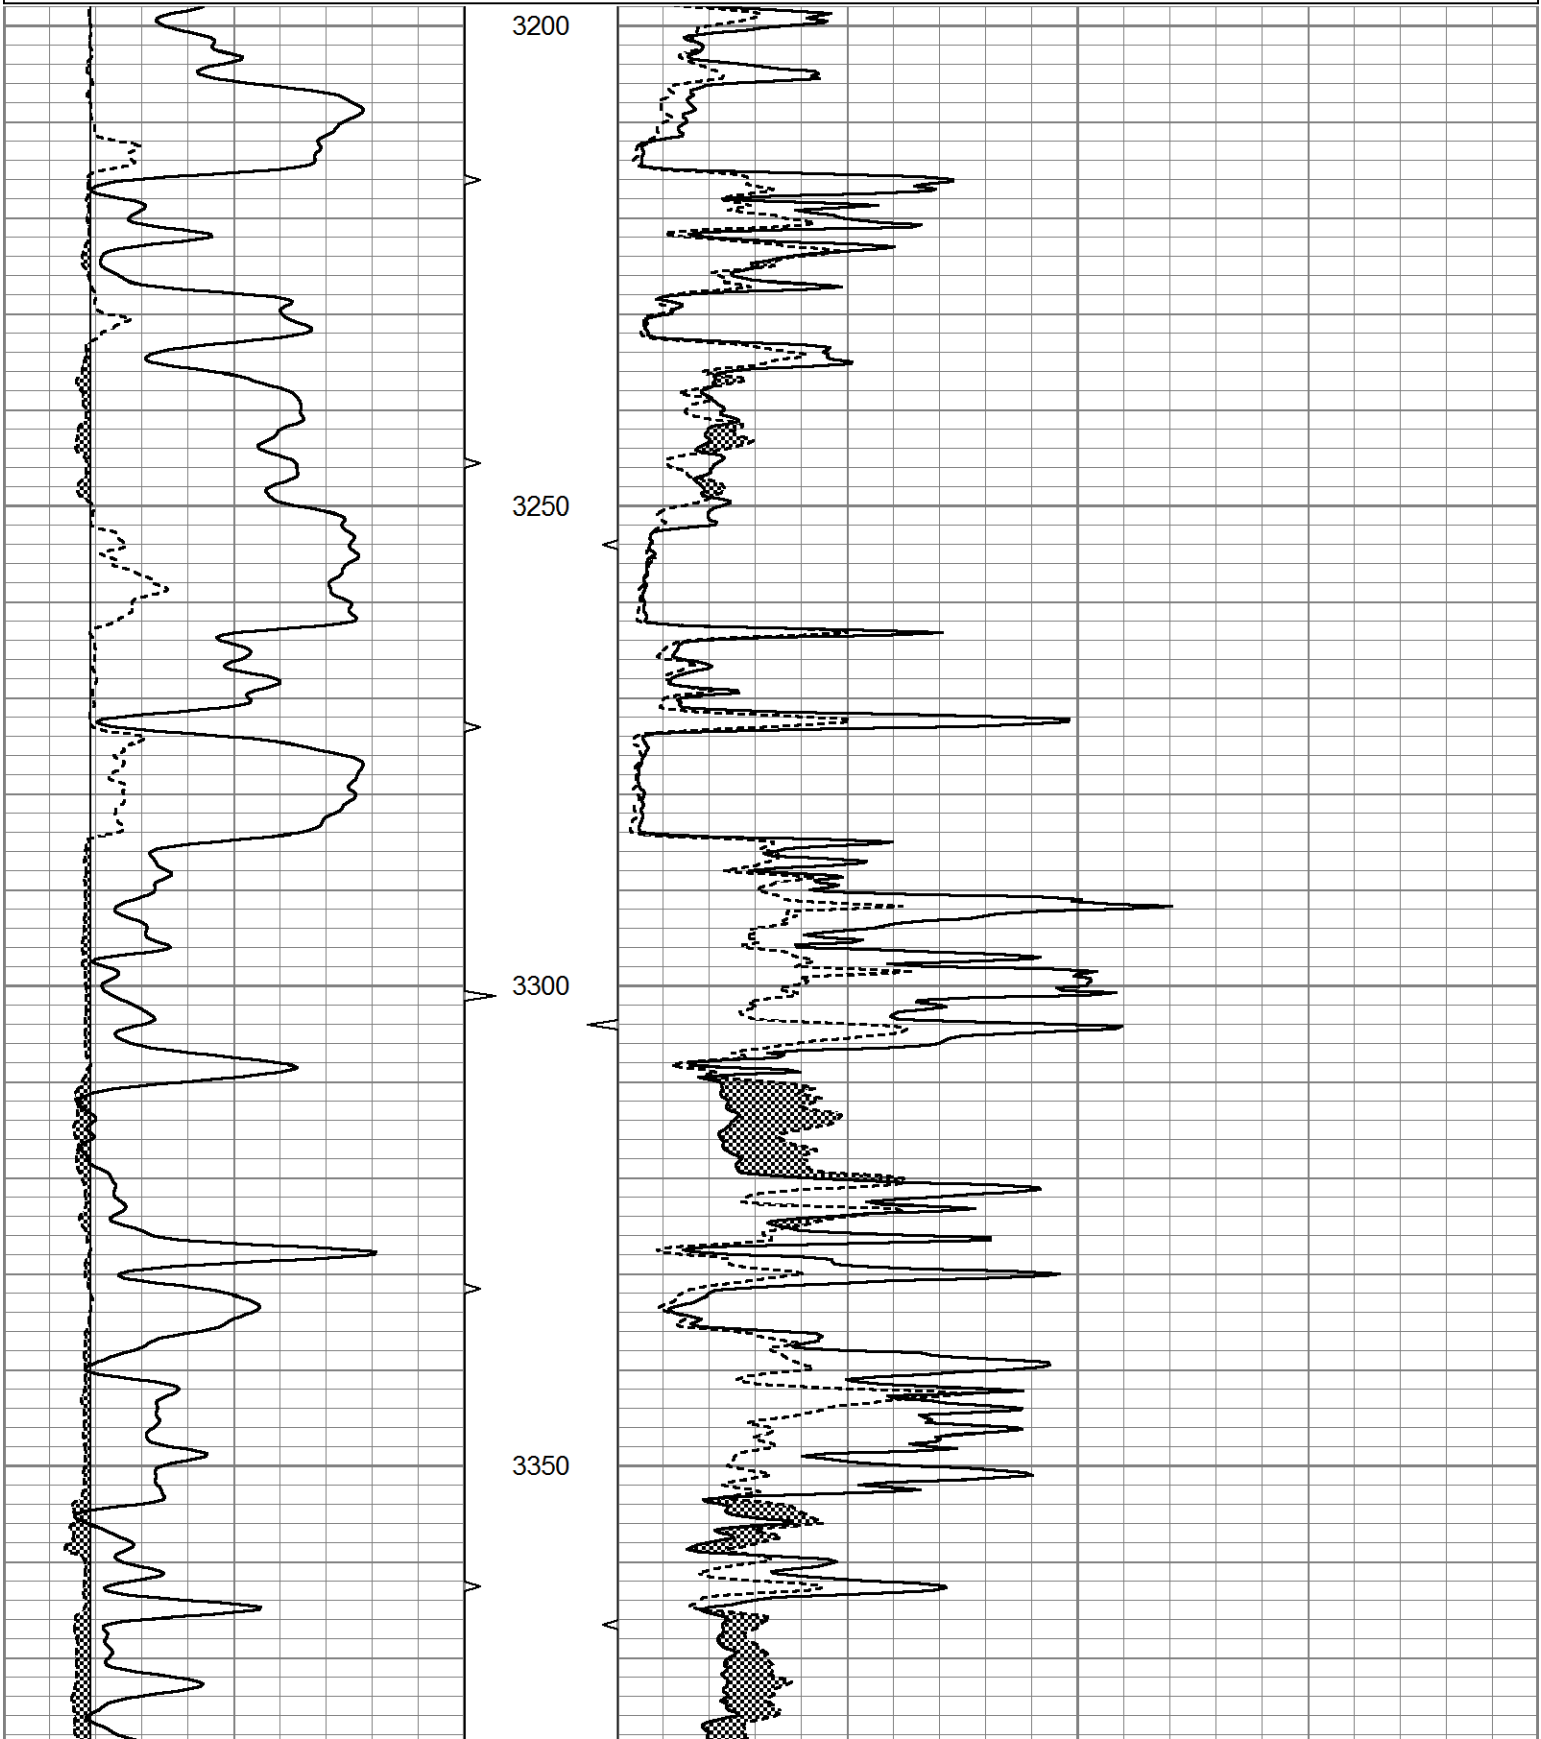

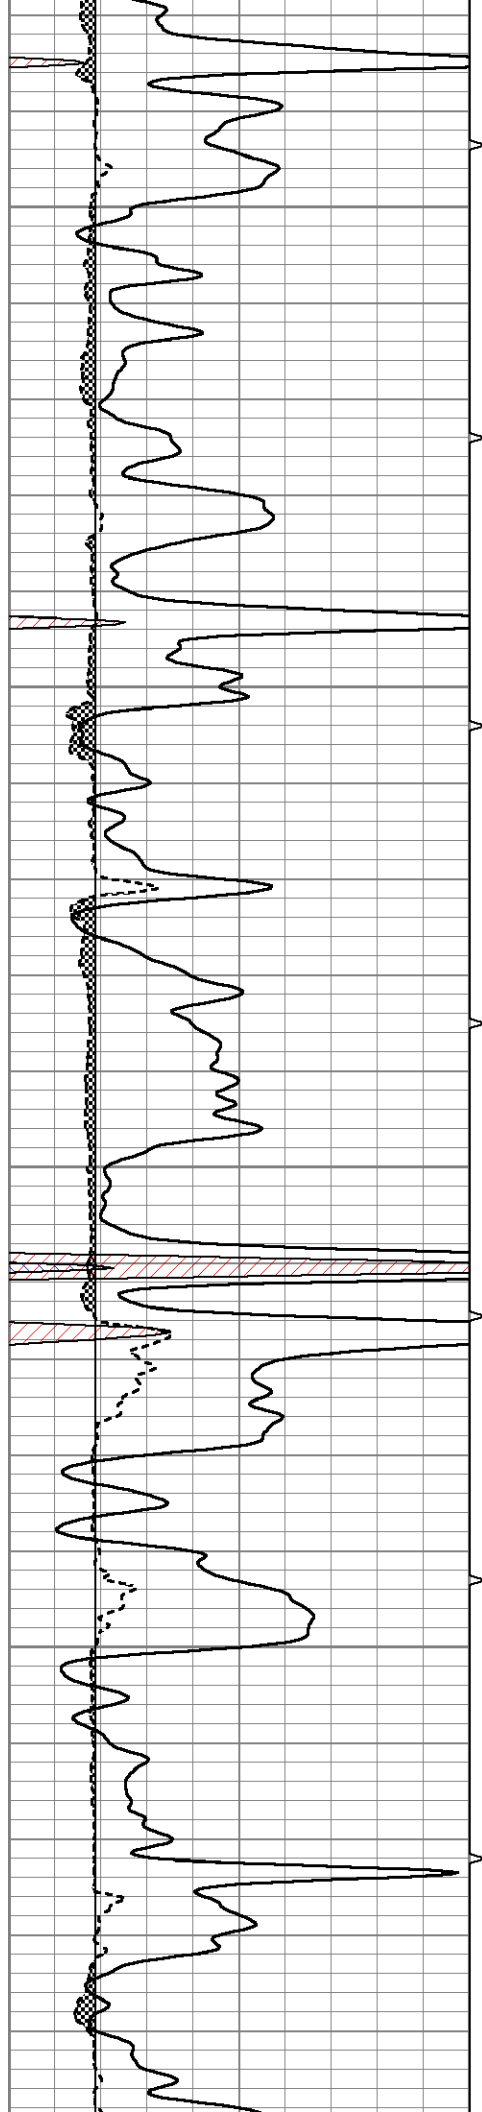




3400


3450

3500

3550


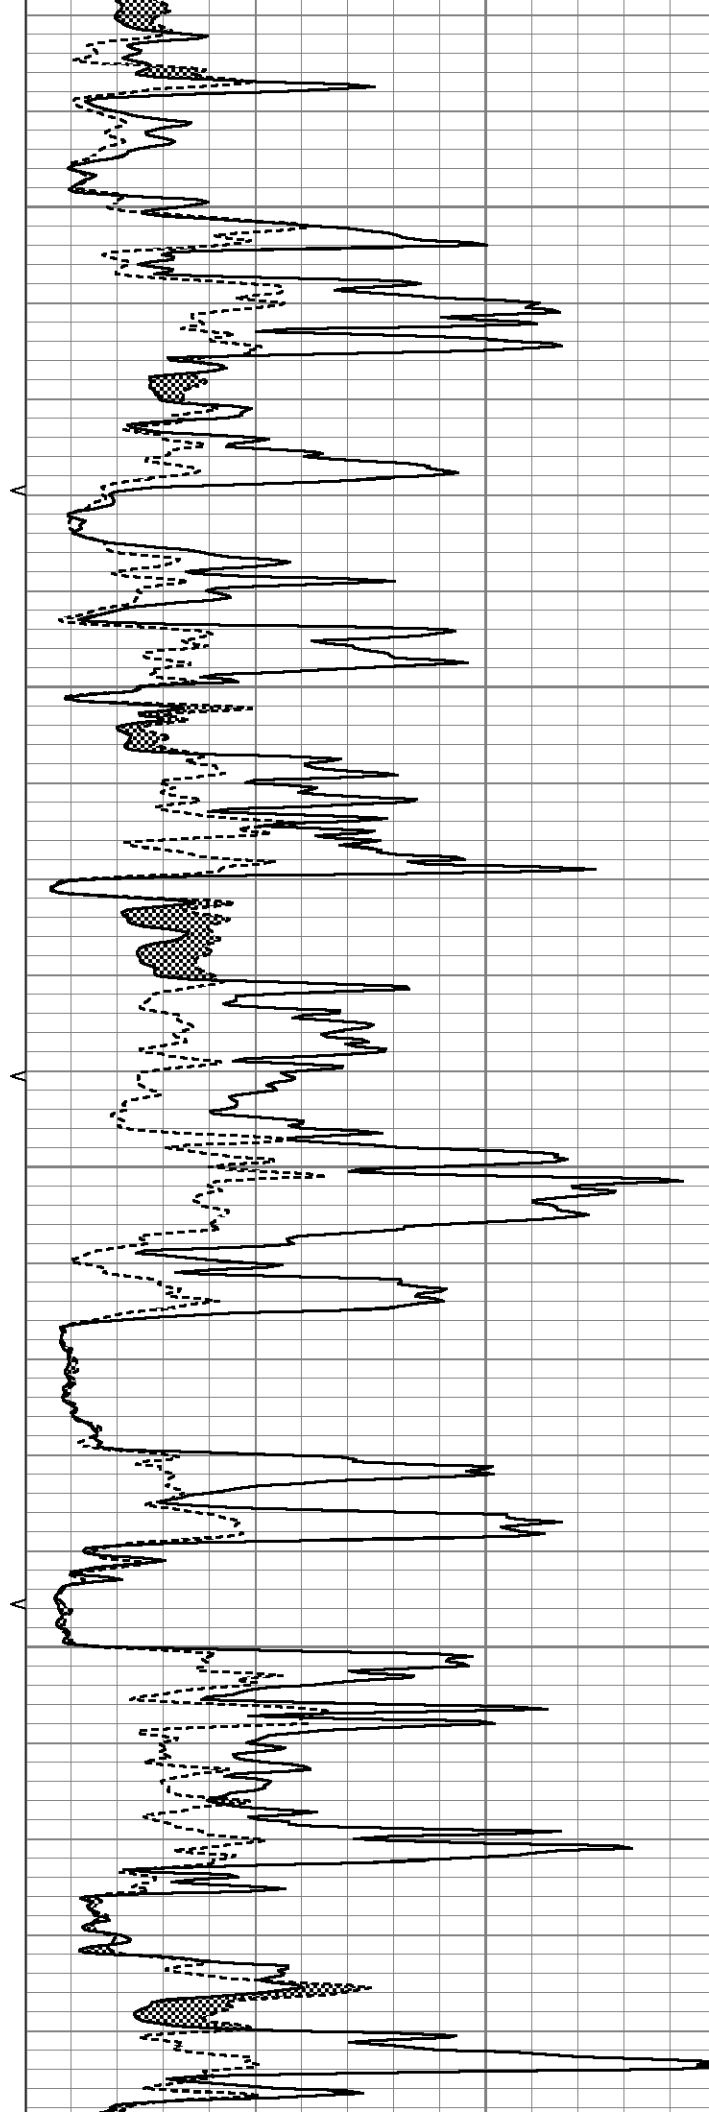


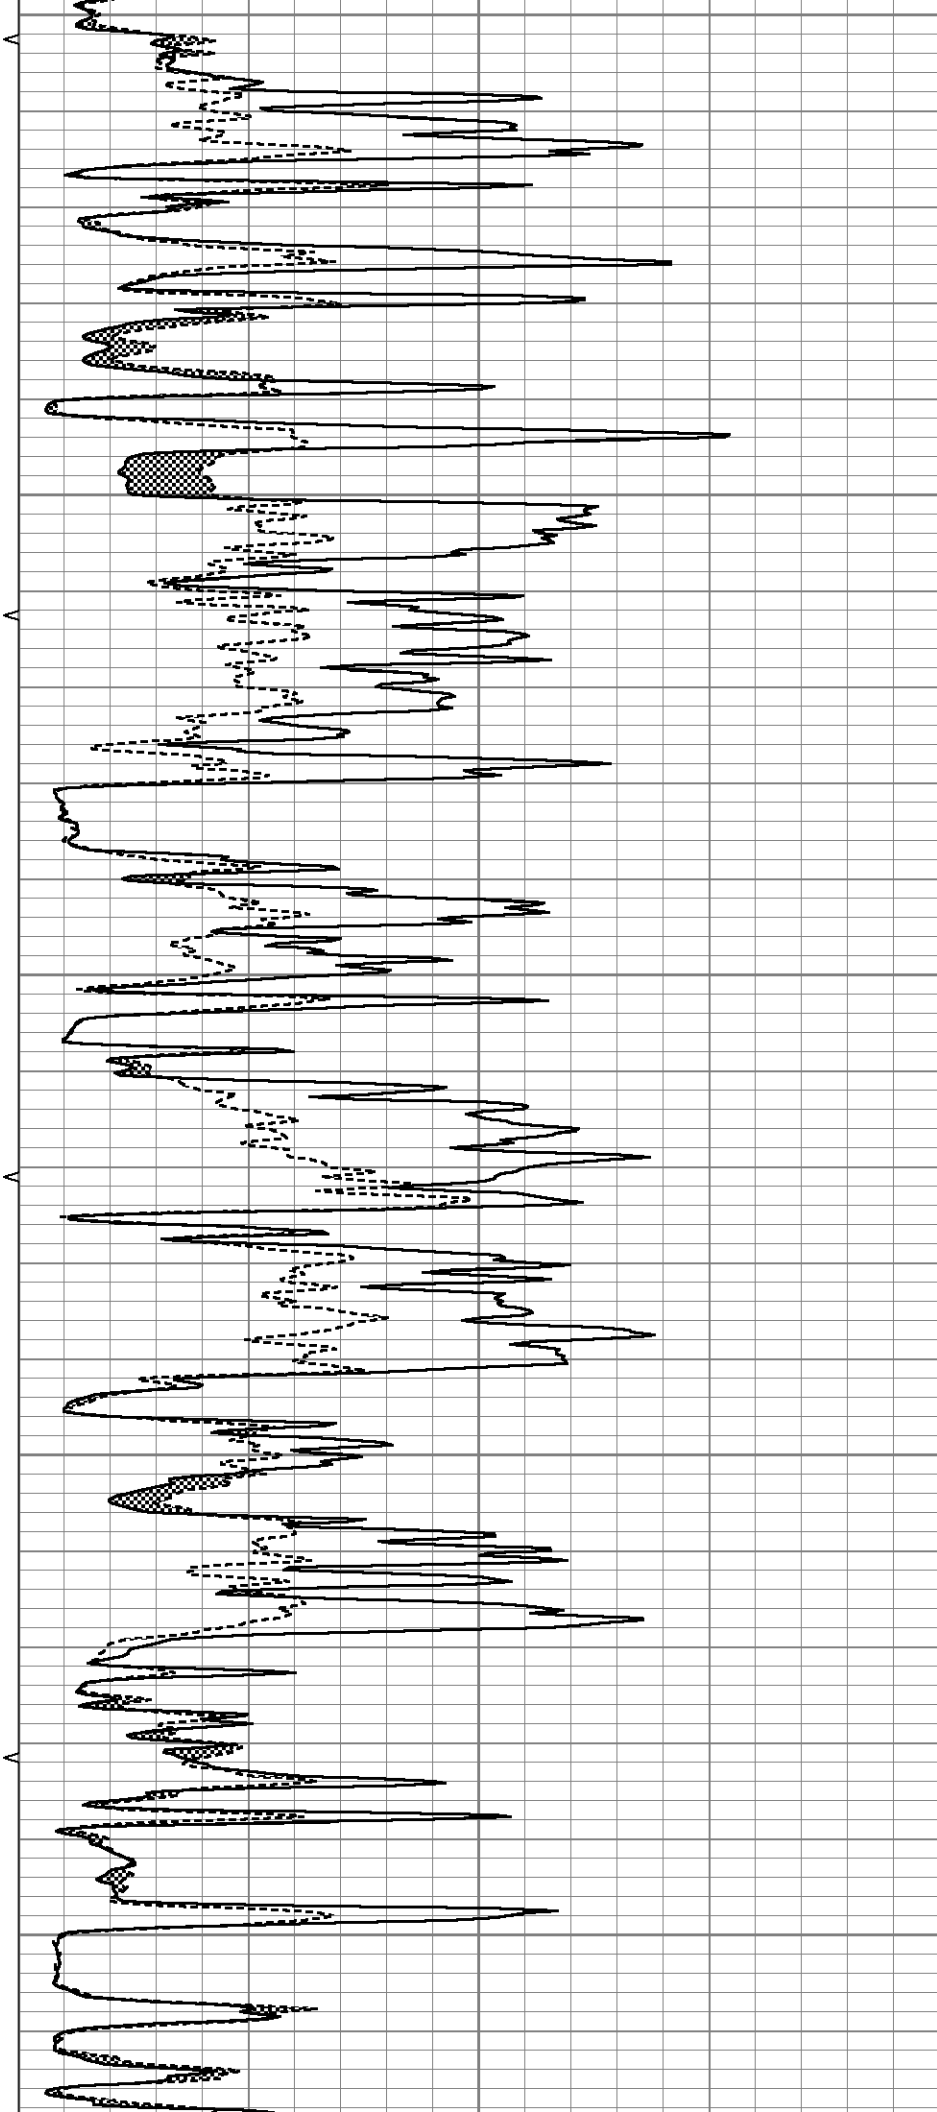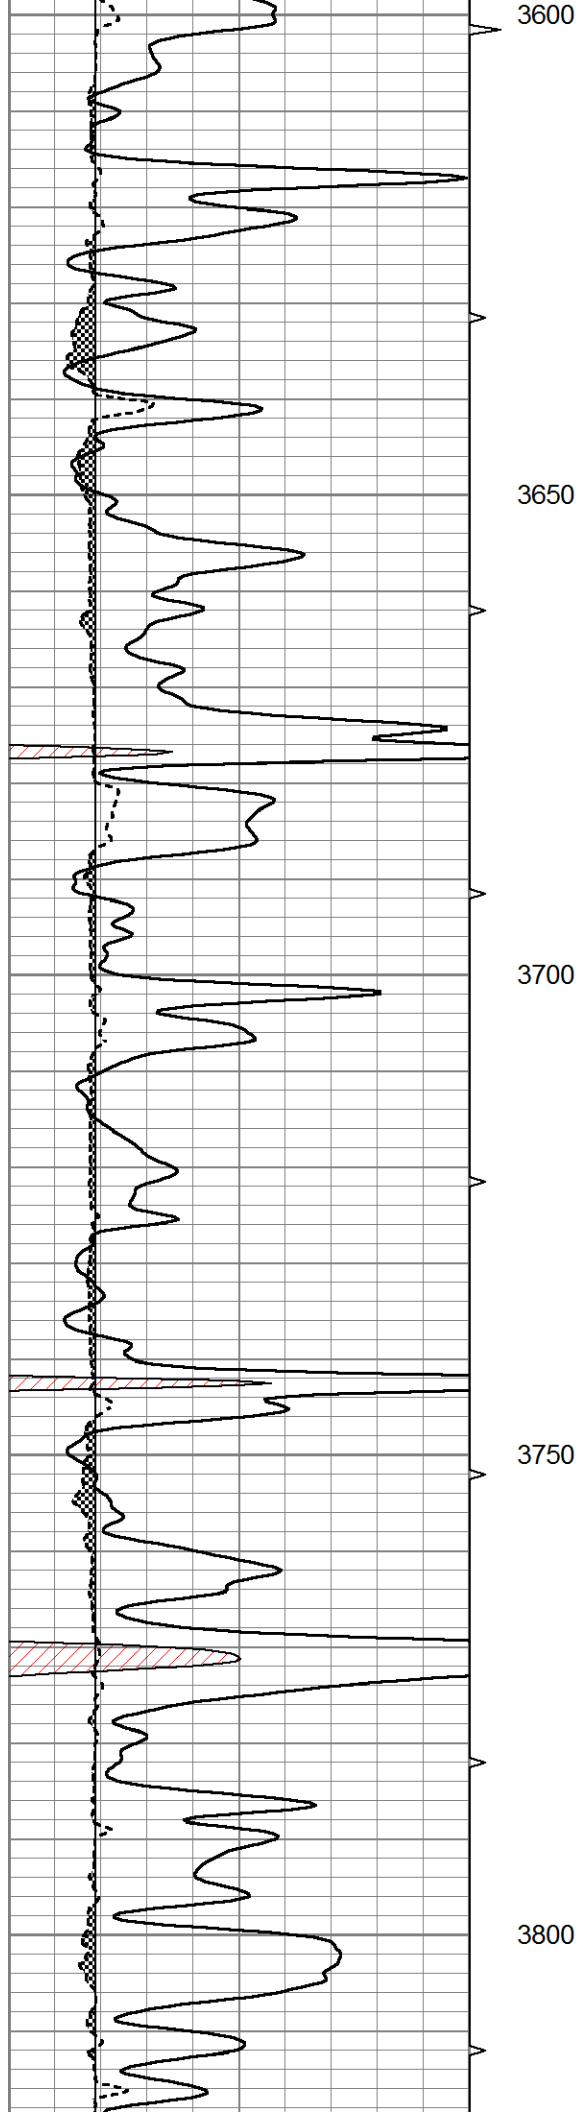


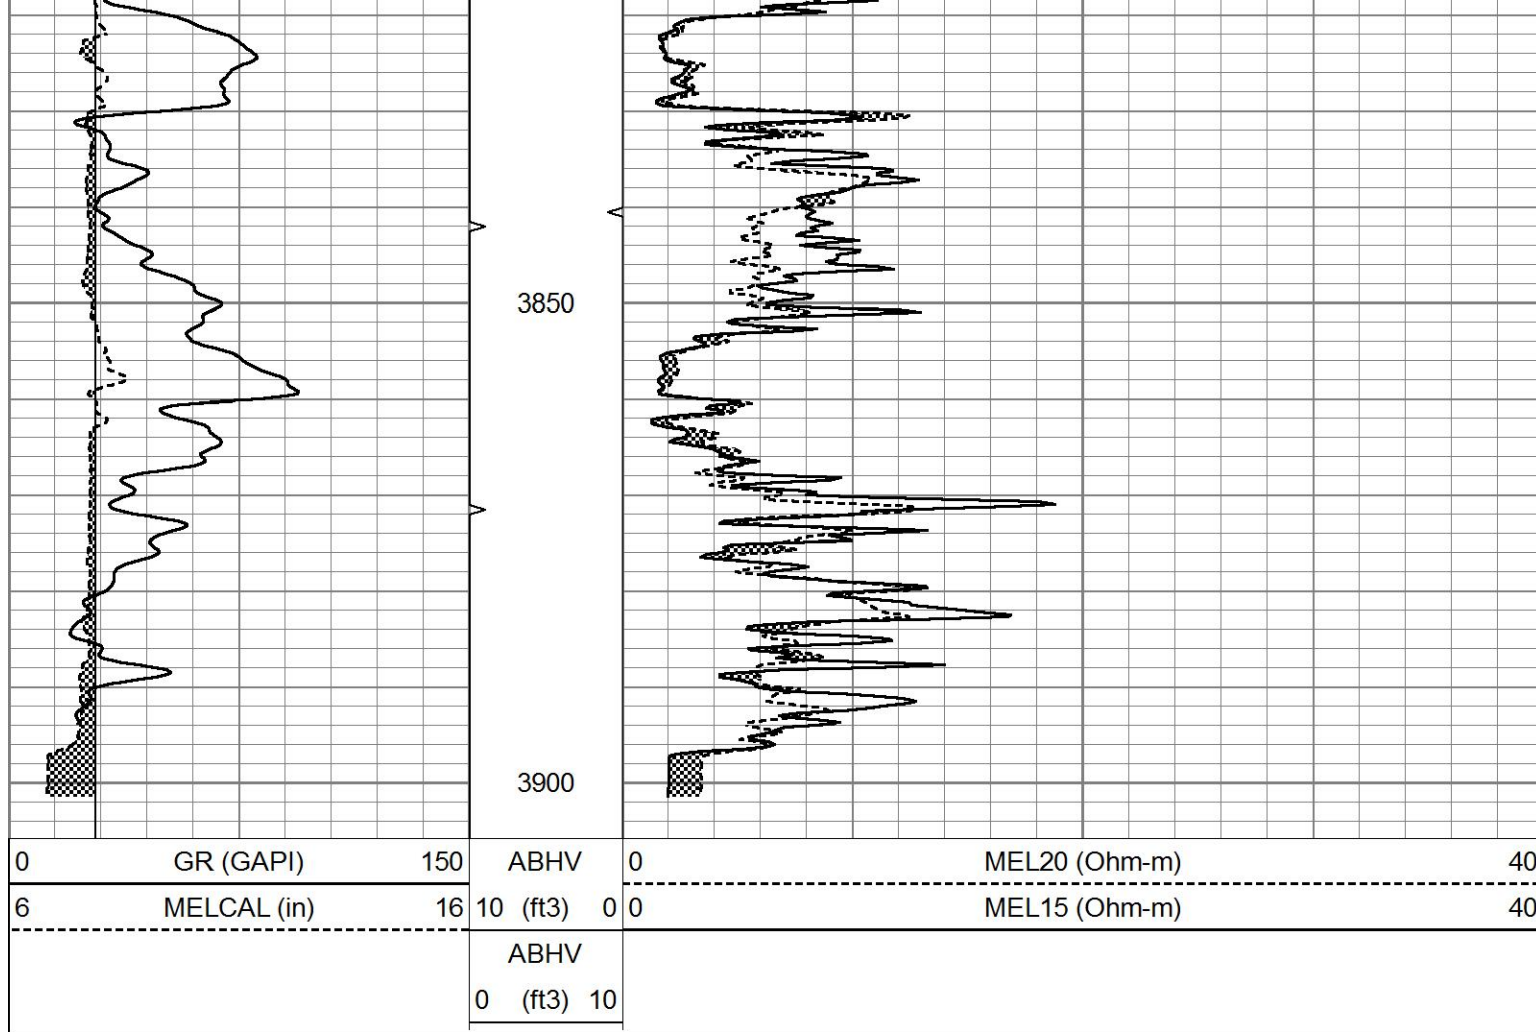

REPEAT SECTION

Database File 6261ddn.db
 Dataset Pathname pass5.1
 Presentation Format micro
 Dataset Creation Fri Mar 11 07:53:35 2022
 Charted by Depth in Feet scaled 1:240

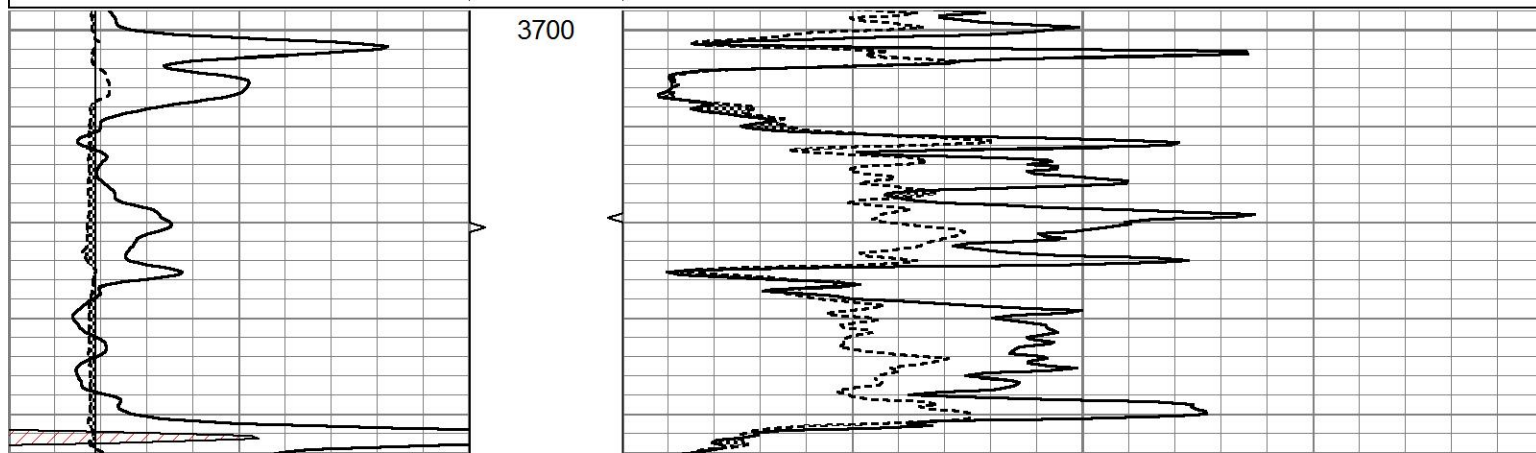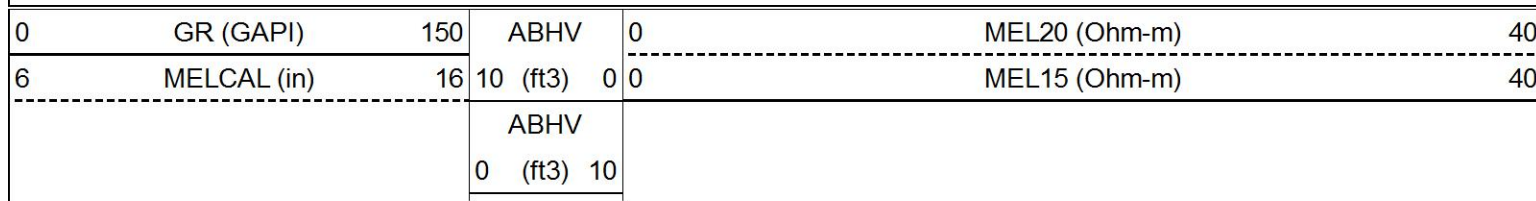

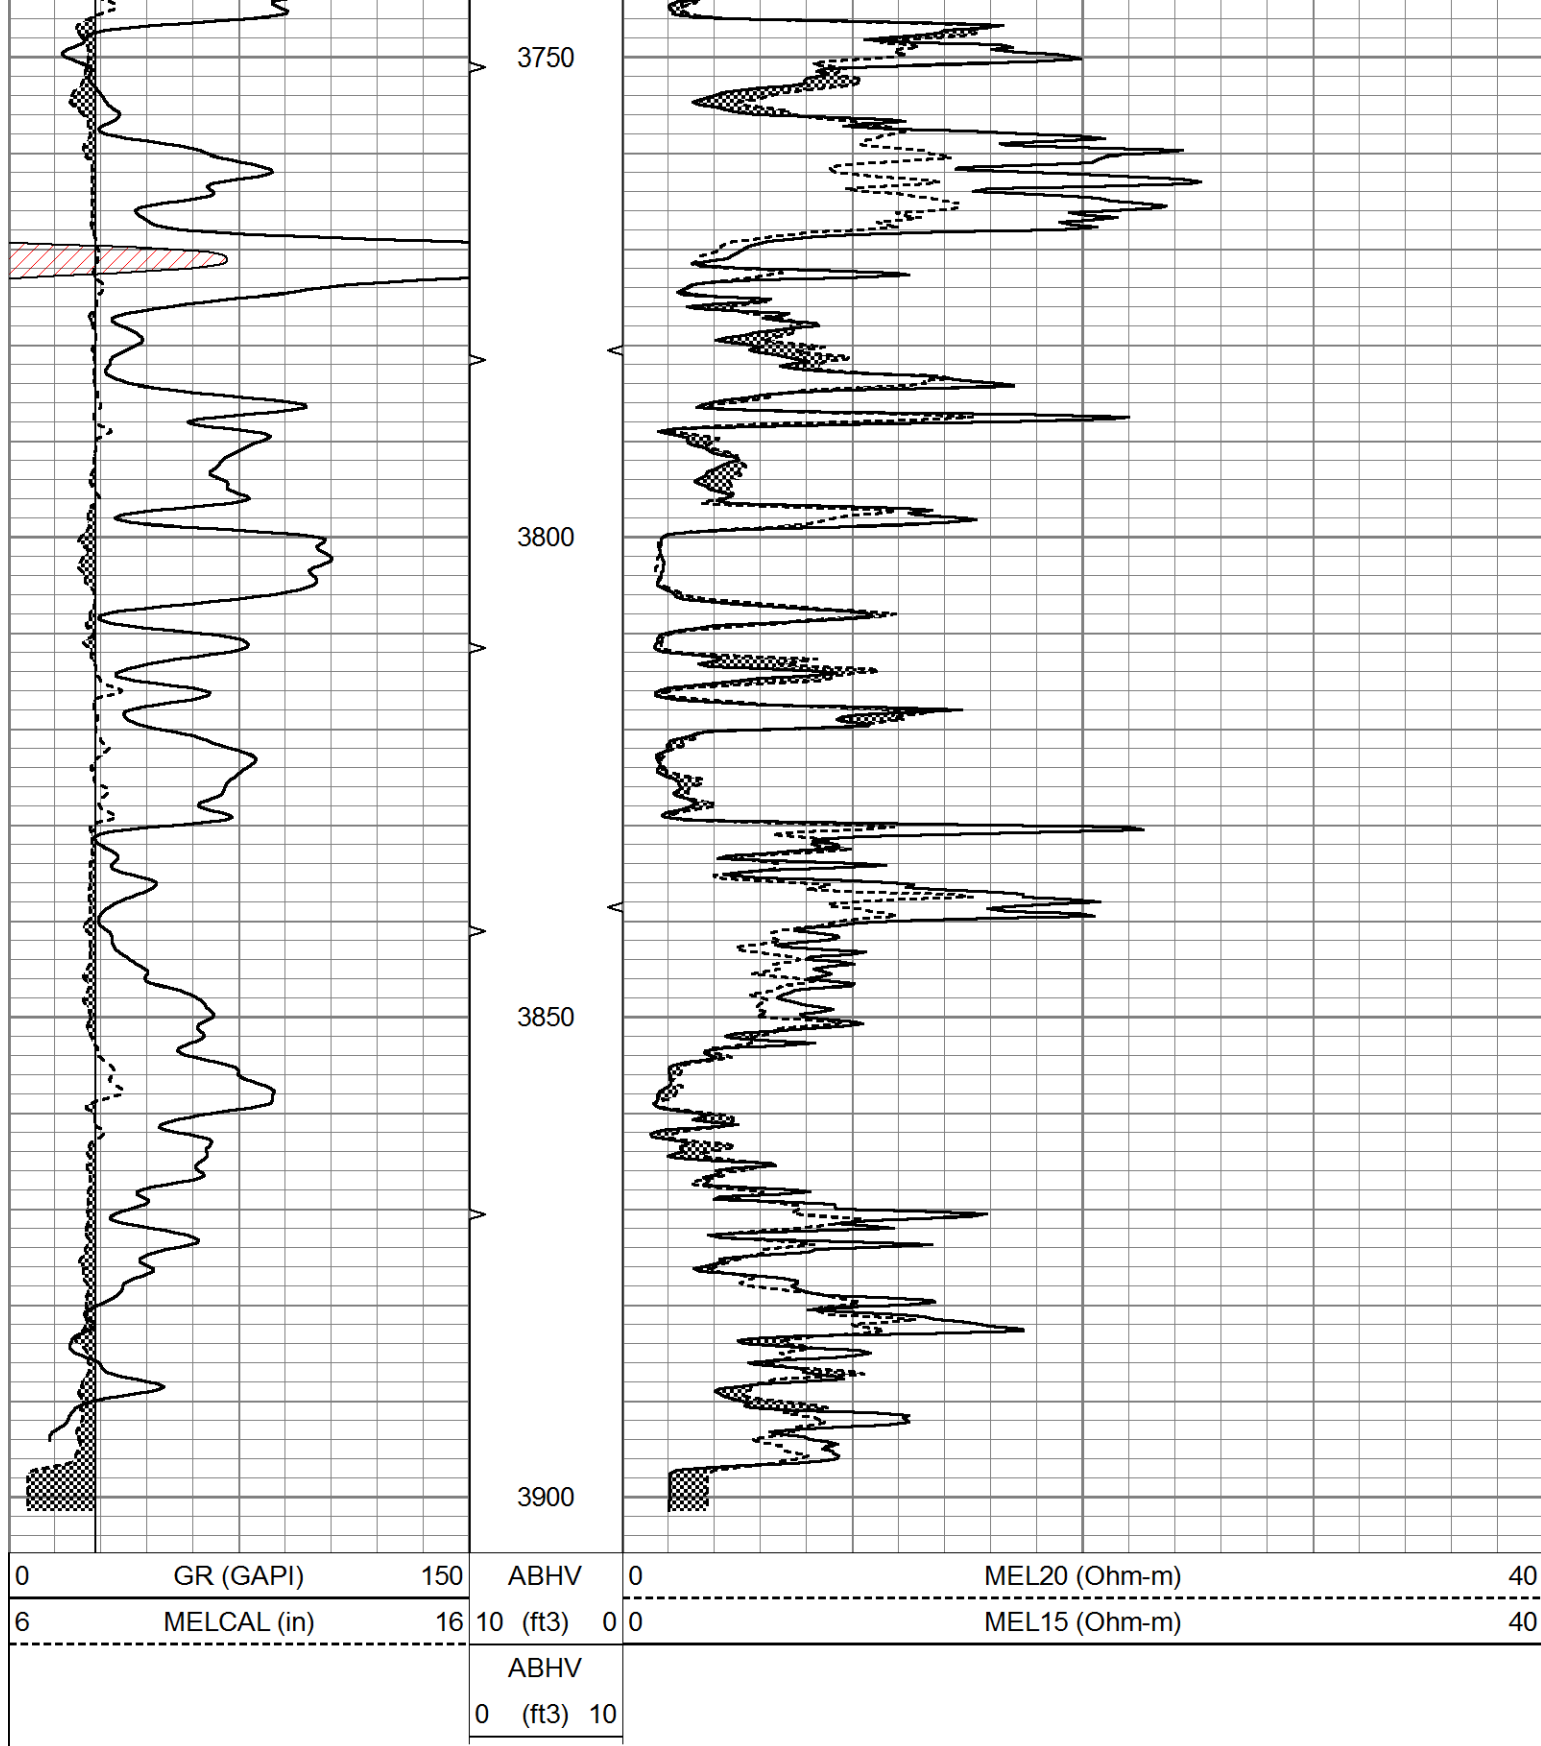

Calibration Report

Database File 6261ddn.db
 Dataset Pathname pass6.2
 Dataset Creation Fri Mar 11 07:50:54 2022

MICRO Calibration Report

Serial Number: 070910
 Tool Model: ProbeN
 Performed: Fri Mar 11 07:37:00 2022

Performed:

Fri Mar 11 07:27:09 2022

Caliper Calibration:

Gain=5.405

Offset=-0.216

References
ReadingsLow Cal
8.000
1.520High Cal
16.000
3.000

1.5" Calibration:

Gain=12.000

Offset=0.300

References
ReadingsLow Cal
0.000
0.000High Cal
20.000
1.216

2" Calibration:

Gain=32.000

Offset=-0.700

References
ReadingsLow Cal
0.000
0.002High Cal
20.000
1.053

Gamma Ray Calibration Report

Serial Number:
Tool Model:
Performed:070558
OPEN_GR
Wed Mar 02 14:49:46 2022

Calibrator Value:

1.0

GAPI

Background Reading:
Calibrator Reading:0.0
1.0cps
cps

Sensitivity:

0.2800

GAPI/cps