



MICRO LOG

Company	PALOMINO PETROLEUM, INC.	
Well	SPEEDWAY #1	
Field	BROUGHTON NORTH	
County	LANE	State KANSAS
Location:	API # : 15-101-22665-0000 2393' FNL & 745' FWL SW - SE - SW - NW	
Permanent Datum	GROUND LEVEL	Elevation 2620
Log Measured From	KELLY BUSHING 11' A.G.L.	
Drilling Measured From	KELLY BUSHING	
SEC 3	TWP 16S	RGE 27W
Other Services	CDL/CNL DIL	
Elevation	K.B. 2631 D.F. 2629 G.L. 2620	
Date	1/20/22	
Run Number	TWO	
Depth Driller	4615	
Depth Logger	4614	
Bottom Logged Interval	4612	
Top Log Interval	3600	
Casing Driller	8 5/8"@225'	
Casing Logger	225	
Bit Size	7 7/8"	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5,200 PPM
Density / Viscosity	9.5/58	
pH / Fluid Loss	9.5/8.0	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	1.10@55F	
Rmf @ Meas. Temp	.825@55F	
Rmc @ Meas. Temp	1.32@55F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.496@122F	
Time Circulation Stopped	4 HOURS	
Time Logger on Bottom	5.15 A.M.	
Maximum Recorded Temperature	122F	
Equipment Number	922339	
Location	HAYS, KANSAS	
Recorded By	JEFF LUEBBERS	
Witnessed By	RYAN SEIB	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-101-22665-0000

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS


PENDENNIS, KS. & HWY 4, E. SIDE OF TOWN TO "RED CHIEF RD.", 2.6 N. AROUND CURVES TO
"RD 285", E. AROUND CURVES TO "TOMAHAWK RD.", 1/2 N., E. INTO





MAIN SECTION

Database File	5940ddn.db
Dataset Pathname	pass7.1M
Presentation Format	micro
Dataset Creation	Thu Jan 20 06:23:47 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

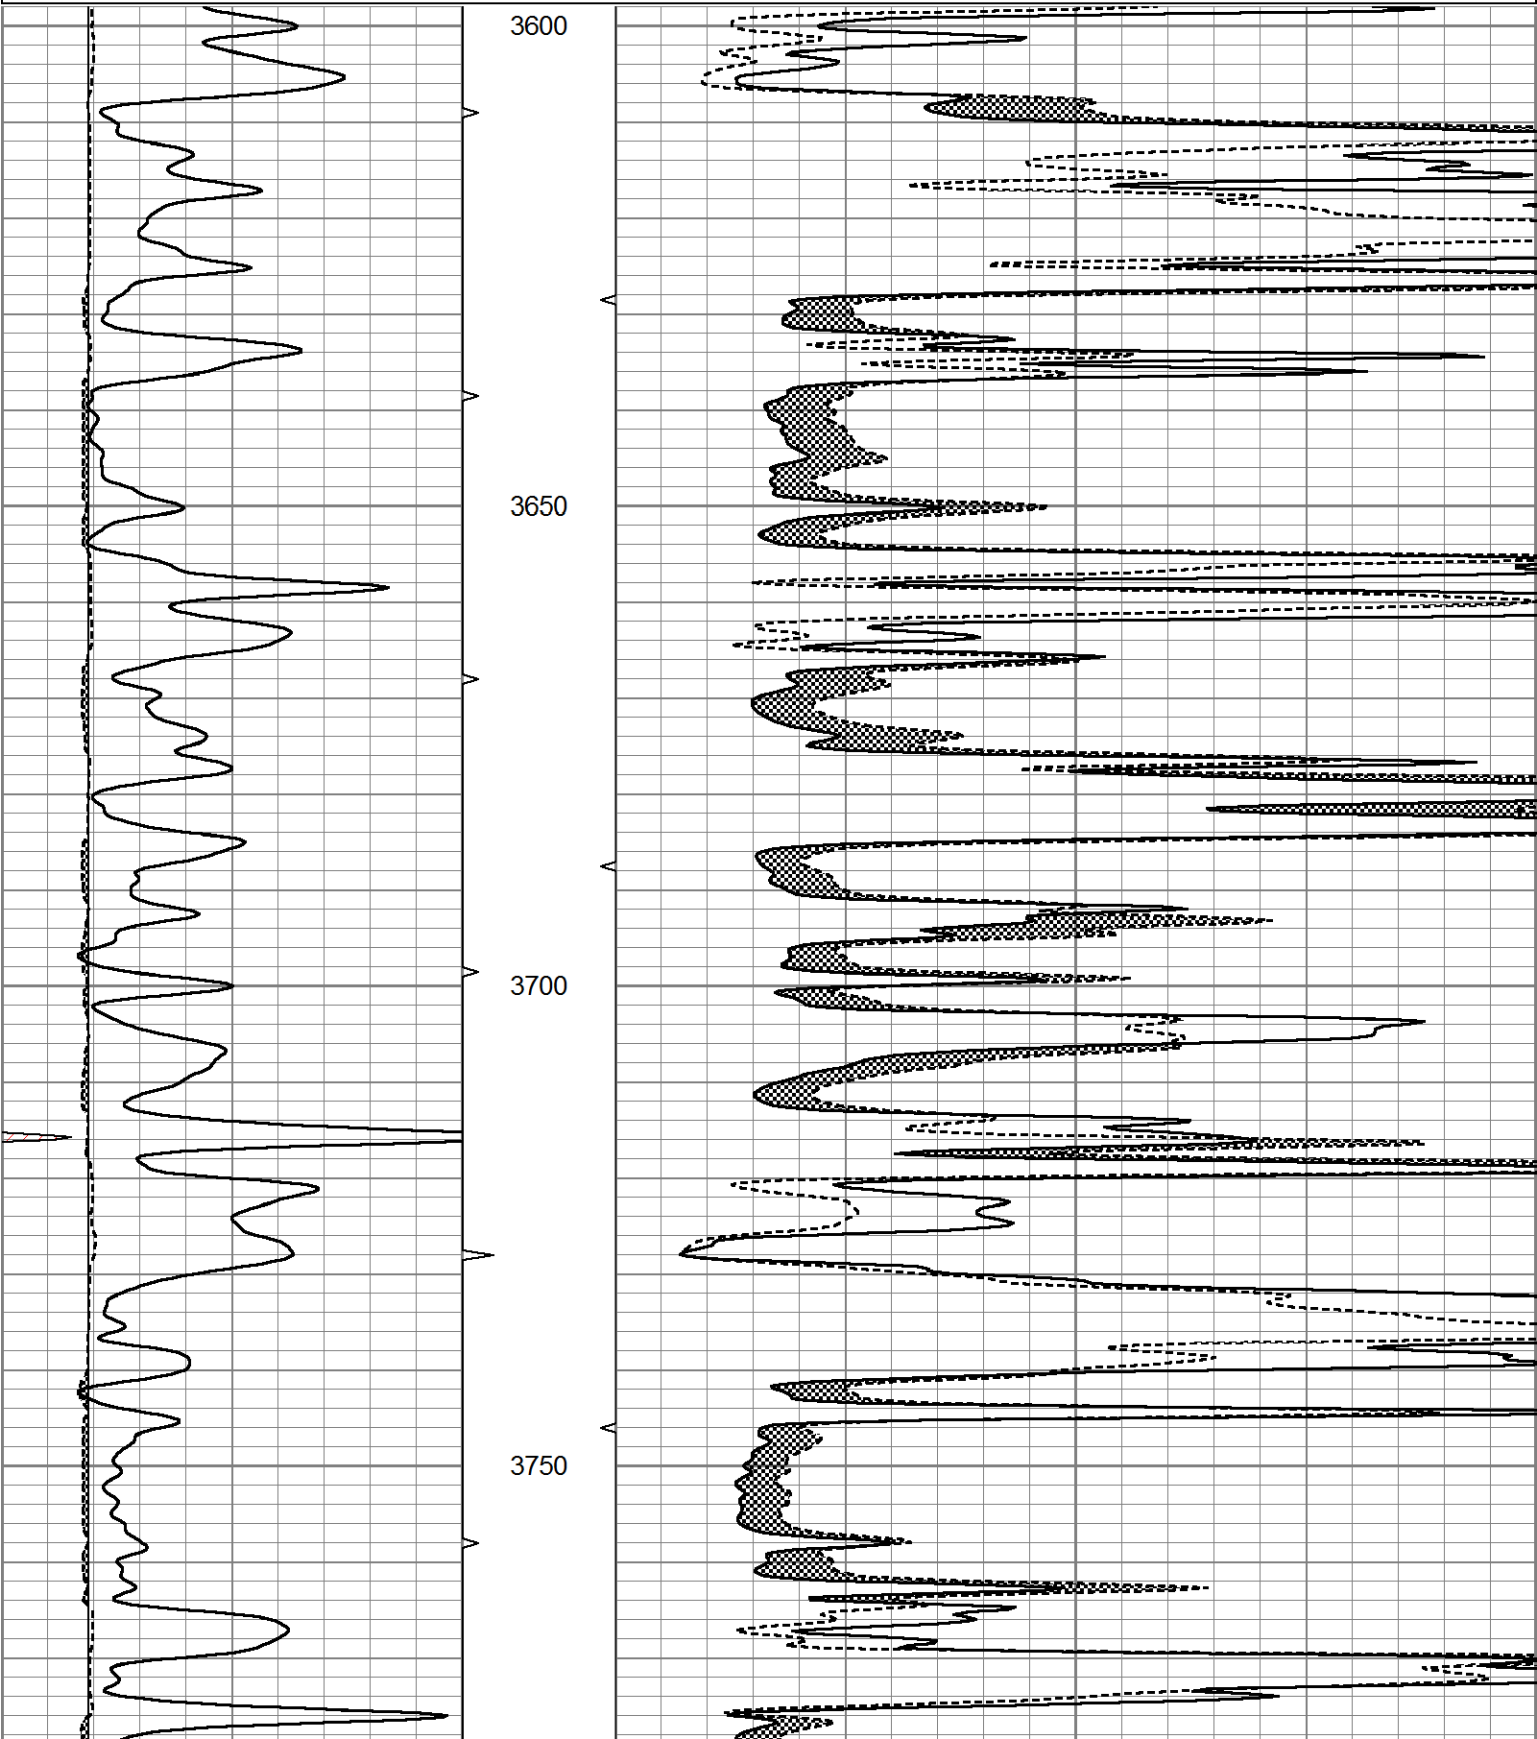

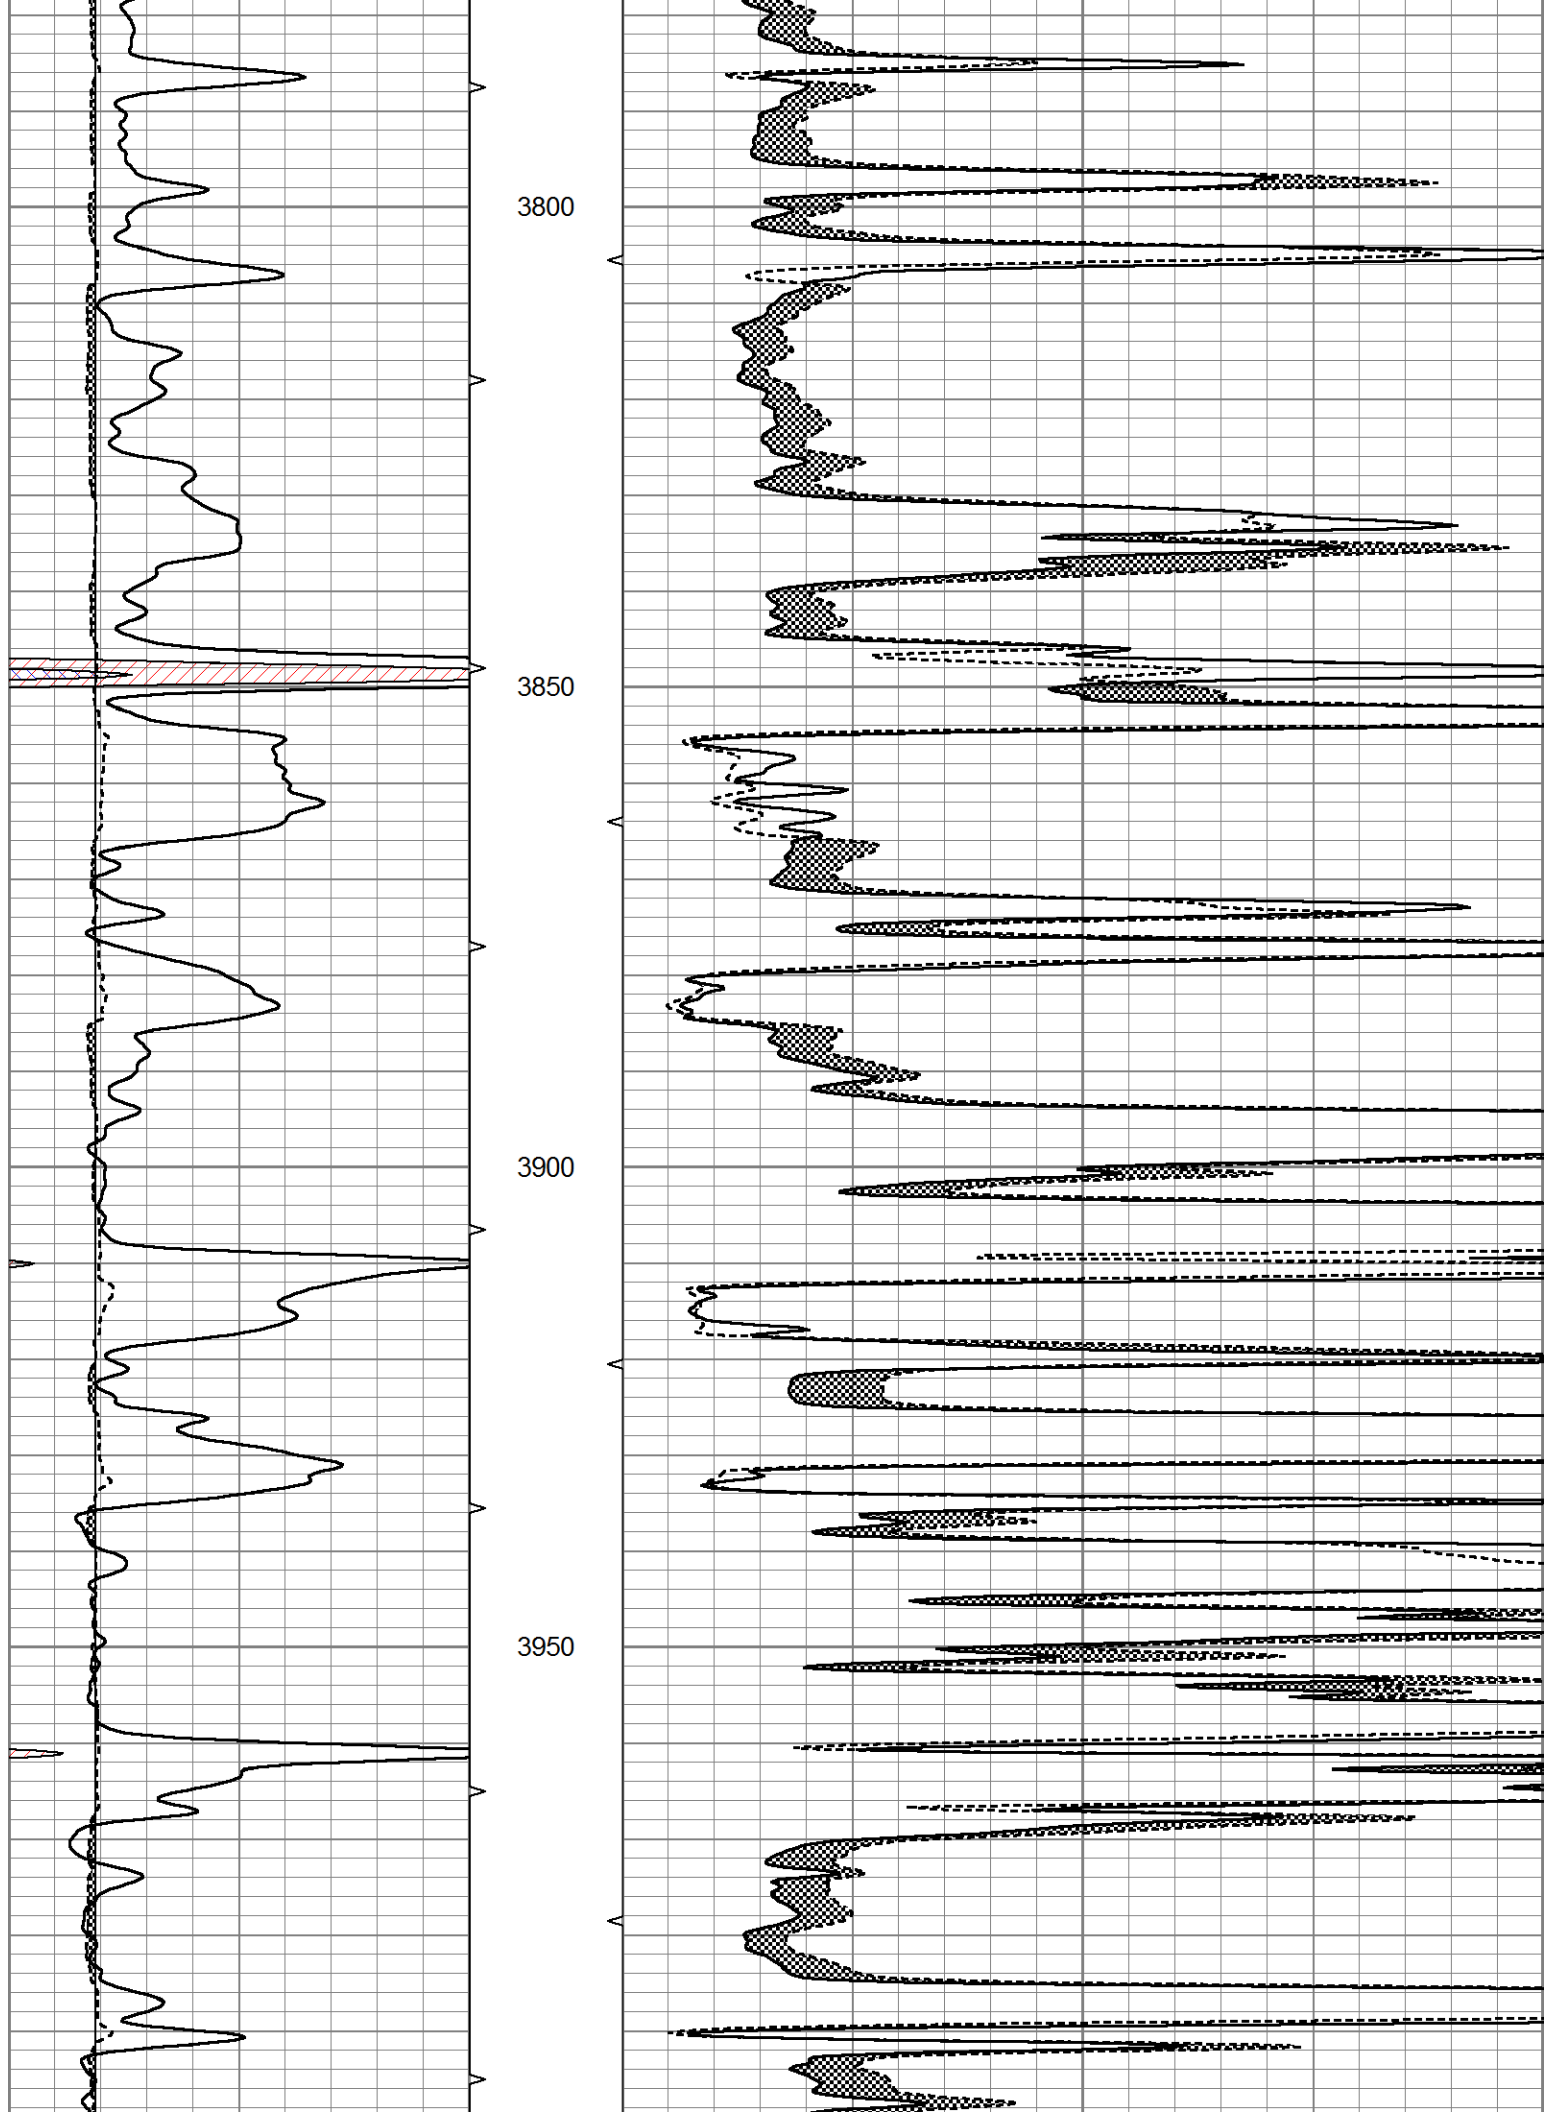

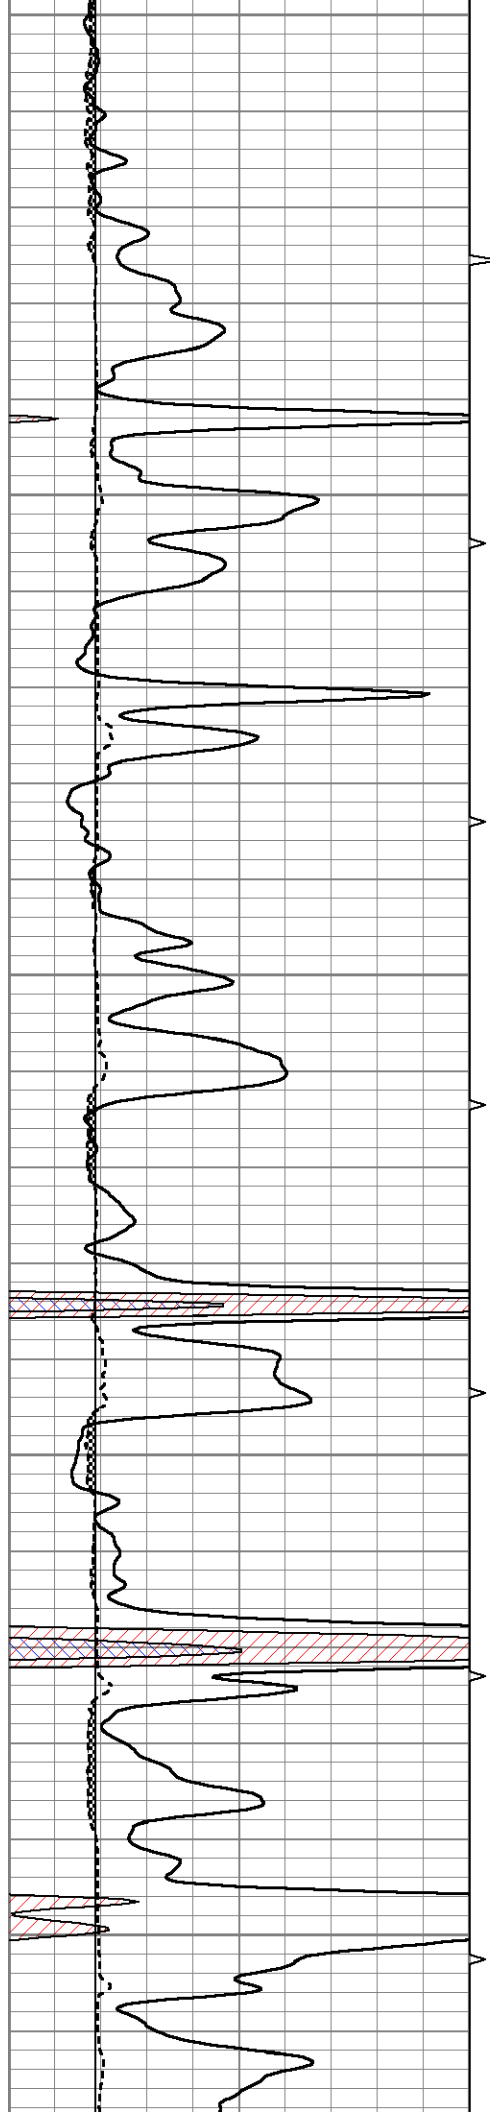


4000


4050


4100

4150

4200

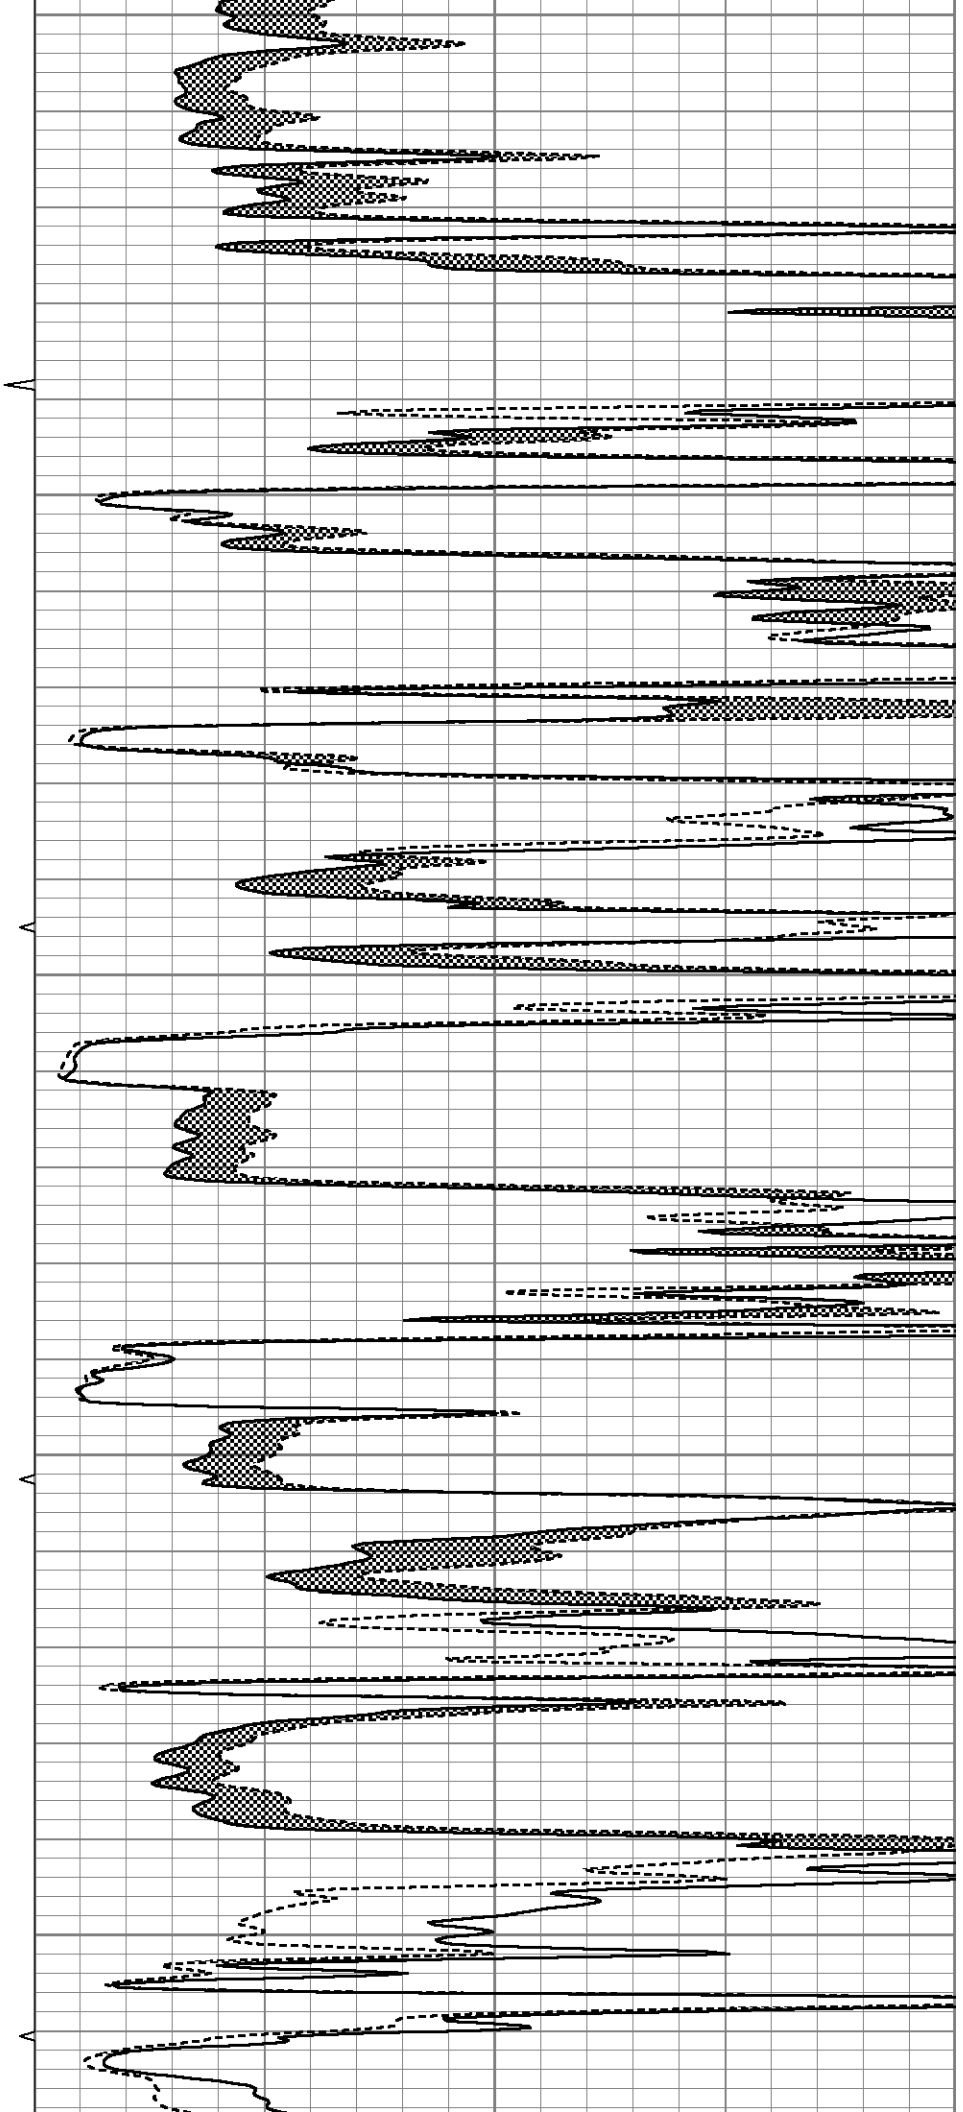

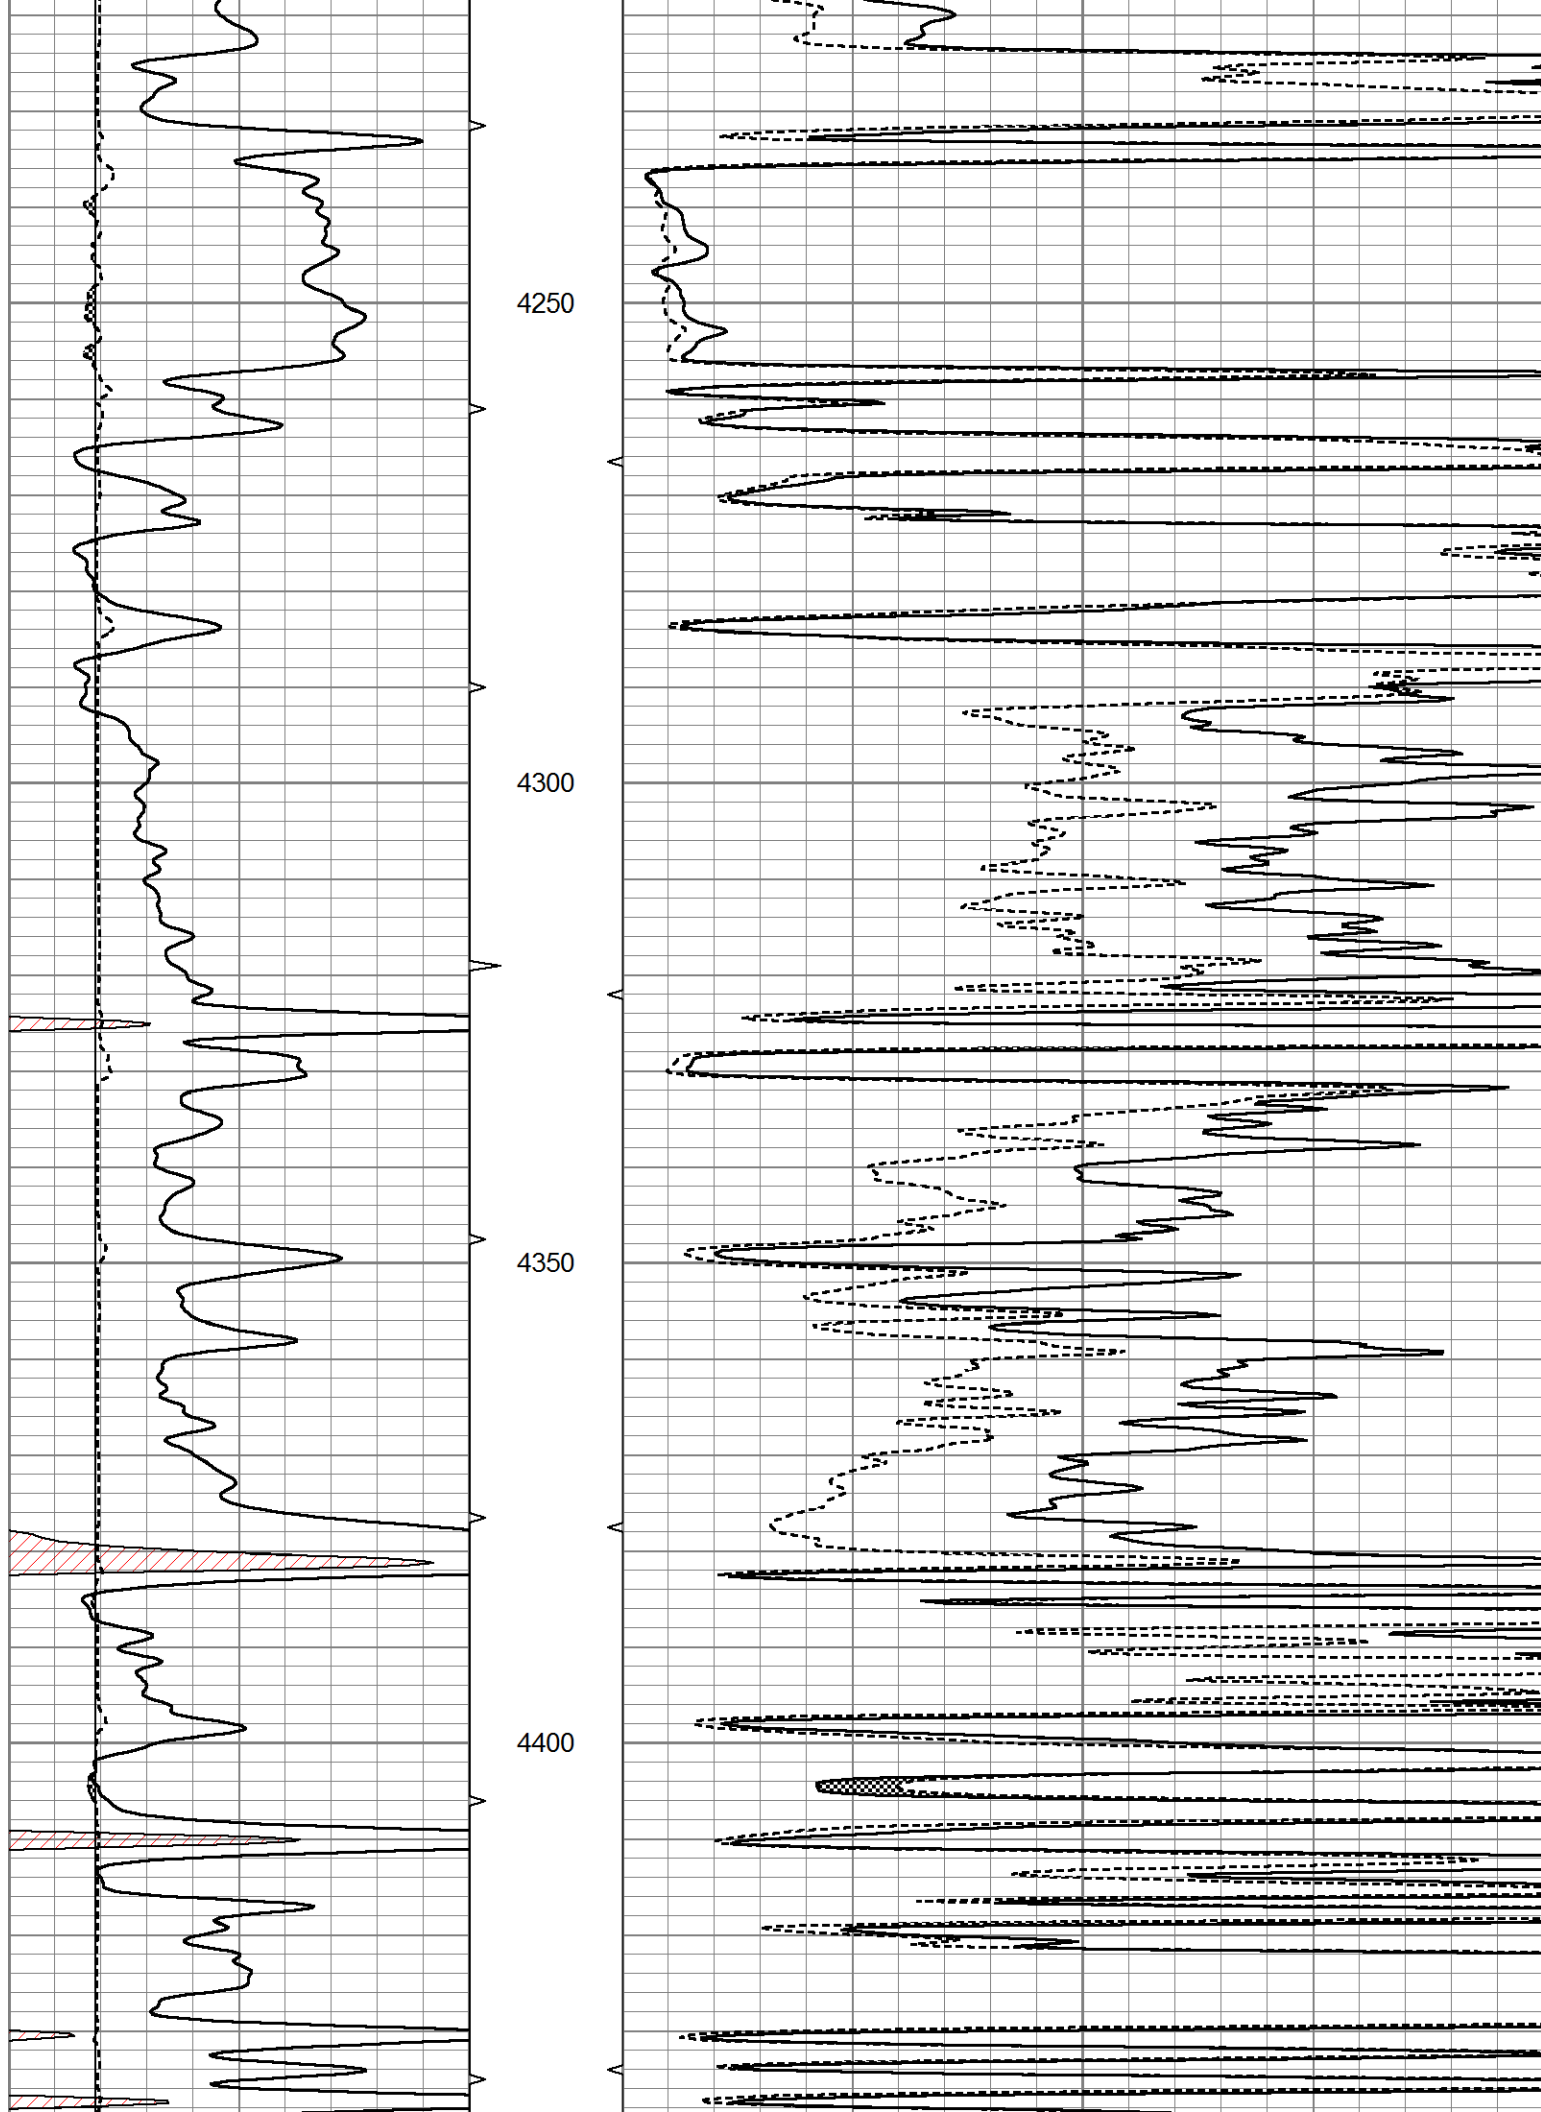

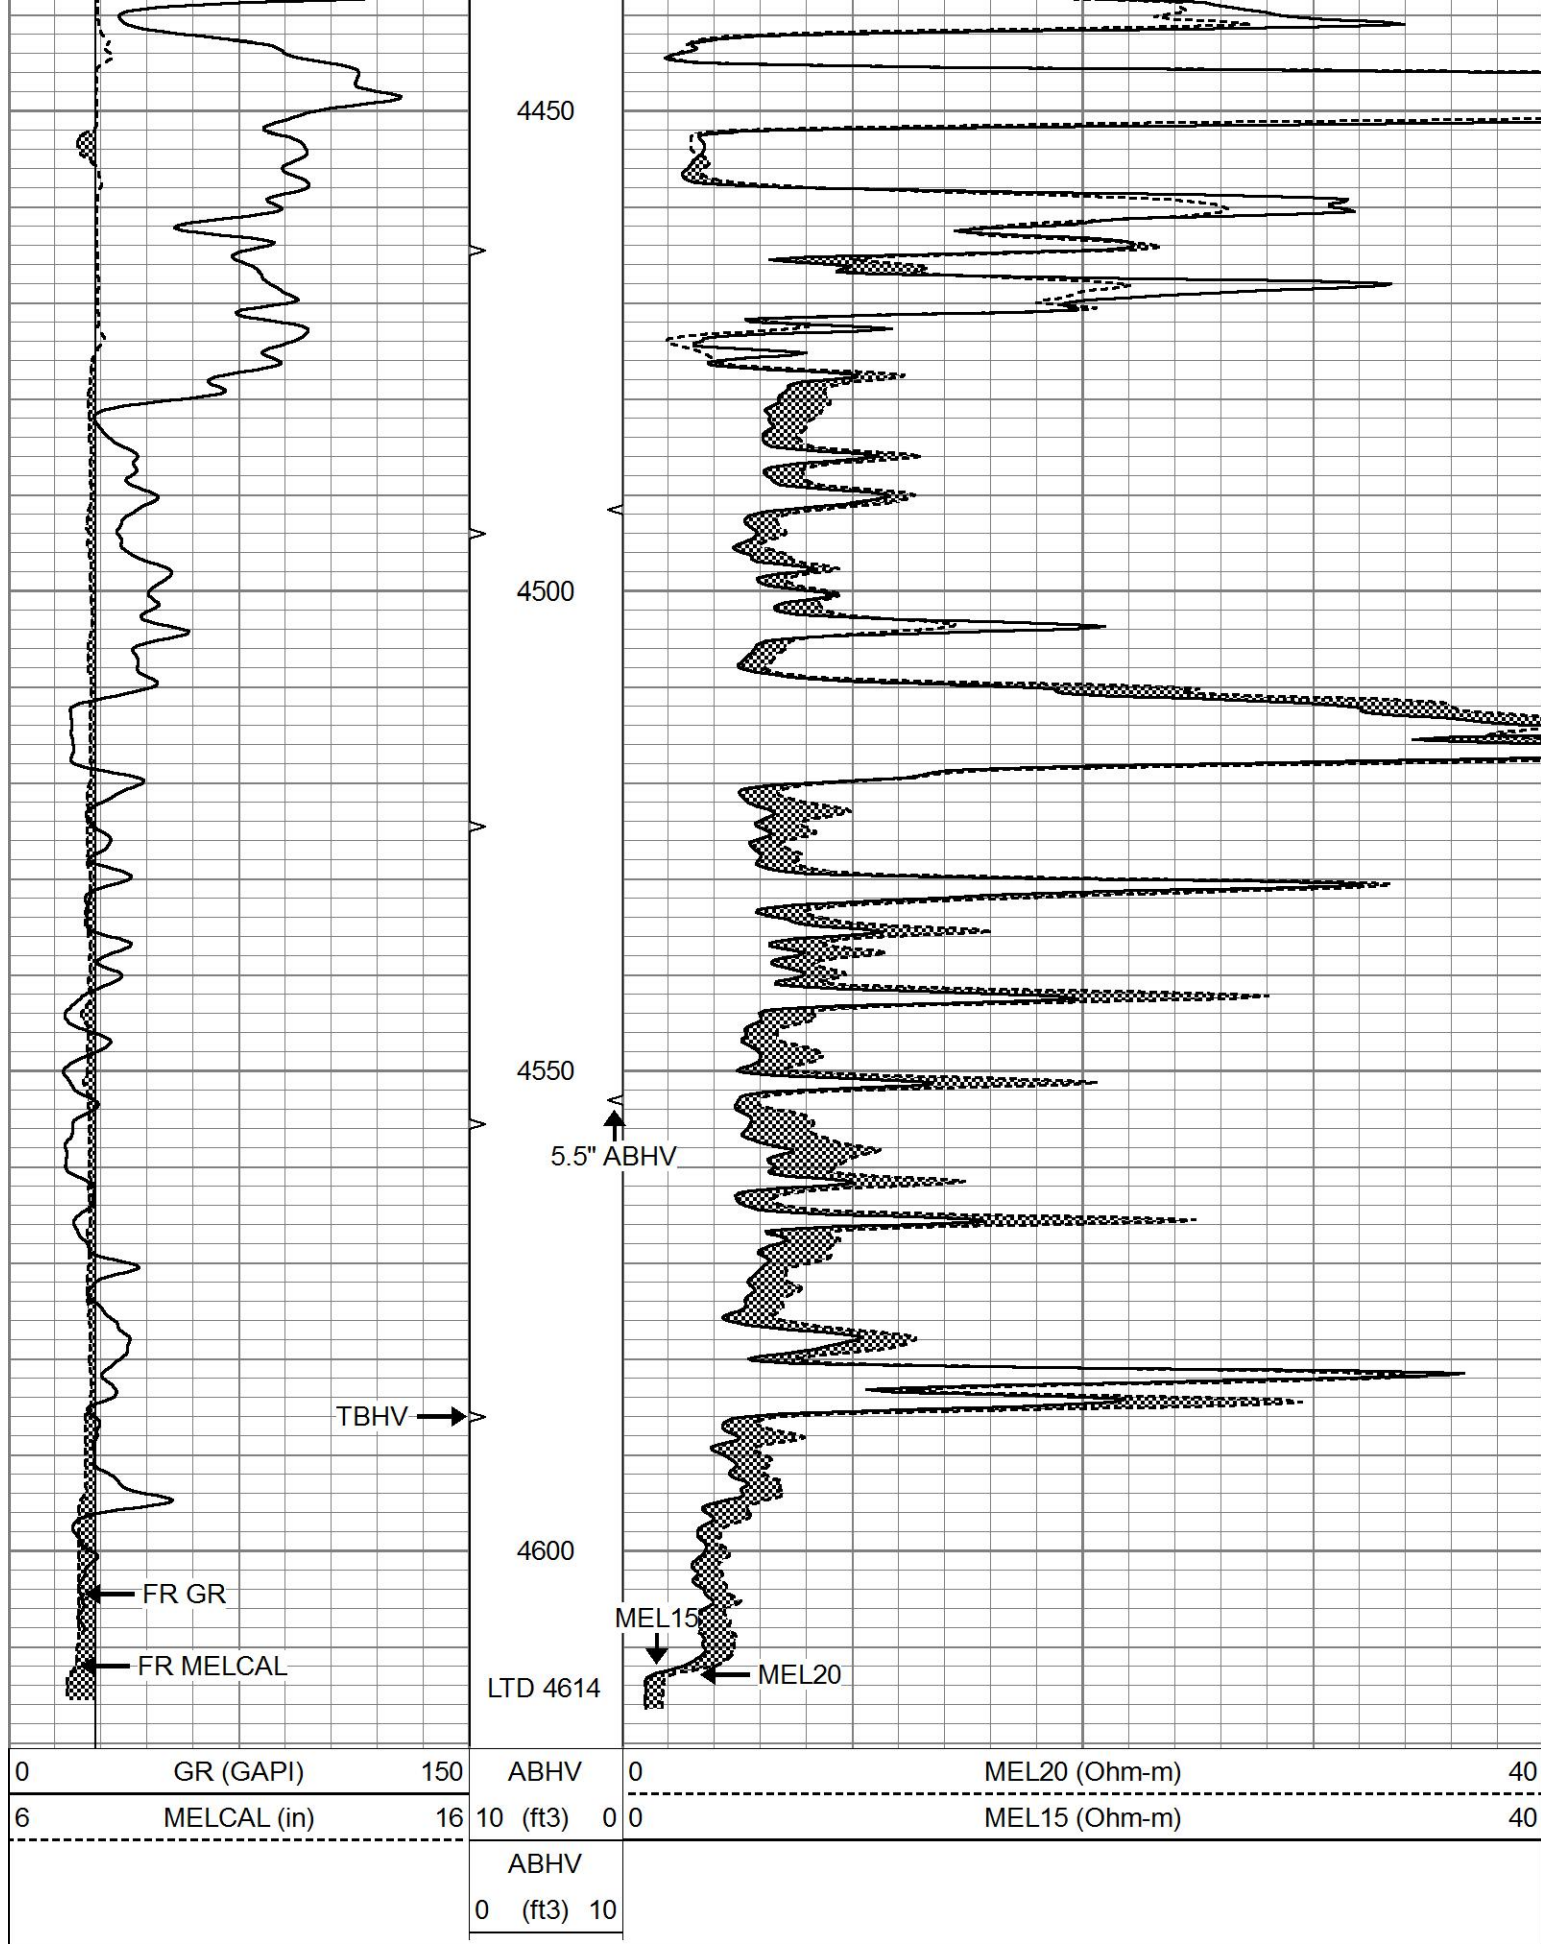



REPEAT SECTION

REFLECT SECTION

Database File 5940ddn.db
 Dataset Pathname pass6.1R
 Presentation Format micro
 Dataset Creation Thu Jan 20 06:21:42 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

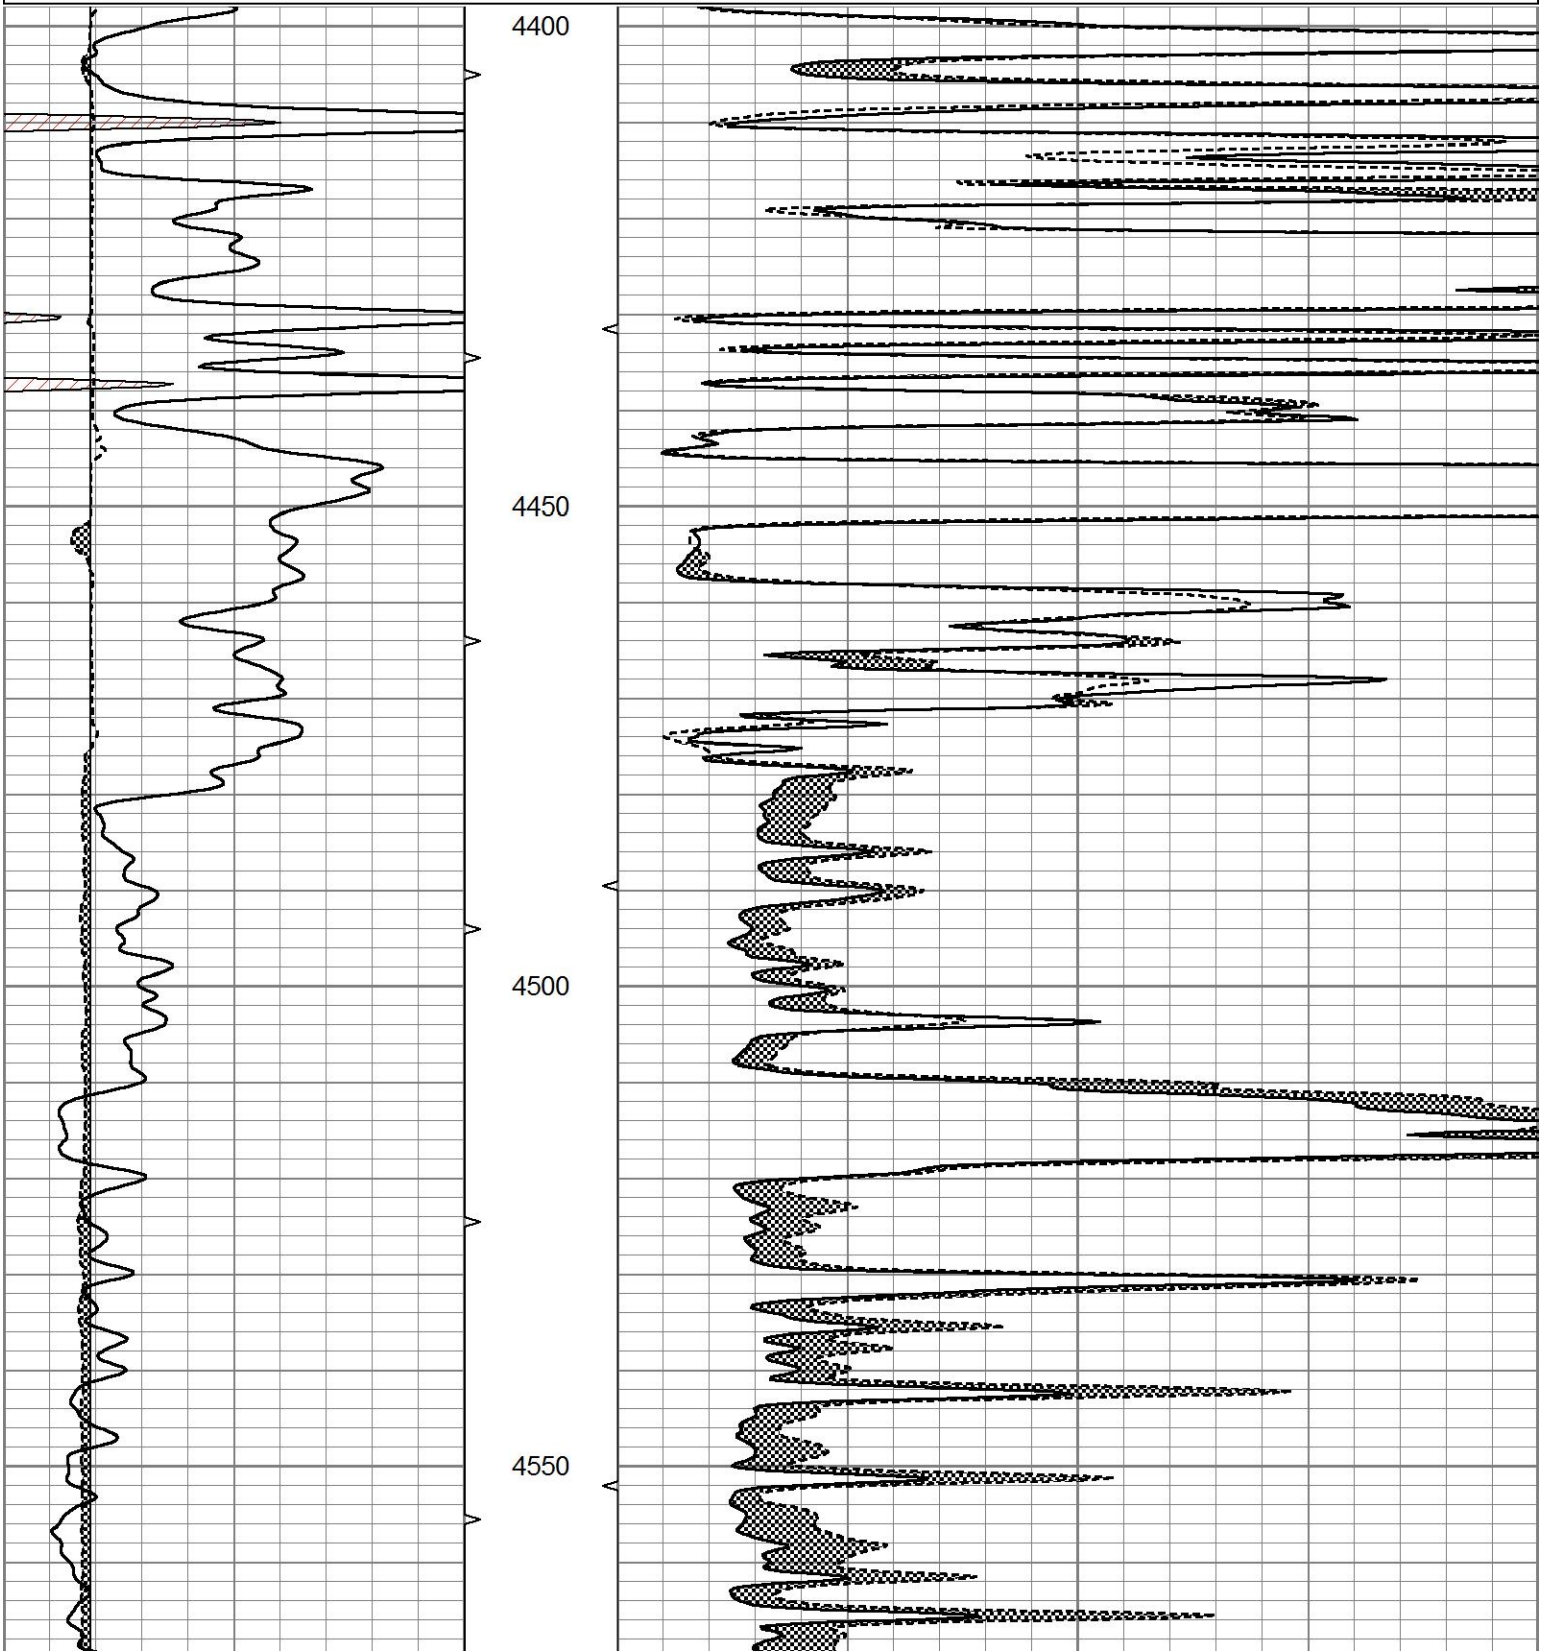

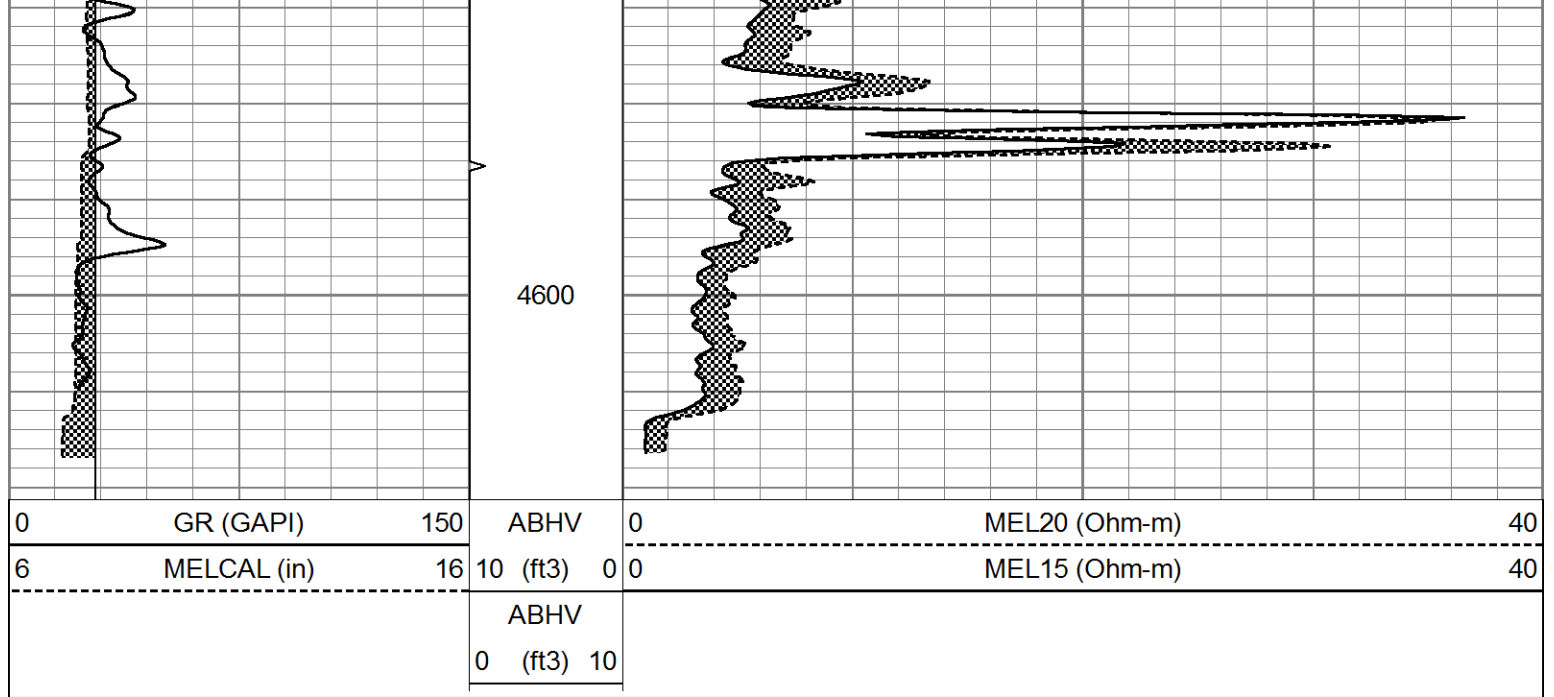

Calibration Report			
Database File	5940ddn.db		
Dataset Pathname	pass7.1M		
Dataset Creation	Thu Jan 20 06:23:47 2022		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Thu Jan 20 05:47:46 2022		
Caliper Calibration:	Gain=3.162	Offset=3.731	
	Low Cal	High Cal	
References	8.000	14.000	
Readings	1.350	3.247	
1.5" Calibration:	Gain=46.000	Offset=-1.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.291	
2" Calibration:	Gain=46.000	Offset=-1.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.003	1.103	
Gamma Ray Calibration Report			
Serial Number:	070558		
Tool Model:	OPEN_GR		
Performed:	Thu Jan 20 06:08:52 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2800	GAPI/cps	