

15-163-02437-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Rooks County. Sec. 27 Twp. 9 Rge. 18 (E) 19 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines 990' N 330' E of S.W. Corner

Lease Owner: Cities Service Oil Co.

Lease Name: Slason Well No. 2

Office Address: Bartlesville, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole): Dry Hole

Date well completed: 9-5-1948

Application for plugging filed: 9-5-1948

Application for plugging approved: 9-5-1948

Plugging commenced: 9-5-1948

Plugging completed: 9-5-1948

Reason for abandonment of well or producing formation: Dry Hole

If a producing well is abandoned, date of last production: 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: M. A. Rives Box 105 Hays, Kansas

Producing formation: Arbuckle Depth to top: 3610 Bottom: Total Depth of Well: 3640 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	318	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy mud from 3640' feet TD to 250 feet. Set plug, dumped 15 Sacks cement mud to 30 feet, set plug and dumped 10 sacks cement mud and dirt to surface.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to: Mr. R. C. Cooper
Address: Box 751 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Mr. James Porter (employee of owner) or (owner) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James Porter

Box 553, Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 17th day of September, 1948

My commission expires 3-12-1951 Notary Public. W. G. Smith

22-237 7-47-10M
PLUGGING
FILE SEC 27 T 9 R 180
BOOK PAGE 54 LINE 19

WELL RECORD

Company Citizen Service Oil Co. Well No. 2 Farm Olson
 Location 990' North and 330' East of SW Corner Sec. 27 T. 9 R. 18W
 Elevation 2152 (2150 cor.) County Neosho State Kansas
 Drlg. Comm. August 22, 1948 Contractor Hoin Drilling Company
 Drlg. Comp. September 5, 1948 Acid None
 T. D. 3640' Initial Prod. Dry Hole - P. & A. 9-6-48

LOGGING RECORD:

8-5/8" @ 318' cor. with 165 sq cor.

FORMATION RECORD:

shale	0-15
sand & shale	85
shale & shells	920
shale & sand	1050
sand	1225
sand & shale	1445
shale	1495
anhydrite	1535
shale & shells	1865
sandy lime & shale	2060
shale	2070
shale & lime	2215
lime	2295
shale & lime	2355
shale	2500
lime & shale	2780
shale	2835
shale & lime	3140
lime	3280
lime & shale	3238
lime	3640 T. D.


D. S. T. 3410-26, rec. 425' water, no oil, open 20 mins., B. H. P. 400%.

D. S. T. 3423-41, rec. 10' rotary mud, no oil, no water, 30 mins., B. H. P. 700%.

Landing	3334'
Weathered Simpson	3579'
Horizontal Arbuckle	3606'
Arbuckle	3610'
Penetration	30'
Total Depth	3640'

GENO:	1000'	0°
	1500'	1°
	2000'	1°
	2500'	1°
	3000'	0°

7-7/8" rotary hole.

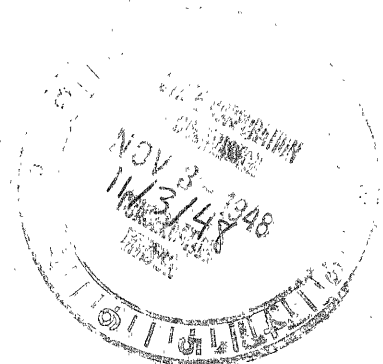

PLUGGING
 FILE SEC 27 T. 9 R. 18W
 BOOK PAGE 54 LINE 19