


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

WELL PLUGGING RECORD

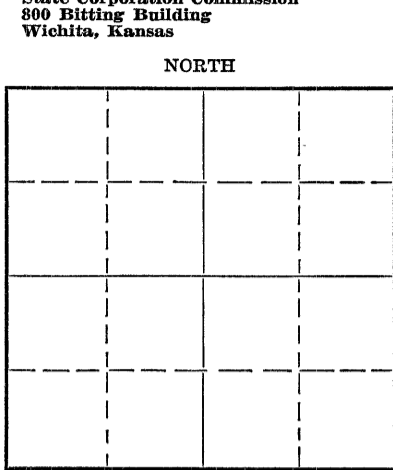

Locate well correctly on above Section Plat

Rocks \_\_\_\_\_ County. Sec. 18 Twp. 9 Rge. 18 (E) \_\_\_\_\_ (W) \_\_\_\_\_  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines NW 1/4 NW 1/4 Sec 18  
Lease Owner Musgrove Petroleum Corp.  
Lease Name None Well No. 1  
Office Address Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed March 17, 19 51  
Application for plugging filed March 17 19 51  
Application for plugging approved March 17 19 51  
Plugging commenced March 17 19 51  
Plugging completed March 17 19 51  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3682 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	1941	Cemented W/125
						skts

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Heavy mud to 190'  
Bridge & plug @ 190'  
15 sacks cement  
Heavy made to 140'  
1/2 sack cotton seed hulls  
10 sacks cement

RECEIVED  
3-20-51  
MAR 20 1951

(If additional description is necessary, use BACK of this sheet)  
Correspondence regarding this well should be addressed to Stearns Drilling Company  
Address Box 313 Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.  
O. G. Stearns (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) O. G. Stearns

(Address) \_\_\_\_\_

SUBSCRIBED AND SWORN to before me this 21 day of March, 19 51

Gene Dalton  
Notary Public.

My commission expires June 20, 1953

PLUGGING  
FILE SEC 18 T 9 R 18  
BOOK PAGE 68 LINE 20

NEU #1

Contractor: Stearns Drilling Company  
Commencement Date: 3-4-51  
Completion Date: 3-17-51

Location: NW<sup>1</sup>/<sub>4</sub> NW<sup>1</sup>/<sub>4</sub> SE<sup>1</sup>/<sub>4</sub>  
Sec. 18, Twp. 9 Rg. 18  
Rooks County, Kansas

Casing Record:  
8-5/8 194'

Dry & Abandoned

WELL LOG

sand and clay	0	70
blue shale	70	194
Shale	194	1075
sand	1075	1250
red bed	1250	1507
Anhydrite lime	1507	1548
shale	1548	1760
sand and lime shells	1760	1845
lime and shale	1845	3000
shale	3000	3075
lime and shale	3075	3218
lime	3218	3545
conglomerate	3545	3670
arbuckle	3670	3682
<u>Total Depth</u>		3682

STATE OF KANSAS )  
                          ) SS  
COUNTY OF RUSSELL )

I hereby certify that the above information is true and correct to the best of my knowledge.

*[Signature]*

SUBSCRIBED AND SWORN to before me this 24<sup>th</sup> day of March, 1951.

*[Signature]*  
Notary Public

My Commission Expires: June 20, 1953

