

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Rooks County. Sec. 18 Twp. 9S Rge. 18 (W)

Location as "NE/CNW/SW" or footage from lines N/2 NE/4 SE/4
Lease Owner Heathman-Seeligson Drilling Co.
Lease Name NEU Well No. 1
Office Address 254 No. Washington, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 3-14- 54
Application for plugging filed 3-14- 19 54
Application for plugging approved 3-14- 19 54
Plugging commenced 3-14- 19 54
Plugging completed 3-14- 19 54
Reason for abandonment of well or producing formation ---

NORTH

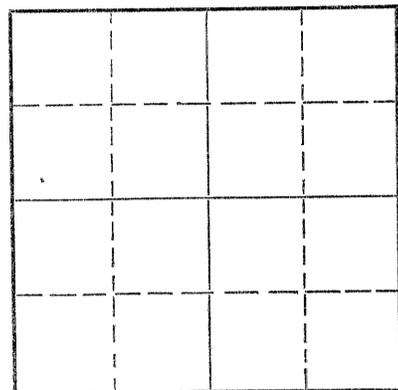

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production --- 19---

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes, Eldon Pettey,

Name of Conservation Agent who supervised plugging of this well Hays, Kansas

Producing formation --- Depth to top --- Bottom --- Total Depth of Well 3602 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
---	---	---	---	8-5/8" Sprl. Weld		
				cemented w/100 sax		
				cement and 1 sax		
				Cal.Chlor. @ 158'		none
				no oil string run -		D&A

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole w/heavy mud, set plug of 1/2 sack hulls @ 155' w/15 sacks cement; filled hole to 40' w/1/2 sack hulls w/10 sacks cement. Cement in bottom of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Heathman-Seeligson Drilling Co.
Address 254 No. Washington, Wichita 7, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
H. D. Shreve (employee of owner) ~~owner or operator~~ of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. HEATHMAN-SEELIGSON DRILLING CO.

(Signature) _____ By: [Signature]

254 No. Washington, Wichita 7, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of March, 19 54

My commission expires June 28, 1956

D. Marjorie Matt
Notary Public.

24-7368-S 3-53-20M

PLUGGING
FILE SEC 18 T 9 R 18 W
BOOK PAGE 20 LINE 36

3-26-54

DRILLERS' LOG

Name: Neu #1 Date Spudded: 3-5-54
 Location: N/2 NE/4 SE/4 Sec.18-9S-18W Rotary Completion: 3-14-54
 Rooks County, Kansas
 Contractor: Heathman-Seeligson Drilling Co. Elevation: 2145 Gr.
 2148 DF
 2151 KB
 Operator: Heathman-Seeligson Drilling Co.
 Surface Casing: 4 jts. Spiral Weld (160') cemented
 w/100 sacks cement and 1 sack
 Cal.Chlor. @ 158'.
 Oil String: None run - D&A

GEOLOGICAL TOPS - KB

Anhydrite	1569 (+ 582)
Base Anhydrite	1610 (+ 541)
Topeka	3045 (- 944)
Heebner	3306 (-1155)
Toronto	3326 (-1175)
Lansing-K.C.	3346 (-1195)
Base K.C.	3352 (-1401)
Conglomerate	3589 (-1438)
Simpson	Not reached
Arbuckle	Not reached
Total Depth	3602 (-1451)

No Electric Log run
 No Drill Stem Tests


L O G

(Figures indicate bottom of formation)

Clay and shale	0	40
Sand and shale		70
Shale		160
Shale and shells		815
Sand		980
Shale and shells		1060
Sand		1270
Shale and shells		1510
Shale, shells and redbed		1569
Anhydrite		1610
Shale and shells		2305
Shale and lime		2860
Lime		2945
Lime and shale		3190
Lime		3602
T.D.		3602

The undersigned, H. D. Shreve, hereby certifies that the above log is a true and correct log of the formations encountered in drilling the above noted well as reflected by the Daily Drilling Reports.

HEATHMAN-SEELIGSON DRILLING CO.

By: 

Subscribed and sworn to before
 me this 25th day of March 1954.

D. Marjorie Mott
 Notary Public

My Commission expires: June 28, 1956

PLUGGING
 FILE SEC 18 T 9 R 18W
 BOOK PAGE 20 LINE 36