



MICRO LOG

Company McCOY PETOLEUM CORPORATION
Well GAEDINER "A" #1-4
Field SLATE CREEK NORTH
County SUMNER
State KANSAS

Company McCOY PETOLEUM CORPORATION
Well GAEDINER "A" #1-4
Field SLATE CREEK NORTH
County SUMNER State KANSAS

Location: API #: 15-191-22837-0000
990' FNL & 1650' FEL
SE-NW-NE
SEC 4 TWP 33S RGE 2E
Permanent Datum GROUND LEVEL Elevation: 1152
Log Measured From KELLY BUSHING 12' A.G.L.
Drilling Measured From KELLY BUSHING
Elevation
K.B. 1164
D.F. 1162
G.L. 1152


Date	3/14/22
Run Number	TWO
Depth Driller	3450
Depth Logger	3451
Bottom Logged Interval	3433
Top Log Interval	253
Casing Driller	8 5/8" @ 273
Casing Logger	273
Bit Size	7 7/8
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.5/62
PH / Fluid Loss	11.0/7.3
Source of Sample	FLOWLINE
Rm @ Meas. Temp	1.5@60F
Rmt @ Meas. Temp	1.13@60F
Rmc @ Meas. Temp	1.8@60F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	81@111F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	////
Maximum Recorded Temperature	111F
Equipment Number	3802
Location	HAYS, KANSAS
Recorded By	TJ DREILING
Witnessed By	TOM PRONOLD

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
-WELLINGTON KS, EAST ON HIGHWAY 160, 7 MILES TO WEBB RD.
-SOUTH 6 MILES TO ROAD 50, -EAST 1/2 MILE.
-SOUTH INTO


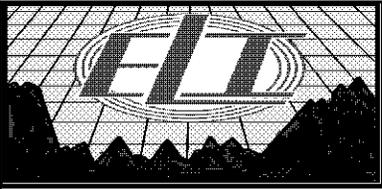




MAIN SECTION


Database File 6250pe.db
 Dataset Pathname pass7.1
 Presentation Format _micro
 Dataset Creation Mon Mar 14 14:06:03 2022
 Charted by Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		


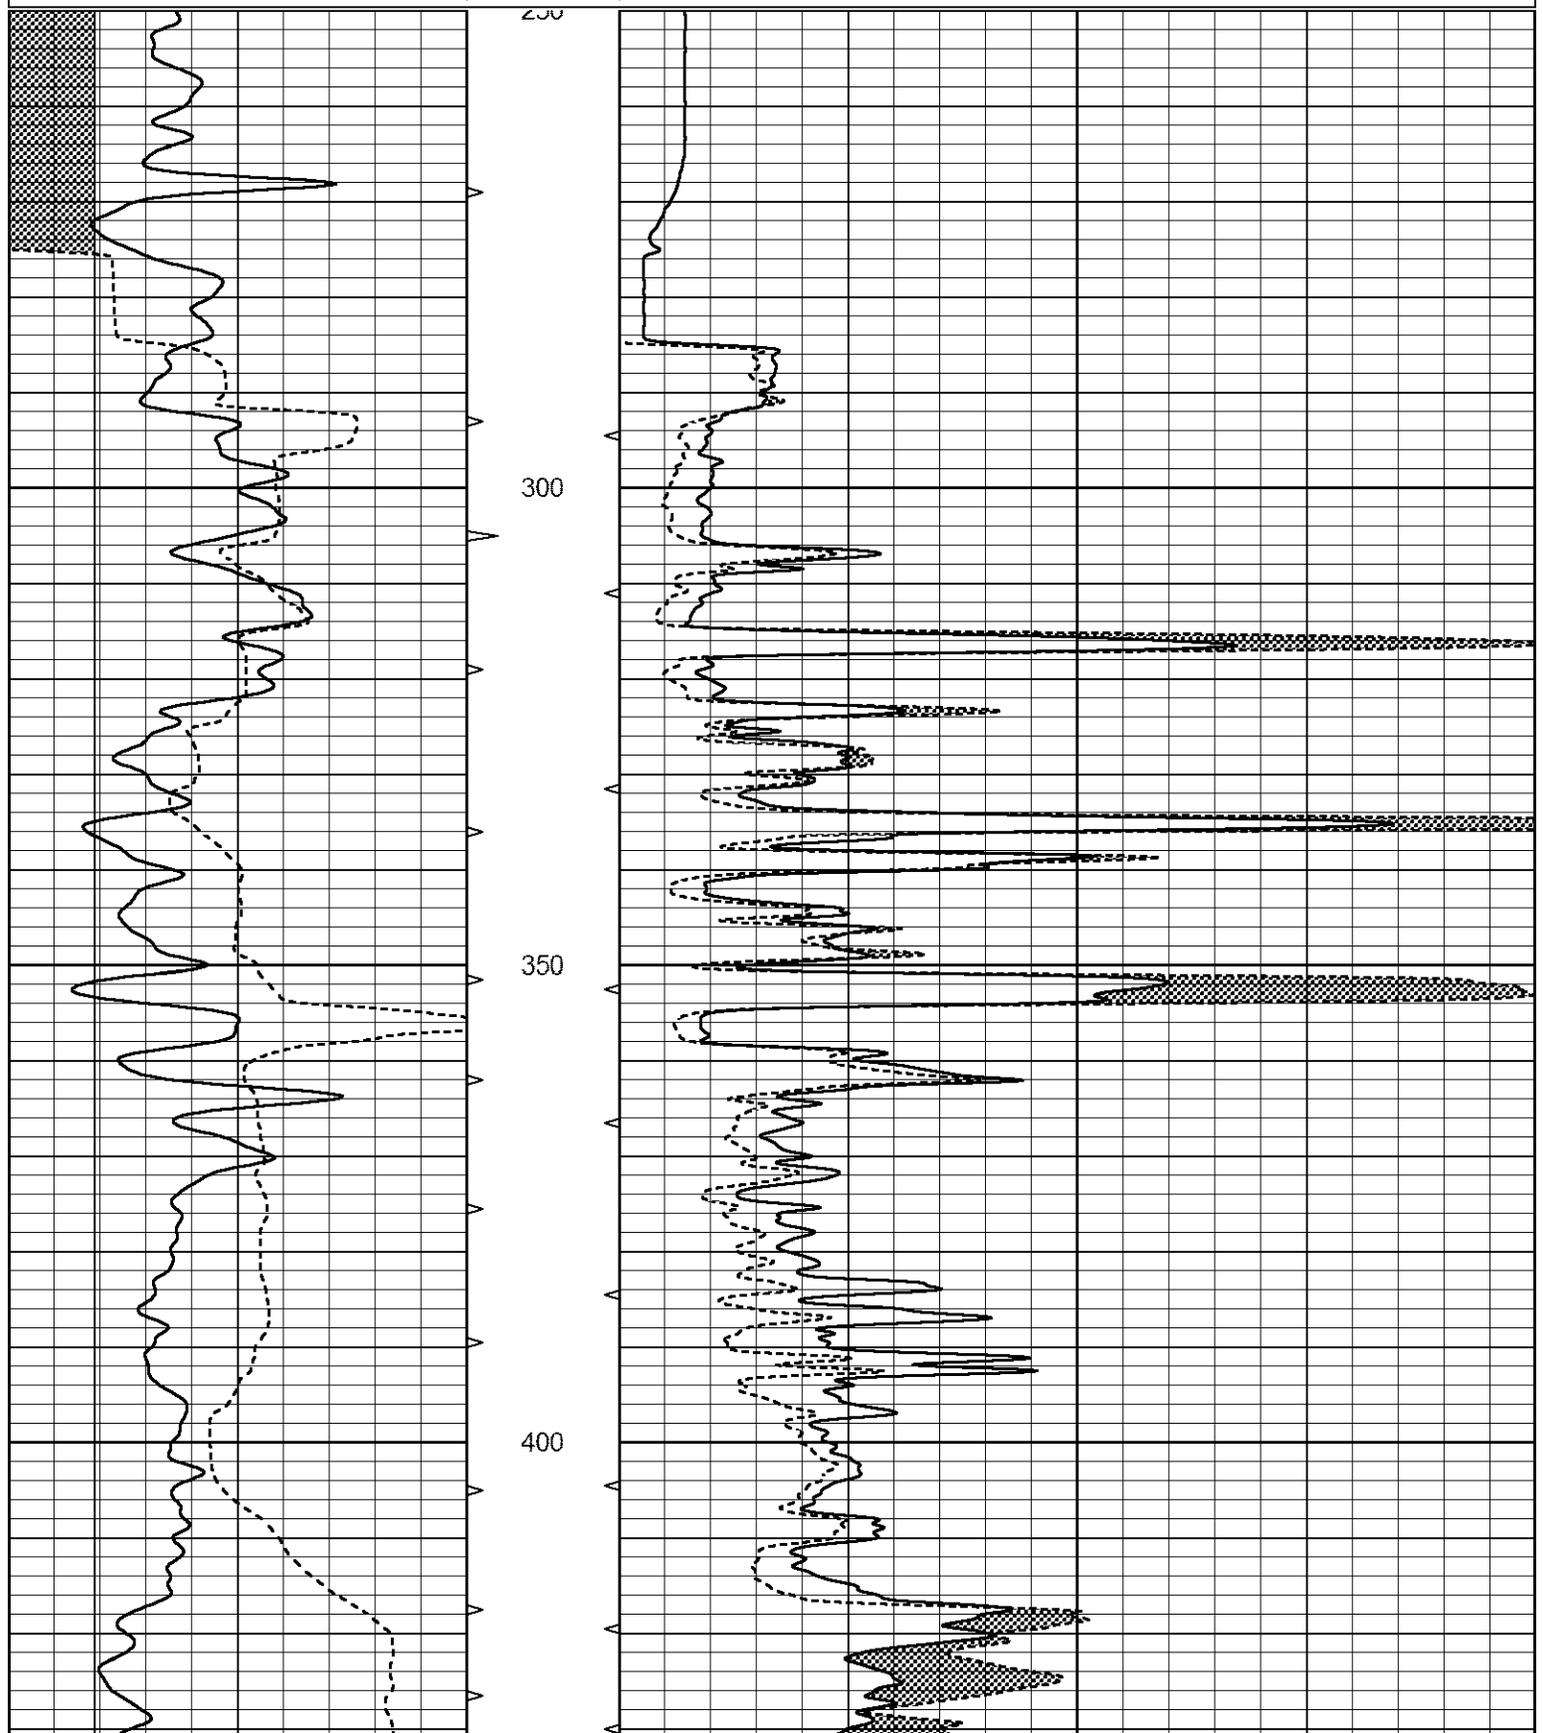


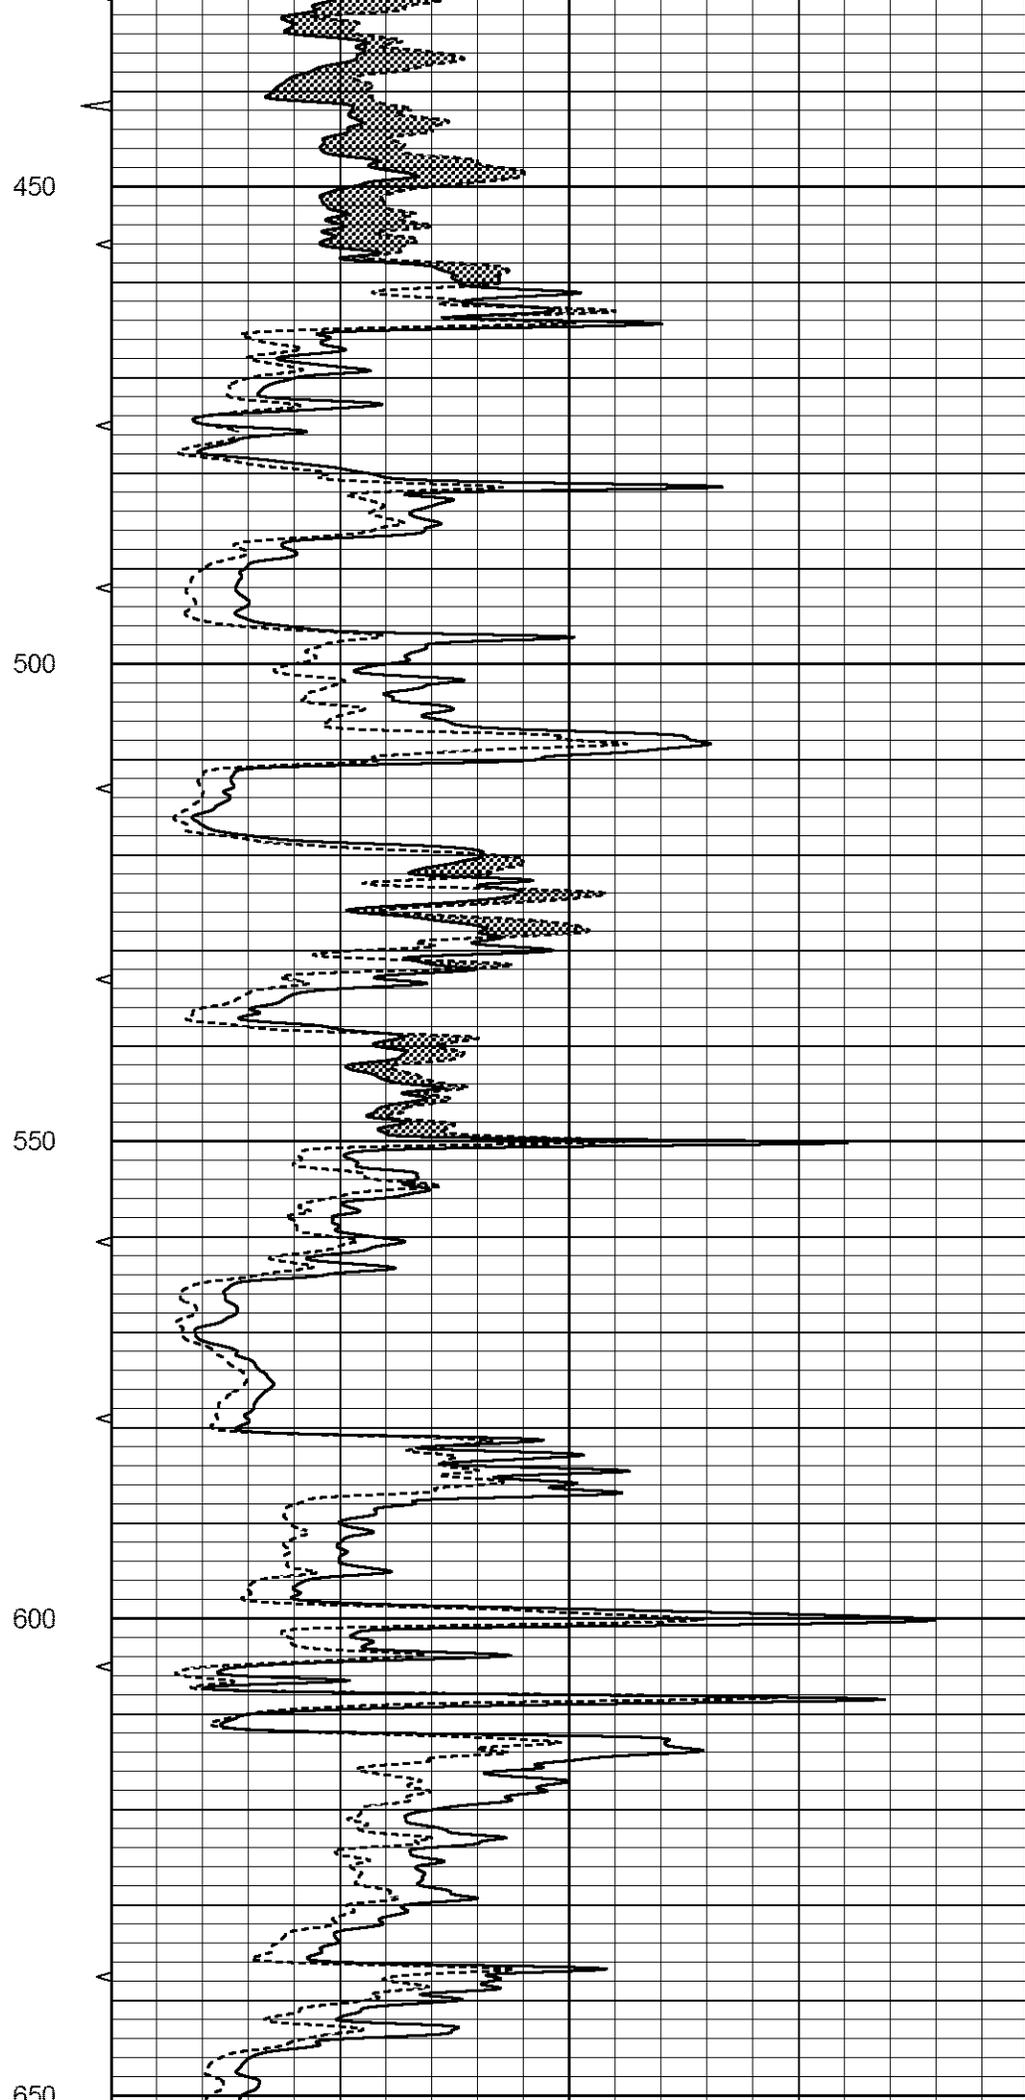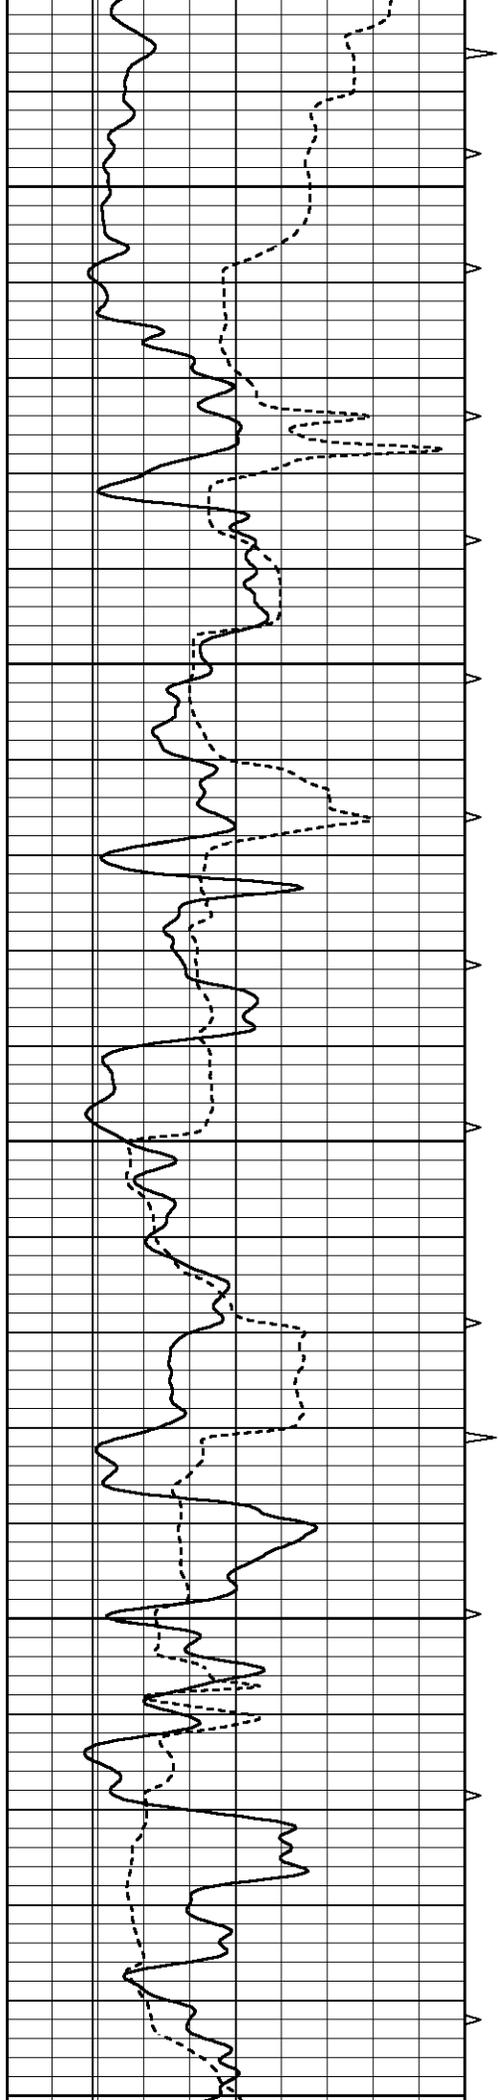


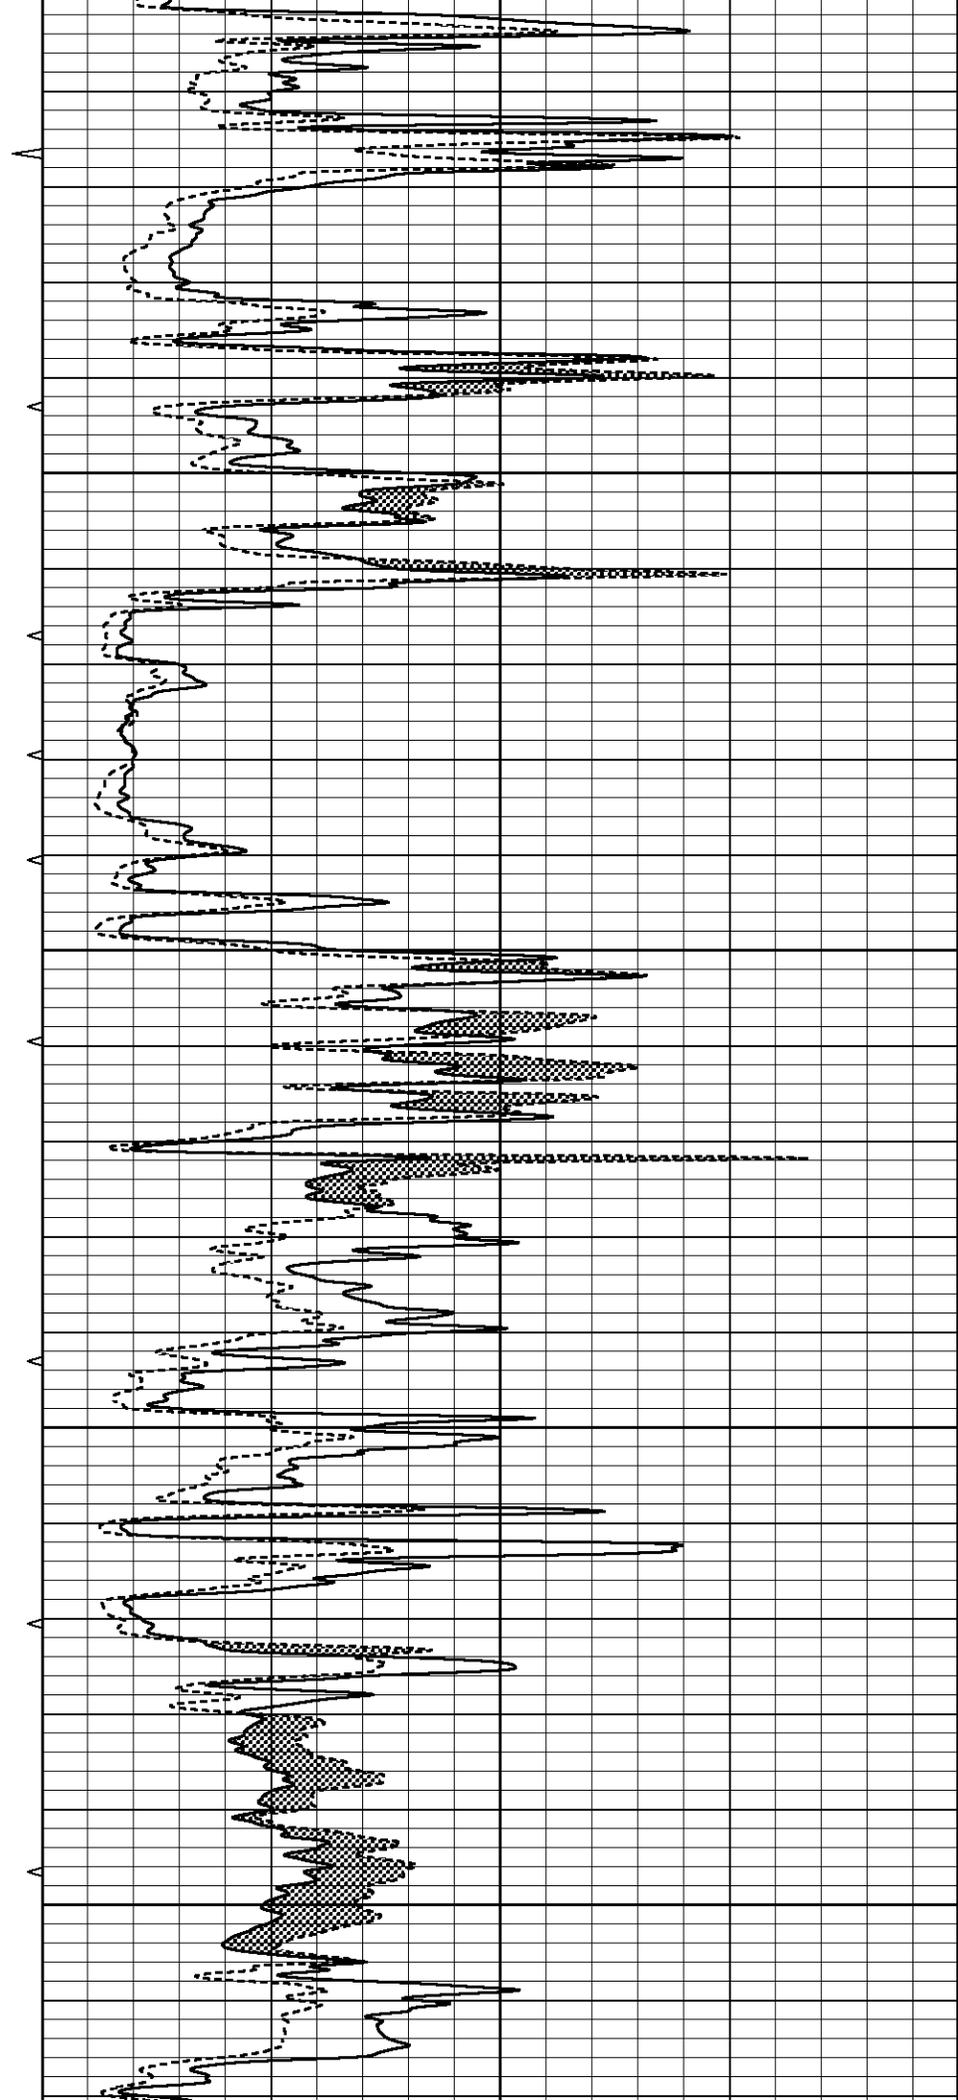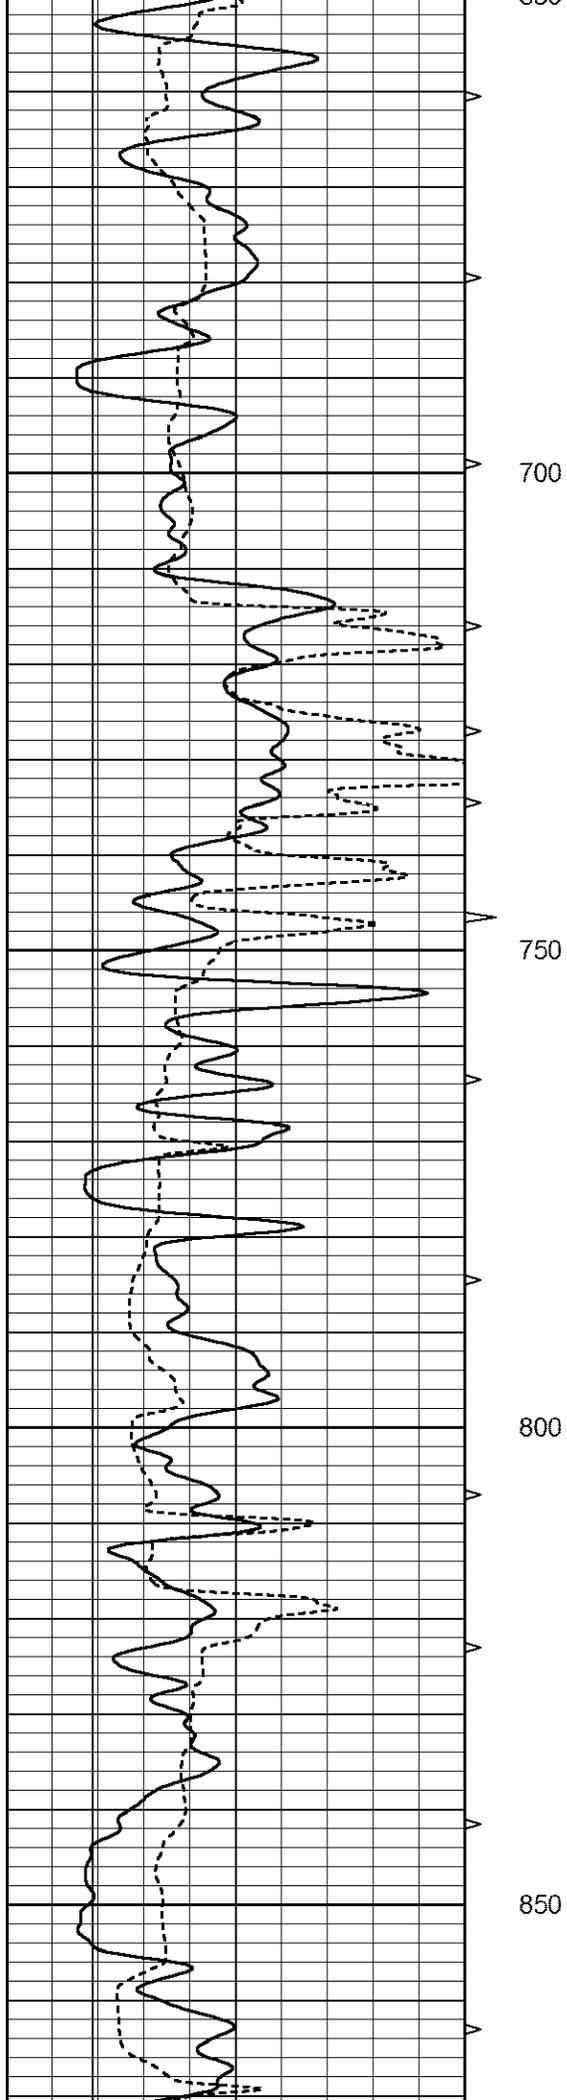


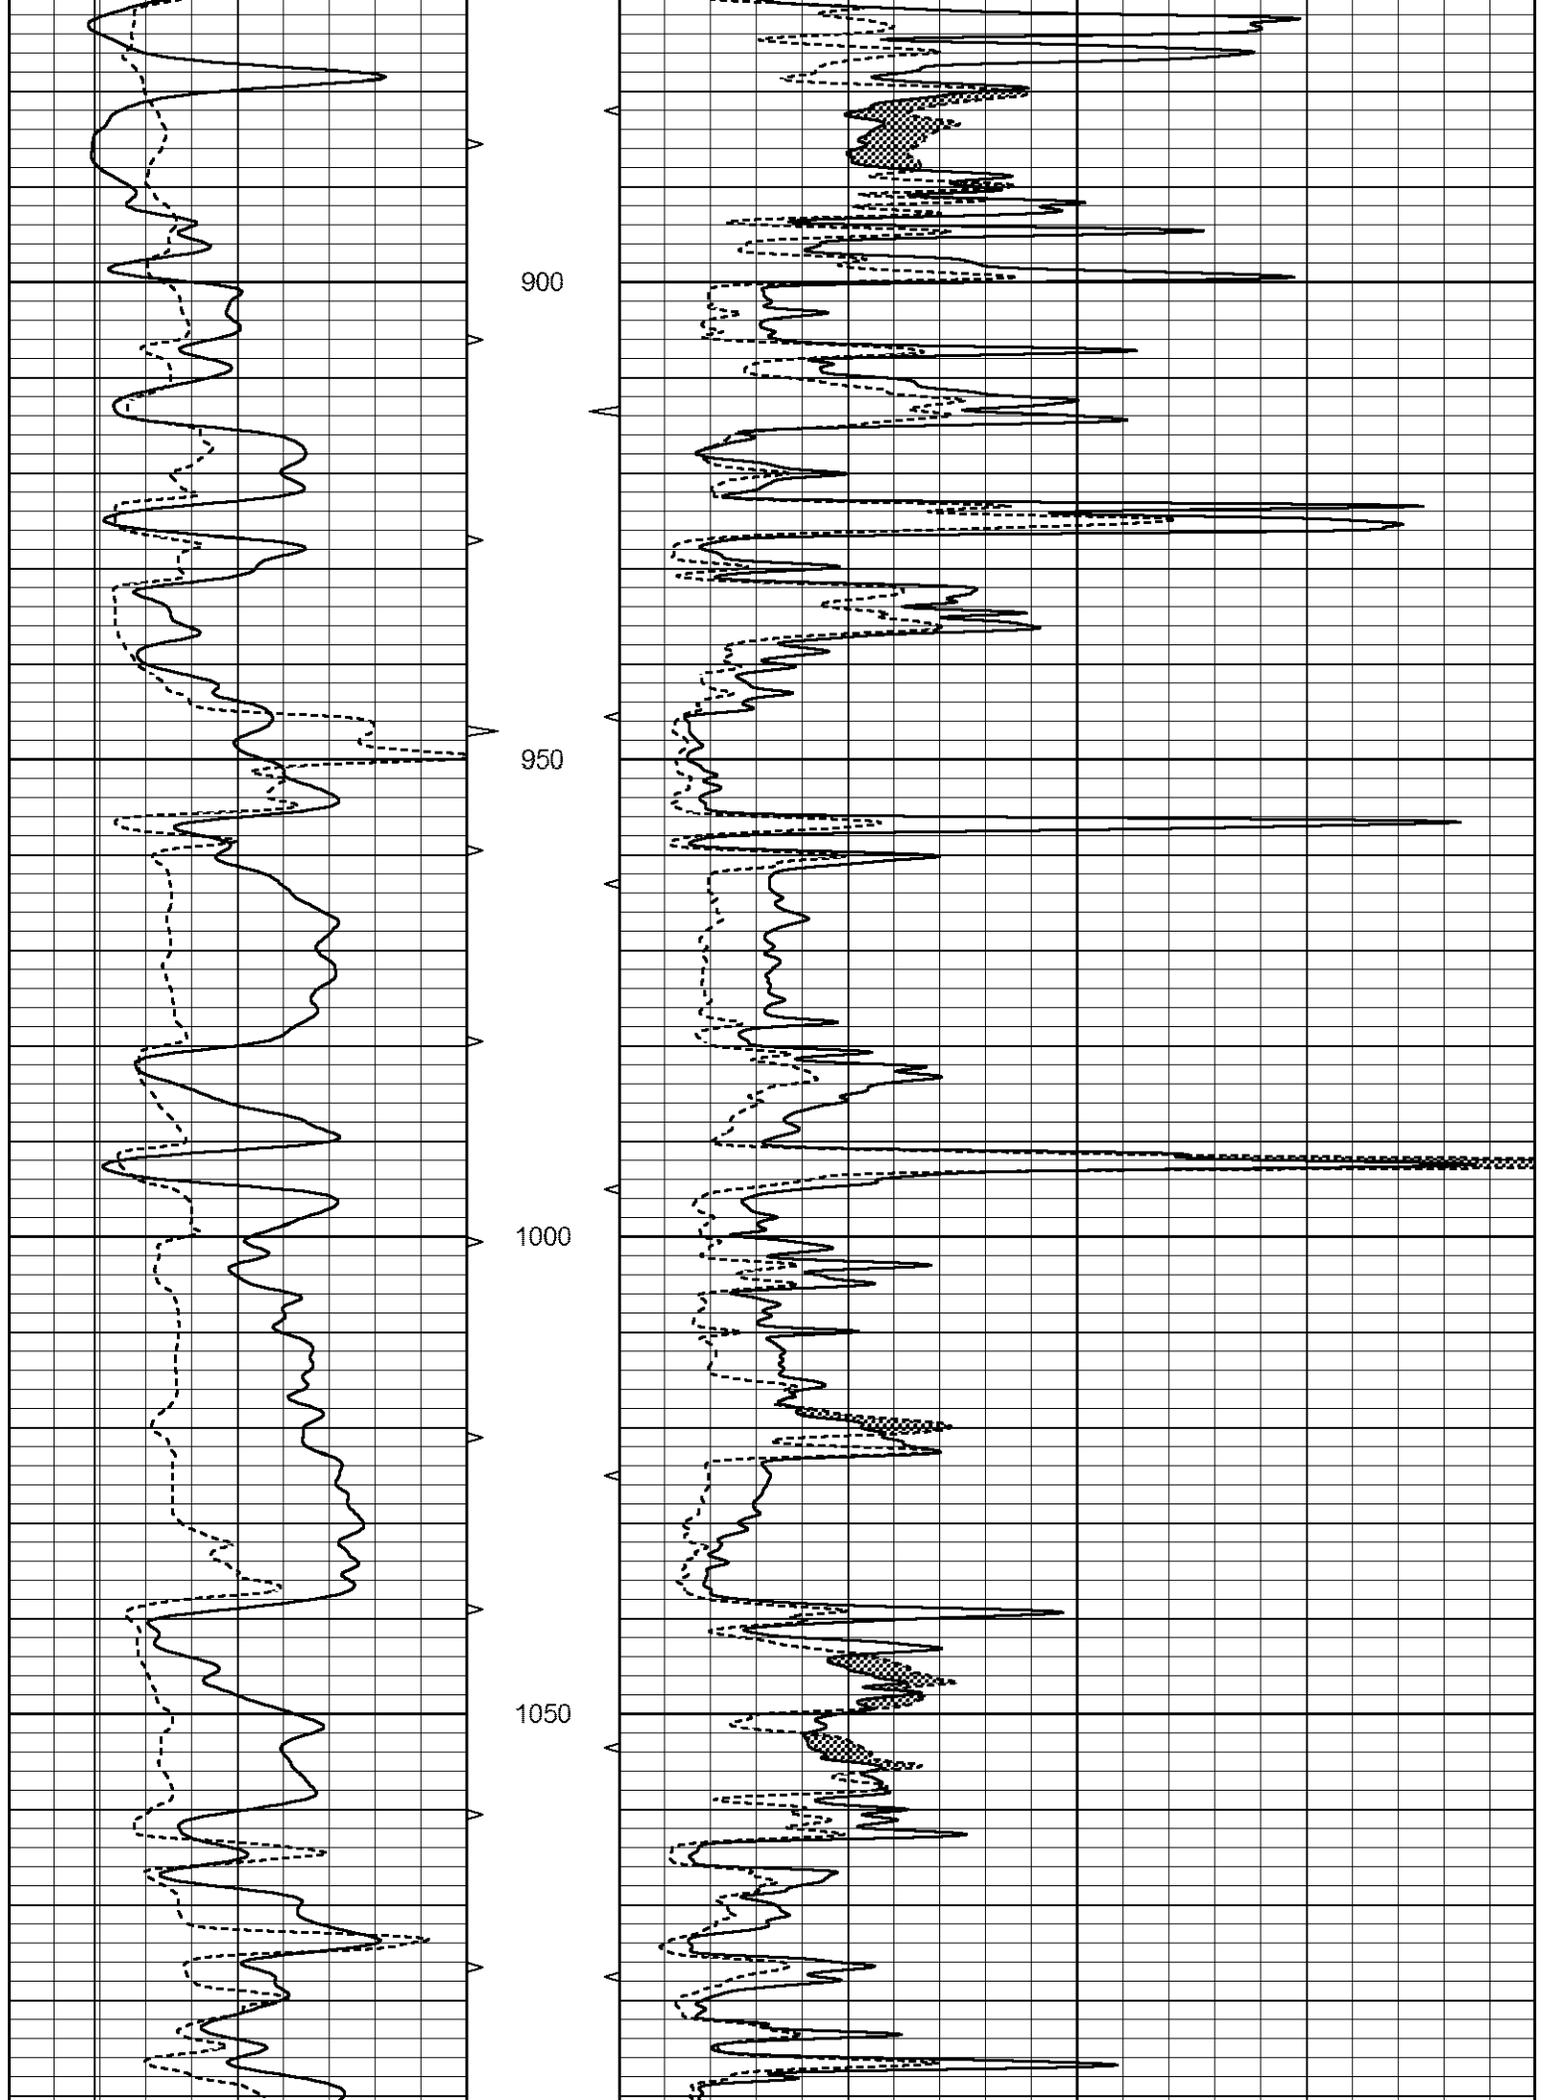

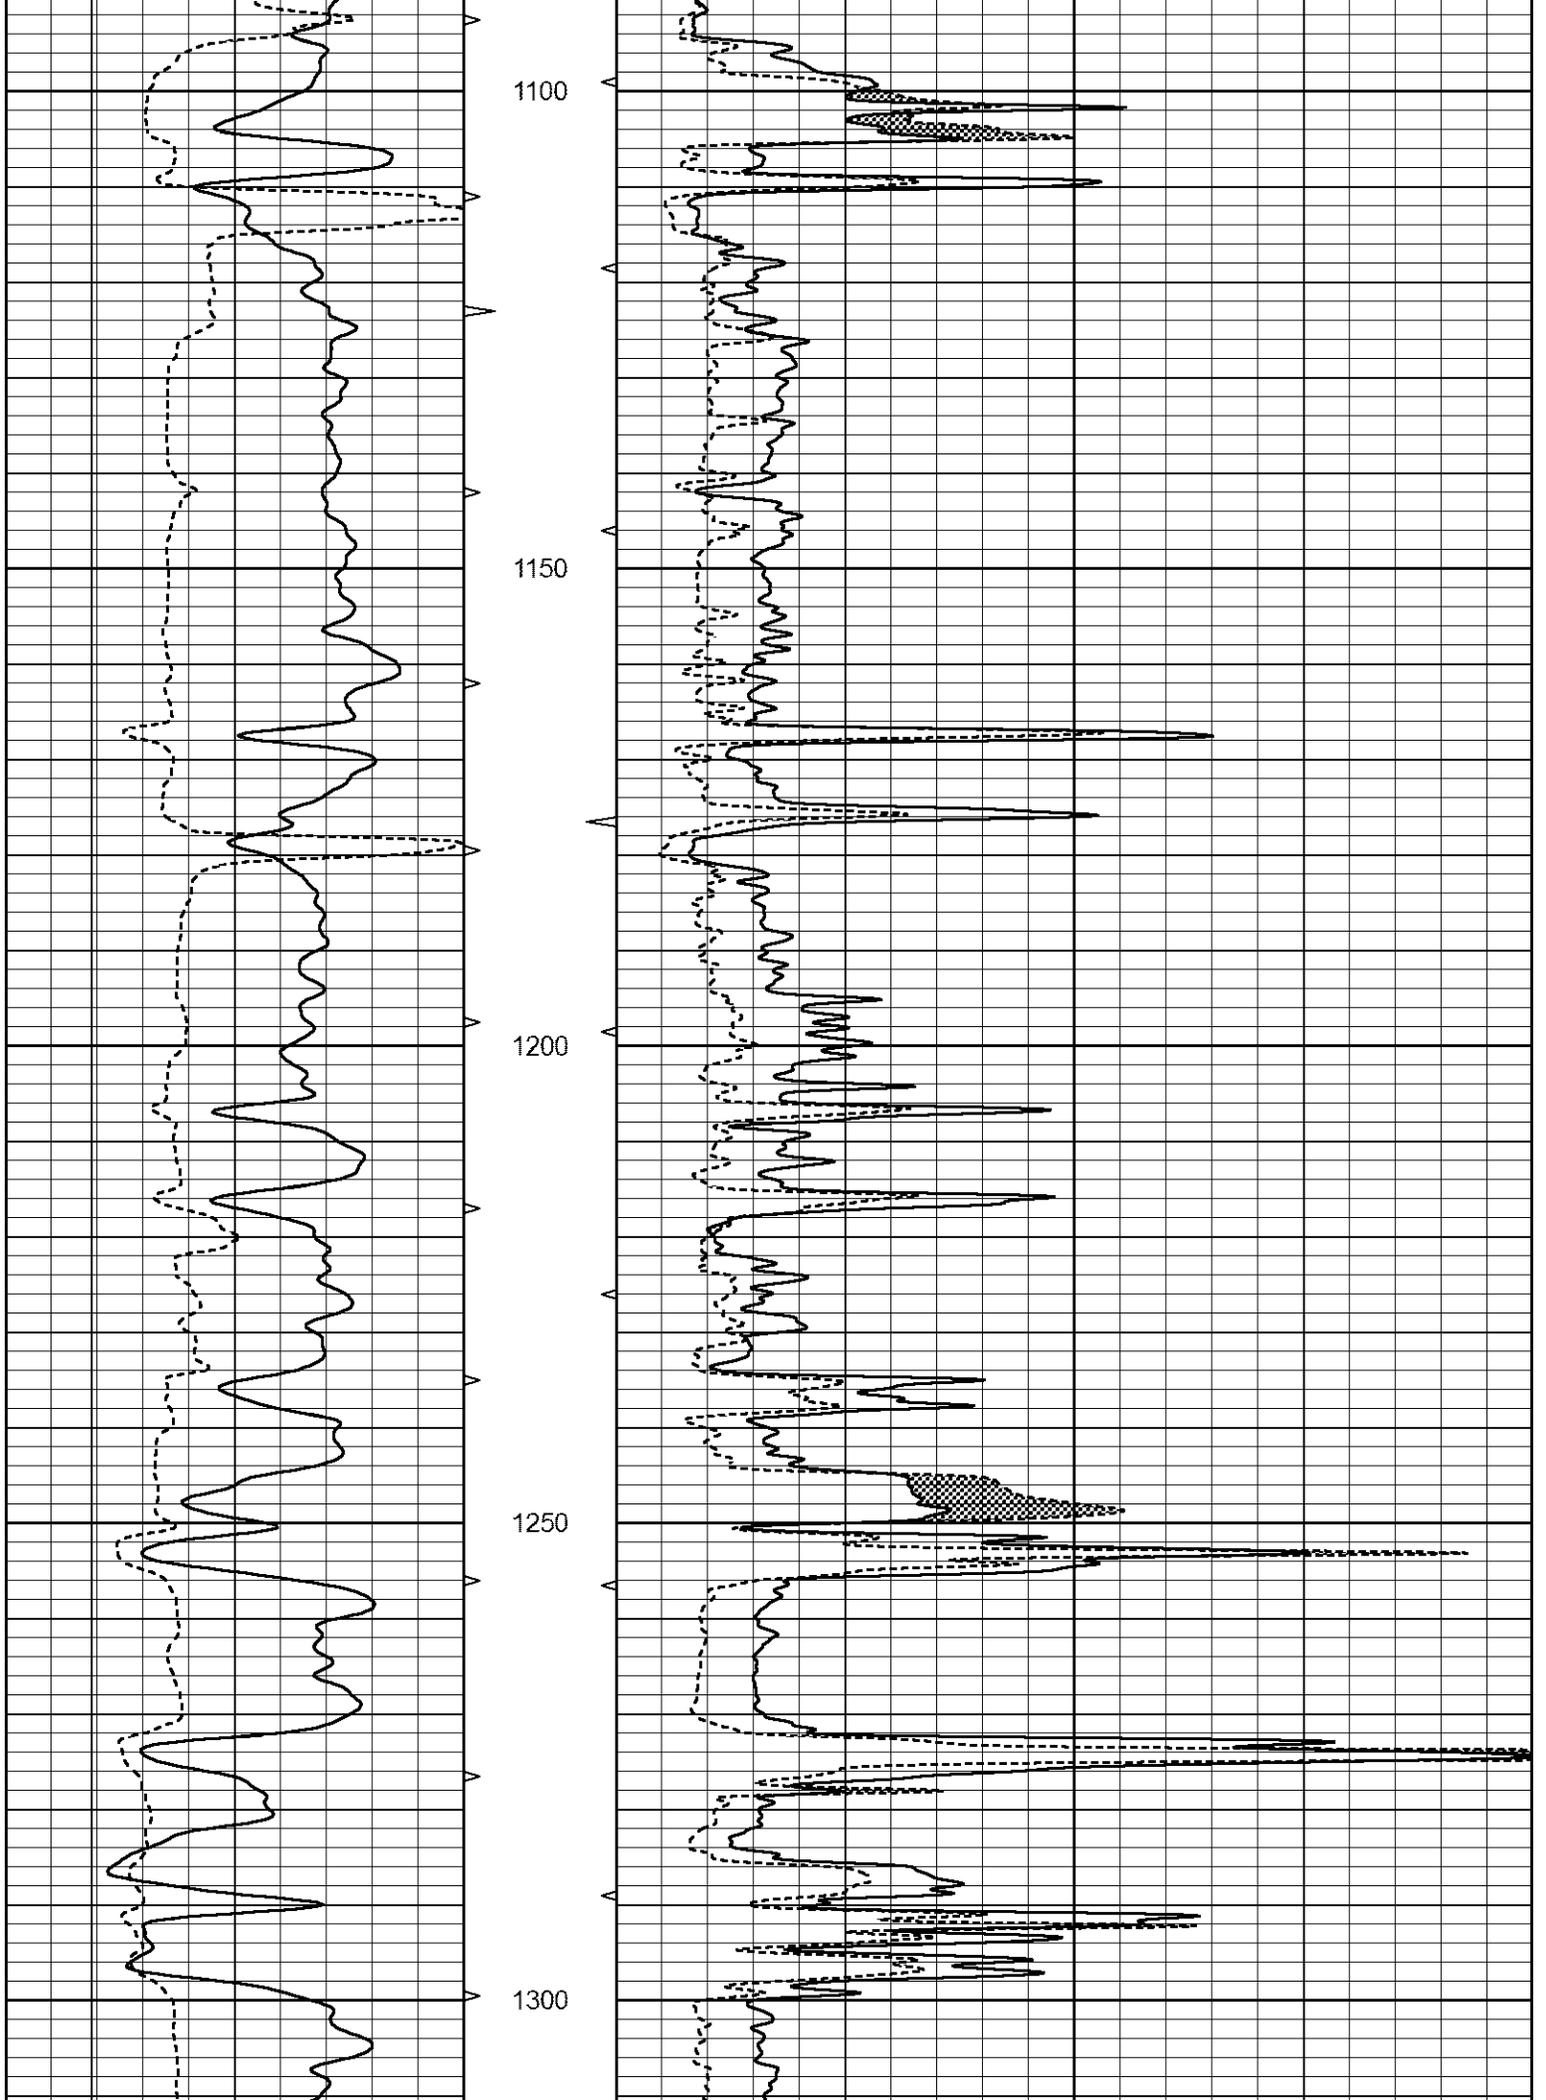


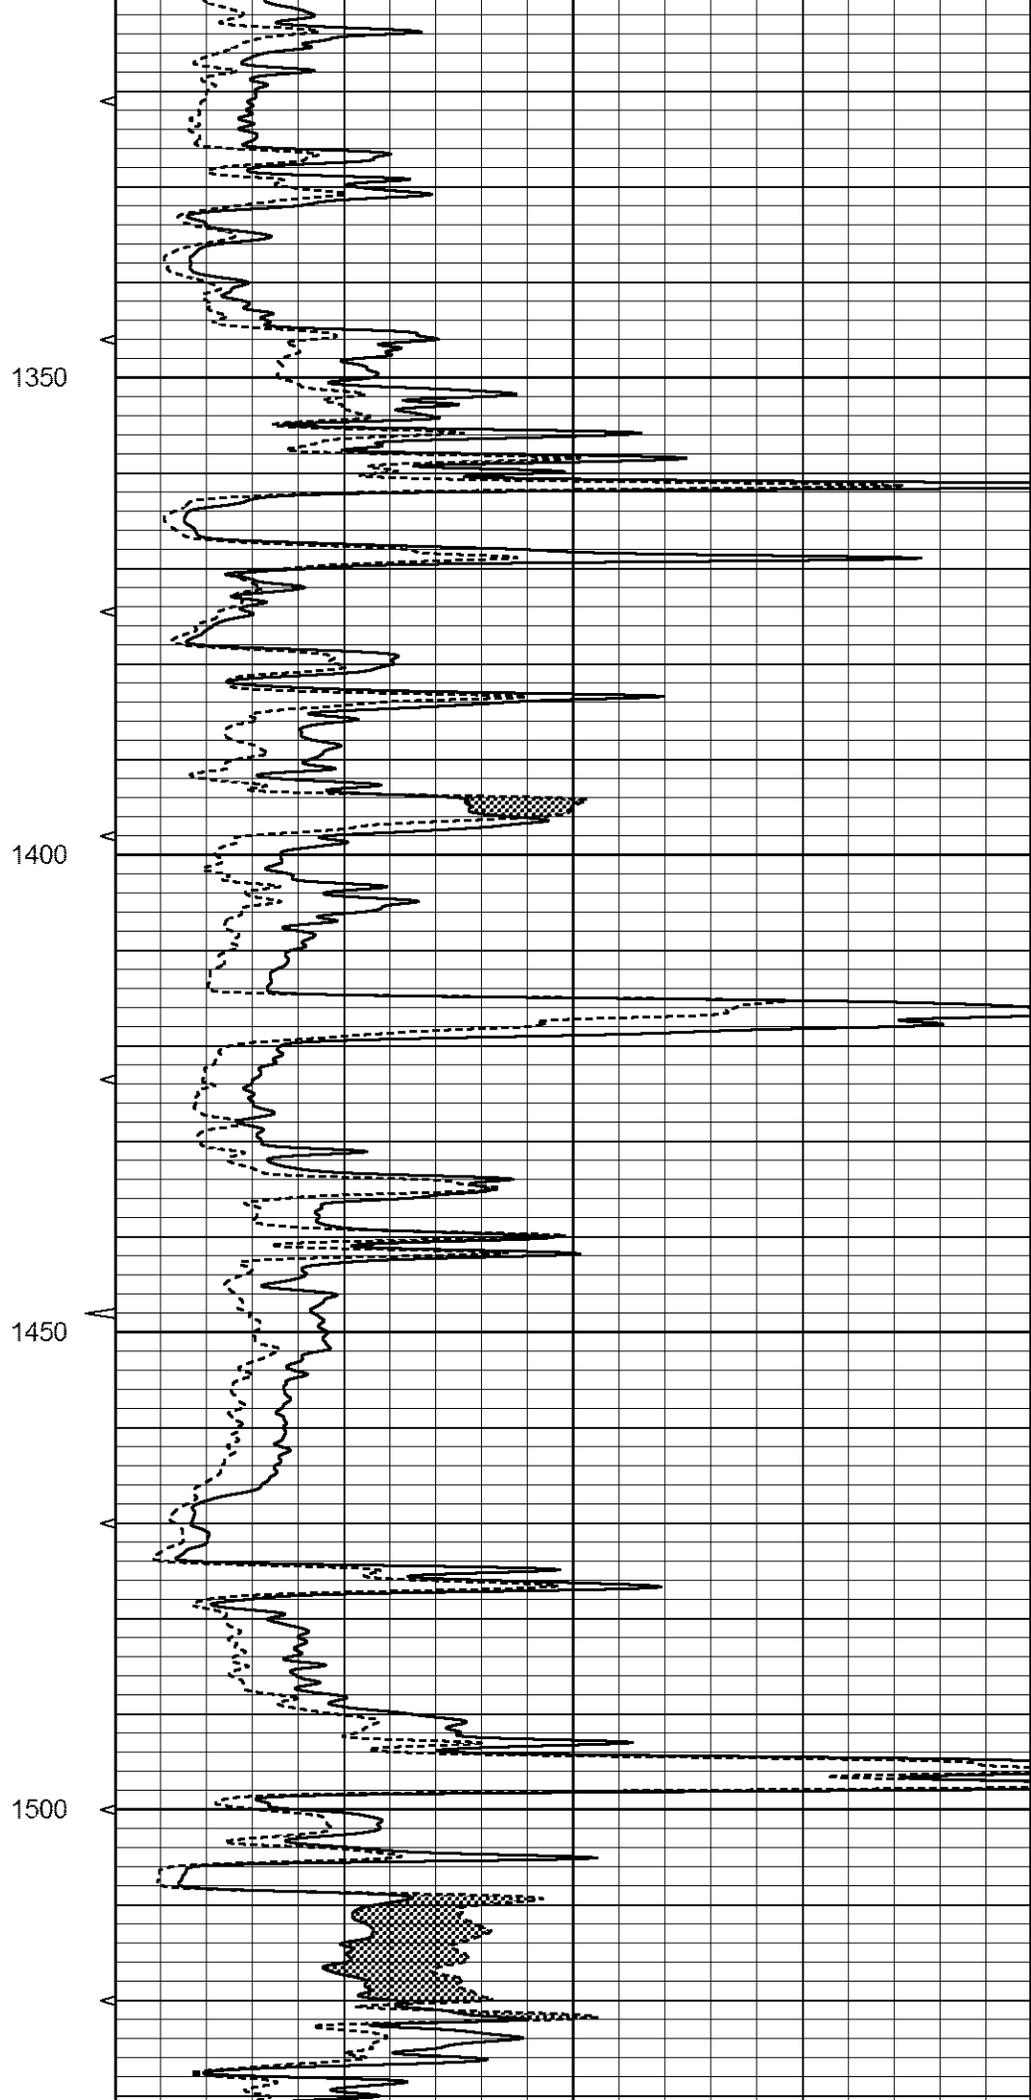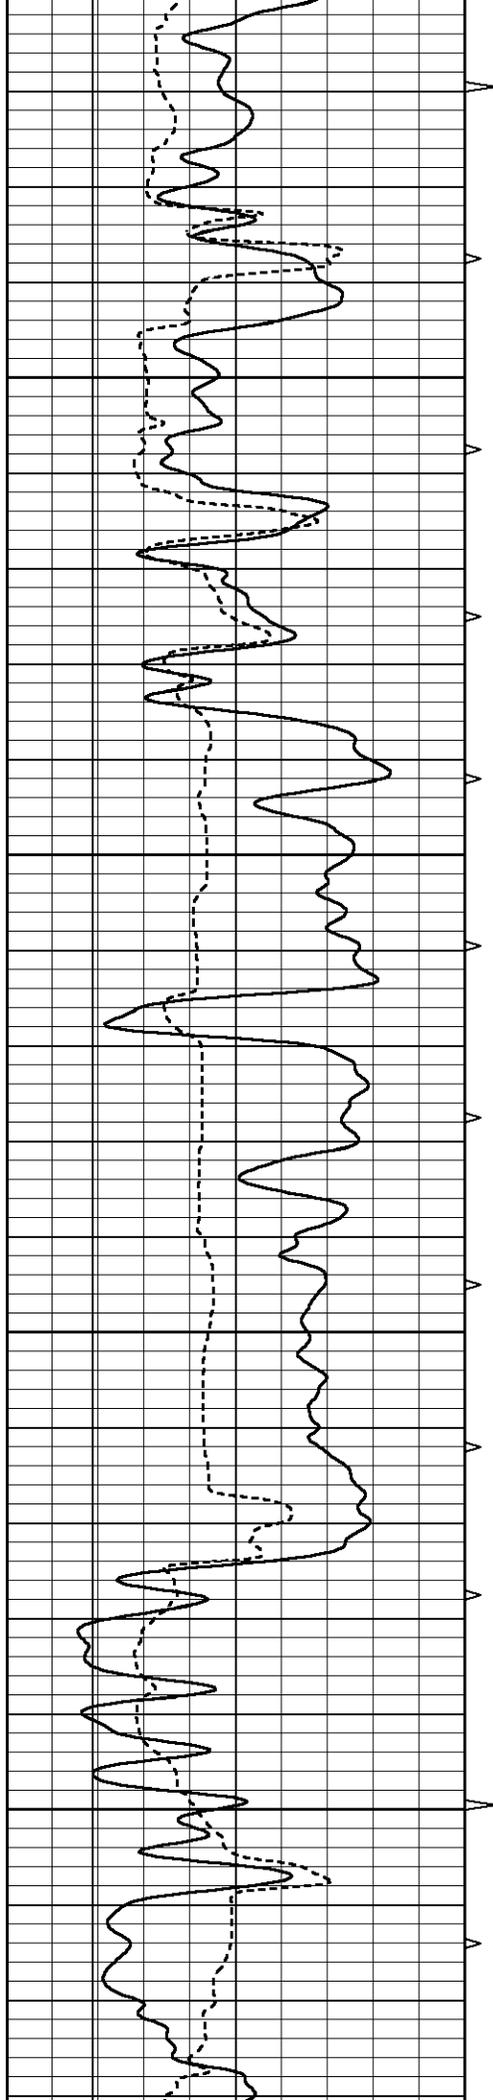


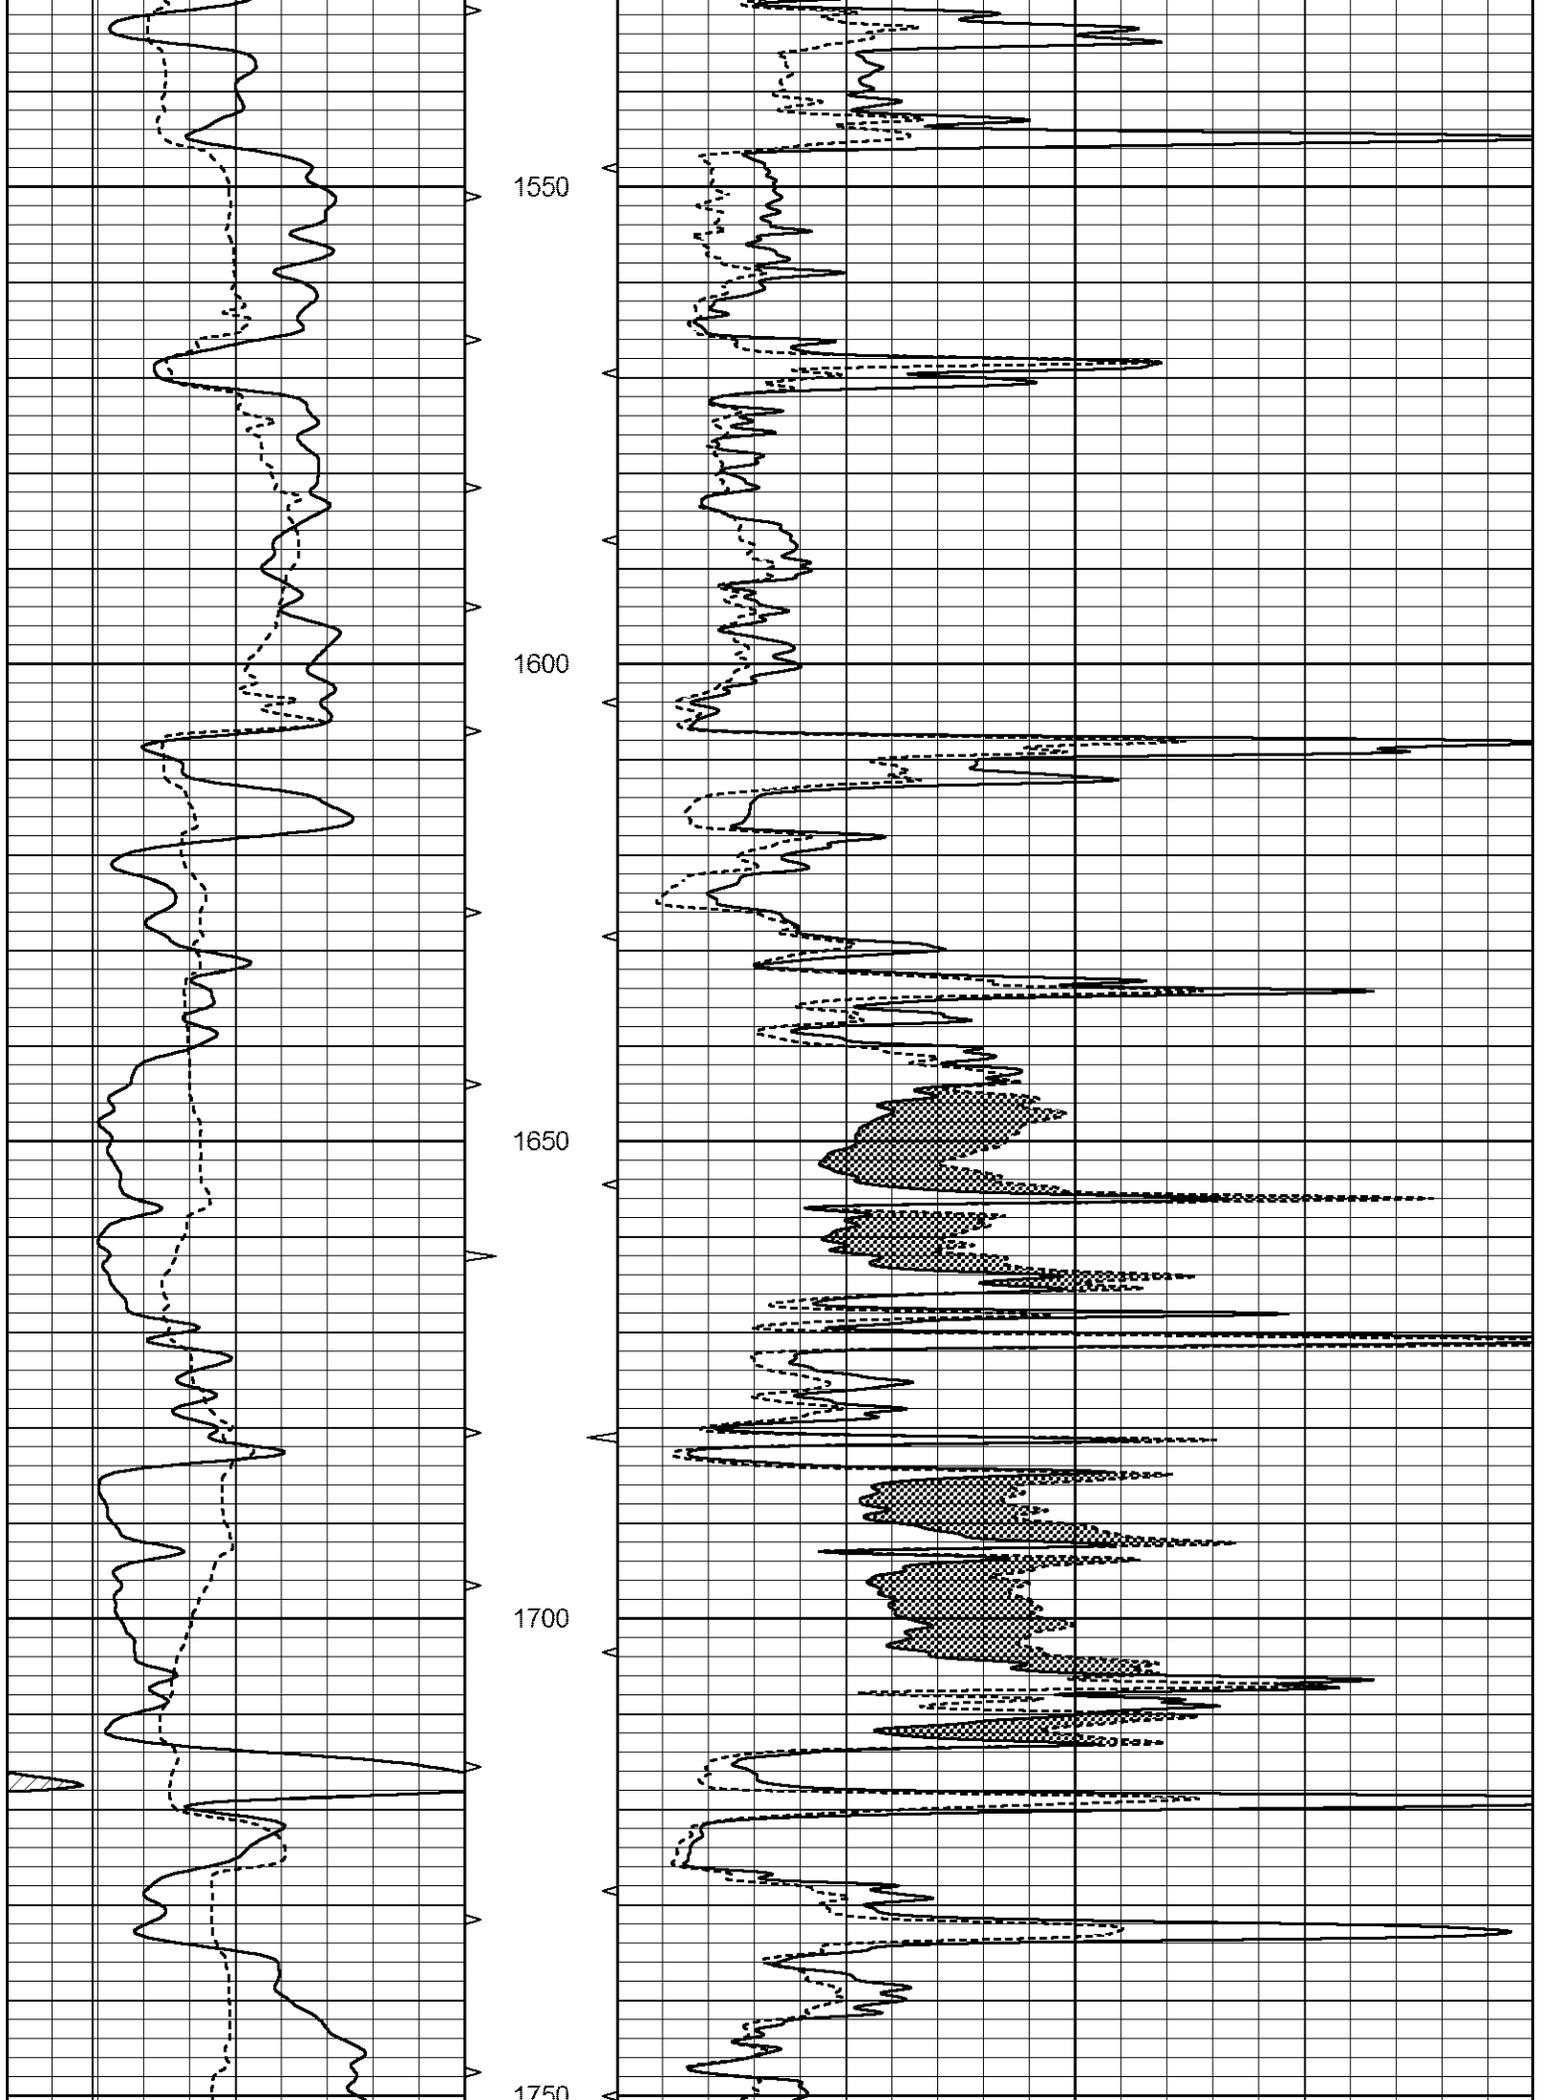

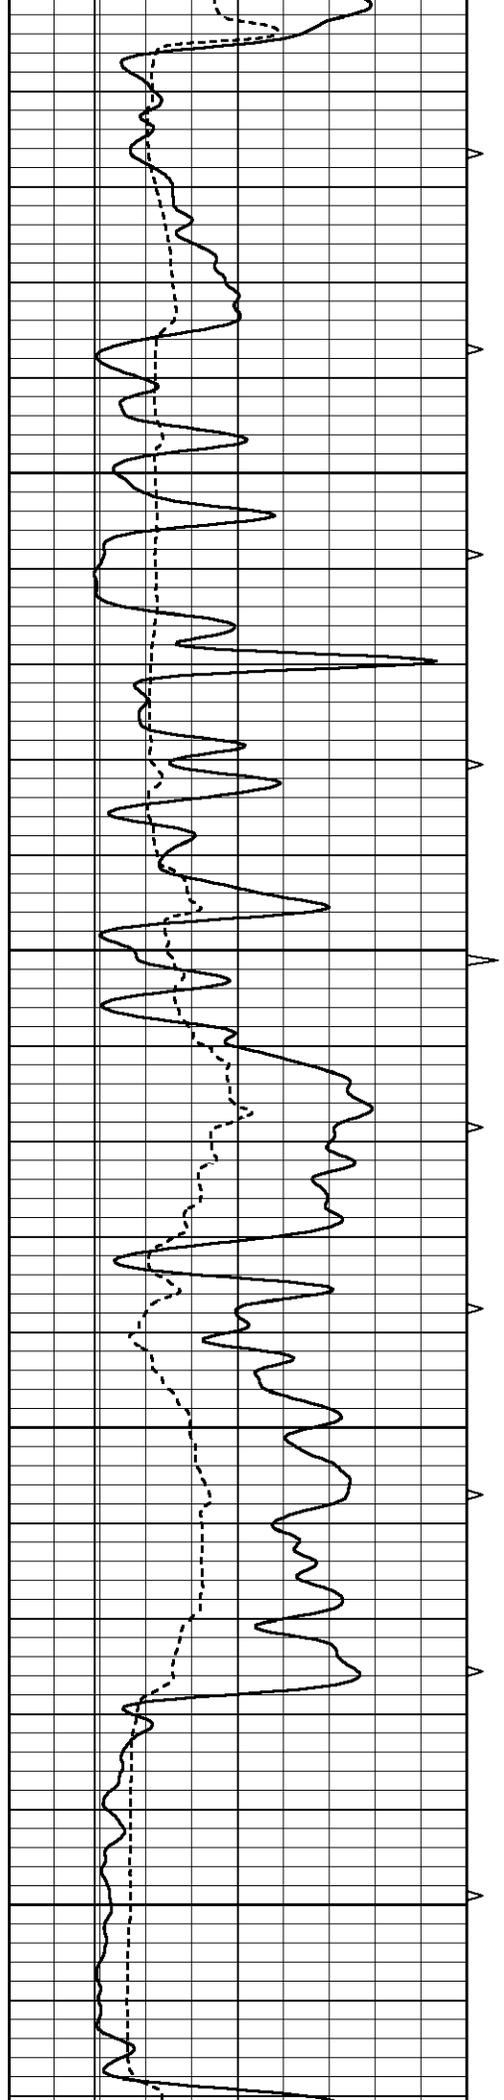

1950 1955 1960 1965 1970

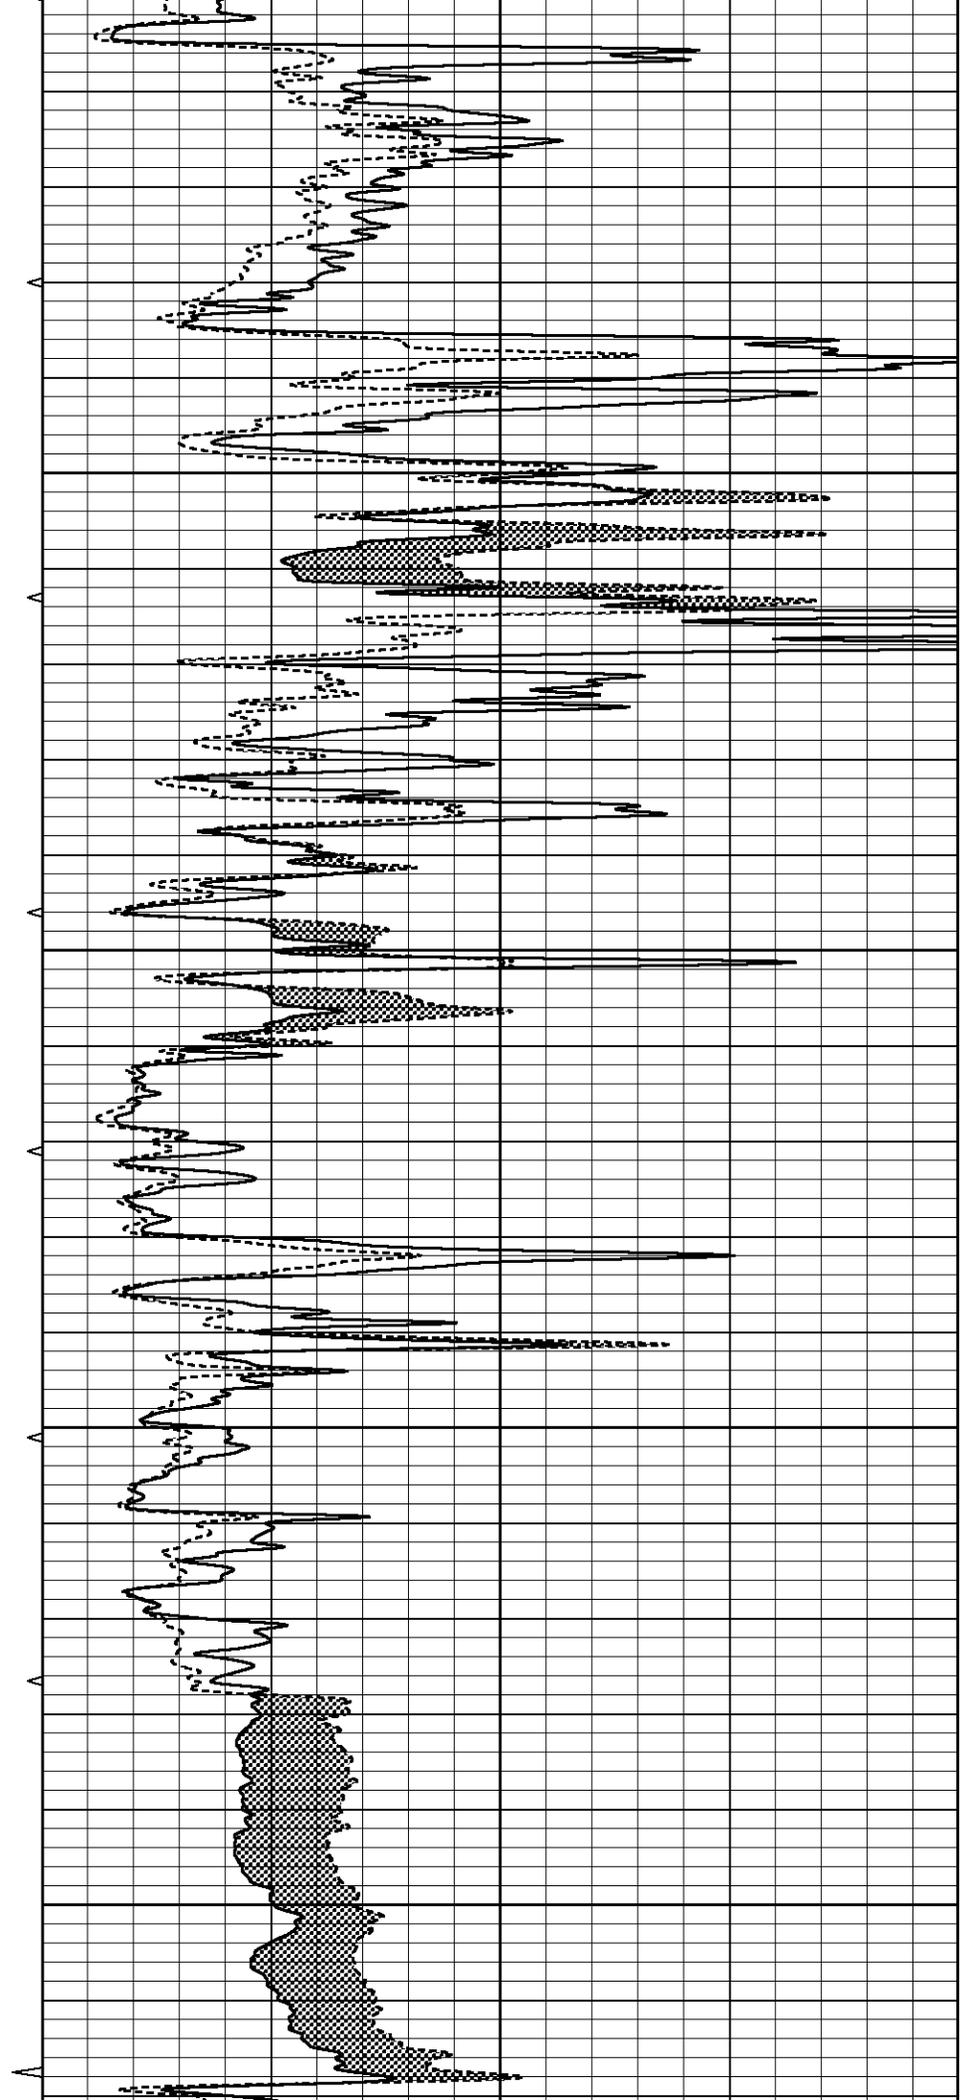

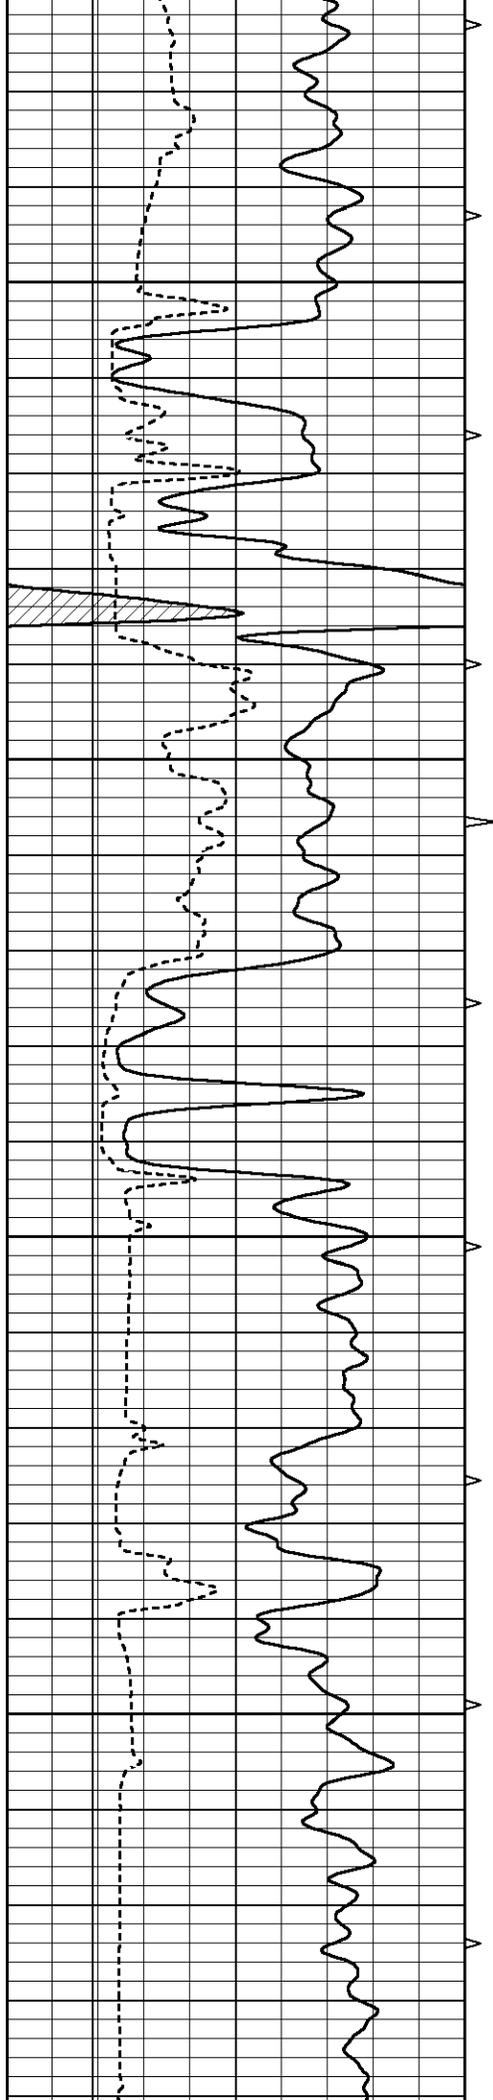




2000



2050



2100



2150

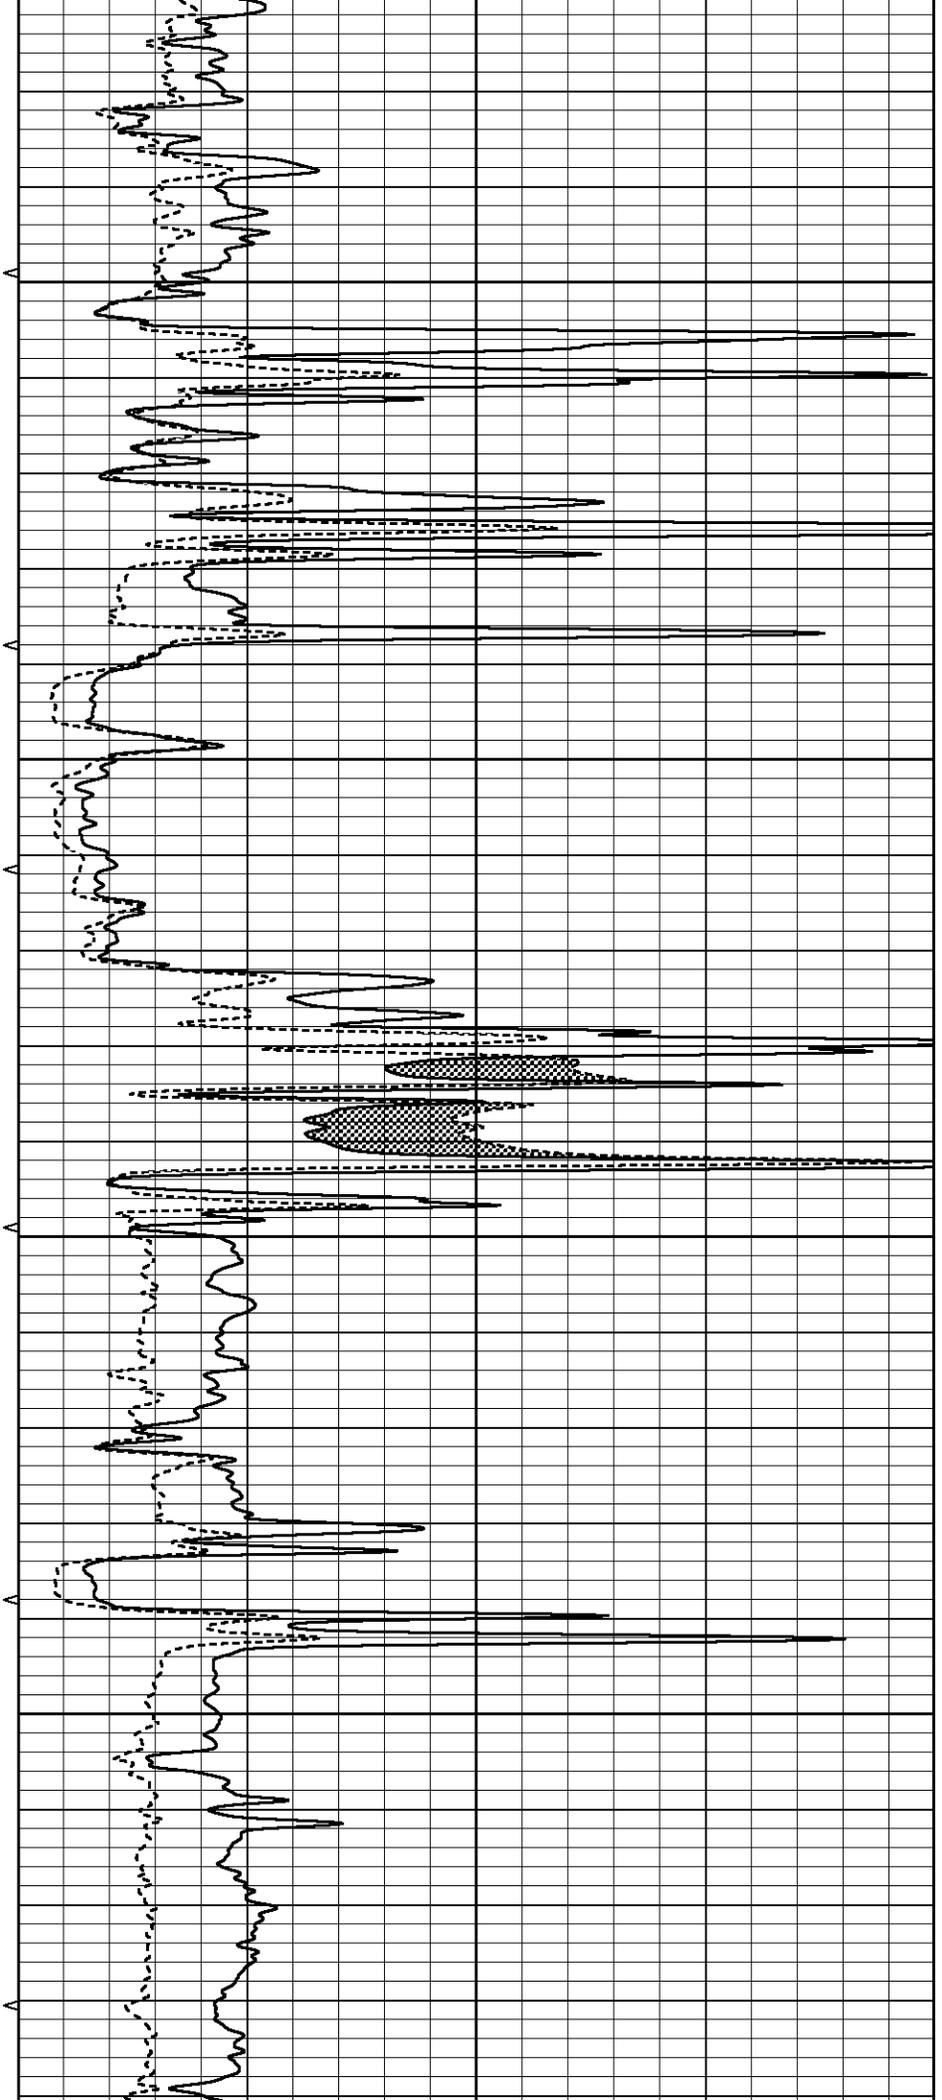

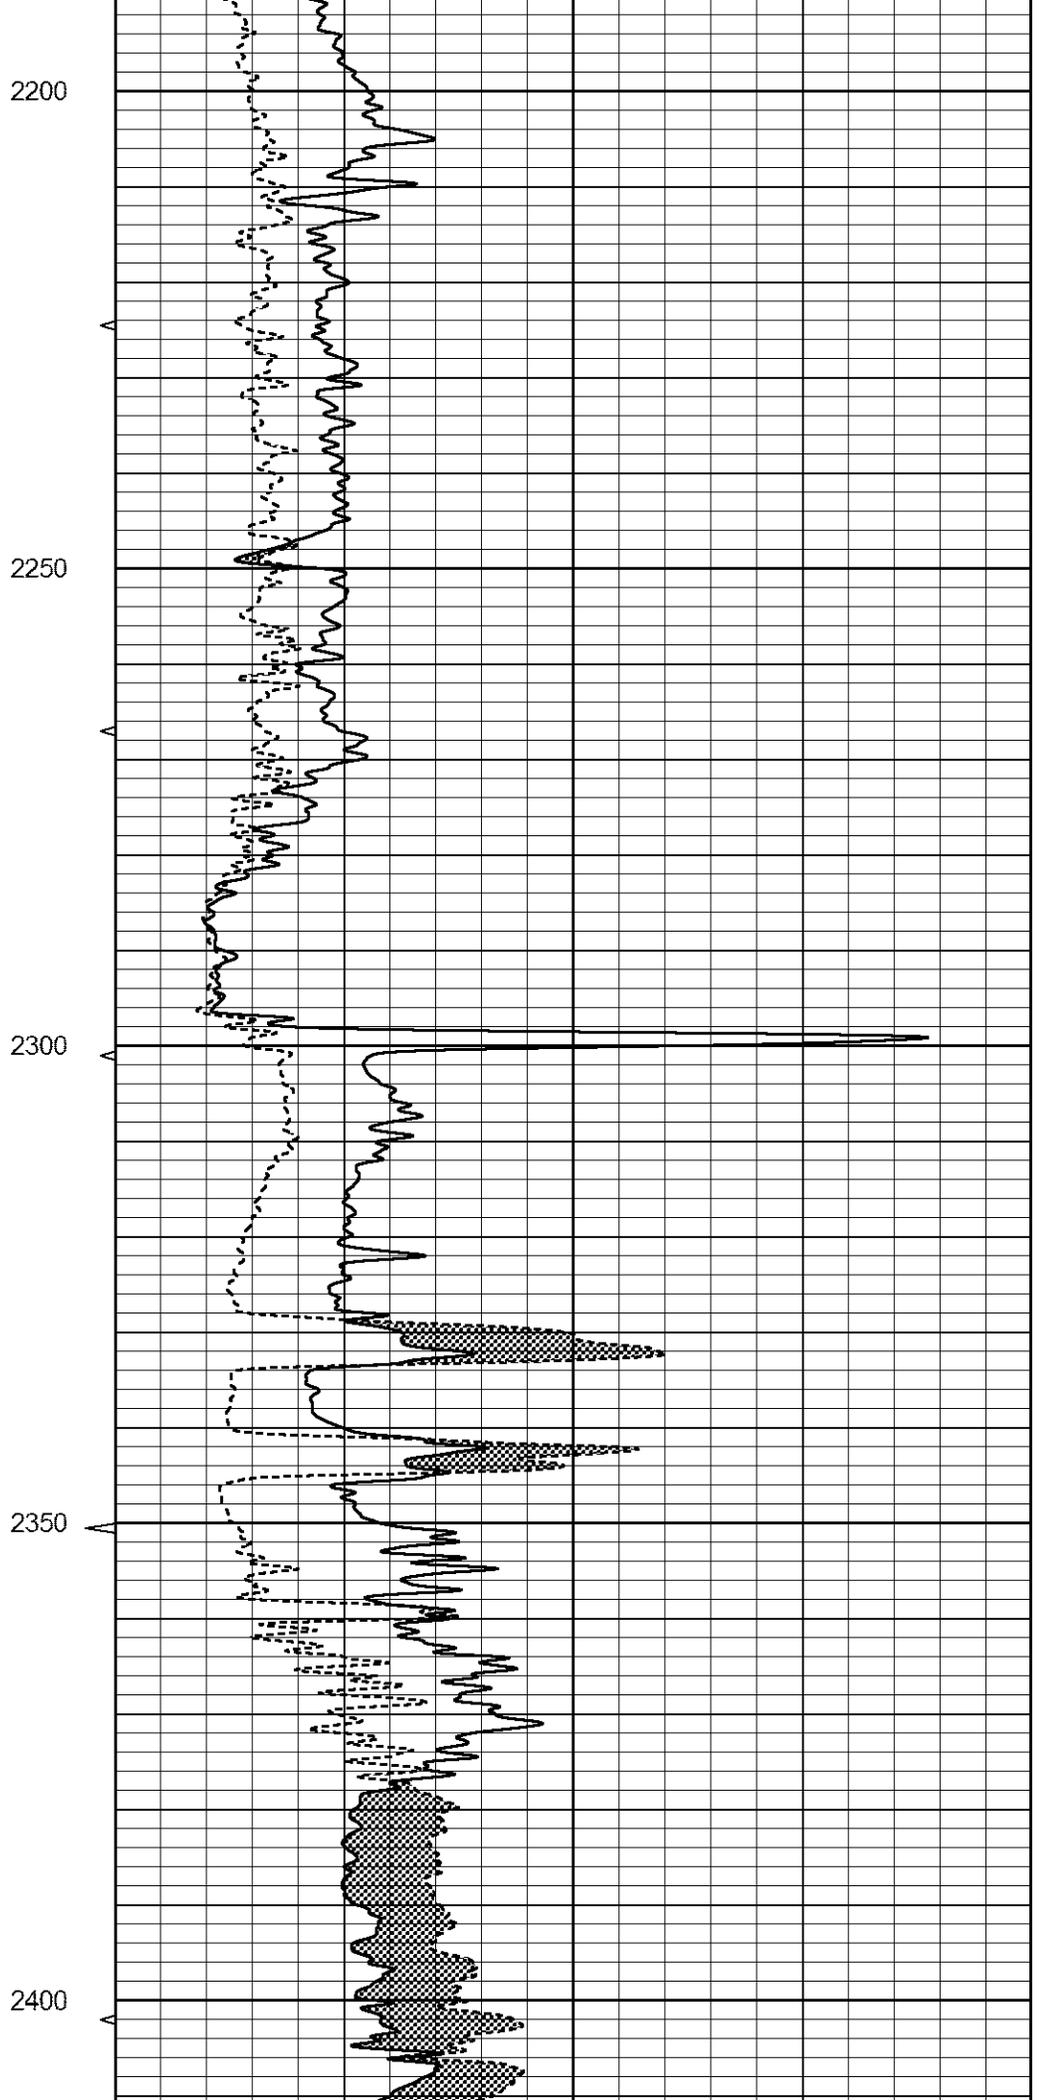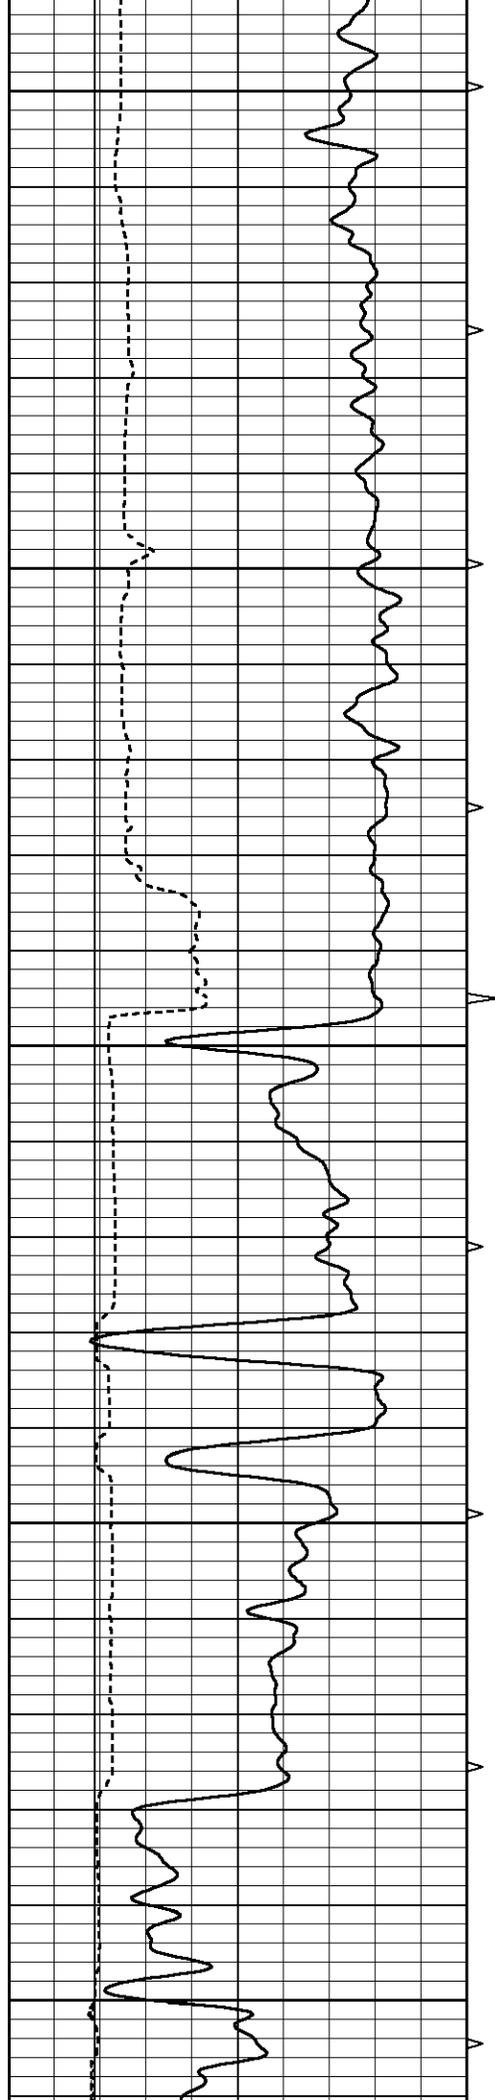

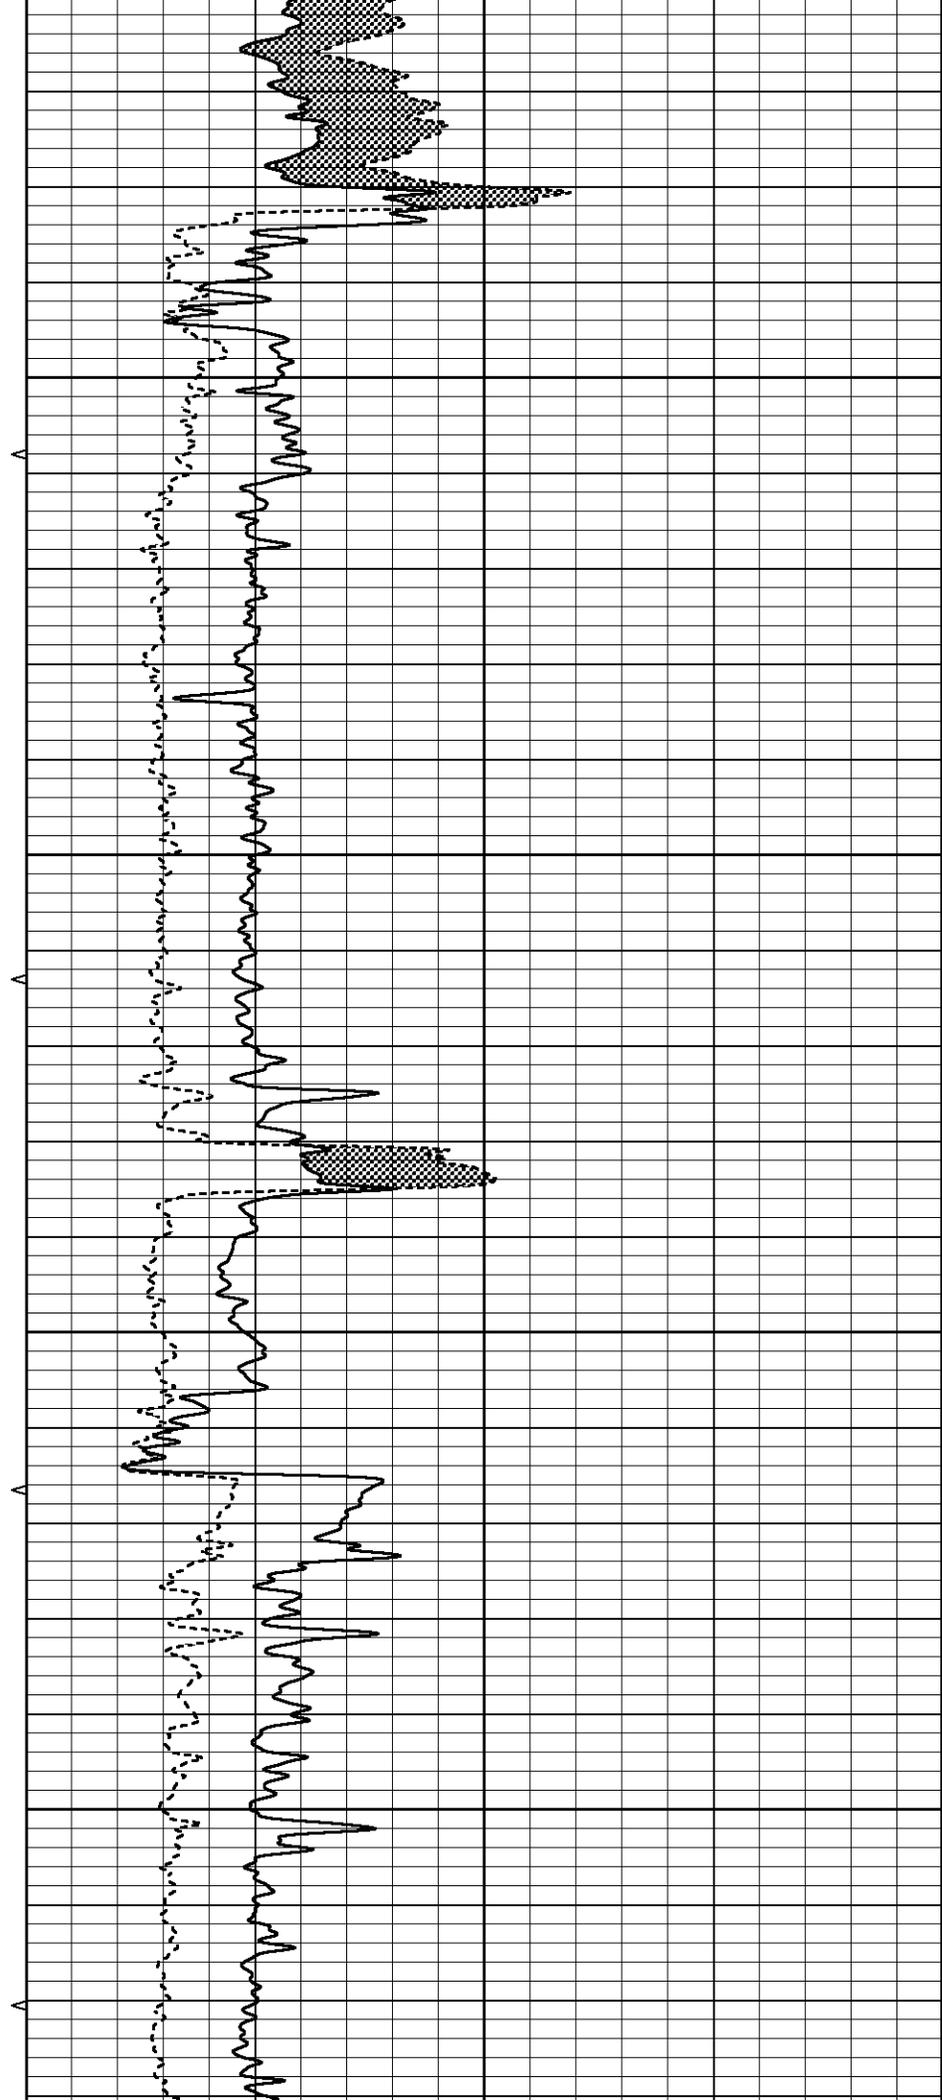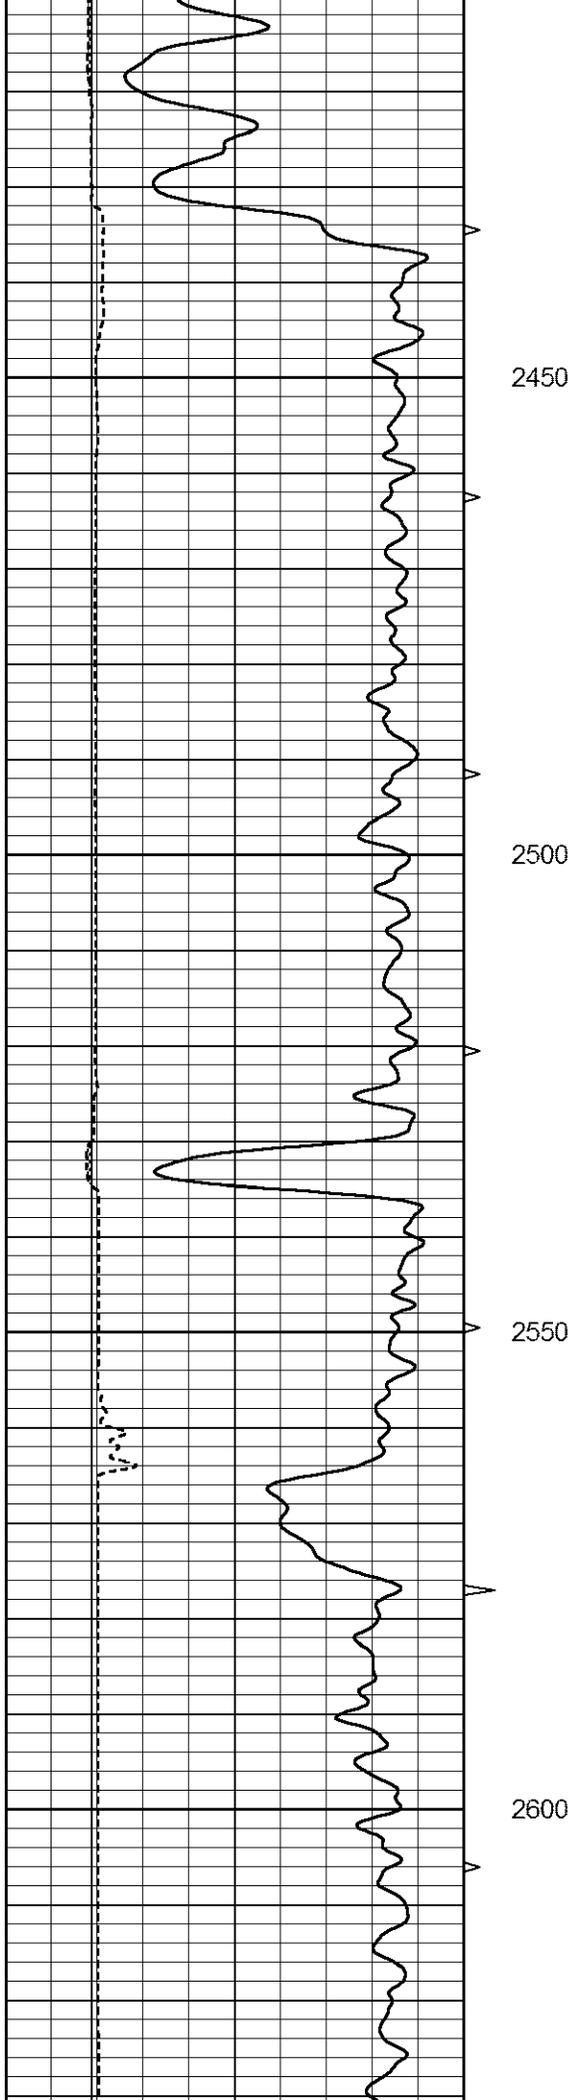

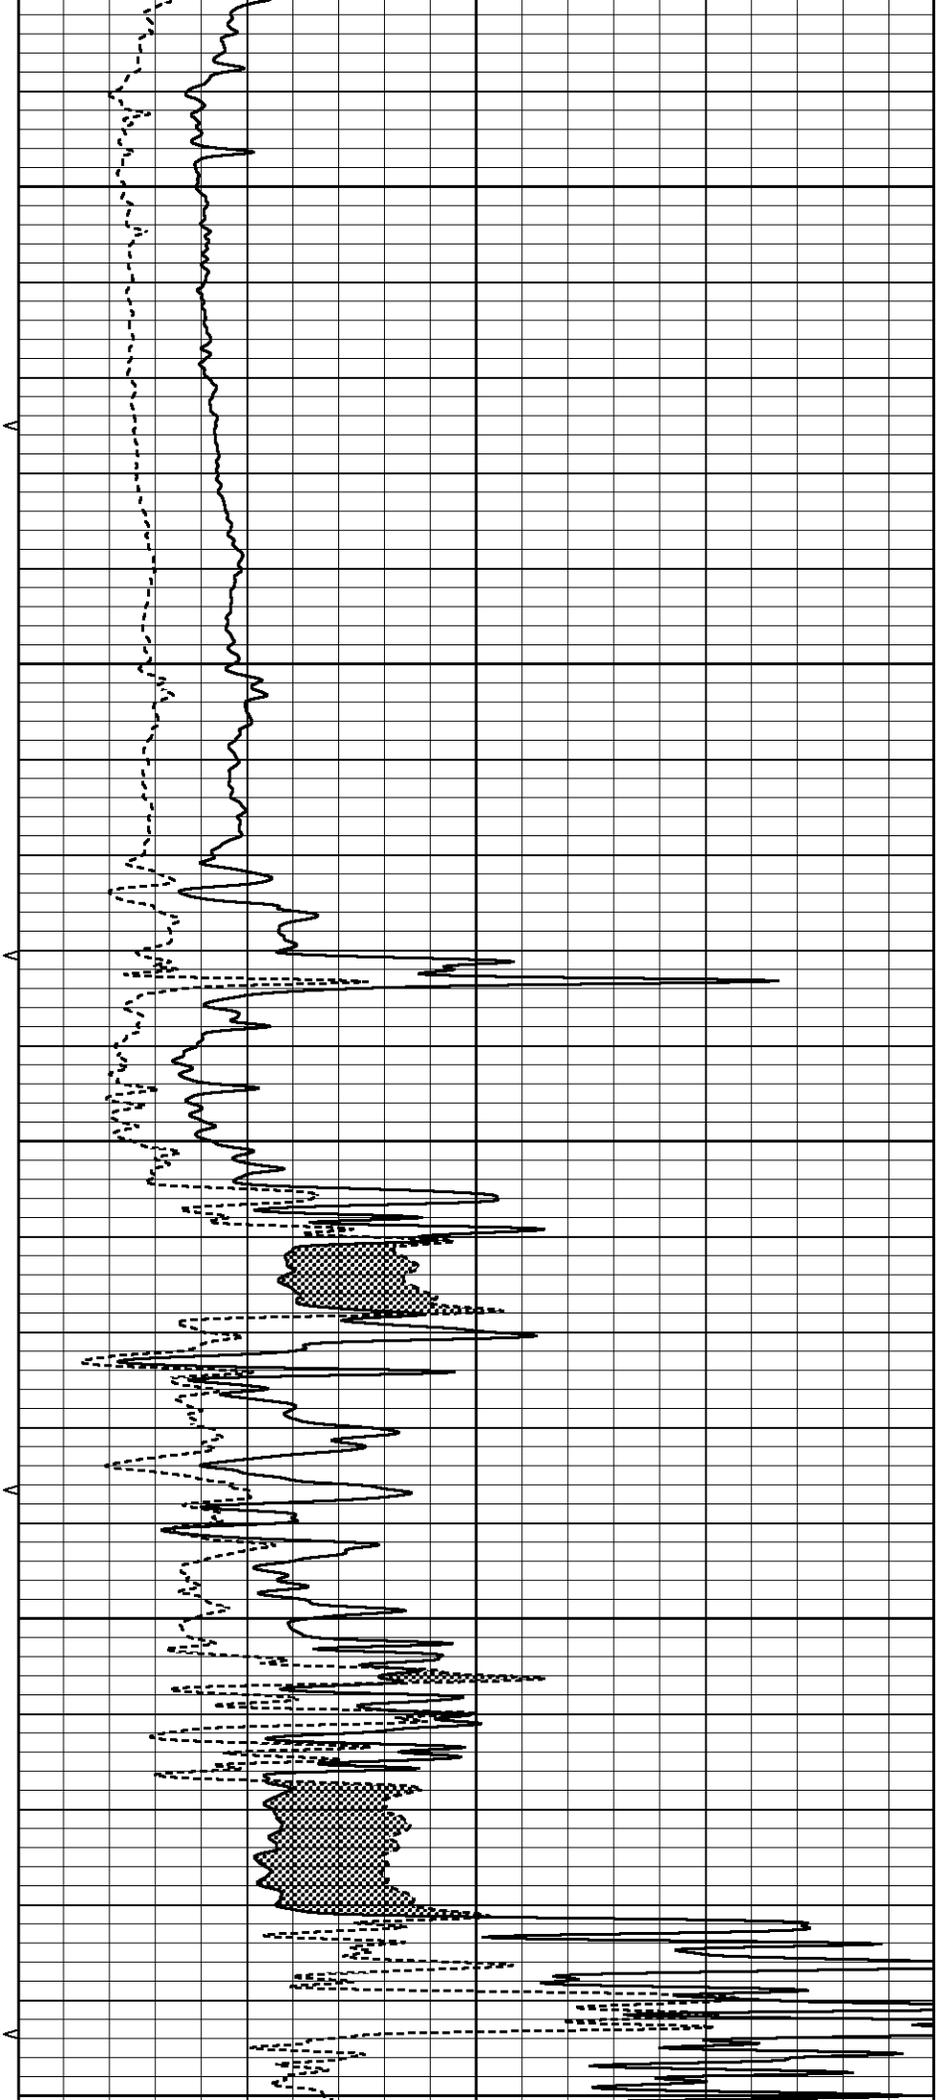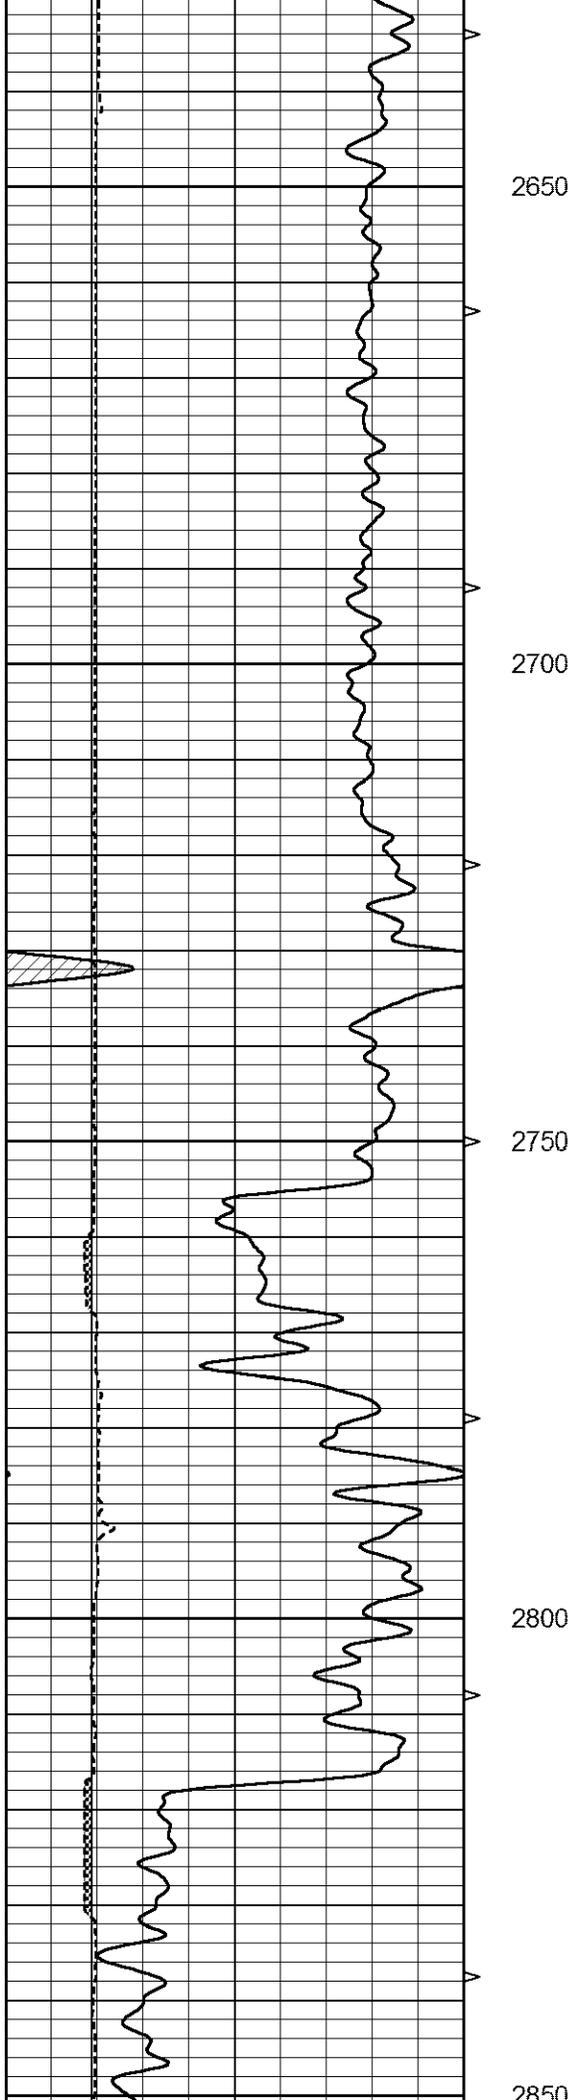

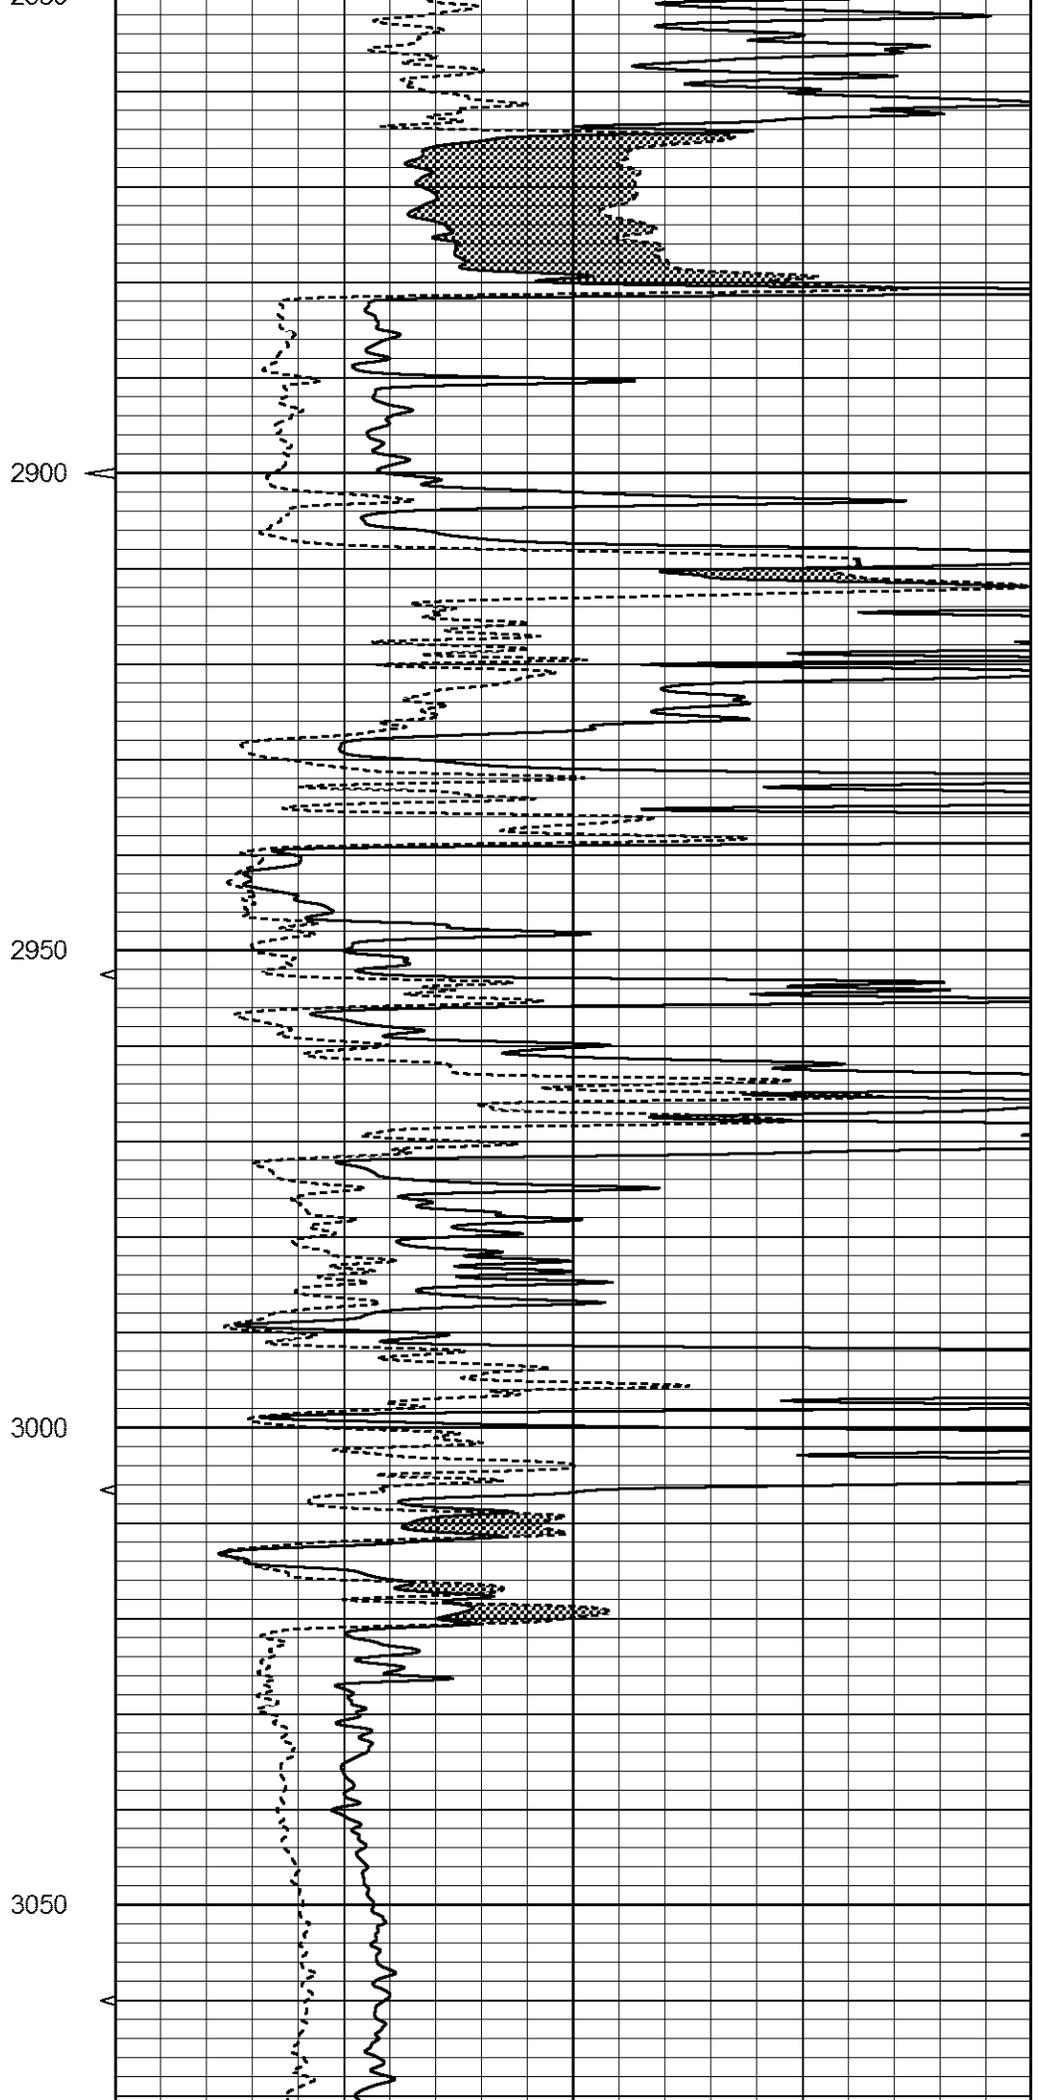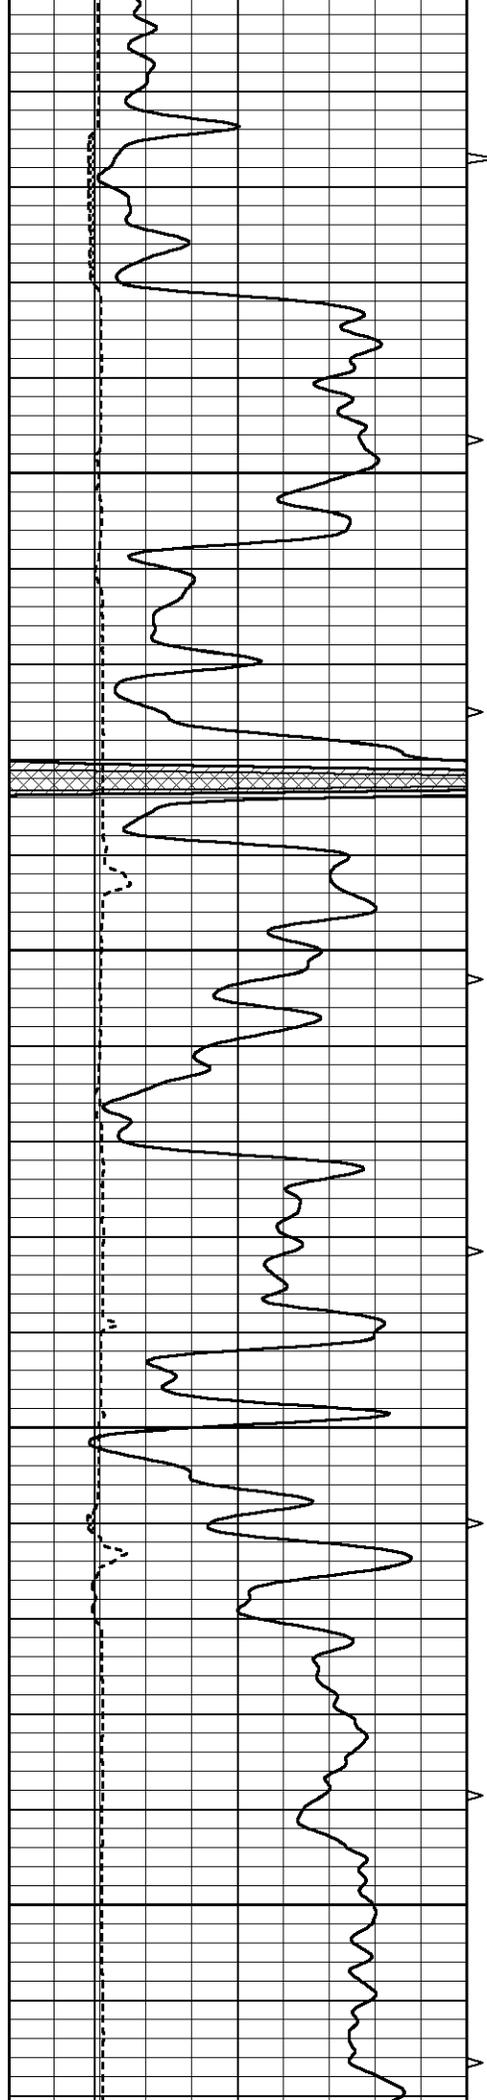


2900

2900

2950

3000

3050

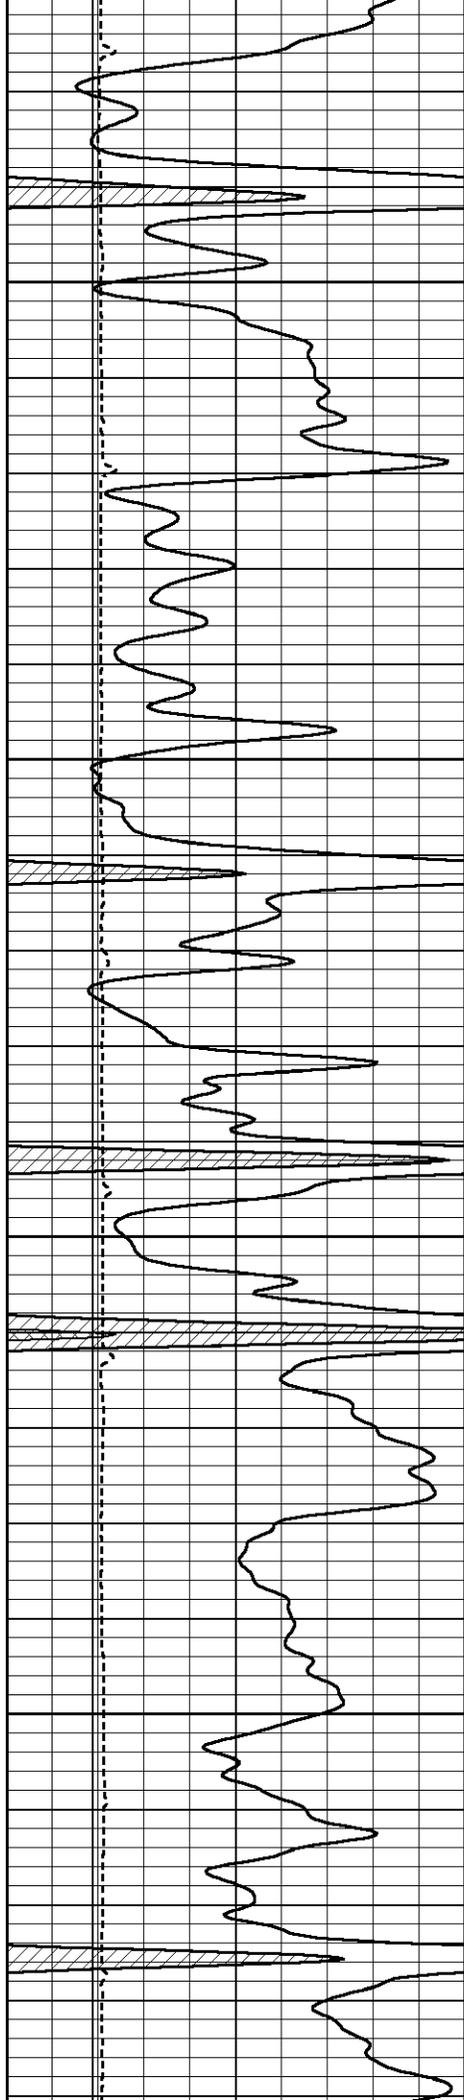



3100

3150

3200


3250

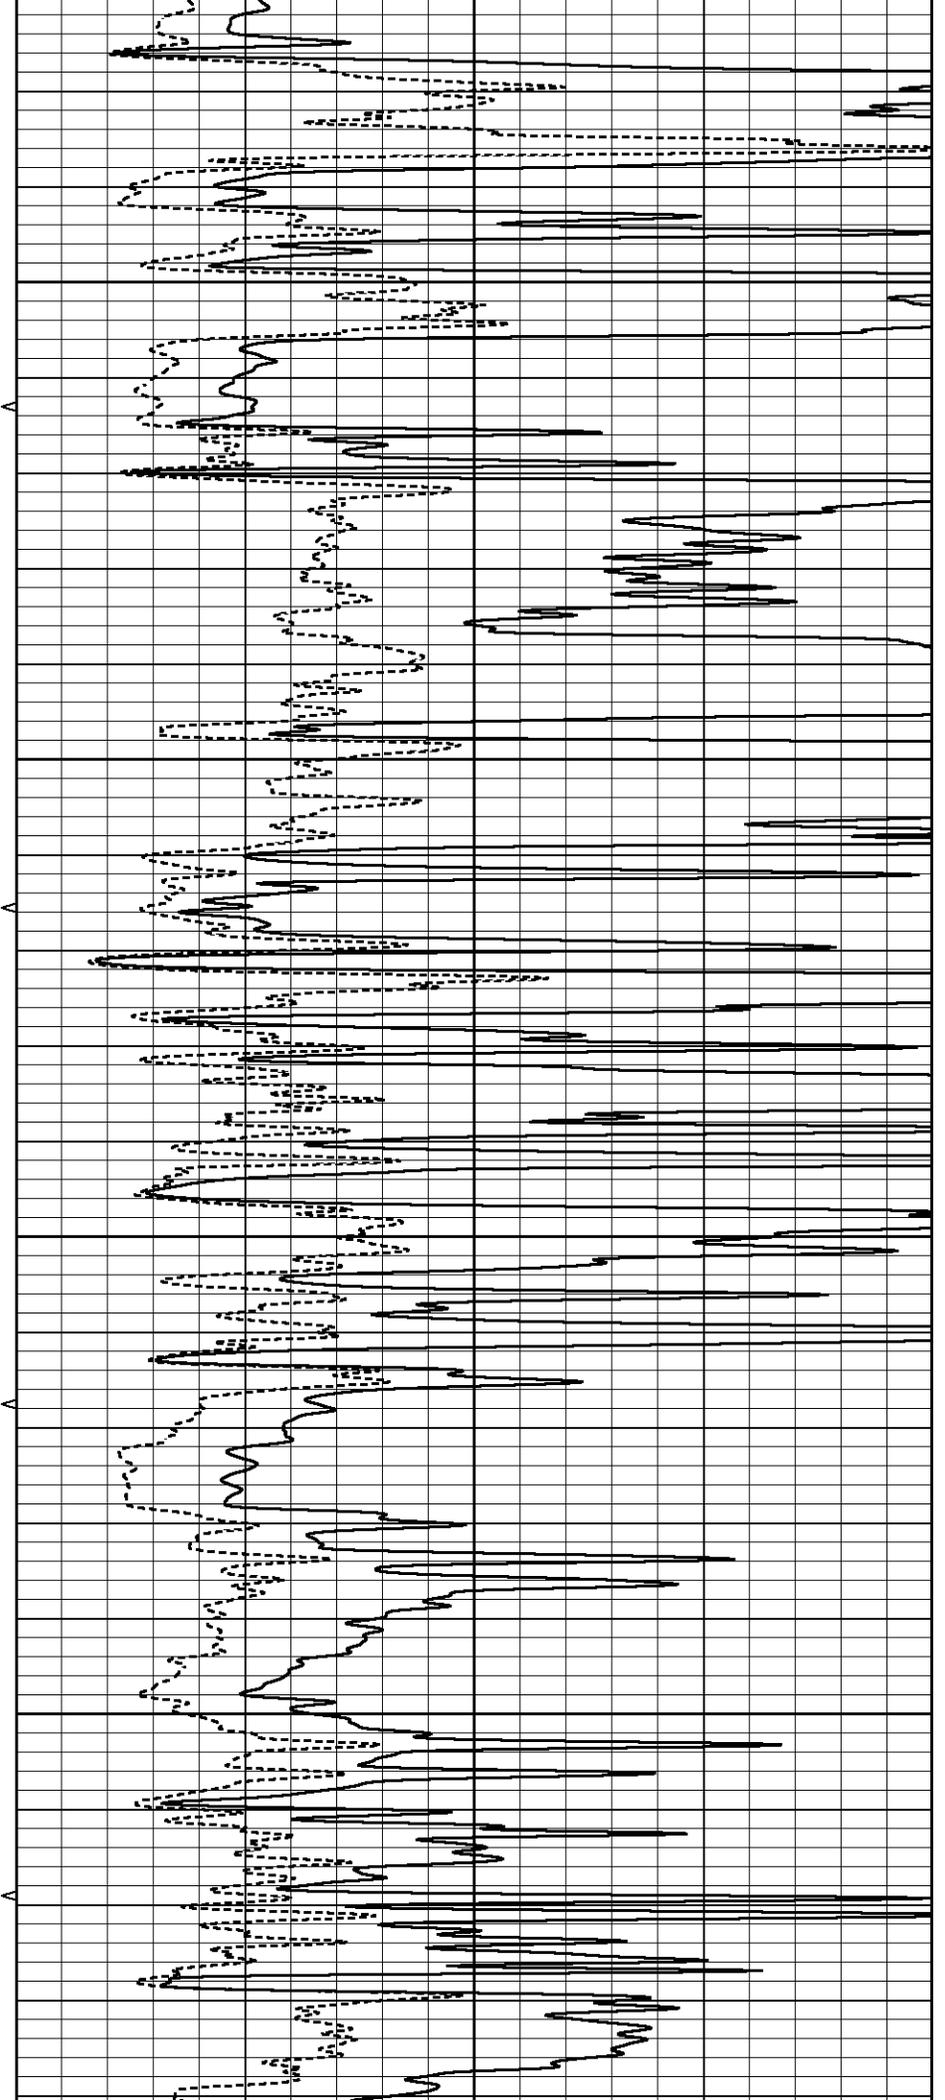


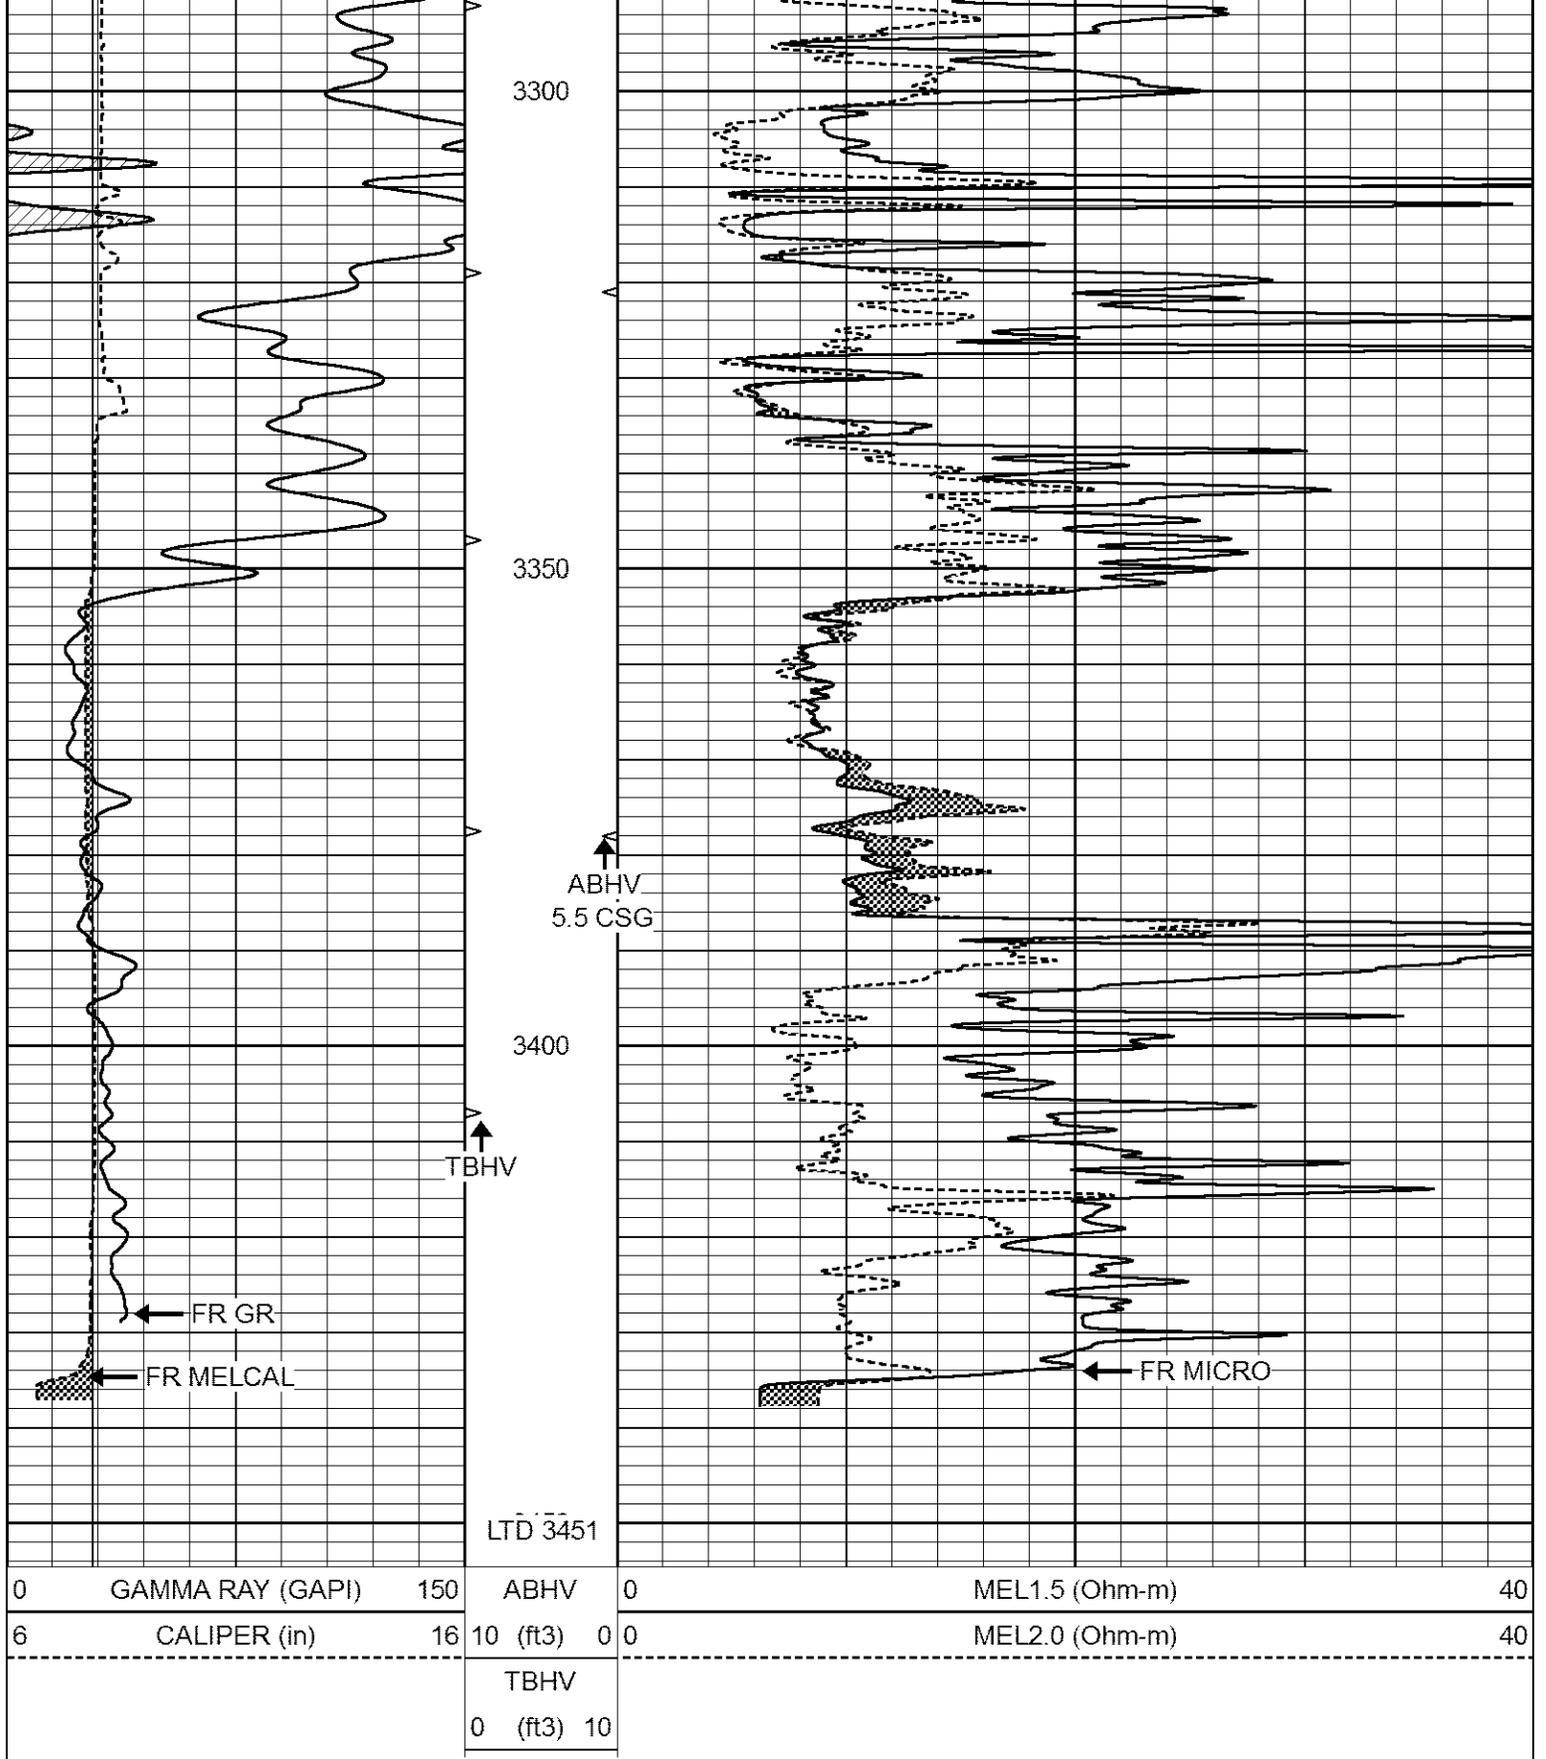

REPEAT SECTION

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

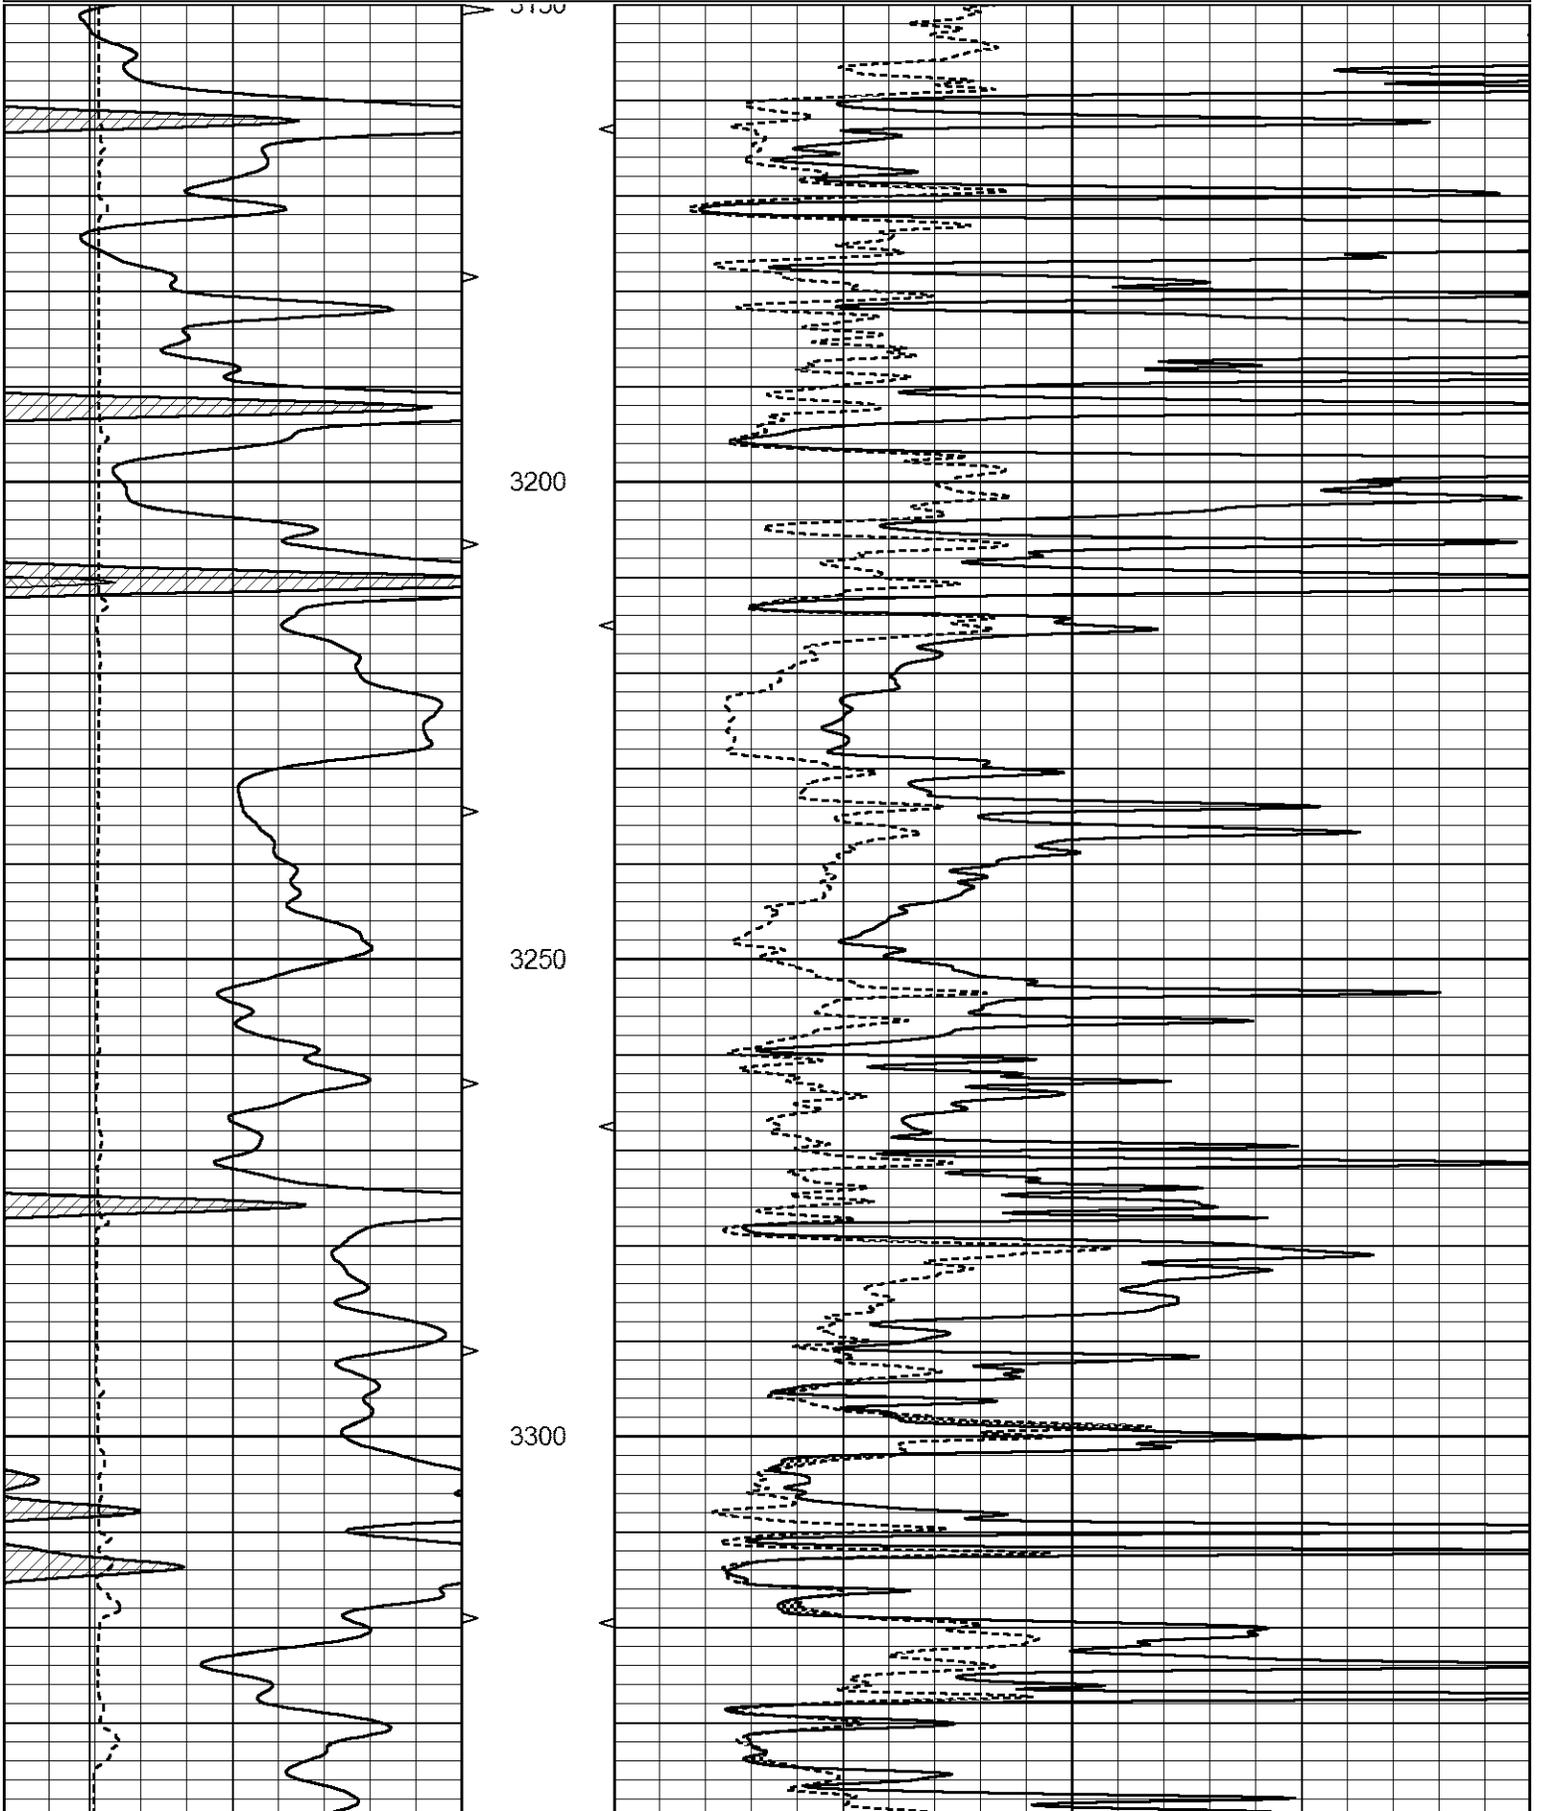

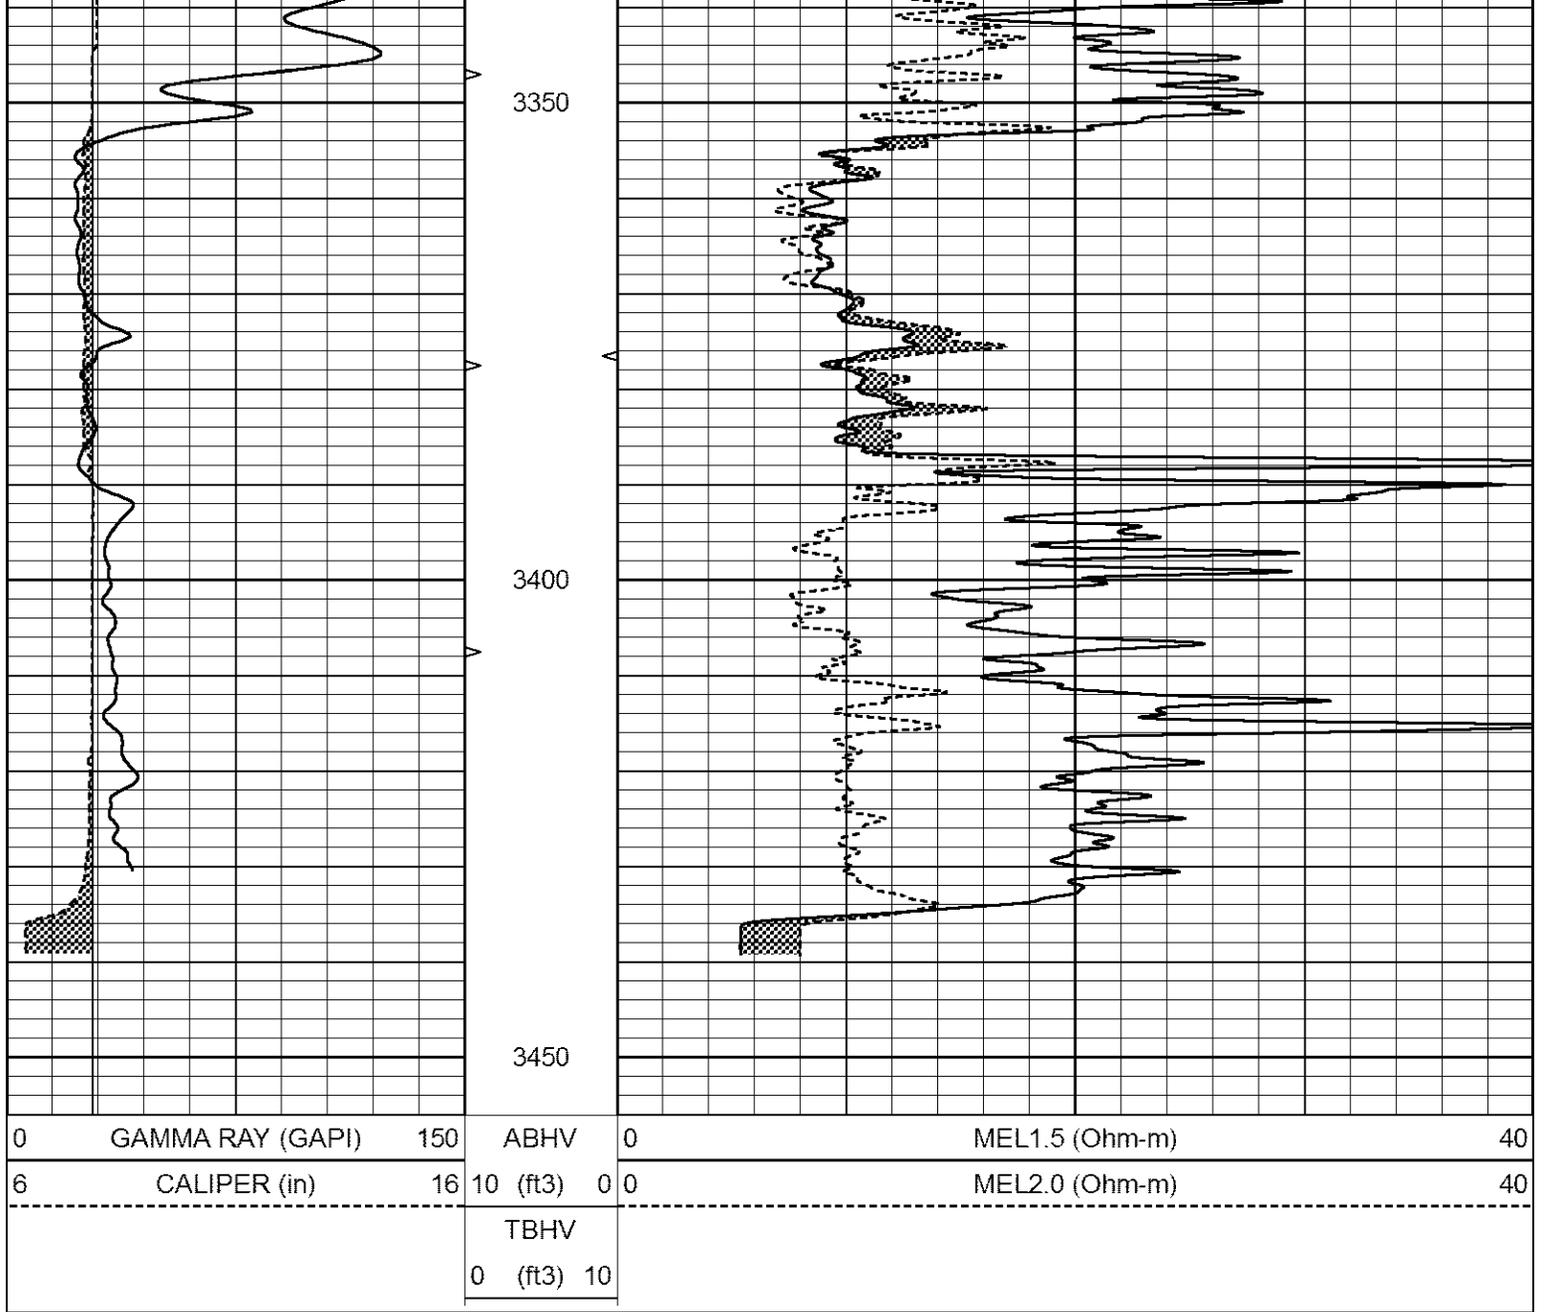

Calibration Report

Database File 6250pe.db
 Dataset Pathname pass7.1
 Dataset Creation Mon Mar 14 14:06:03 2022

MICRO_USR Calibration Report

Serial Number:	070910	
Tool Model:	ProbeL	
Performed:	Sun Jan 23 09:07:22 2022	
Caliper Calibration:	Gain=7.192	Offset=3.002
References	Low Cal 8.000	High Cal 14.000
Readings	0.723	1.557
1.5" Calibration:	Gain=35.000	Offset=1.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.335
2" Calibration:	Gain=65.000	Offset=1.000

Z Calibration:	Gain=65.000	Offset=-1.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.029

Microlog Calibration Report

Serial-Model: 070910-ProbeL
 Performed: (Not Performed)

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number: 070558
 Tool Model: Probe1
 Performed: Fri Oct 30 21:32:56 2020

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 0.2700 GAPI/cps