

SONIC LOG

Company RAYDON EXPLORATION, INC.	
Well FANSHER FARMS #2-6	
Field NA	
County FINNEY	
State KANSAS	
Location: API # : 15-055-22548-0000 1650' FSL & 1650' FEL	
SEC 6 TWP 23S RGE 32W	
Permanent Datum Log Measured From Drilling Measured From	GROUND LEVEL Elevation 2858 KELLY BUSHING 9' A.G.L KELLY BUSHING
Other Services CDL/CNL/PE DIL/MEL	
Elevation K.B. 2867 D.F. 2865 G.L. 2858	
Date	1/28/22
Run Number	TWO
Depth Driller	5000
Depth Logger	5000
Bottom Logged Interval	4990
Top Log Interval	1800
Casing Driller	8 5/8" @ 1812
Casing Logger	1812
Bit Size	7 7/8
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.3/42
pH / Fluid Loss	10.0/6.4
Source of Sample	FLOWLINE
Rm @ Meas. Temp	1.20 @ 65F
Rmf @ Meas. Temp	.90 @ 65F
Rmc @ Meas. Temp	1.44 @ 65F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	.62 @ 126F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	////
Maximum Recorded Temperature	125F
Equipment Number	3802
Location	HAYS, KANSAS
Recorded By	JASON CAPPELLUCCI
Witnessed By	ED GRIEVES
	TJ DREILING


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS


GARDEN CITY, KS. - NORTH TO 6 MILE RD. - 1/2 EAST TO THIRD ST. - 1 1/4 NORTH - WEST INTO

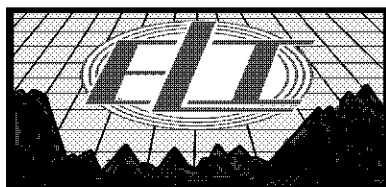



MAIN SECTION

Database File	6232pe.db
Dataset Pathname	pass6
Presentation Format	_slt
Dataset Creation	Fri Jan 28 22:43:01 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)	40
6	CALIPER (in)	16	10 (ft3) 0	30	SONIC POROSITY (pu)	-10
			TBHV	0	ITT (msec)	20
			0 (ft3) 10			

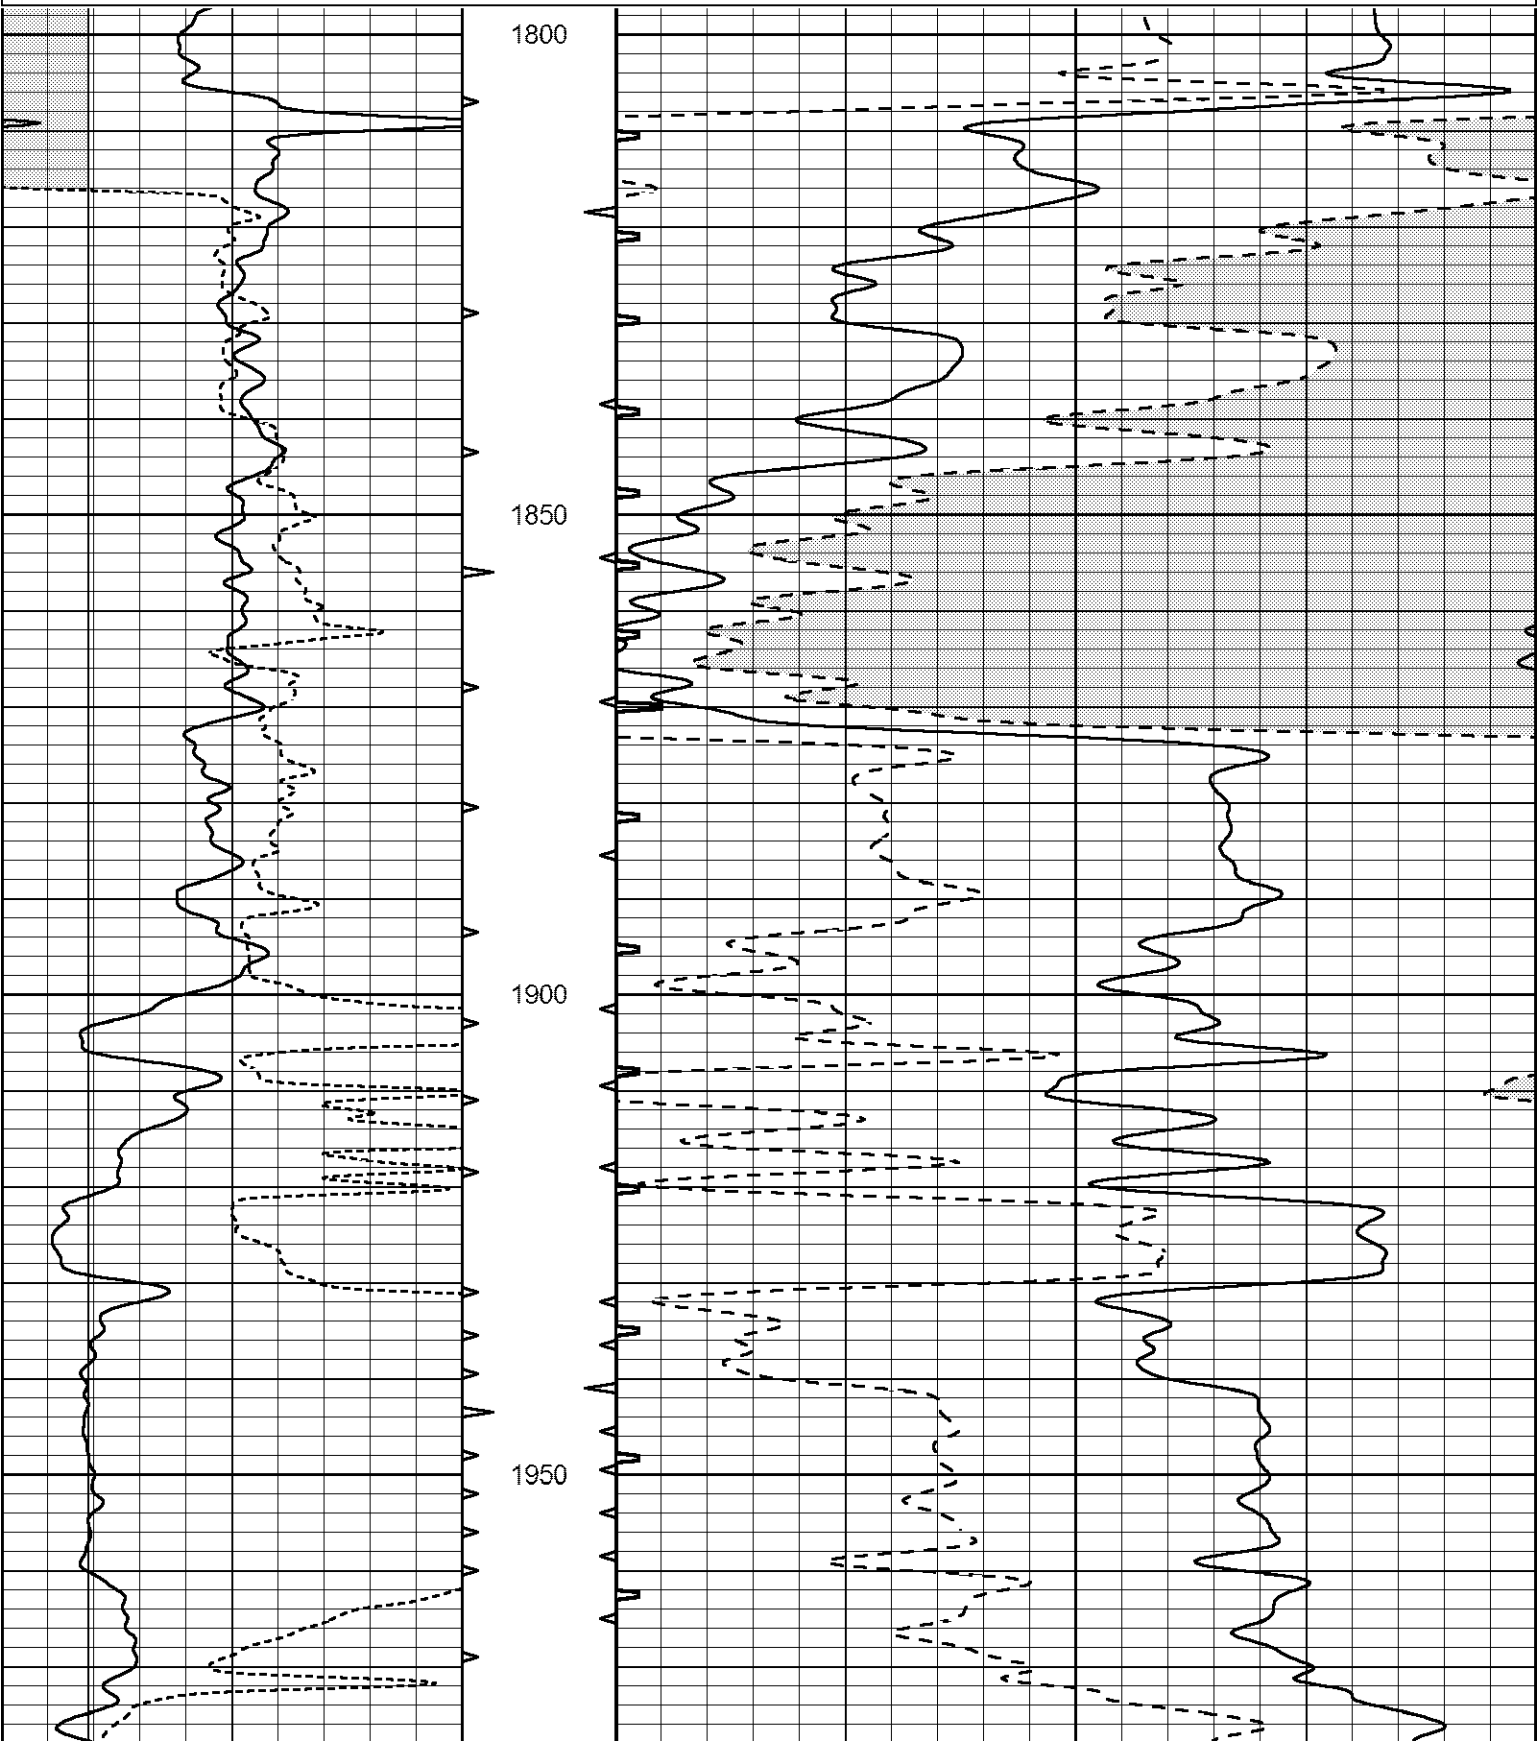

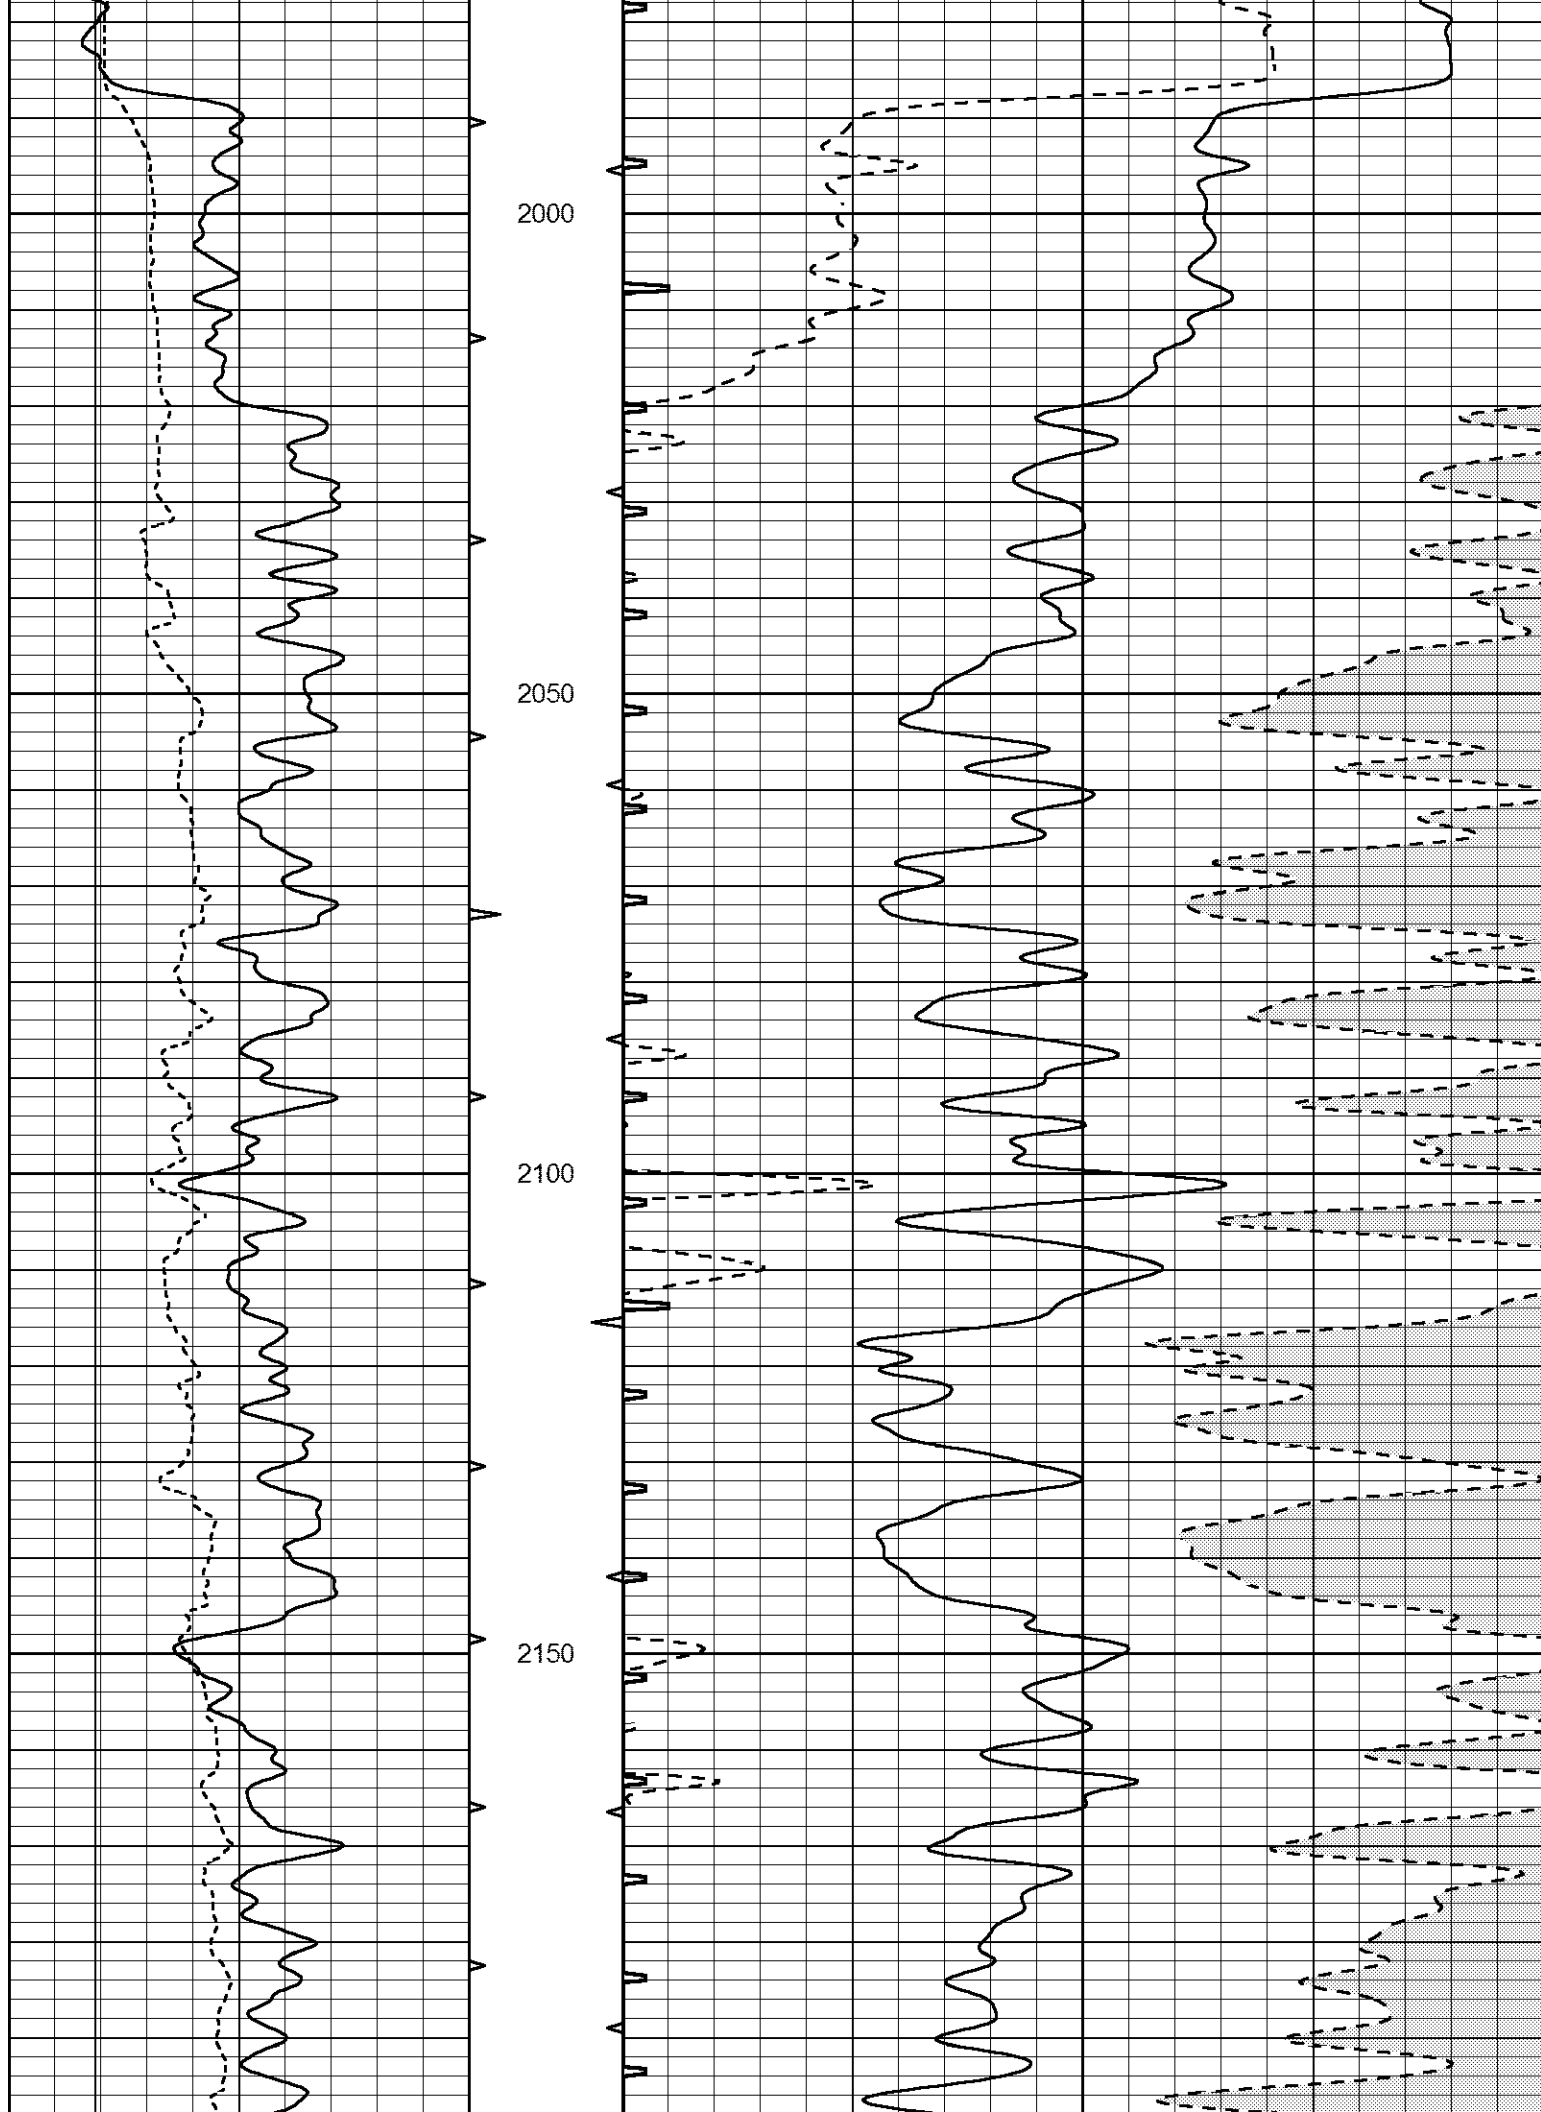

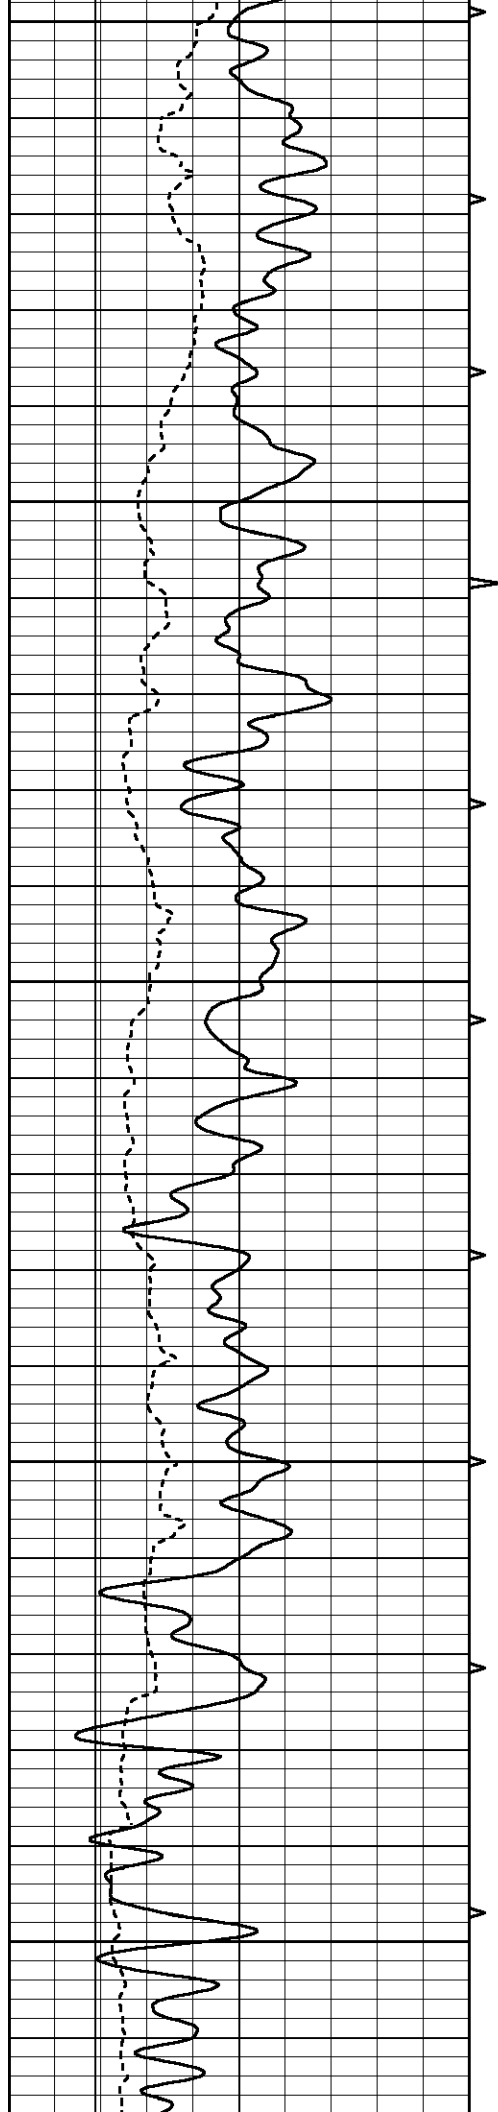


2200


2250

2300

2350

2400

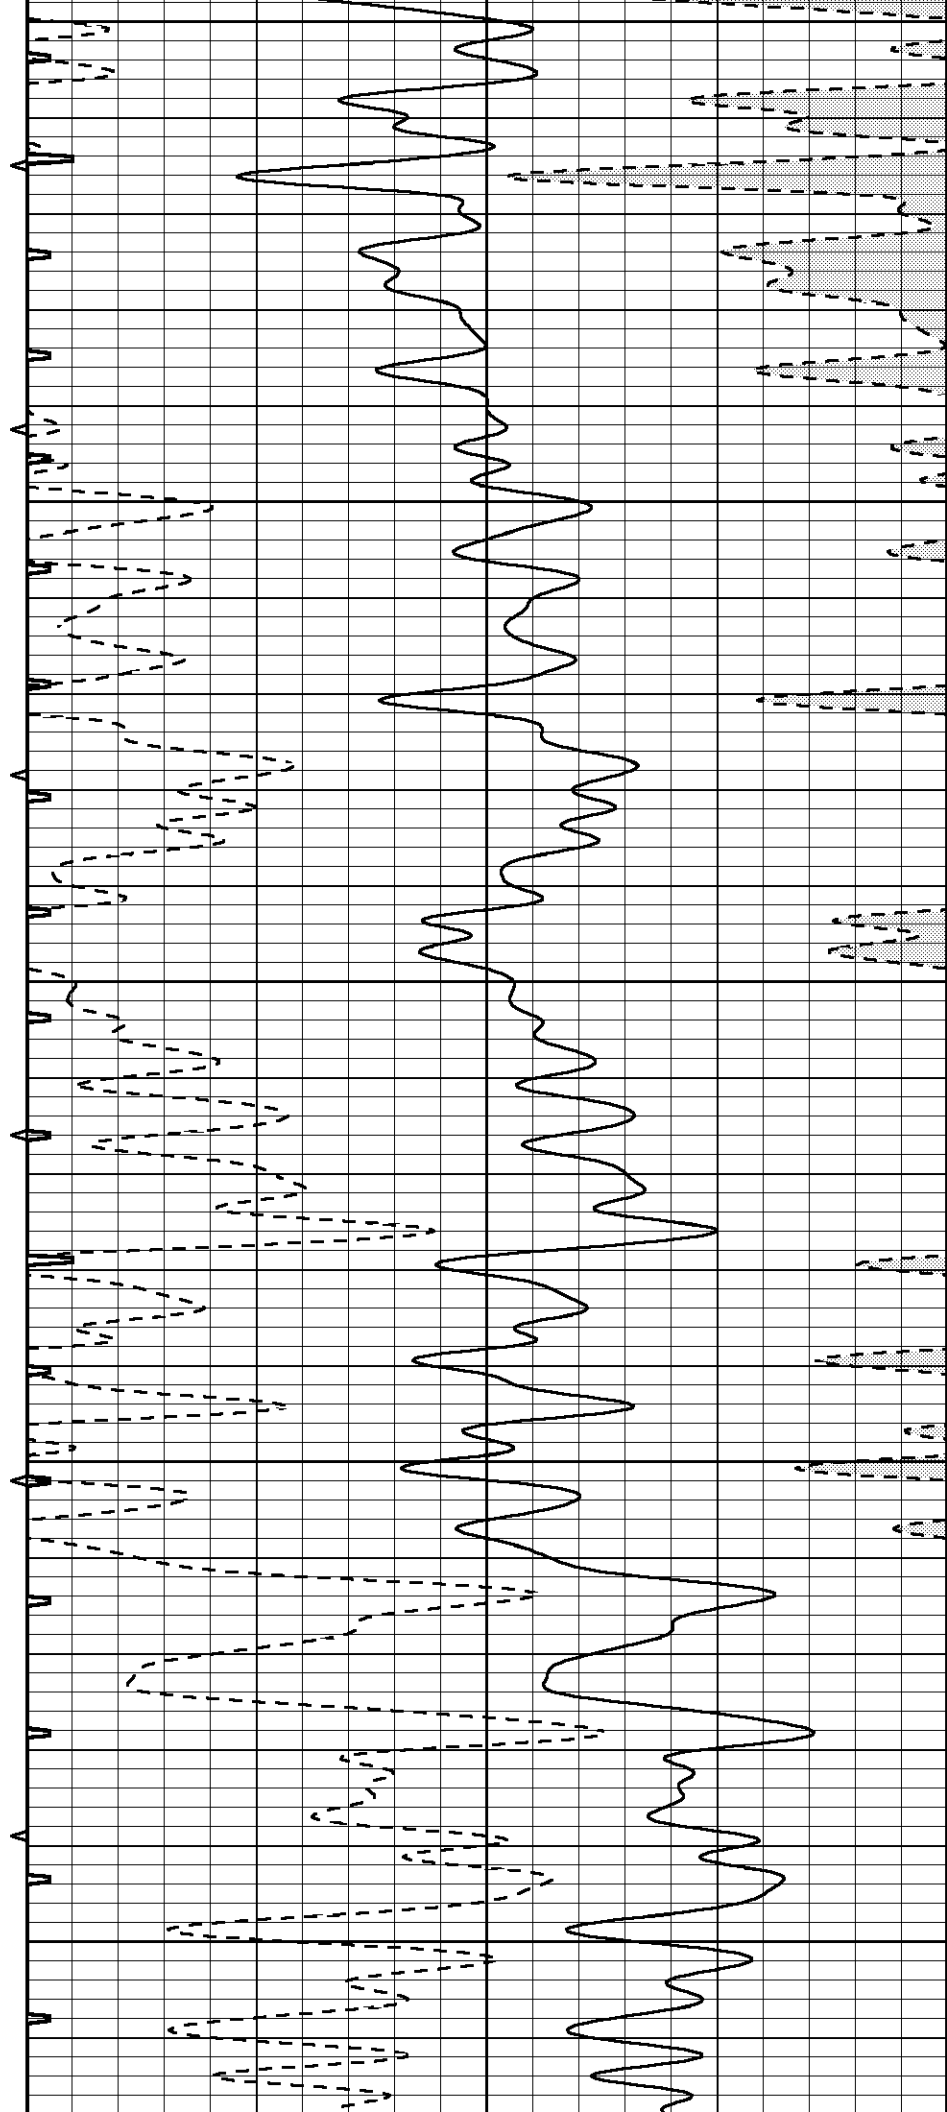

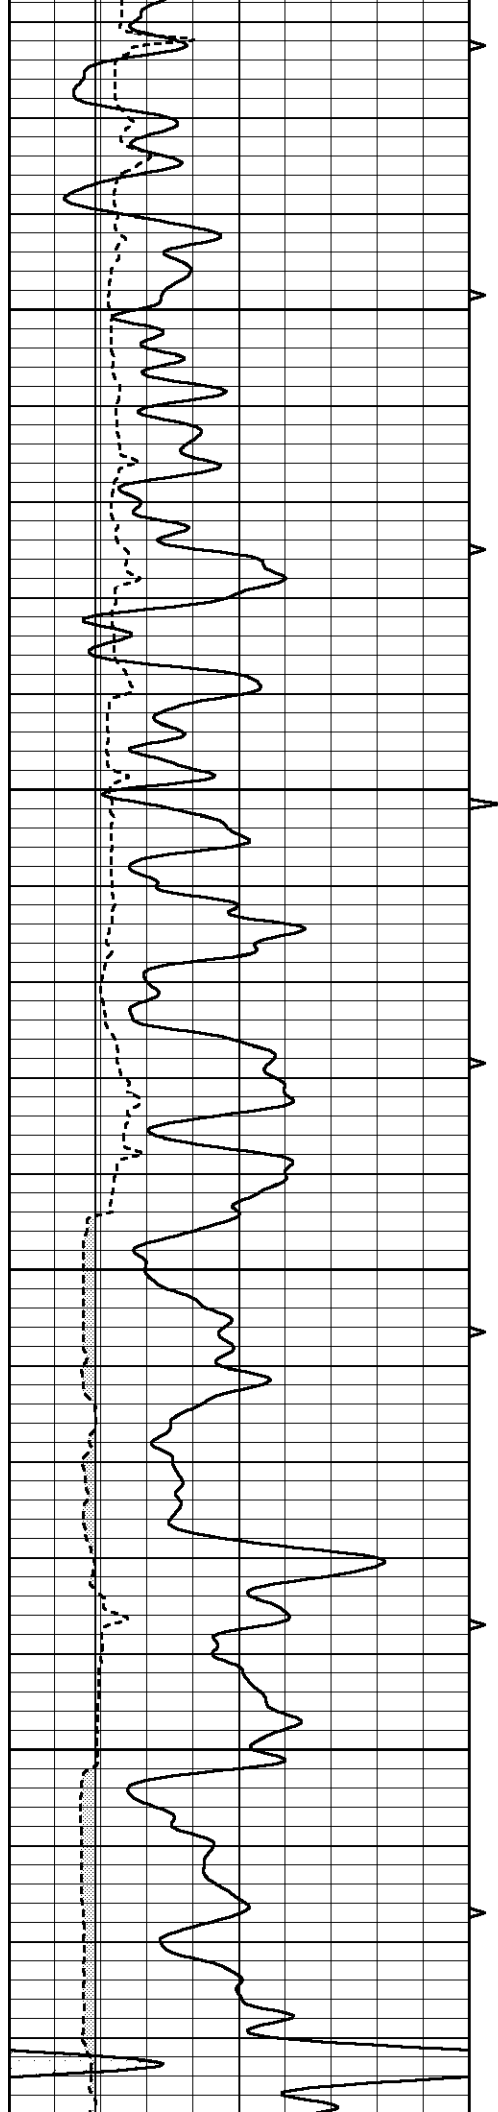



2450

2500

2550

2600

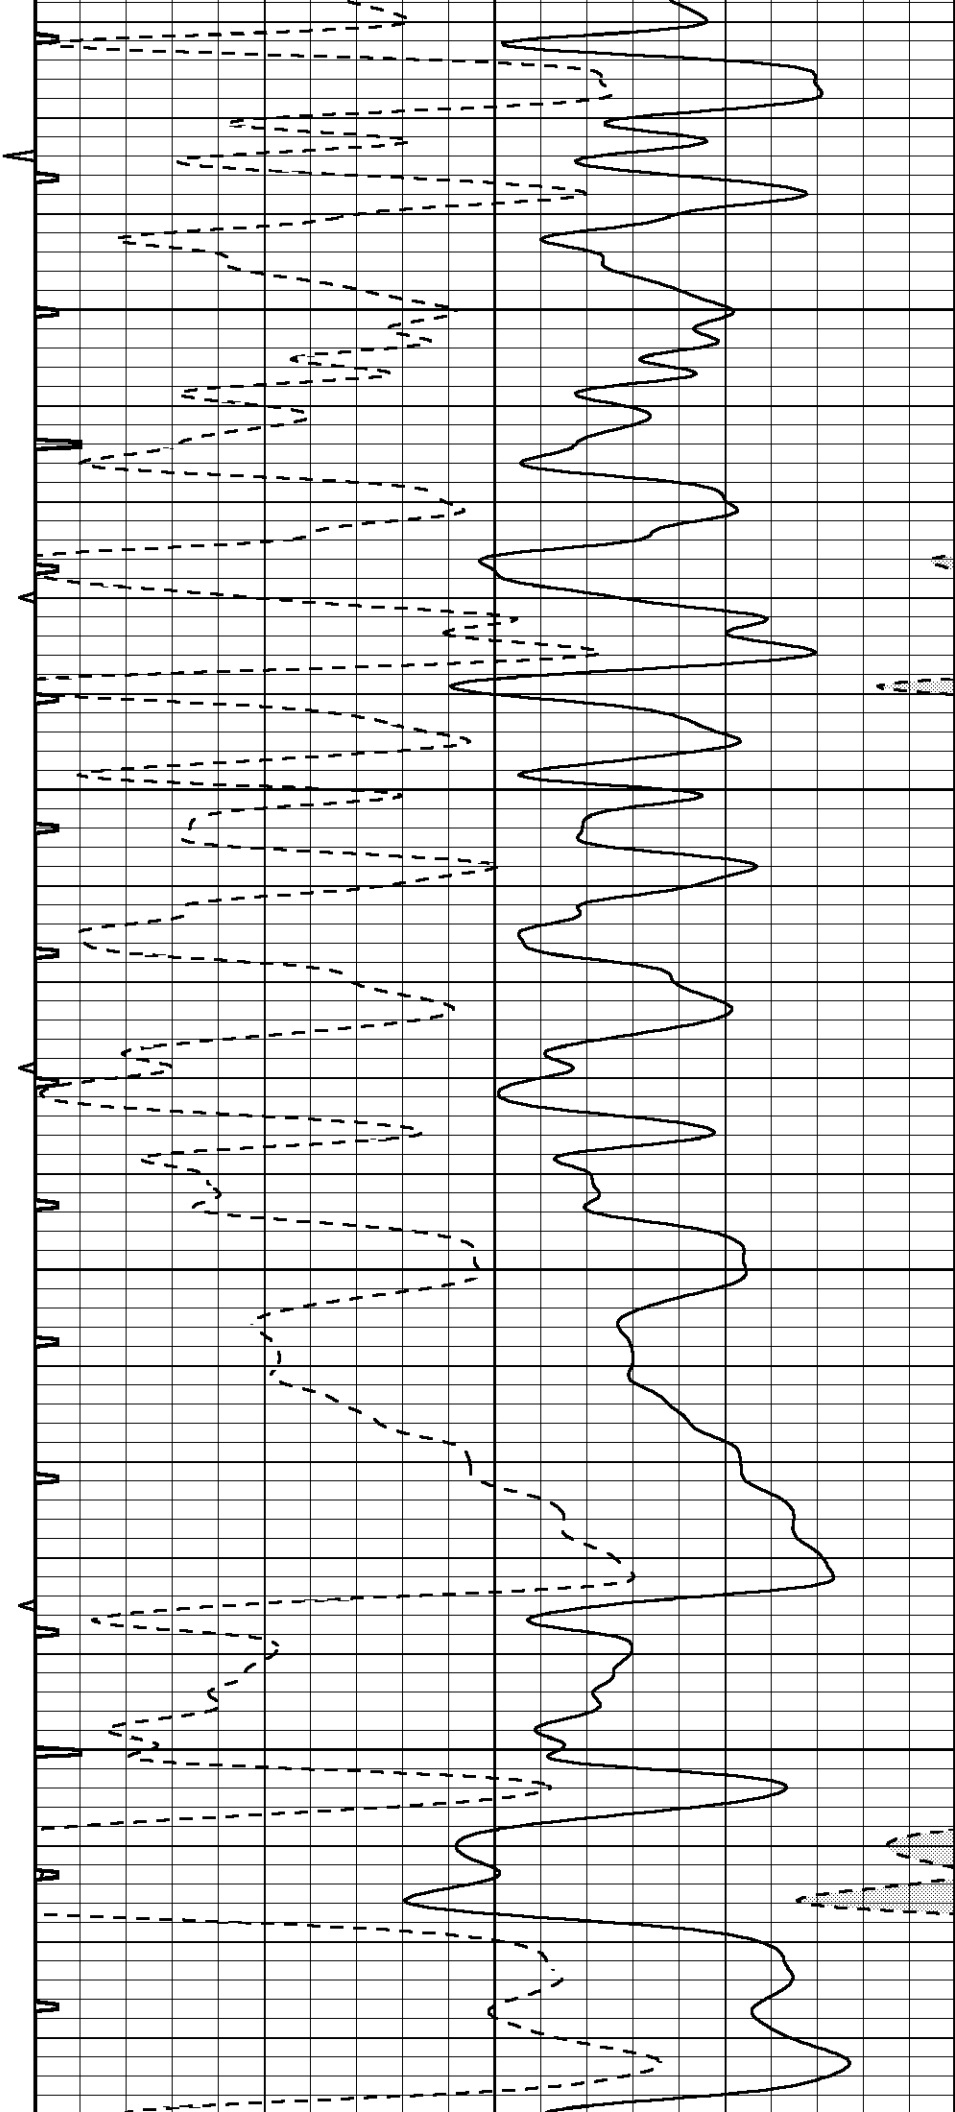

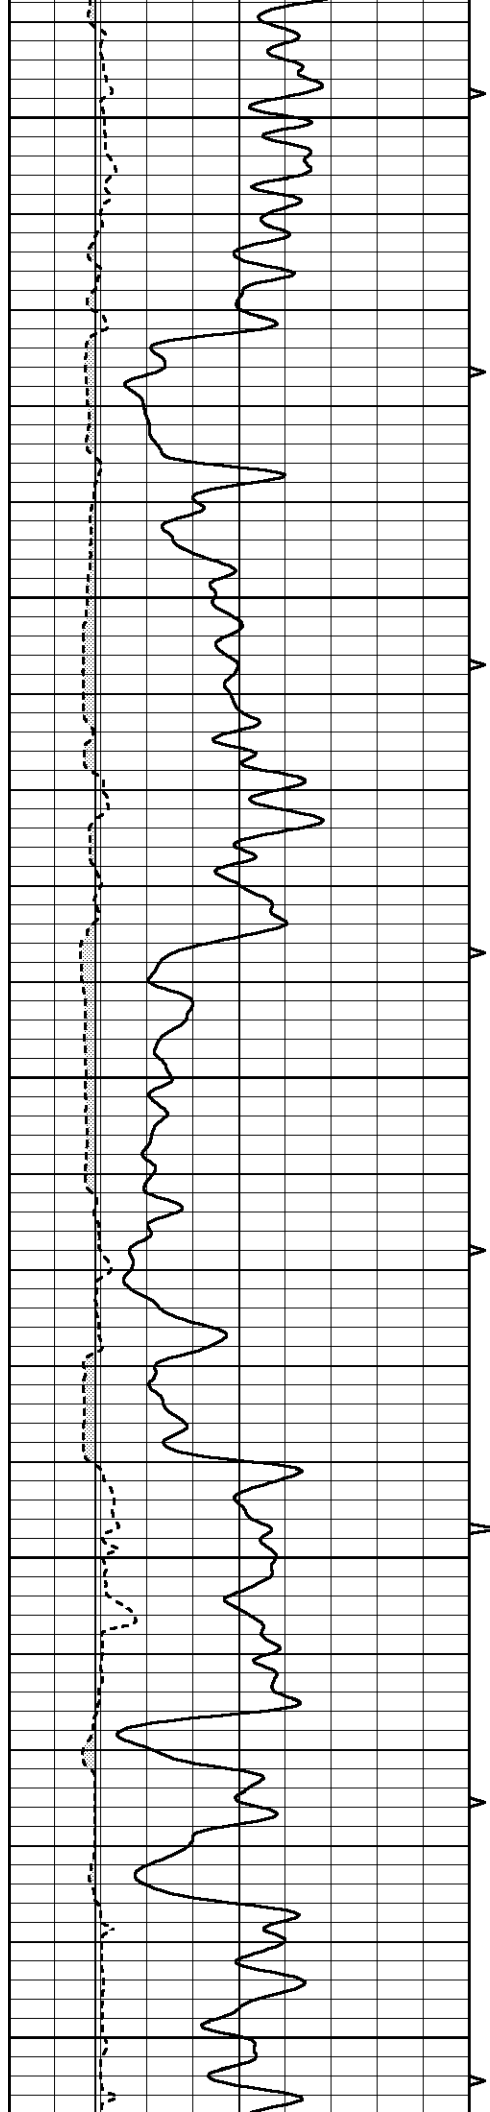



2650


2700

2750

2800

2850

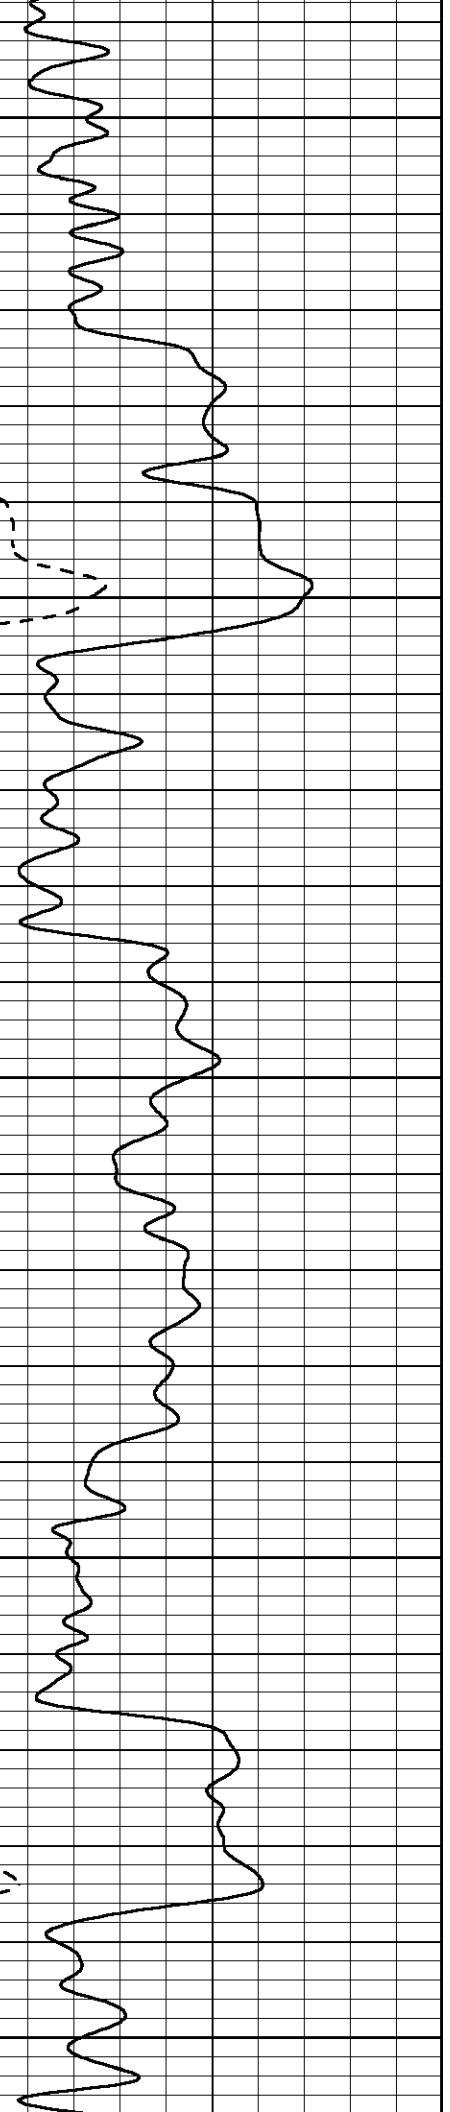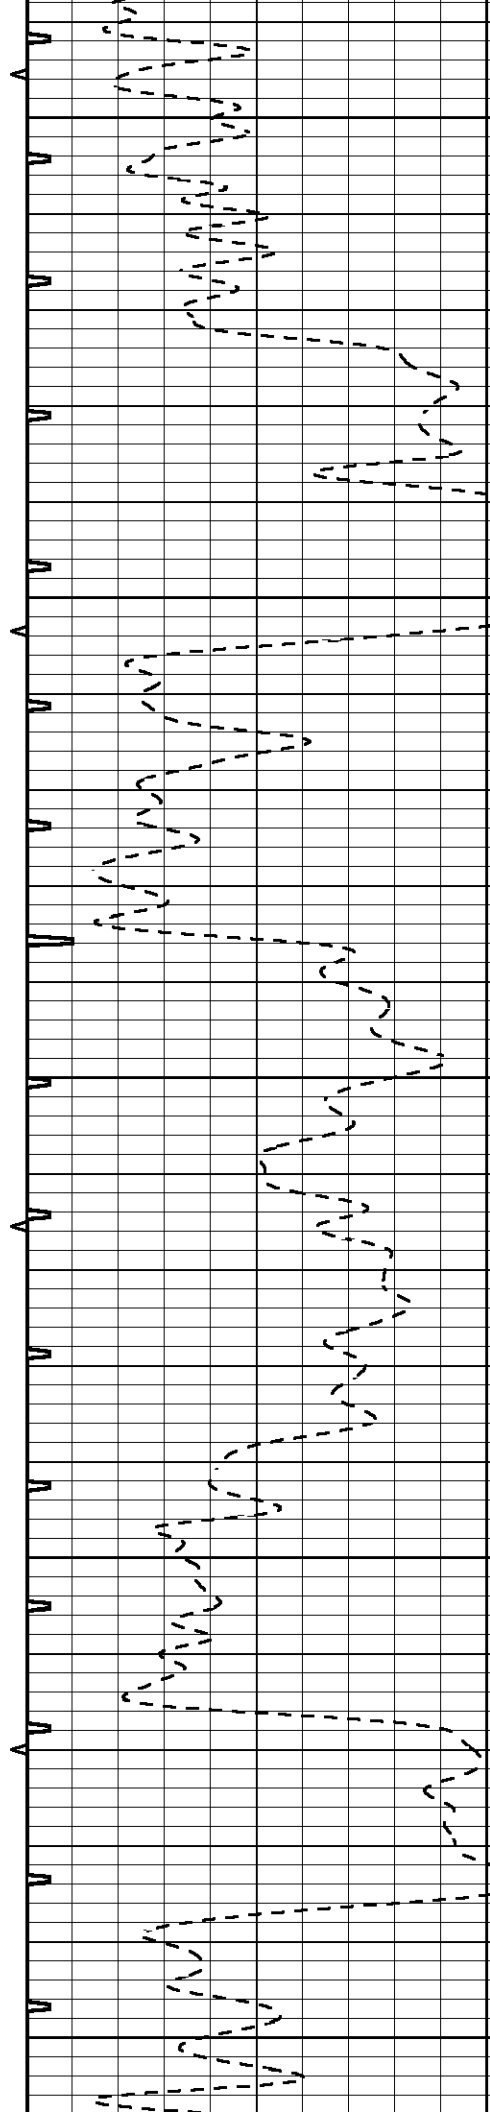

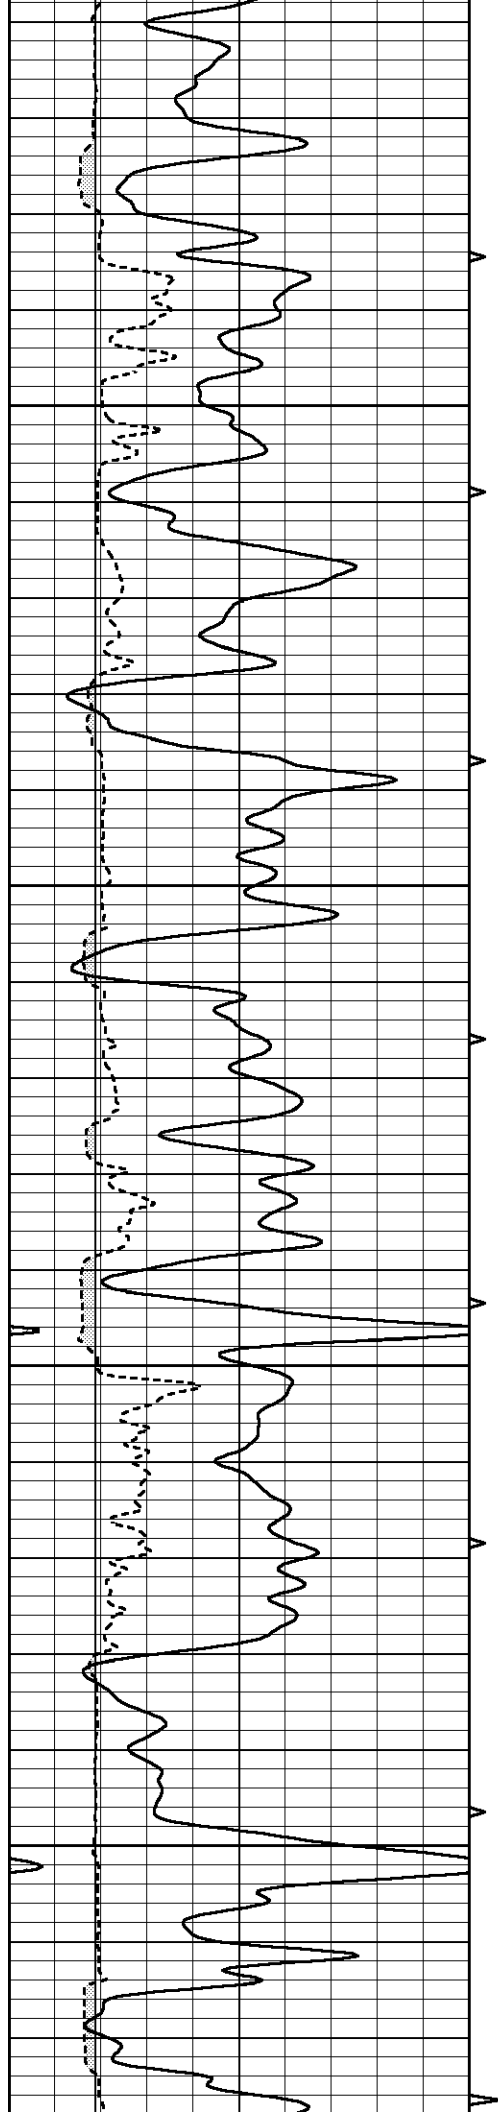



2900


2950

3000

3050

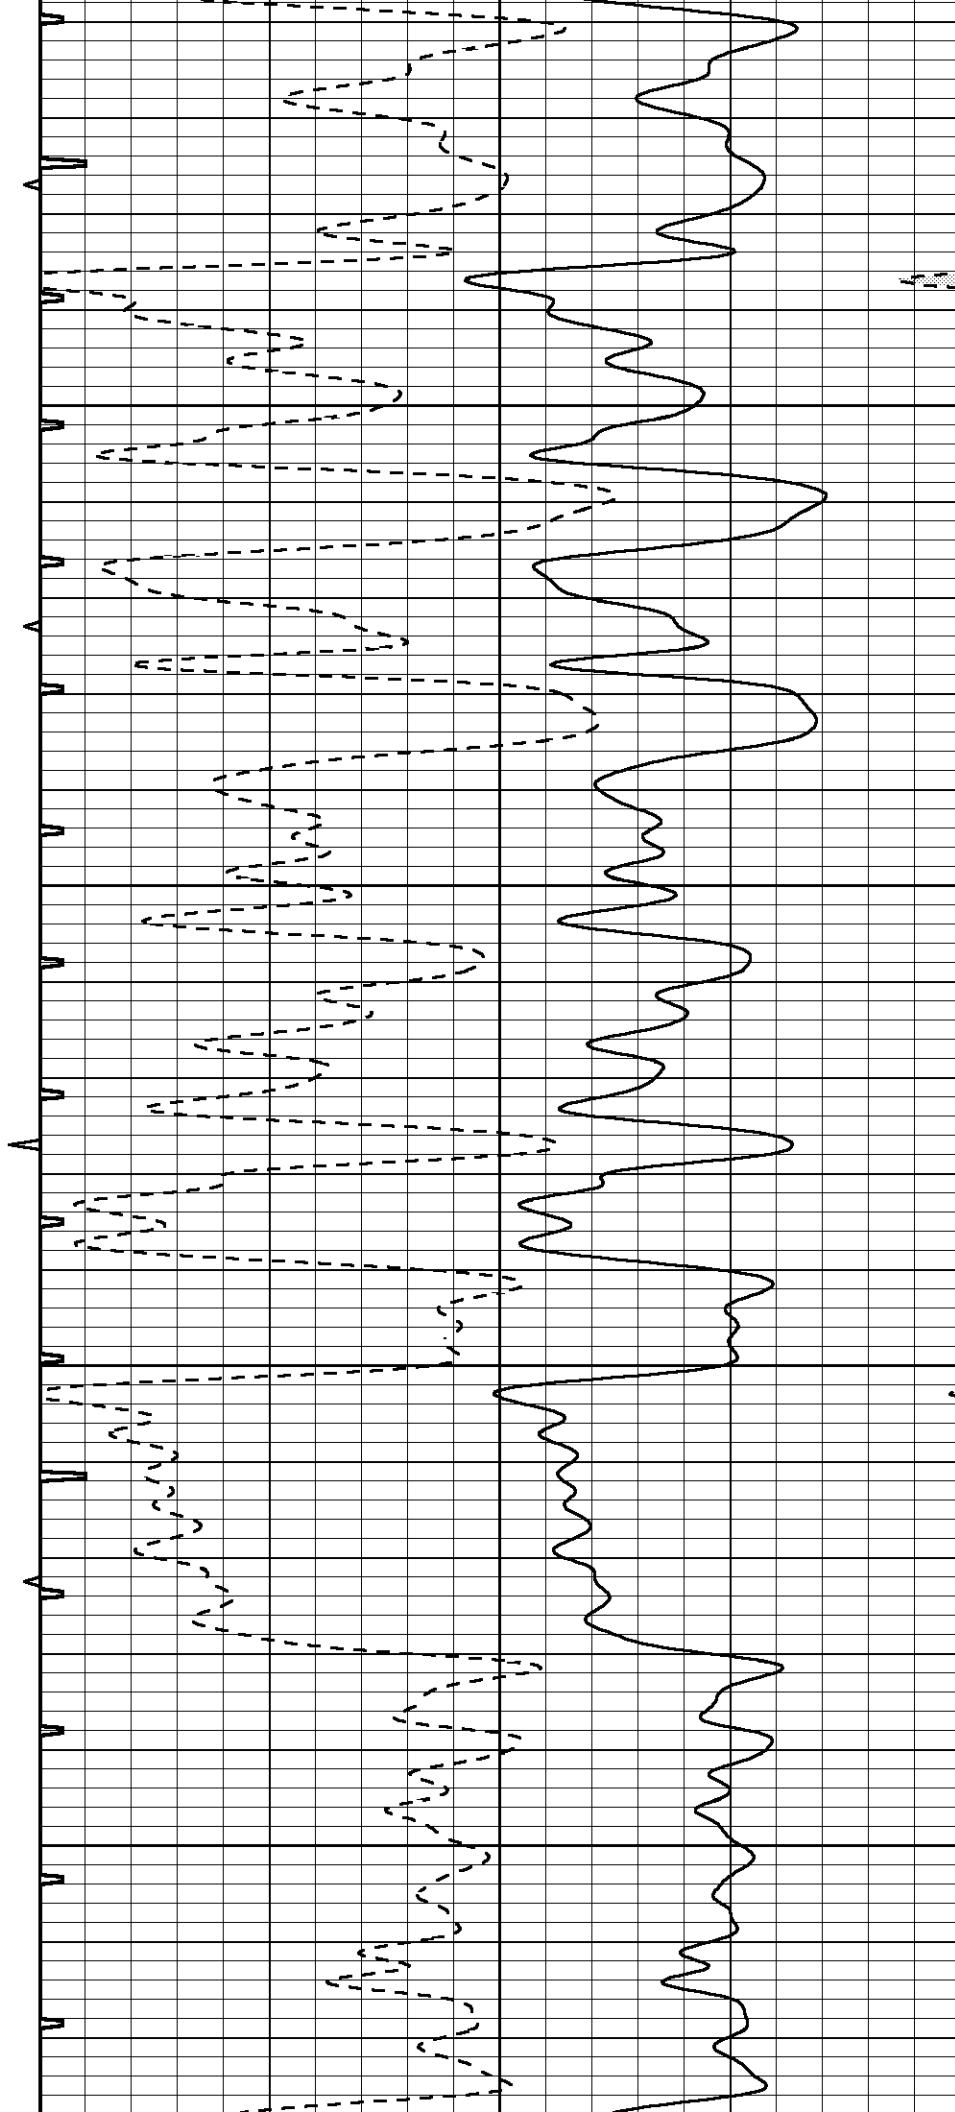

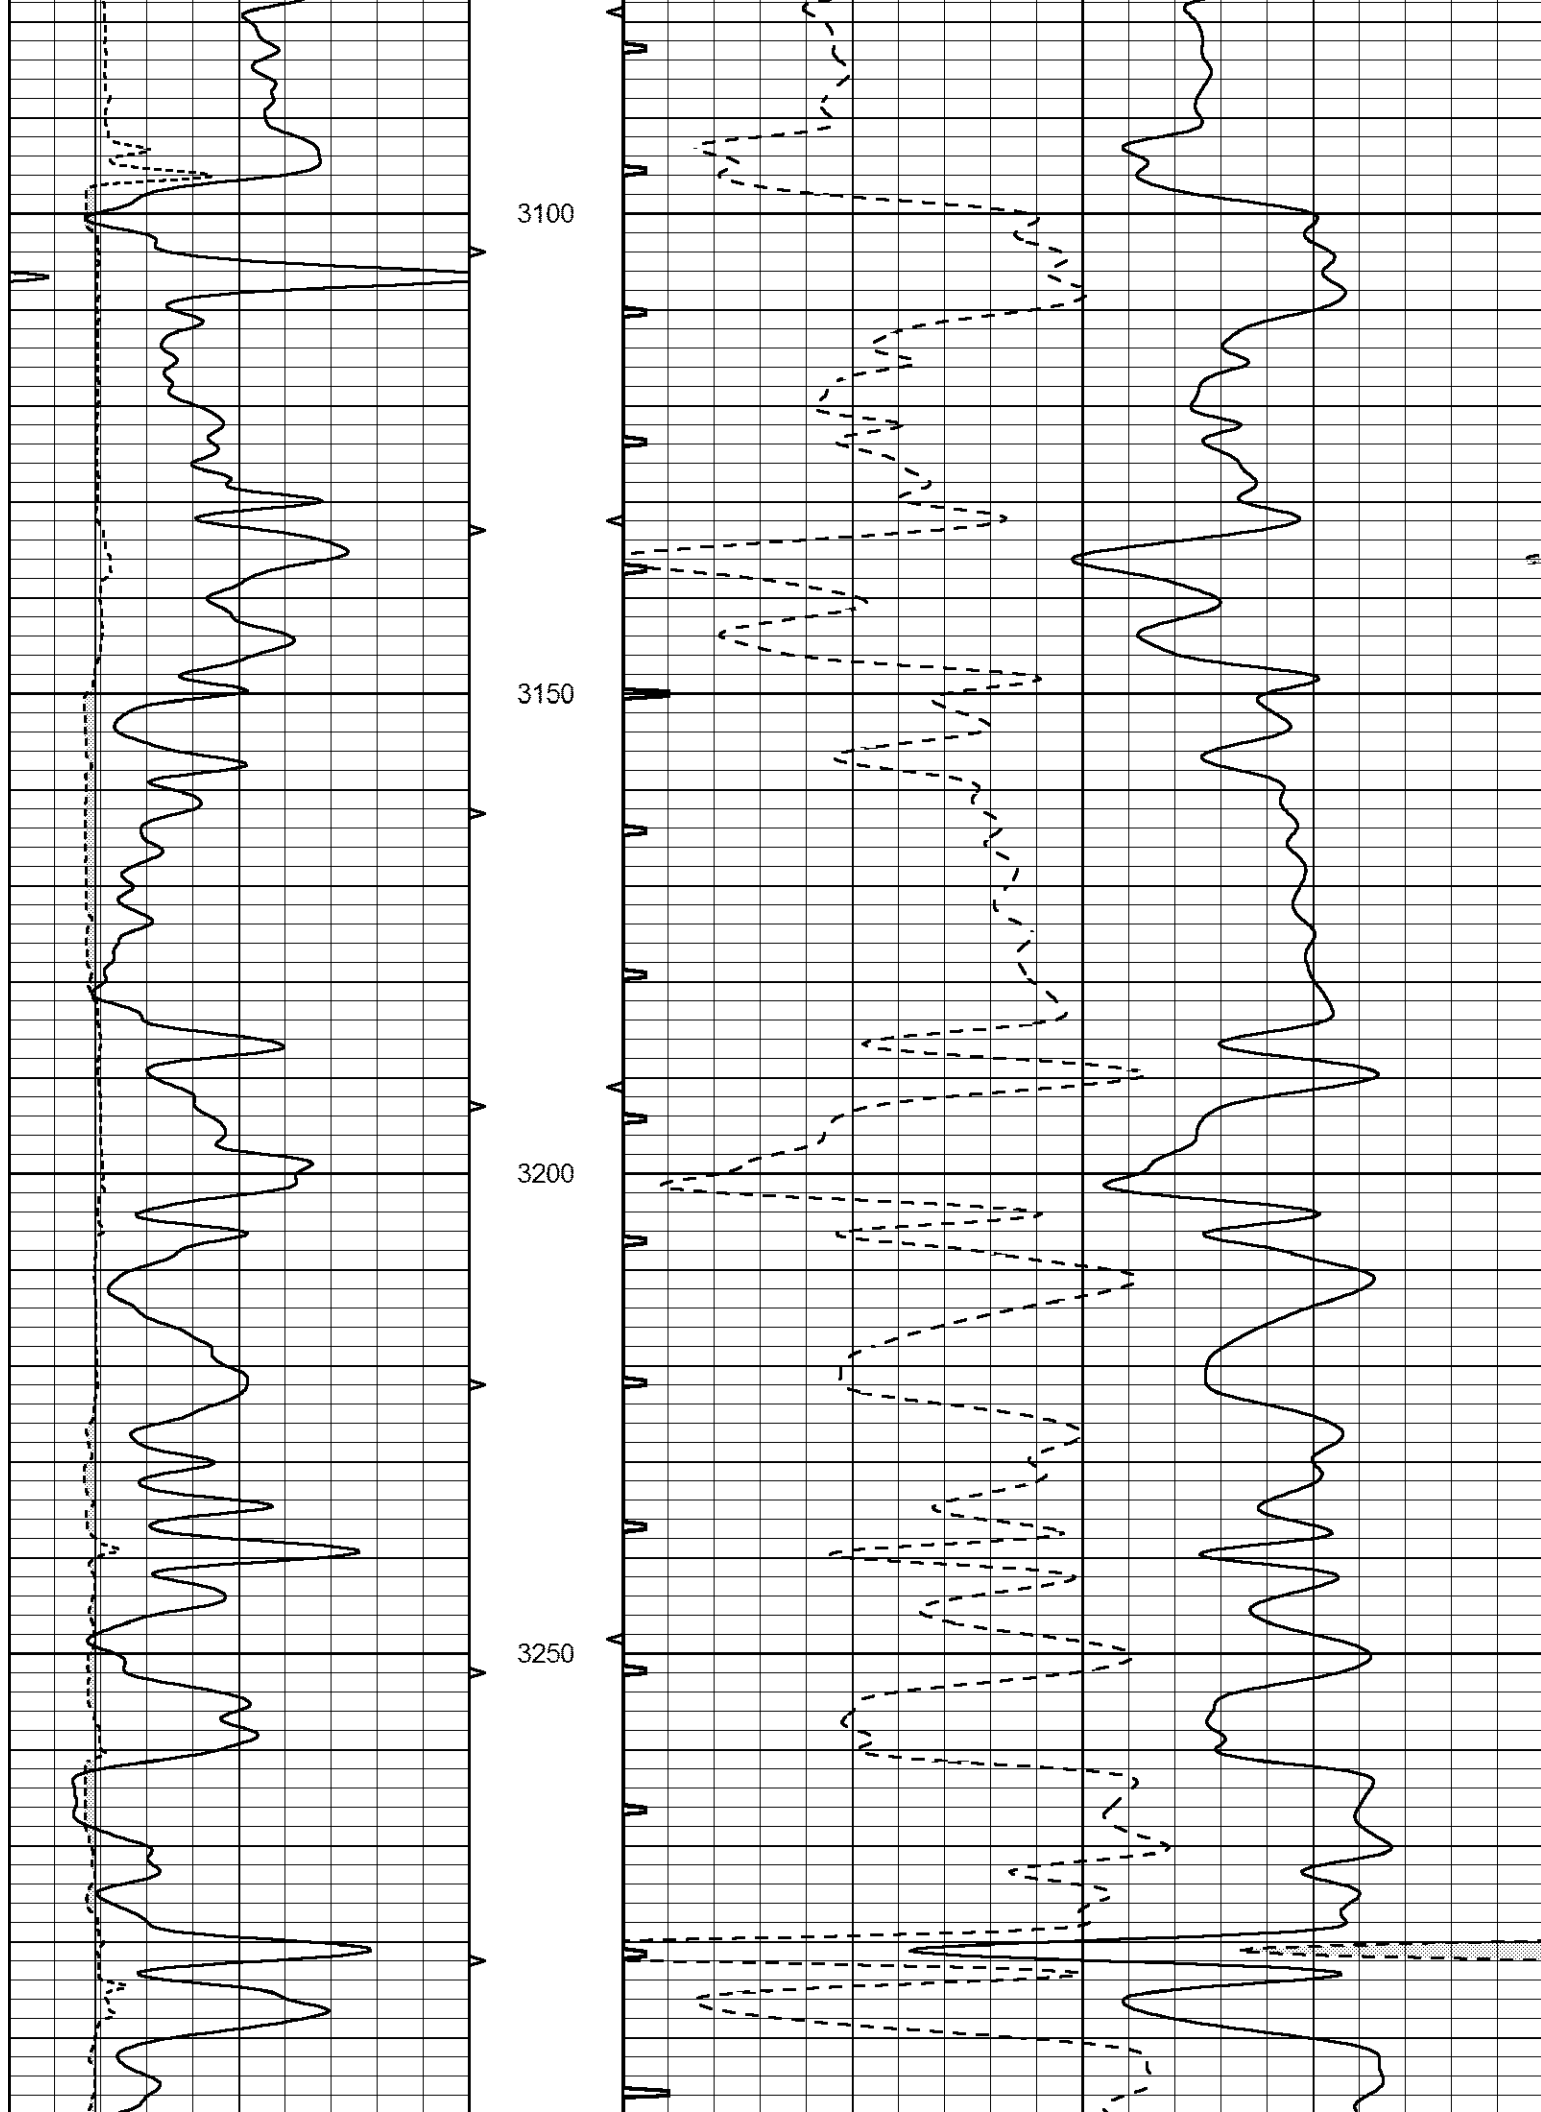

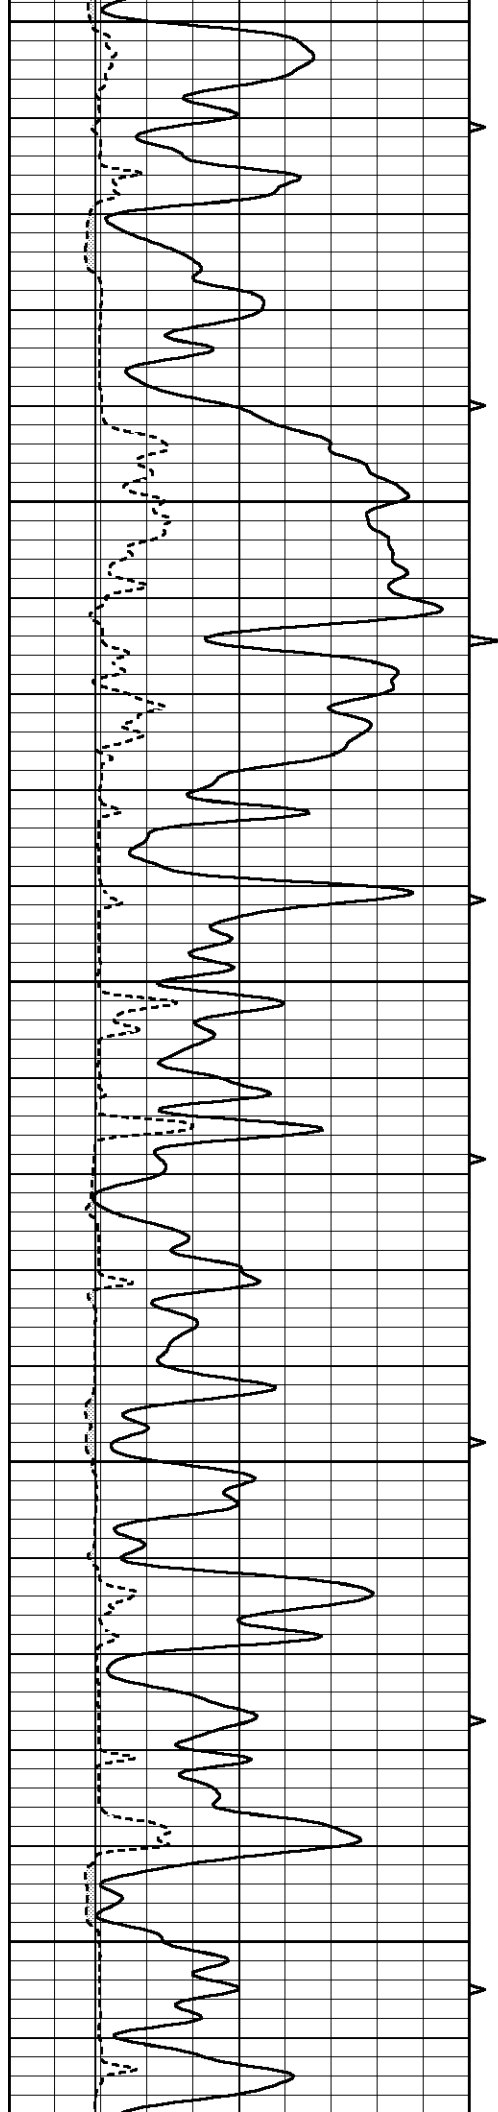


3300


3350


3400


3450


3500

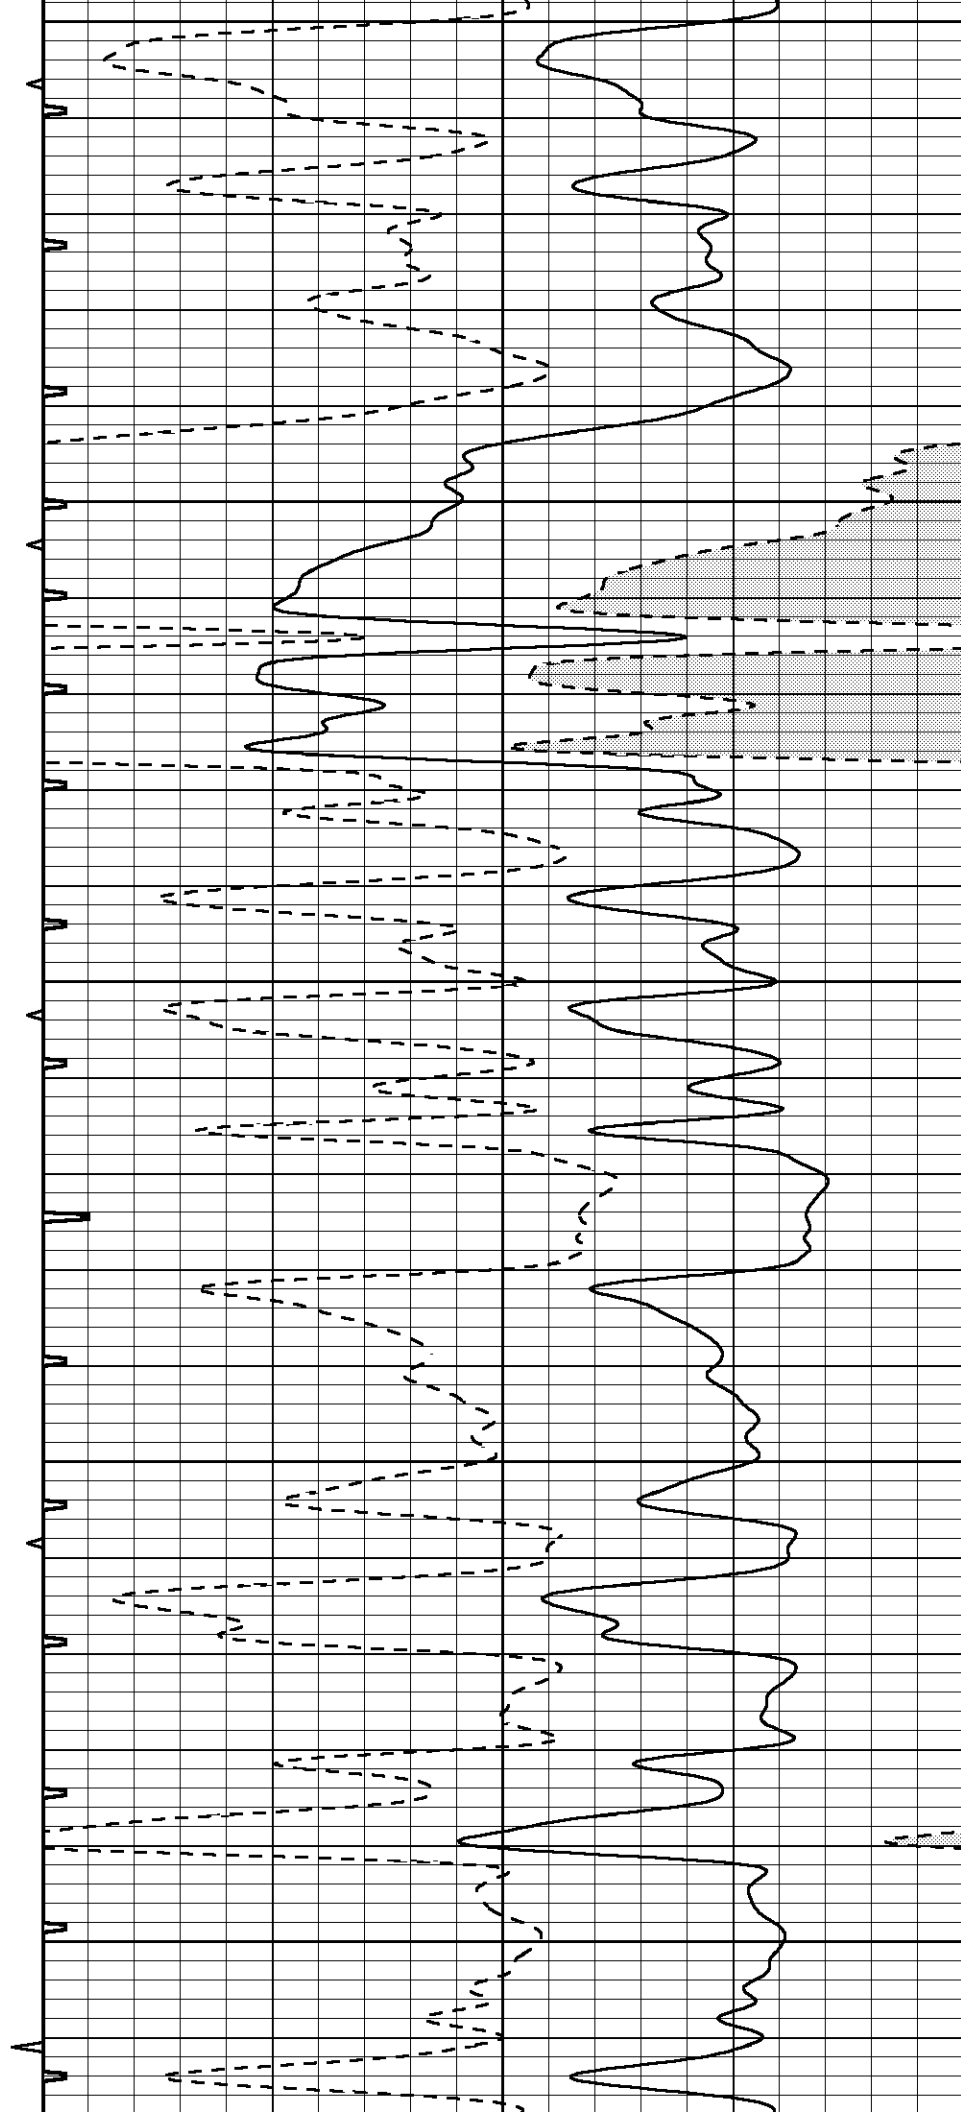


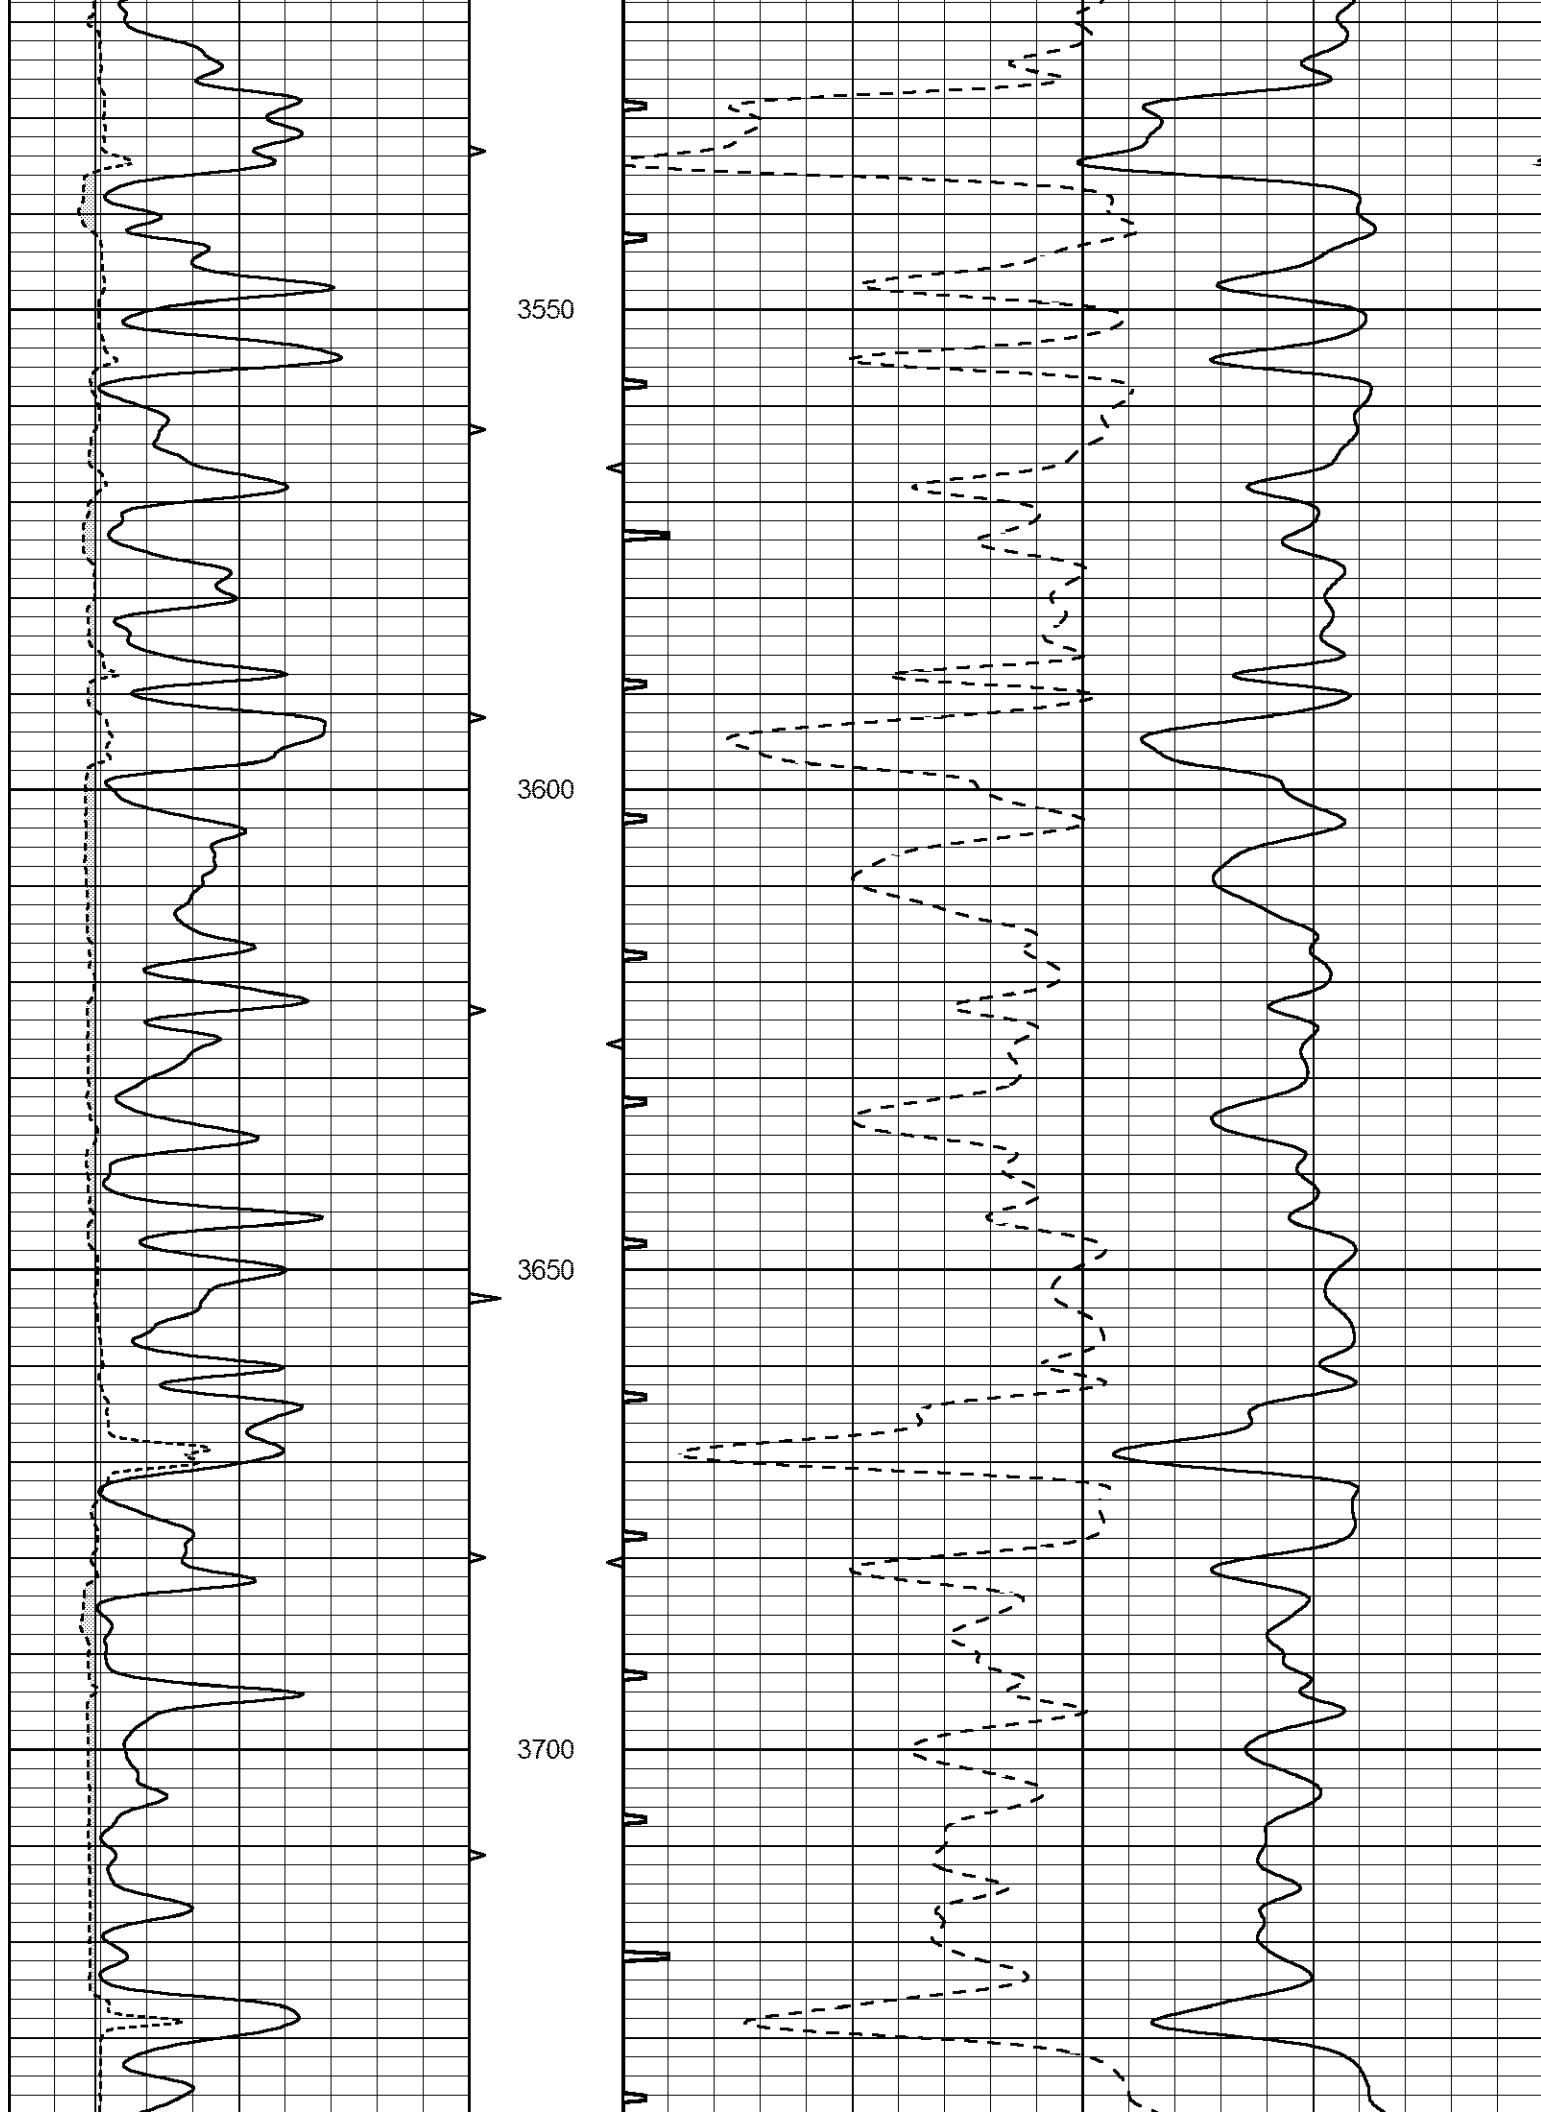

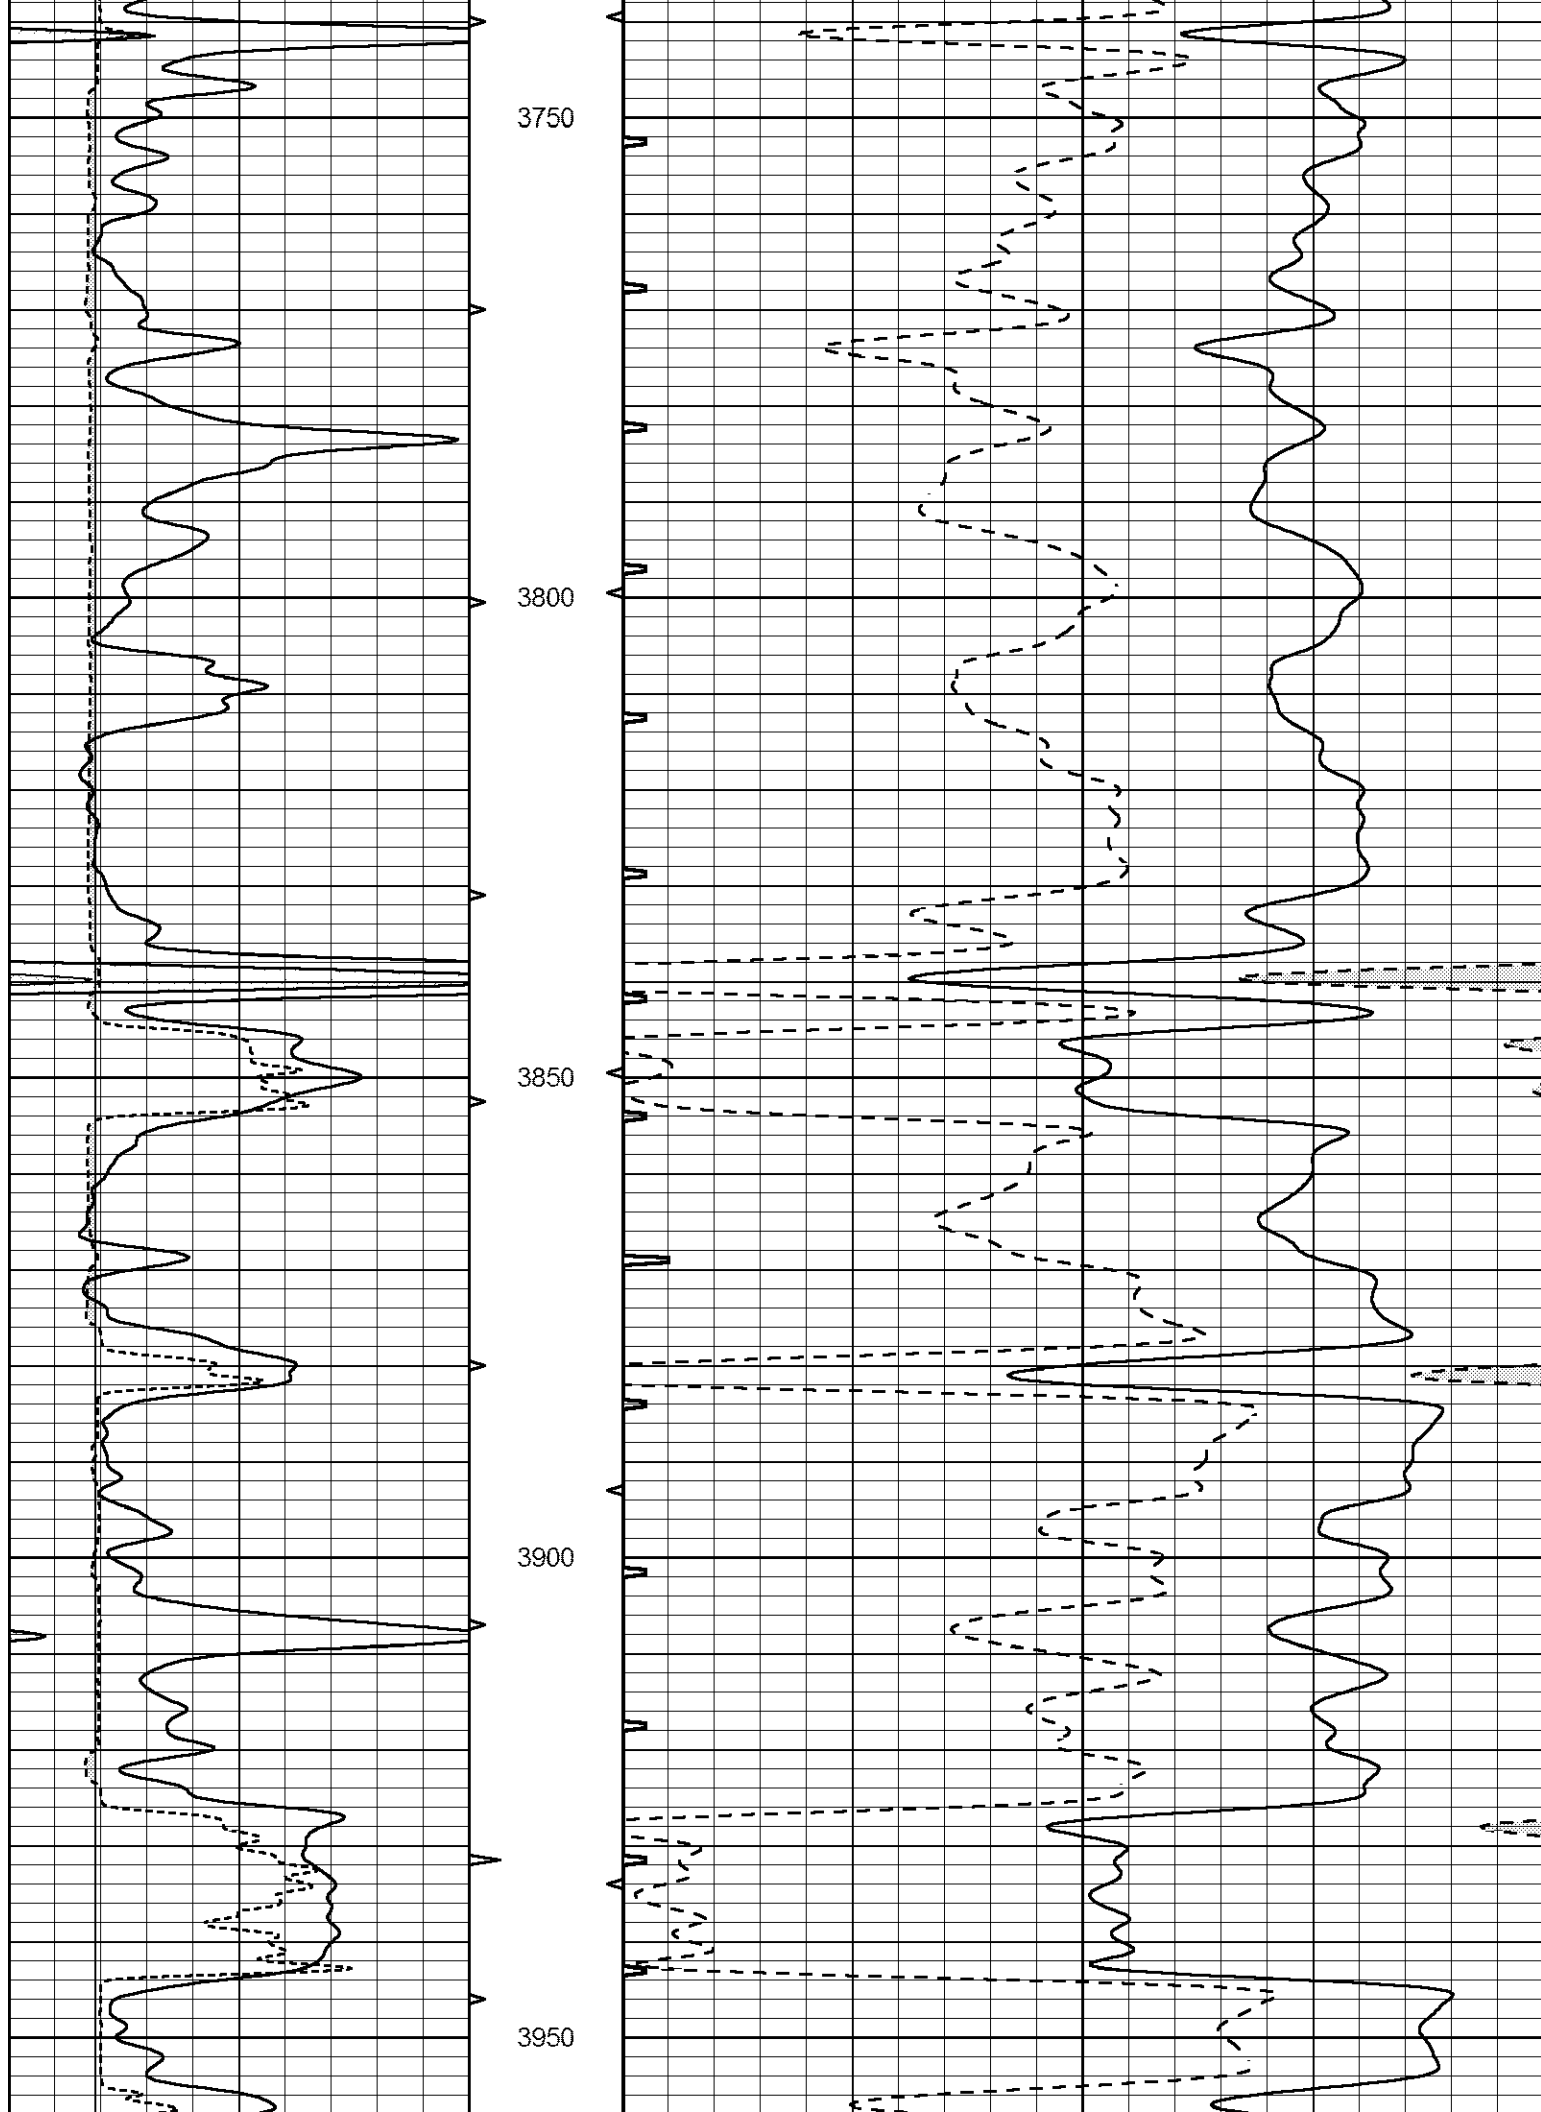

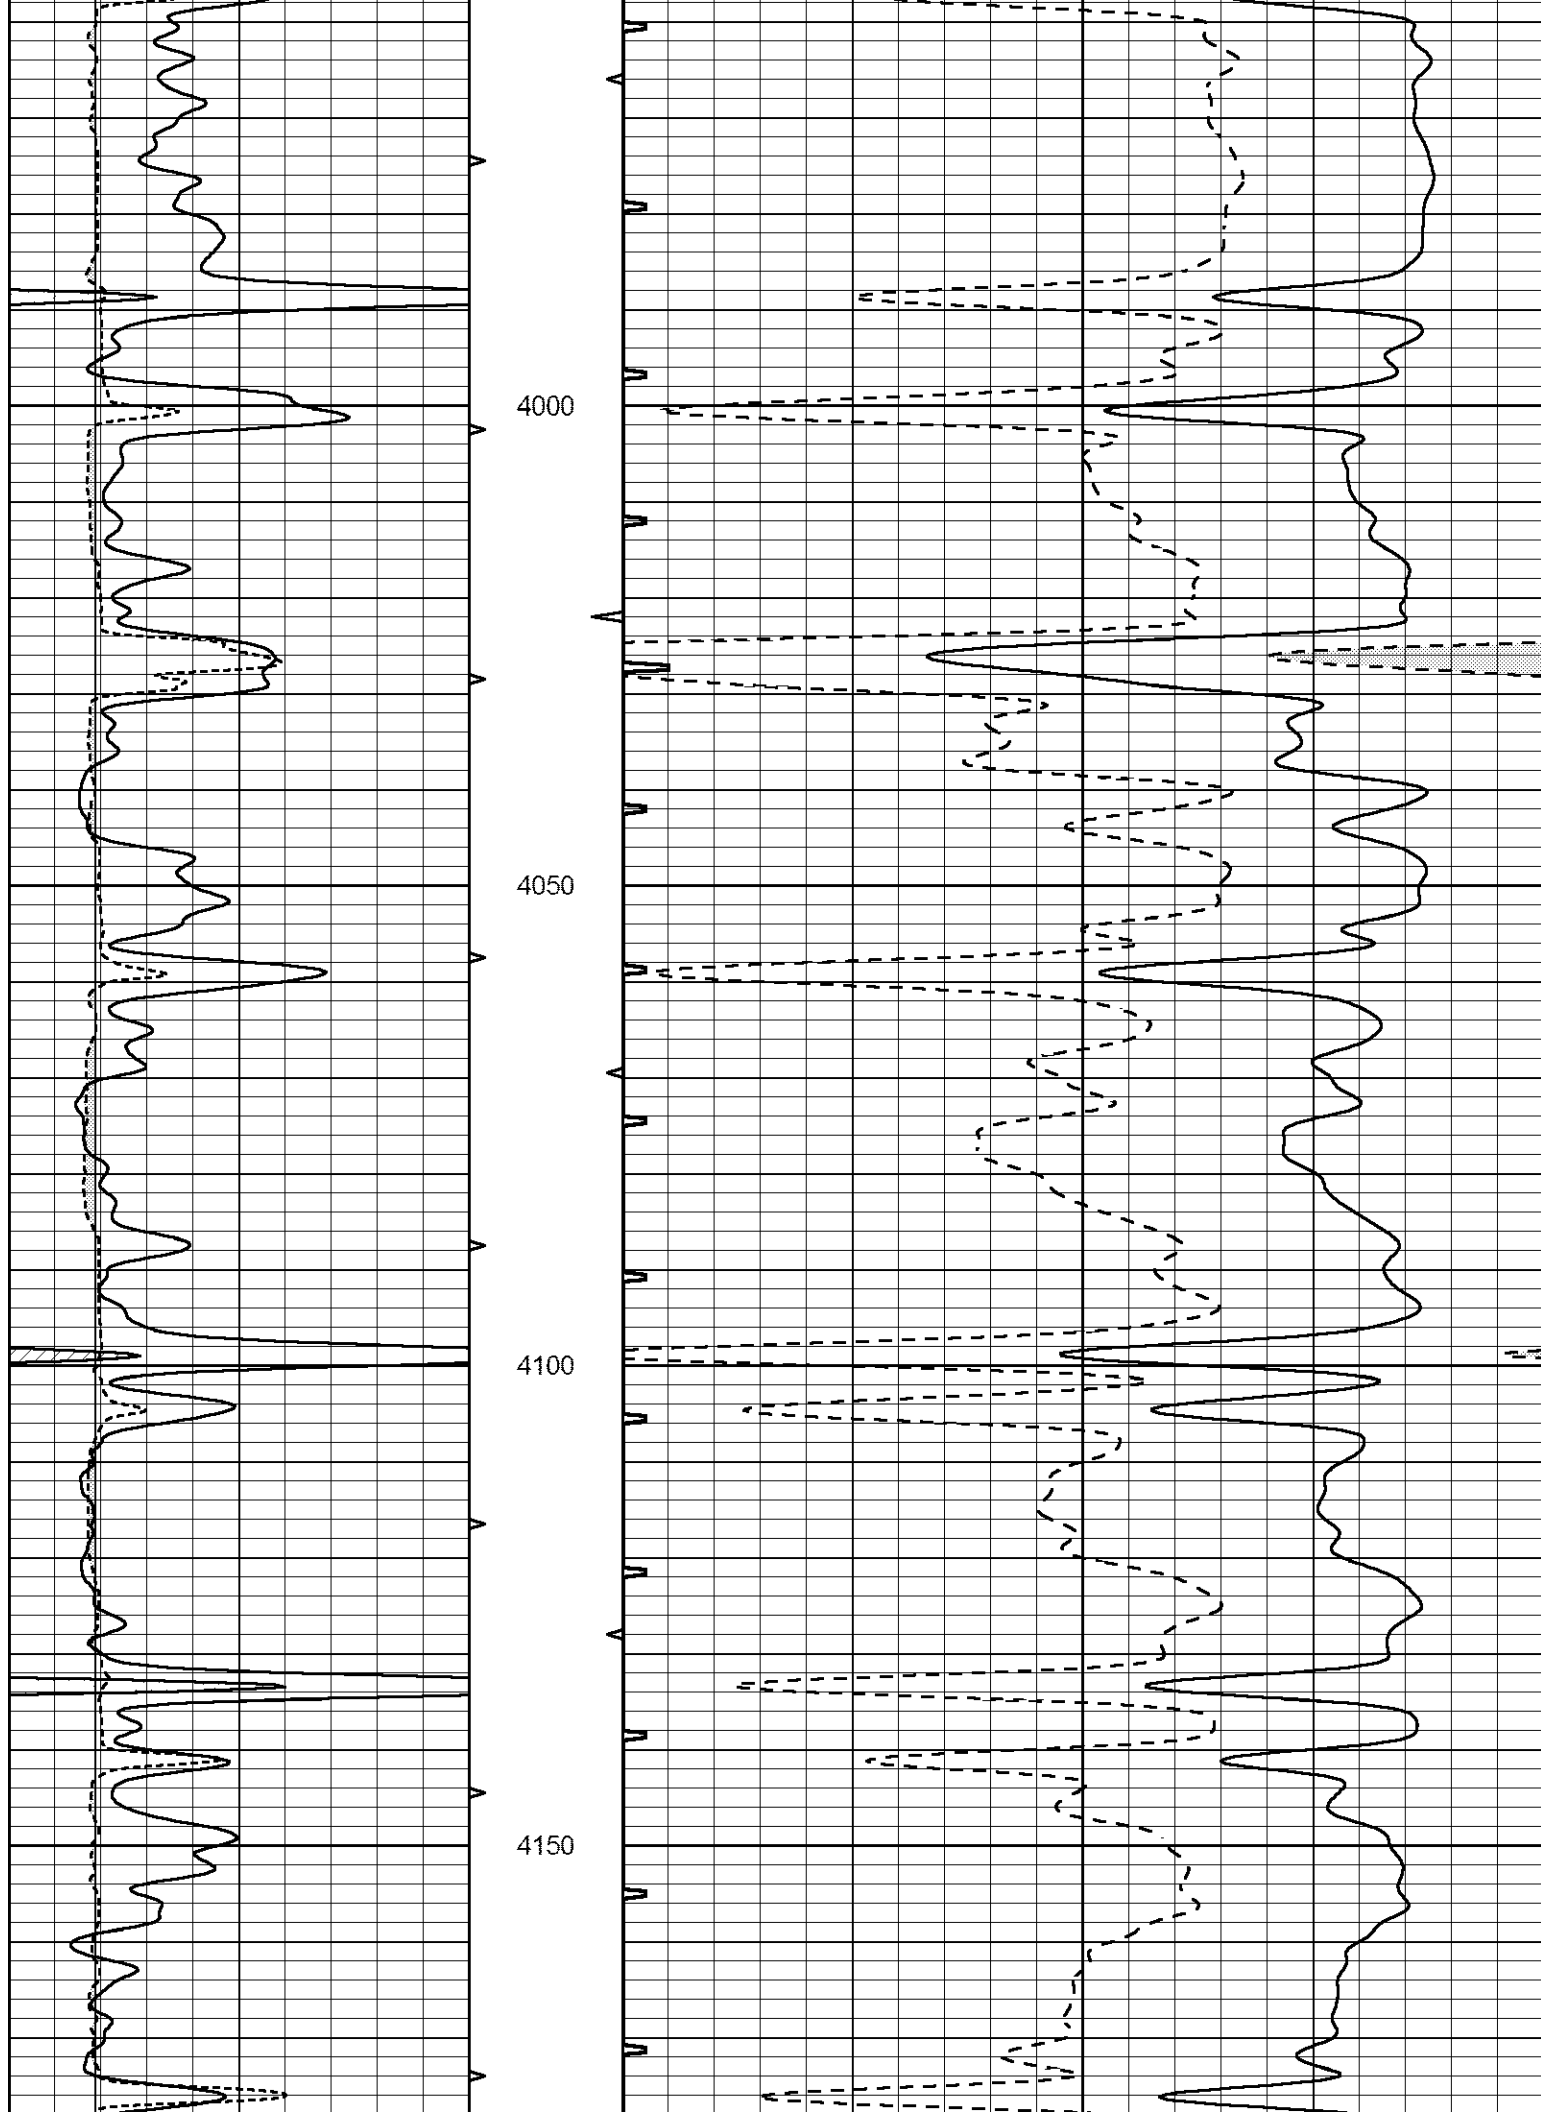

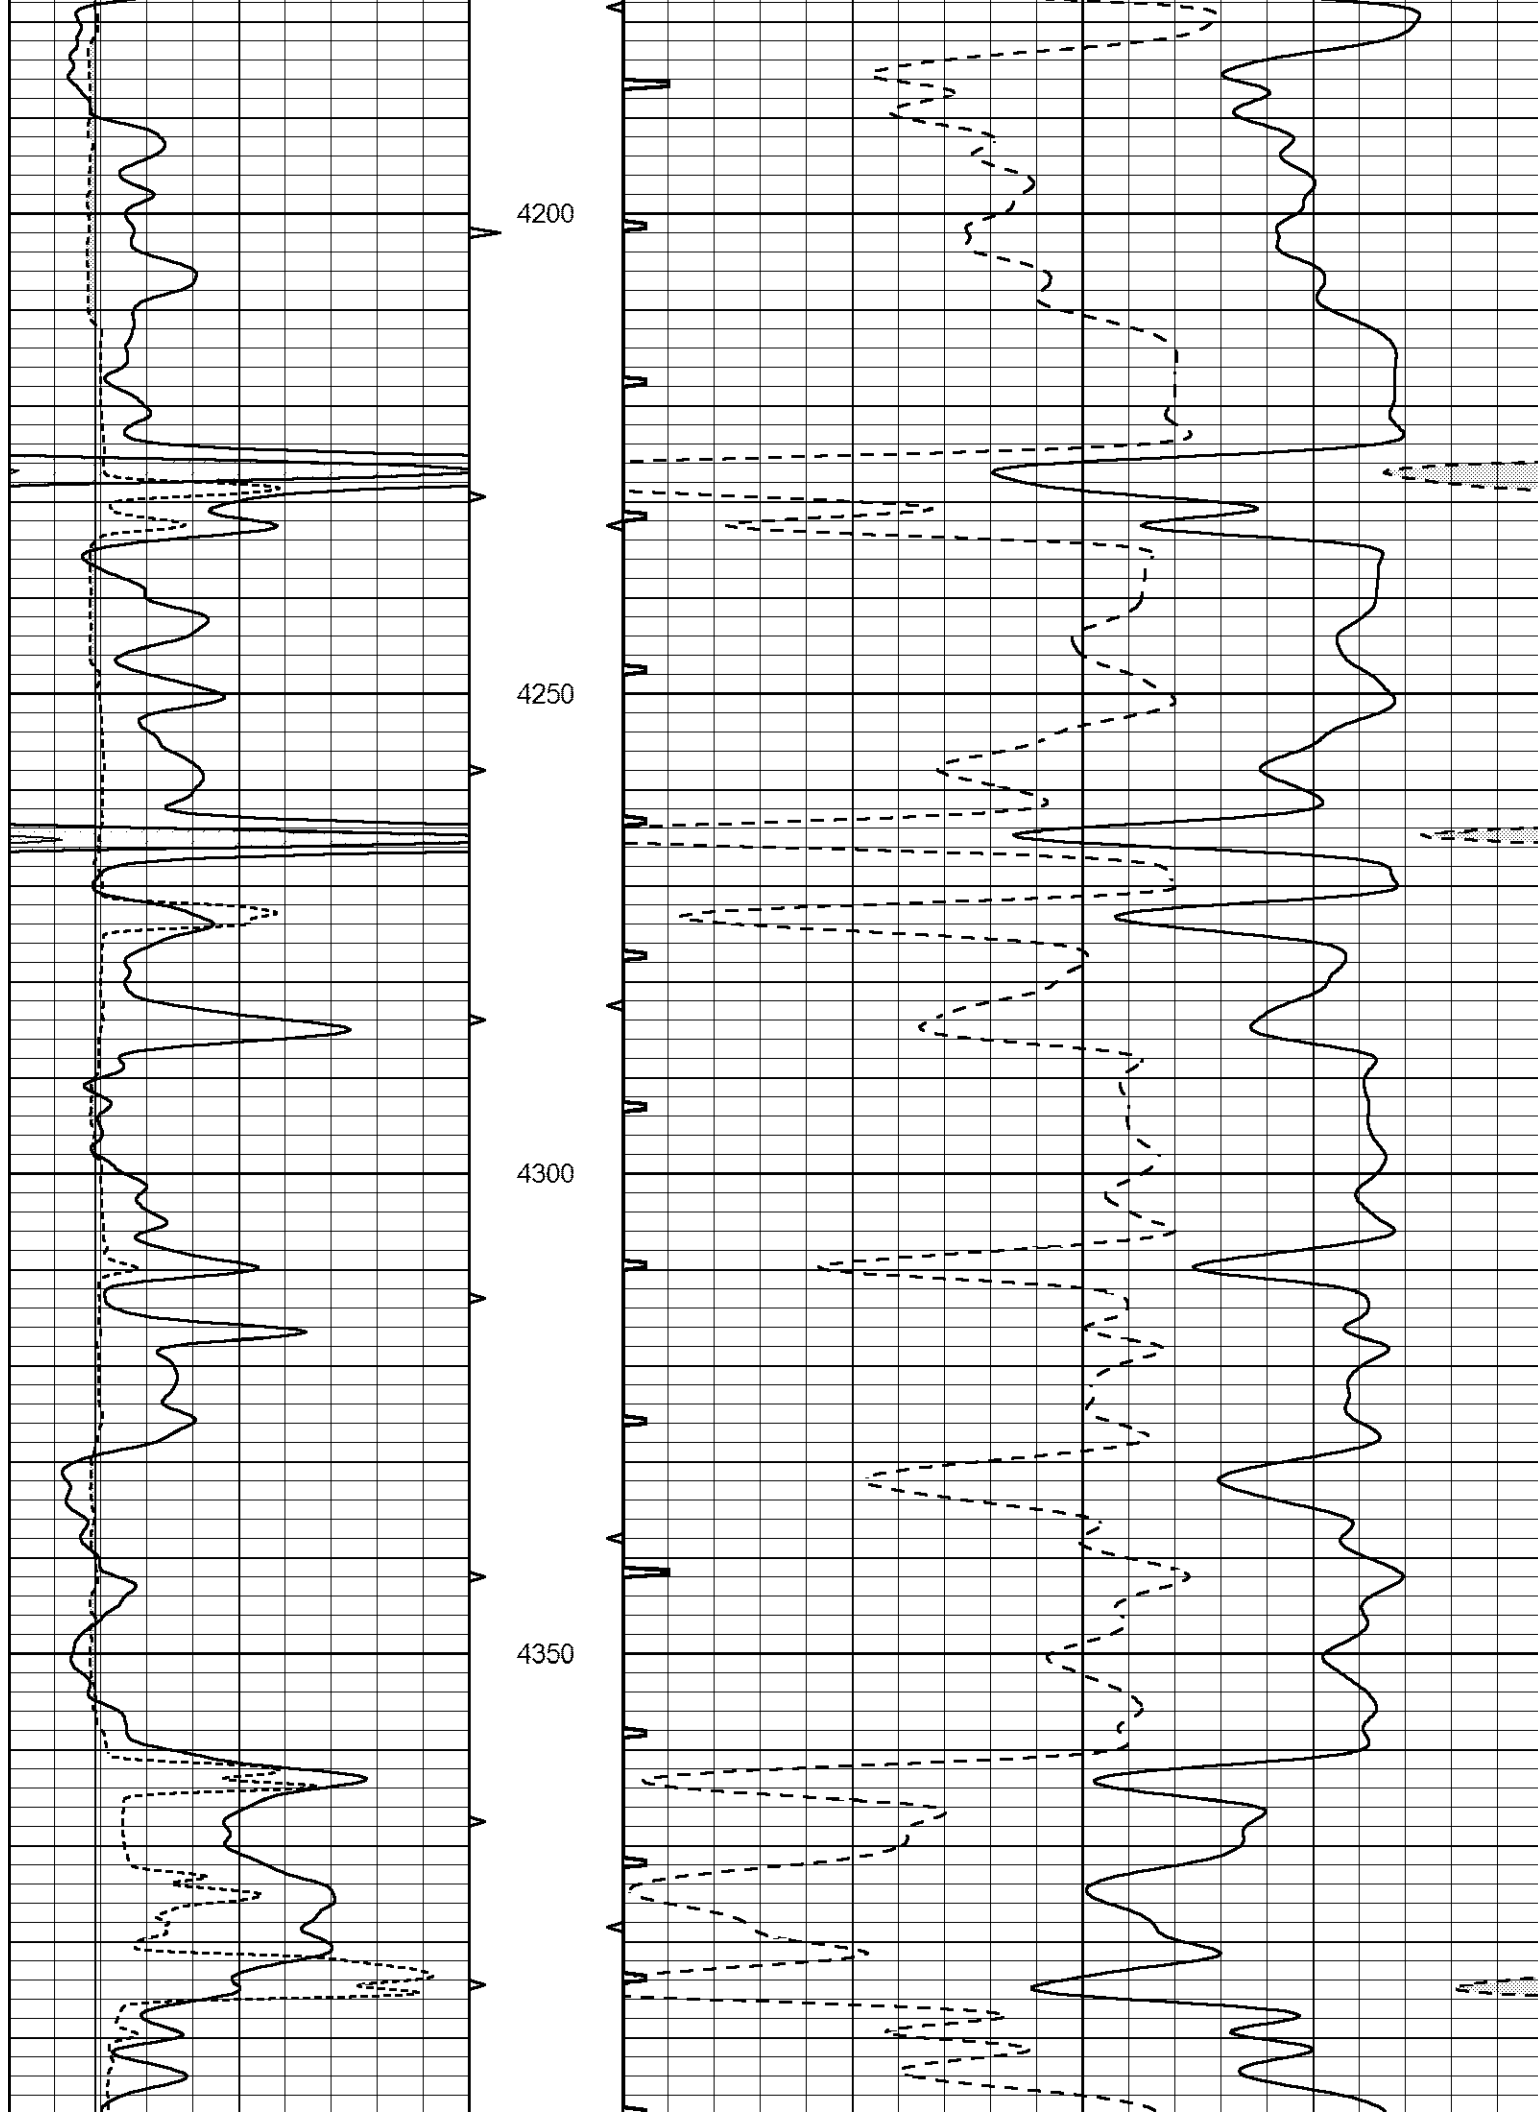

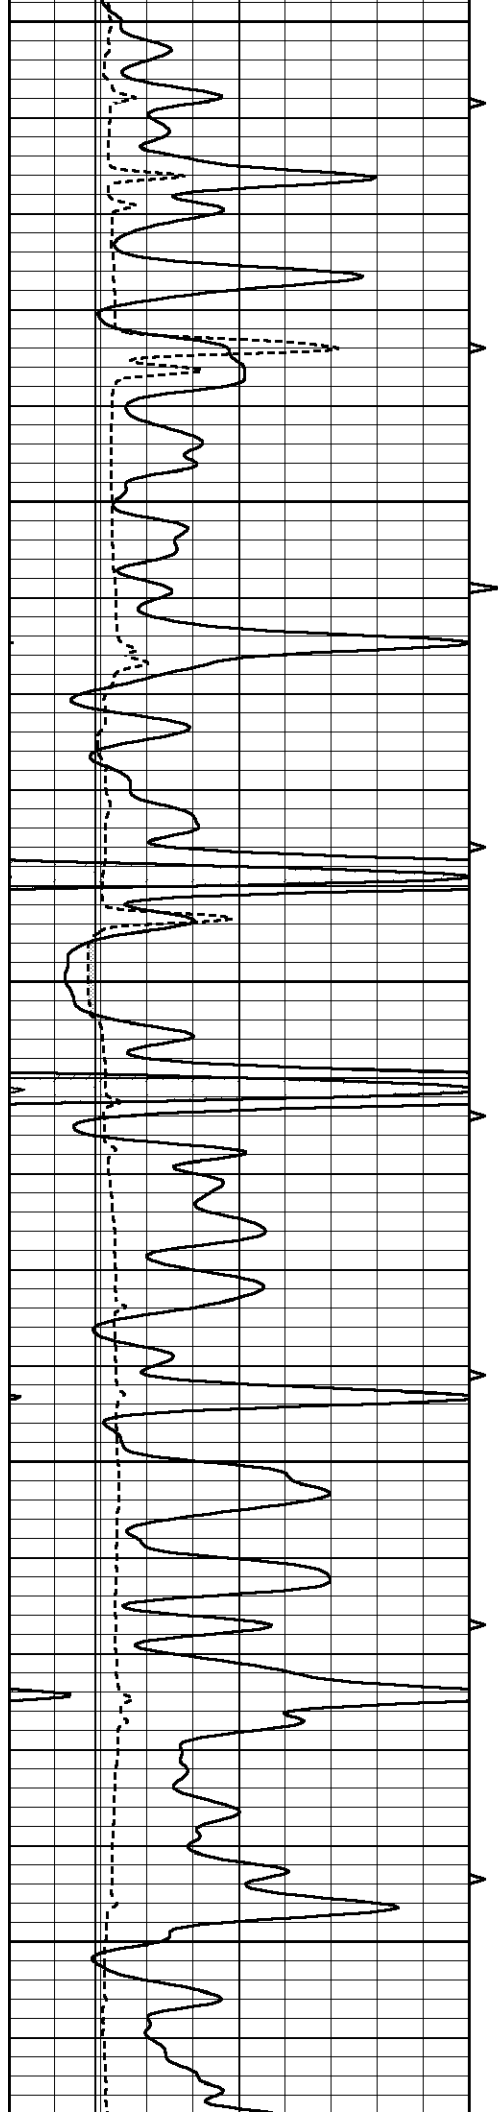


4400


4450



4500

4550

4600

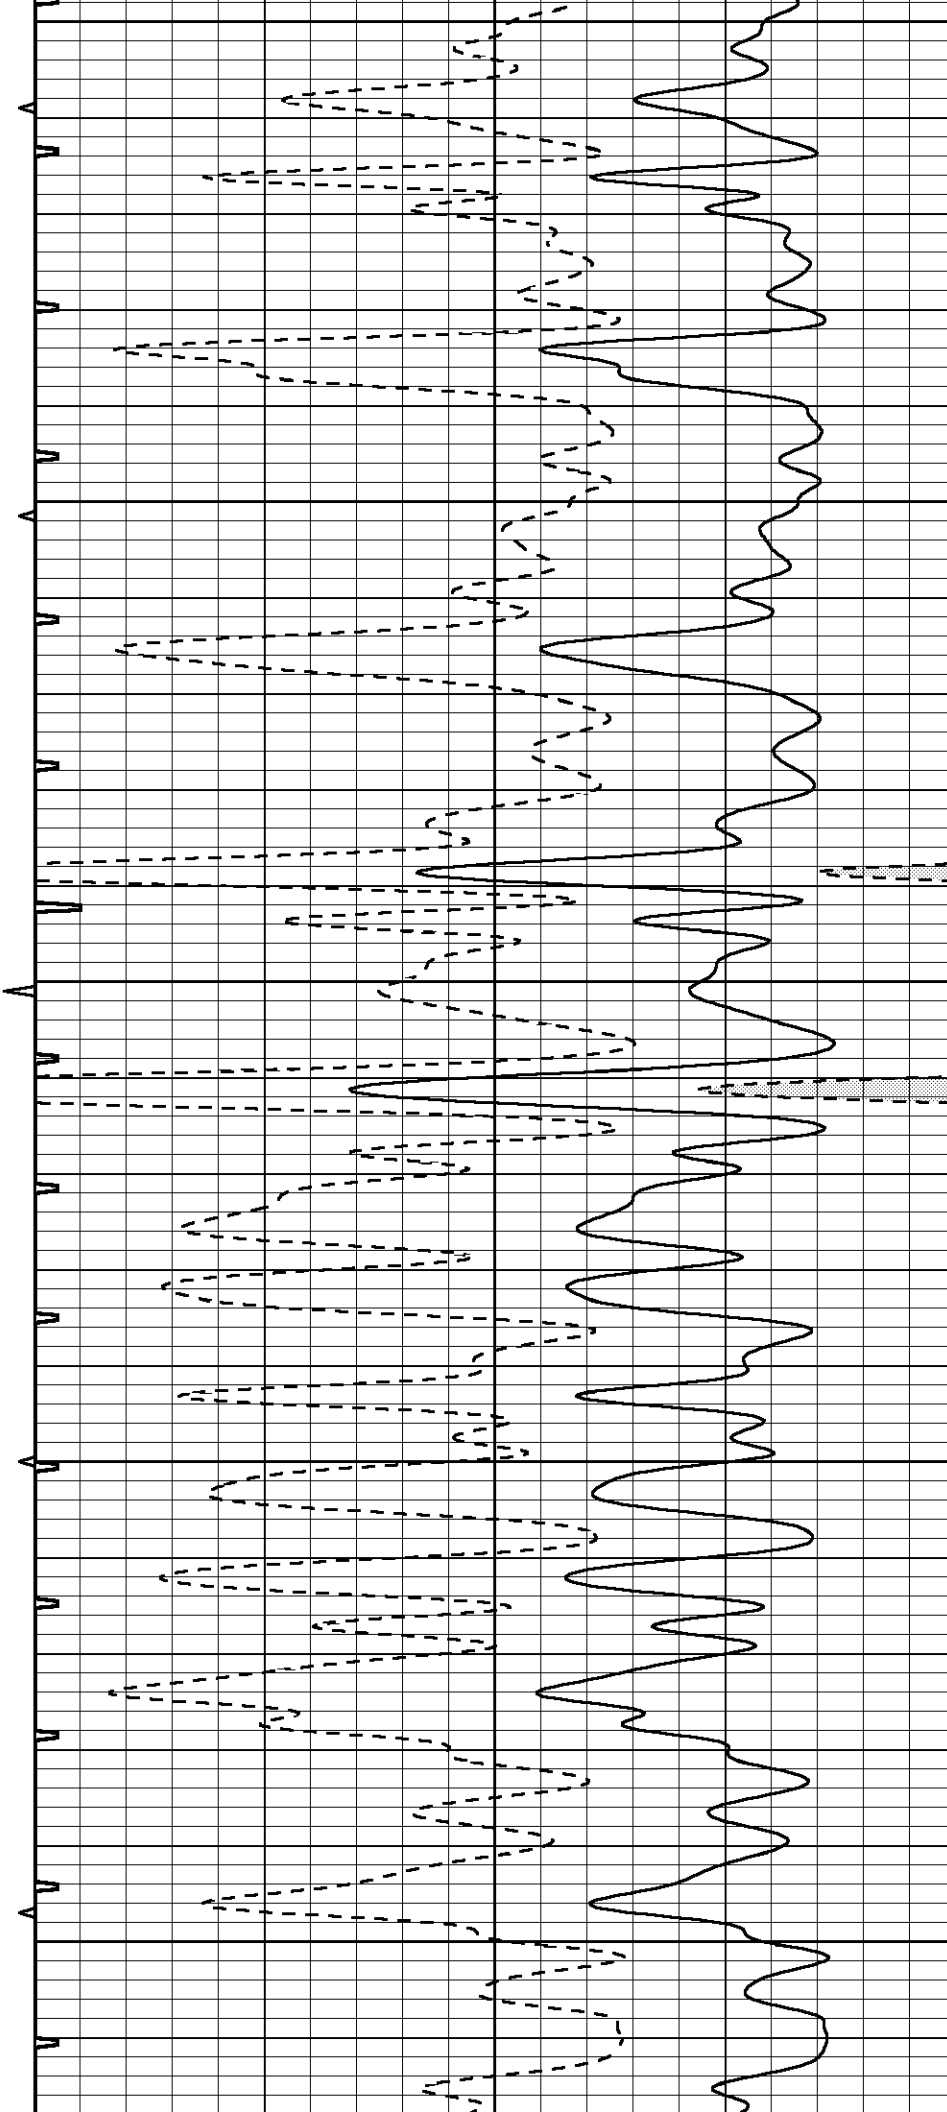

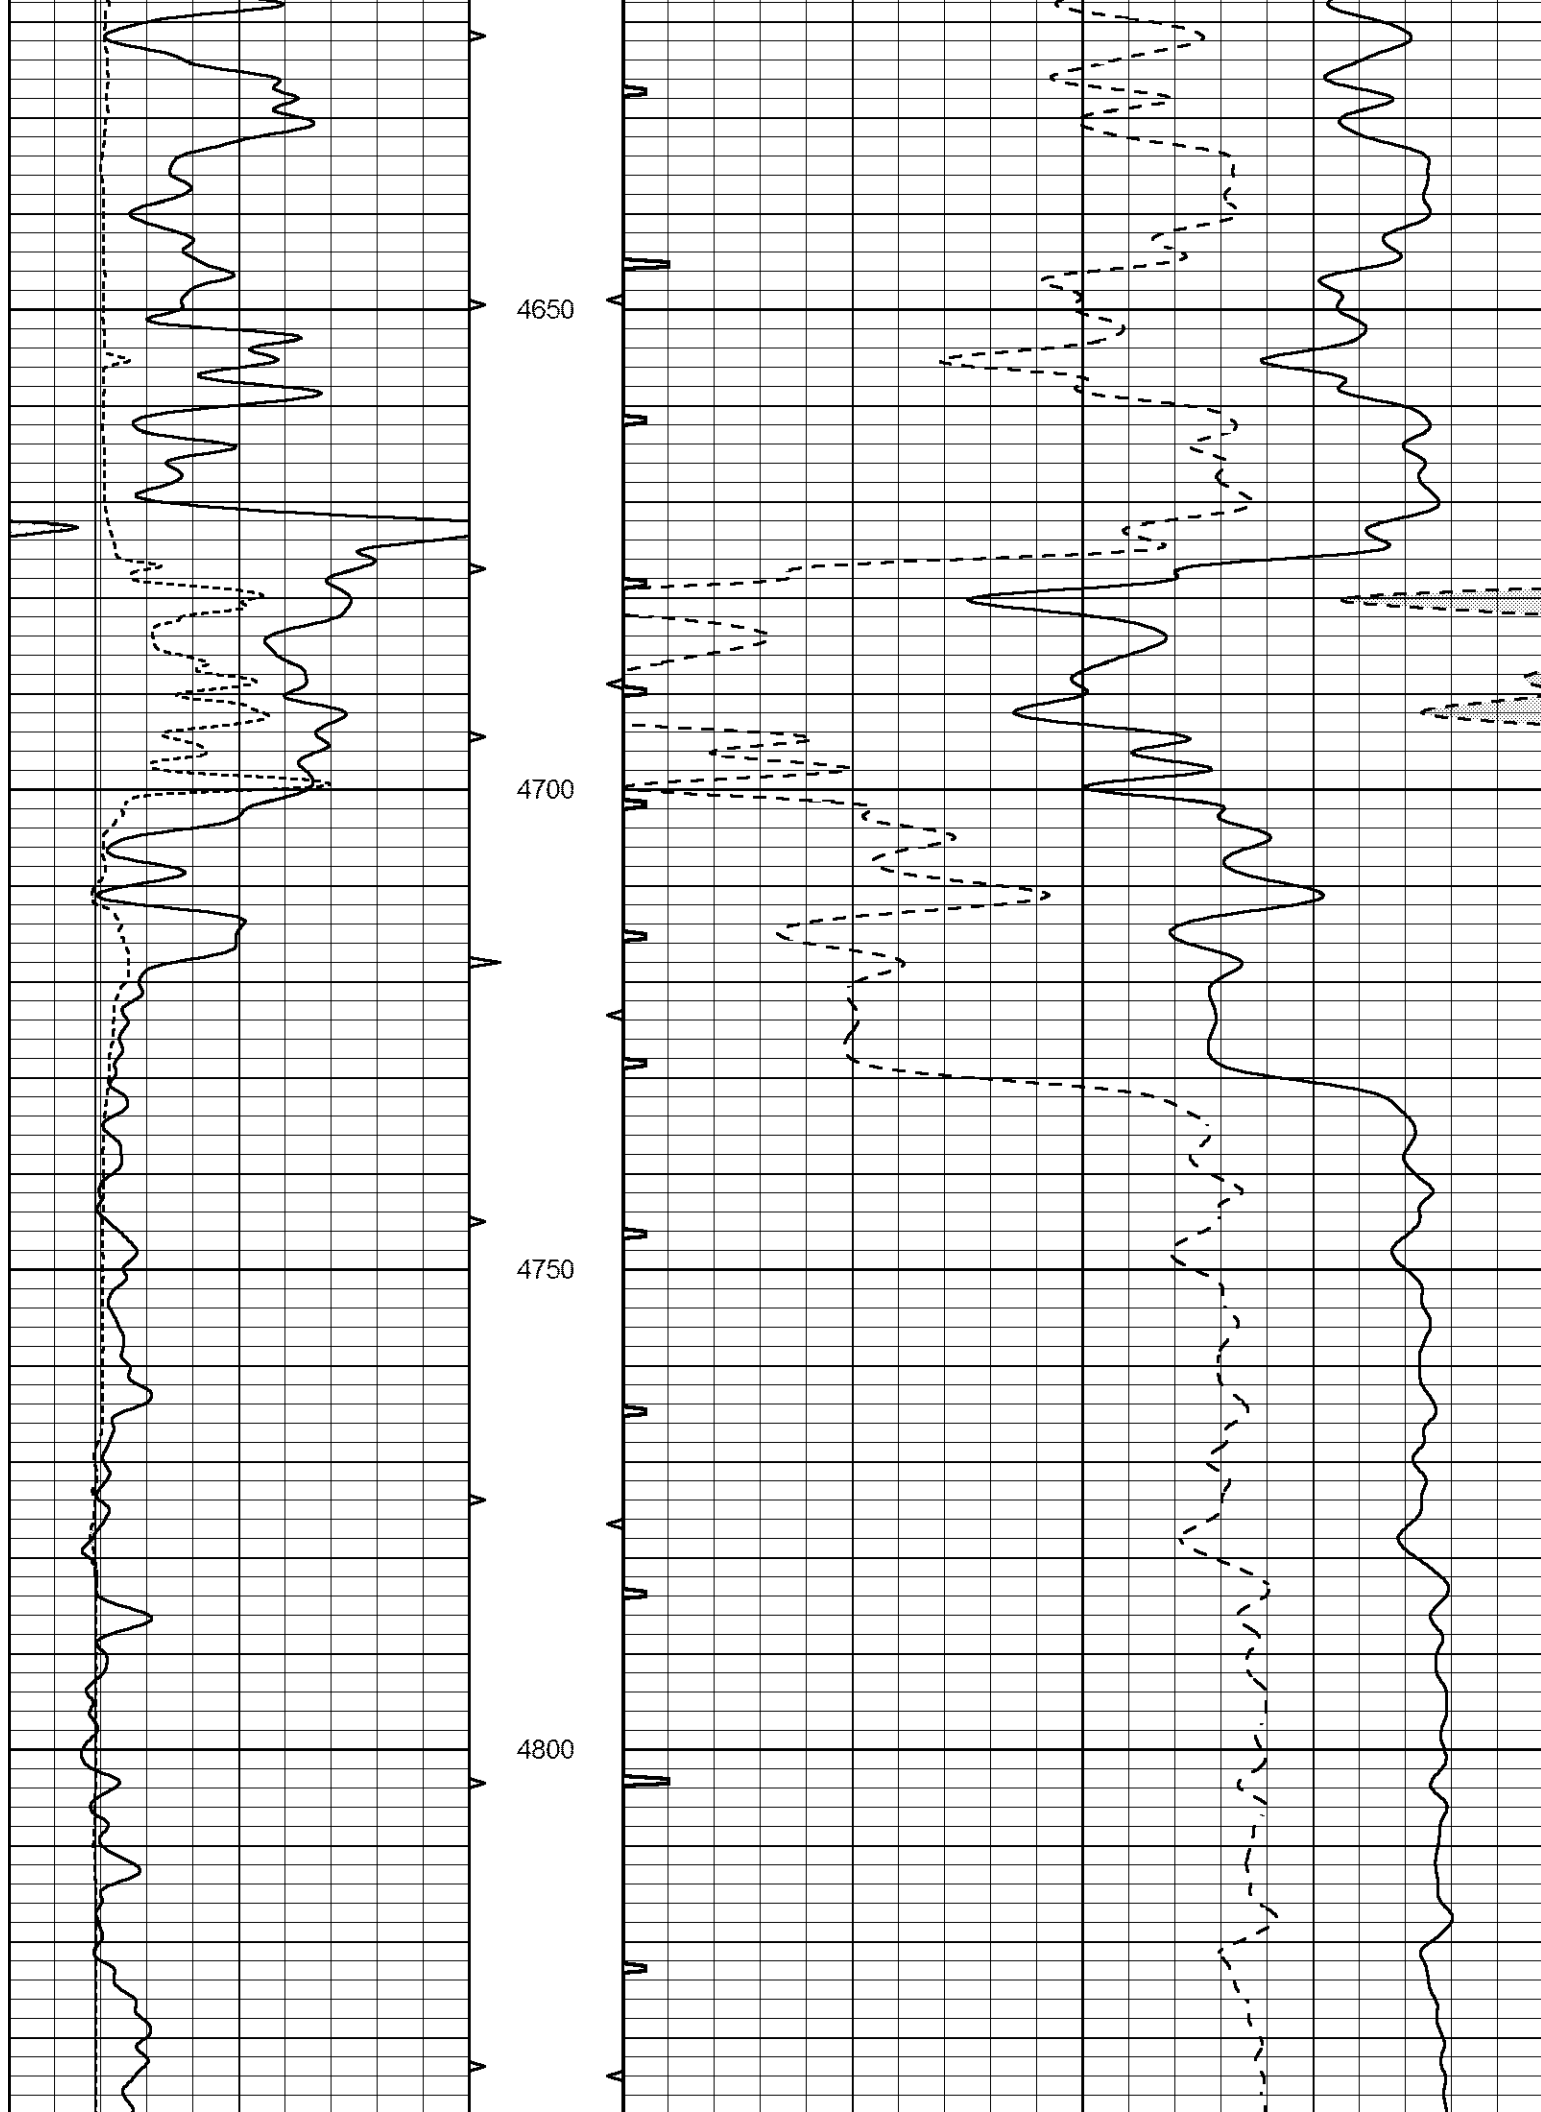

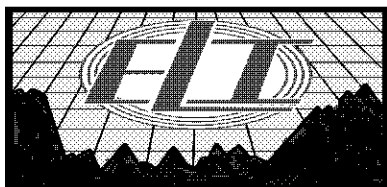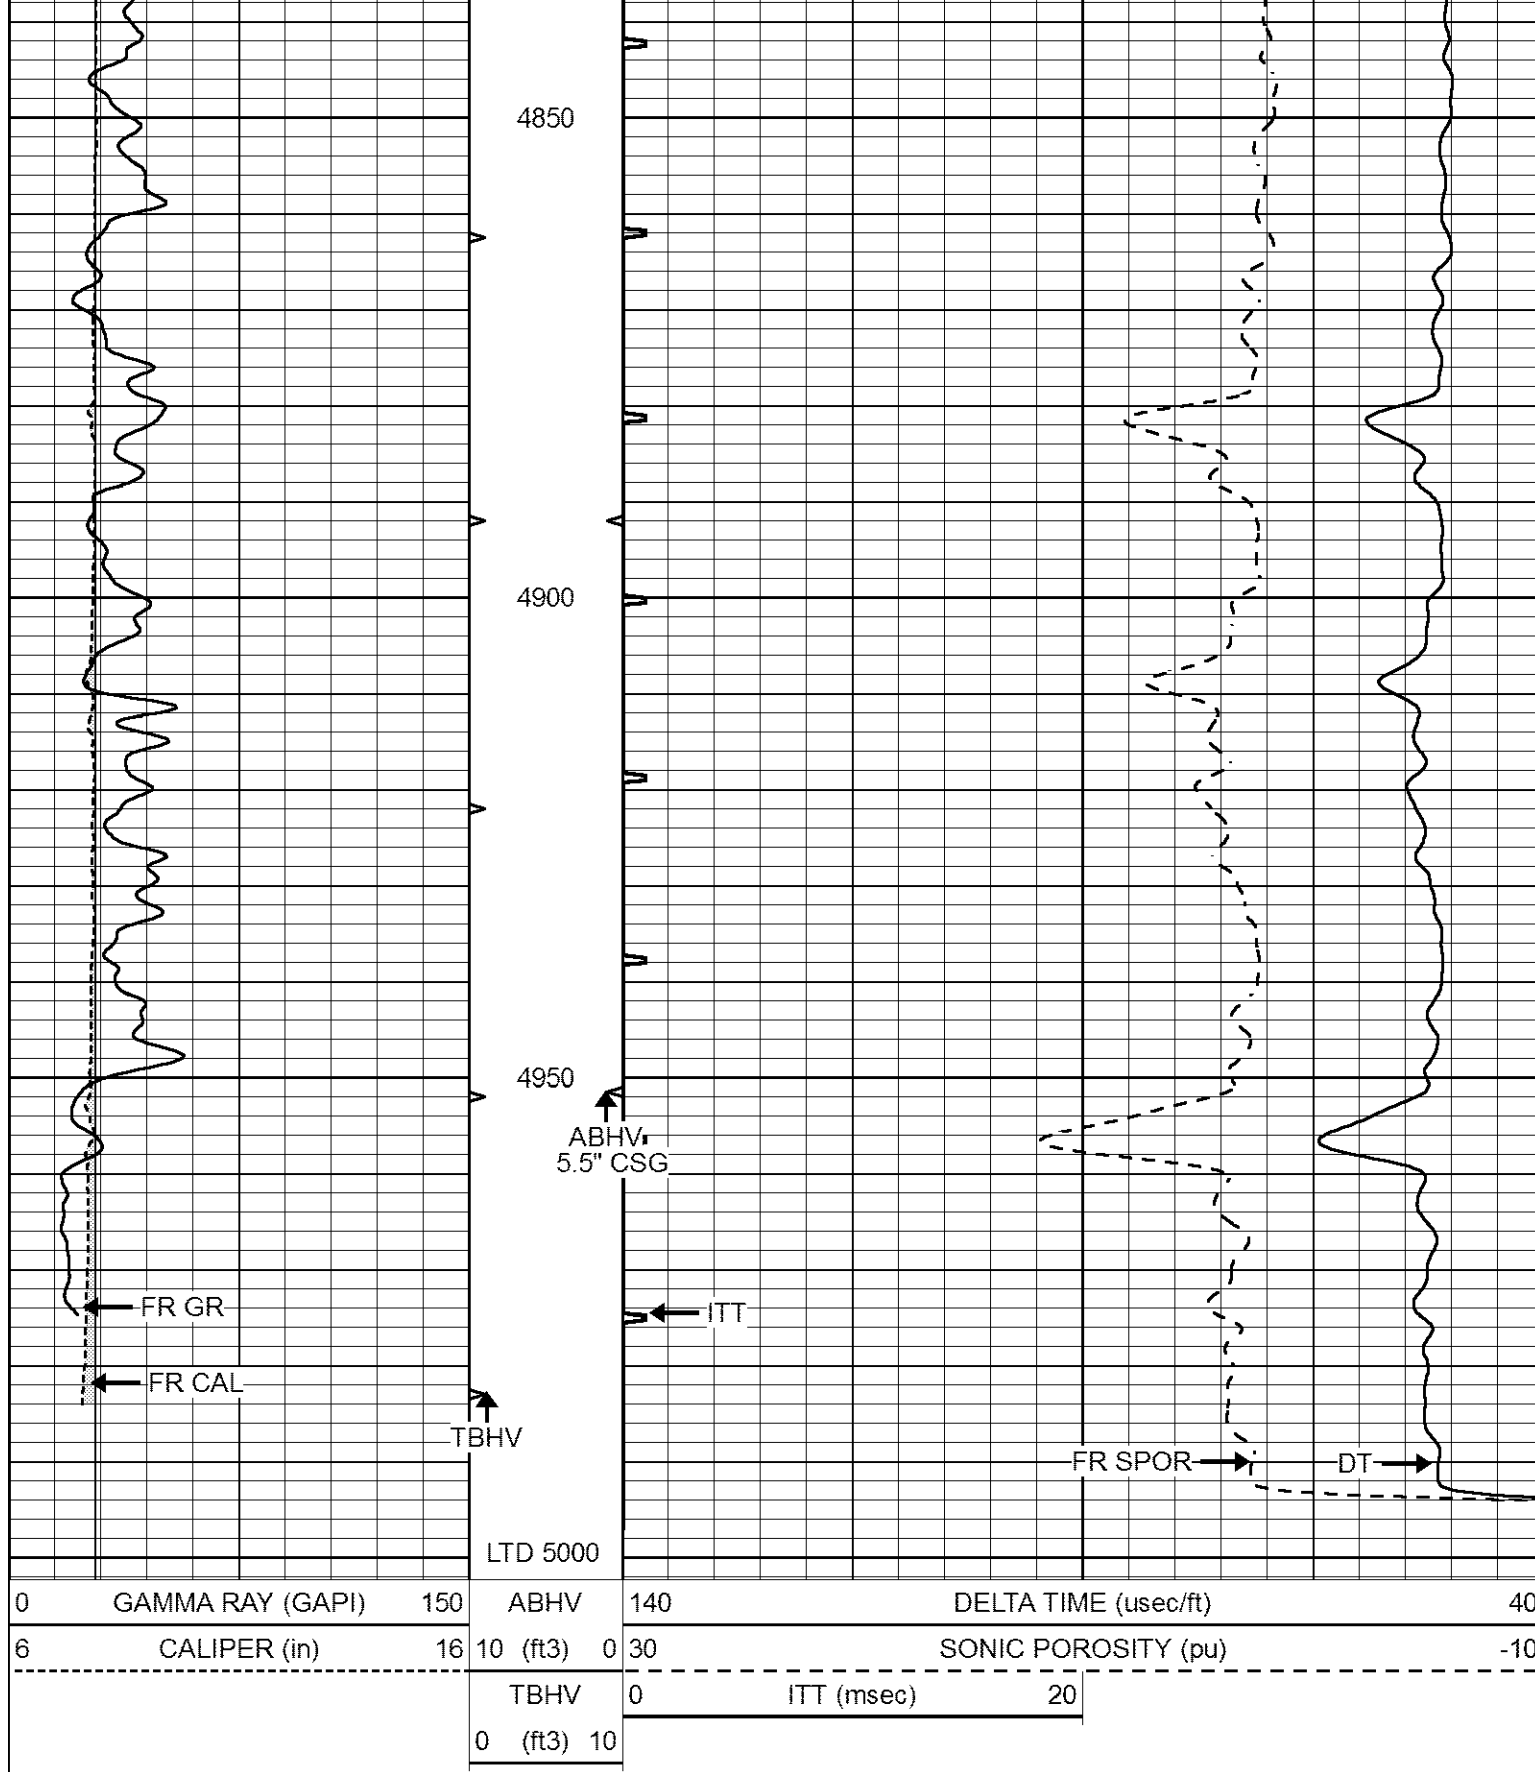

REPEAT SECTION

0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)	40
6	CALIPER (in)	16	10 (ft3) 0	30	SONIC POROSITY (pu)	-10
			TBHV	0	ITT (msec)	20
			0 (ft3) 10			

