

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-10661-00-00
Spot: SWNESE Sec/Twnshp/Rge: 31-26S-12W
1650 feet from S Section Line, 990 feet from E Section Line
Lease Name: BINGER C J Well #: 7
County: PRATT Total Vertical Depth: 4331 feet

Operator License No.: 9232
Op Name: TIMBERLINE OIL & GAS CORPORATIO
Address: 4000 PENROSE PLACE
RAPID CITY, SD 57702

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	7	4322	2020	WITH 300 SX CMT
SURF	10.75	648		WITH 600 SX CMT

\$ 140.76

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/16/2007 10:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3650' & 7 SX CMT. PLUG AT 670' WITH 15 SX GEL & 80 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 40' WITH 25 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 01/16/2007 12:25 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SIDETRACKED 7" FROM 3773-4320'. 11/64 LEFT 6 JOINTS OF TUBING IN ORIGINAL CASING. SANDED TO 3650' & 7 SX CMT. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 670' WITH 15 SX GEL - 80 SX CMT. 2ND PLUG AT 300' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 25 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4261	4271		
4244	4254		
4218	4226		

INVOICED
DATE 2-7-07
INV. NO. 2007061316

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

District: 01

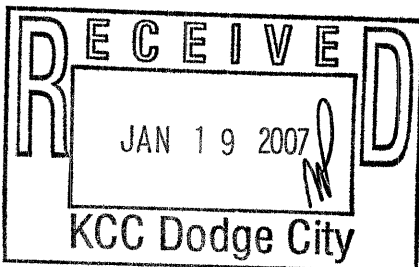

Signed Richard W. Lacey

(TECHNICIAN)

RECEIVED

FEB 05 2007 Form CP-2/3

KCC WICHITA

[Handwritten signature]