



MICRO LOG

Company I A OPERATING, INC.

Well CLOCK #3-1

Field CONKLING

County PAWNEE State KANSAS

Location: API #: 15-145-21870-0000

1455' FSL & 383' FWL
SW - NW - SW

SEC 3 TWP 20S RGE 18W

Permanent Datum GROUND LEVEL Elevation 2180
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL/SONIC

Elevation
K.B. 2188
D.F. 2186
G.L. 2180

Date 5/29/22

Run Number TWO

Depth Driller 4109

Depth Logger 4110

Bottom Logged Interval 4094

Top Log Interval 3300

Casing Driller 8 5/8"@1283'

Casing Logger 1283

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.2/55

pH / Fluid Loss 10.5/6.4

Source of Sample FLOWLINE

Rm @ Meas. Temp .510@80F

Rmf @ Meas. Temp .383@80F

Rmc @ Meas. Temp .612@80F

Source of Rmf / Rmc MEASURED

Rm @ BHT .349@117F

Time Circulation Stopped 4 HOURS

Time Logger on Bottom 6:00 A.M.

Maximum Recorded Temperature 117F

Equipment Number 8916

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By JEFF LAWLER

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
RUSH CENTER, KS. (4 WAY STOP) 8 1/2S. ON HWY 183, E. INTO





MAIN SECTION

Database File	6559pe.db
Dataset Pathname	pass6.2
Presentation Format	_micro
Dataset Creation	Sun May 29 07:07:59 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

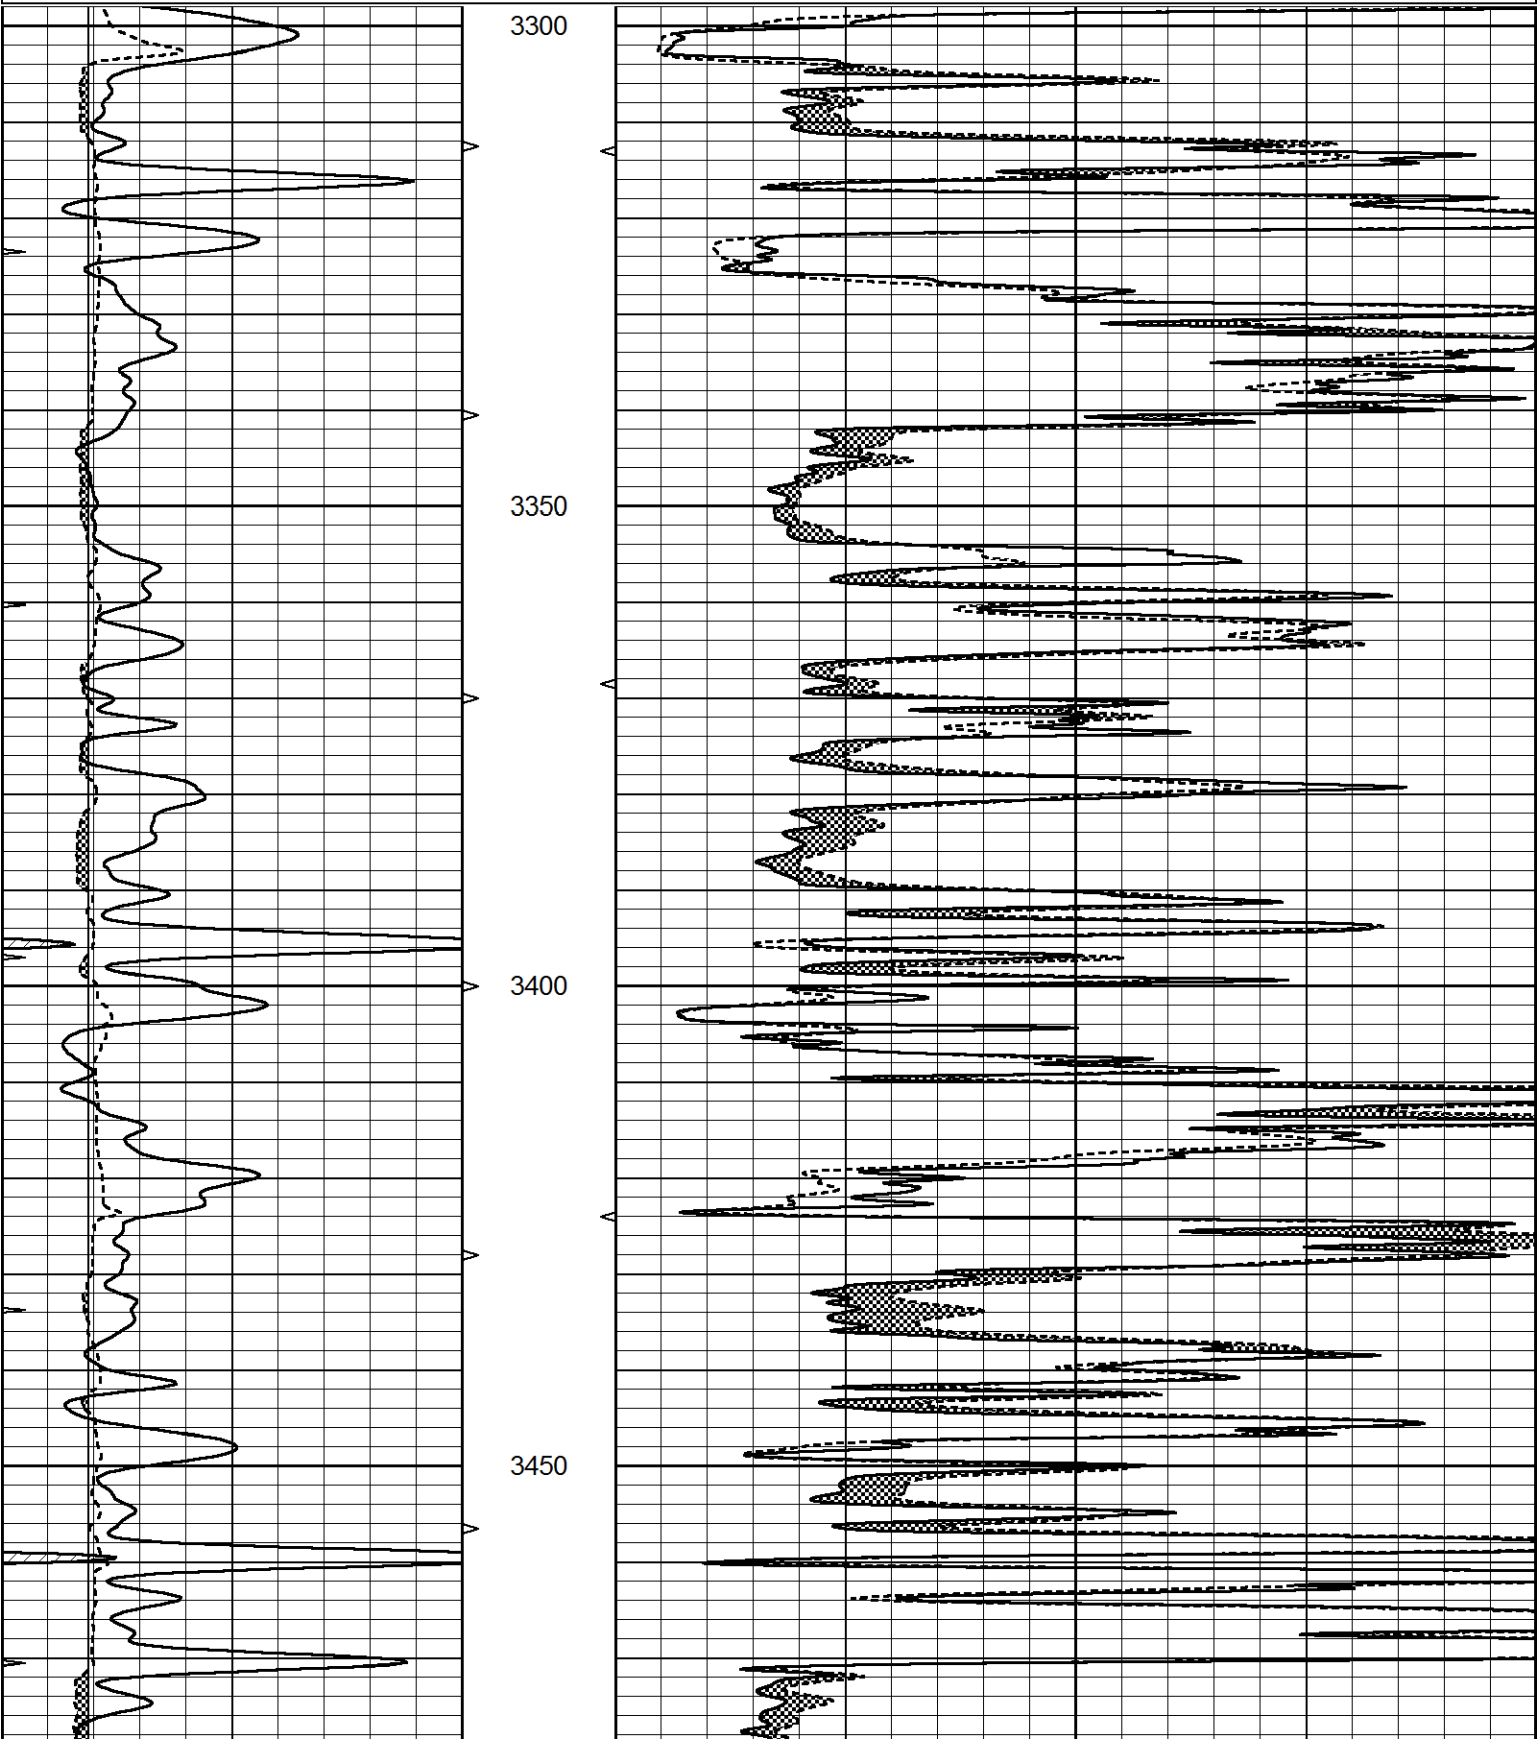

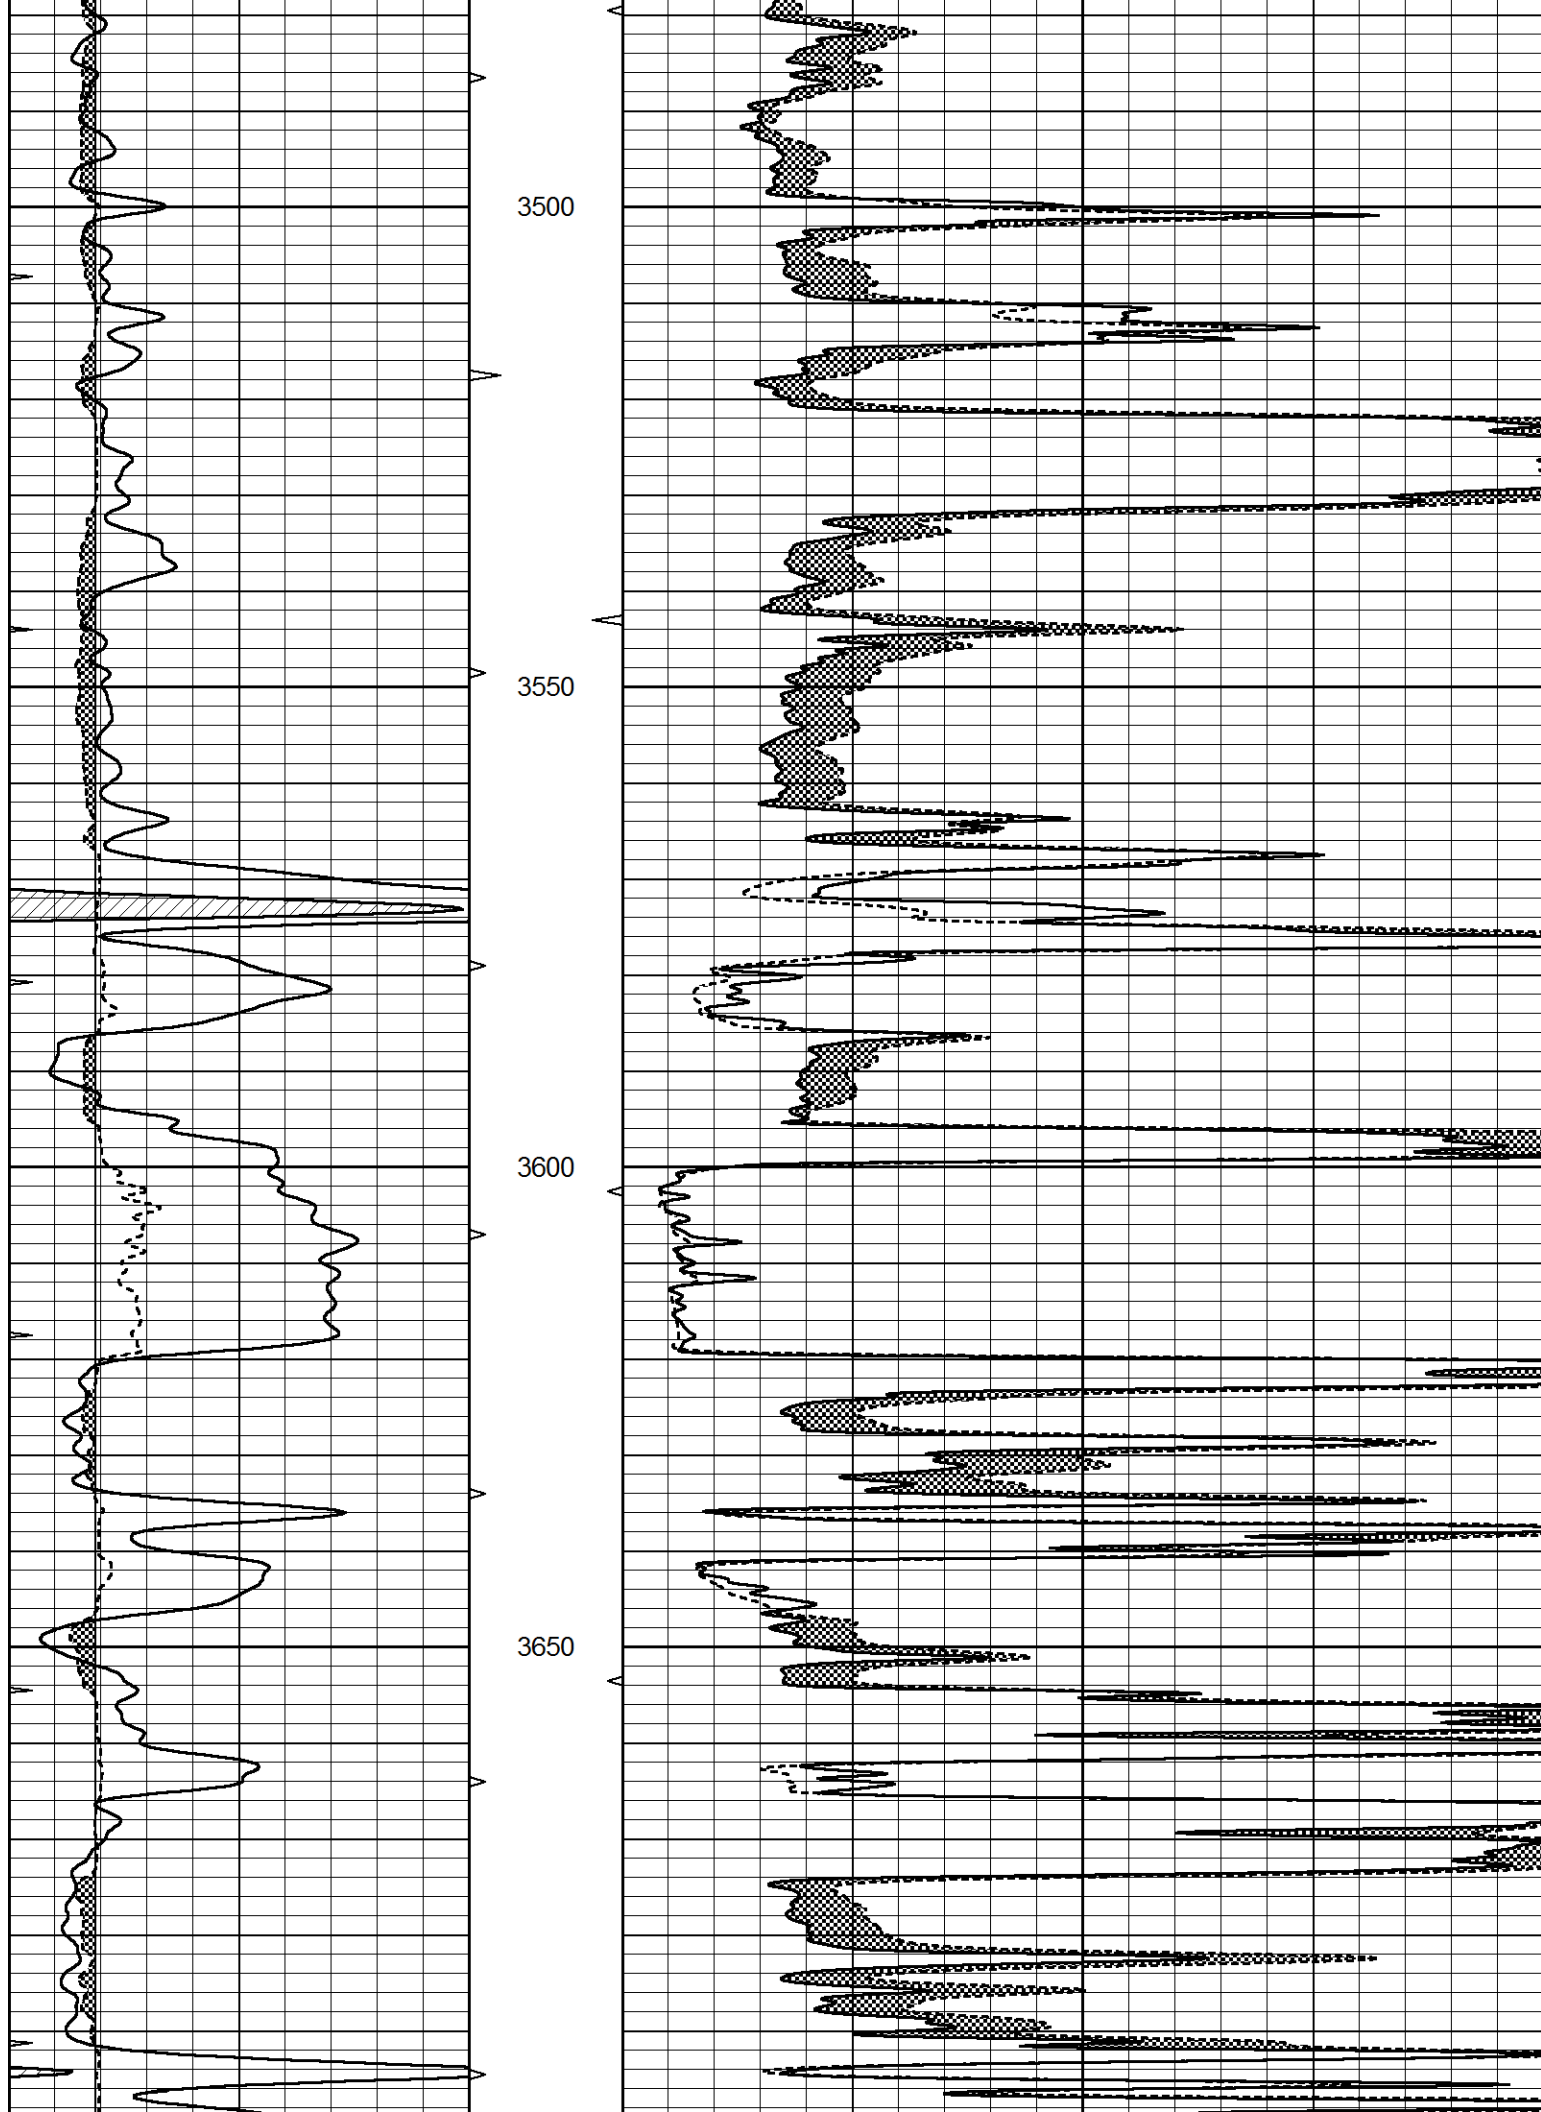

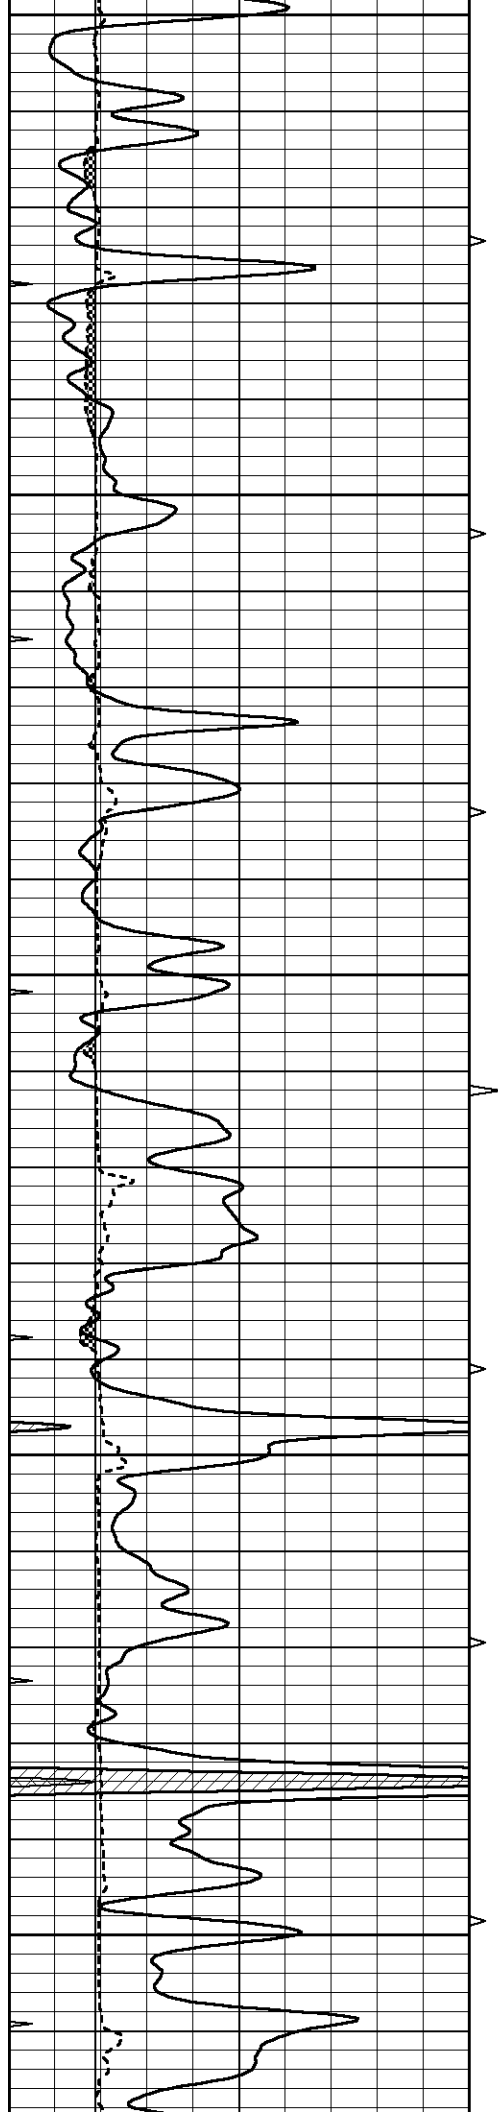


3700


3750

3800

3850

3900

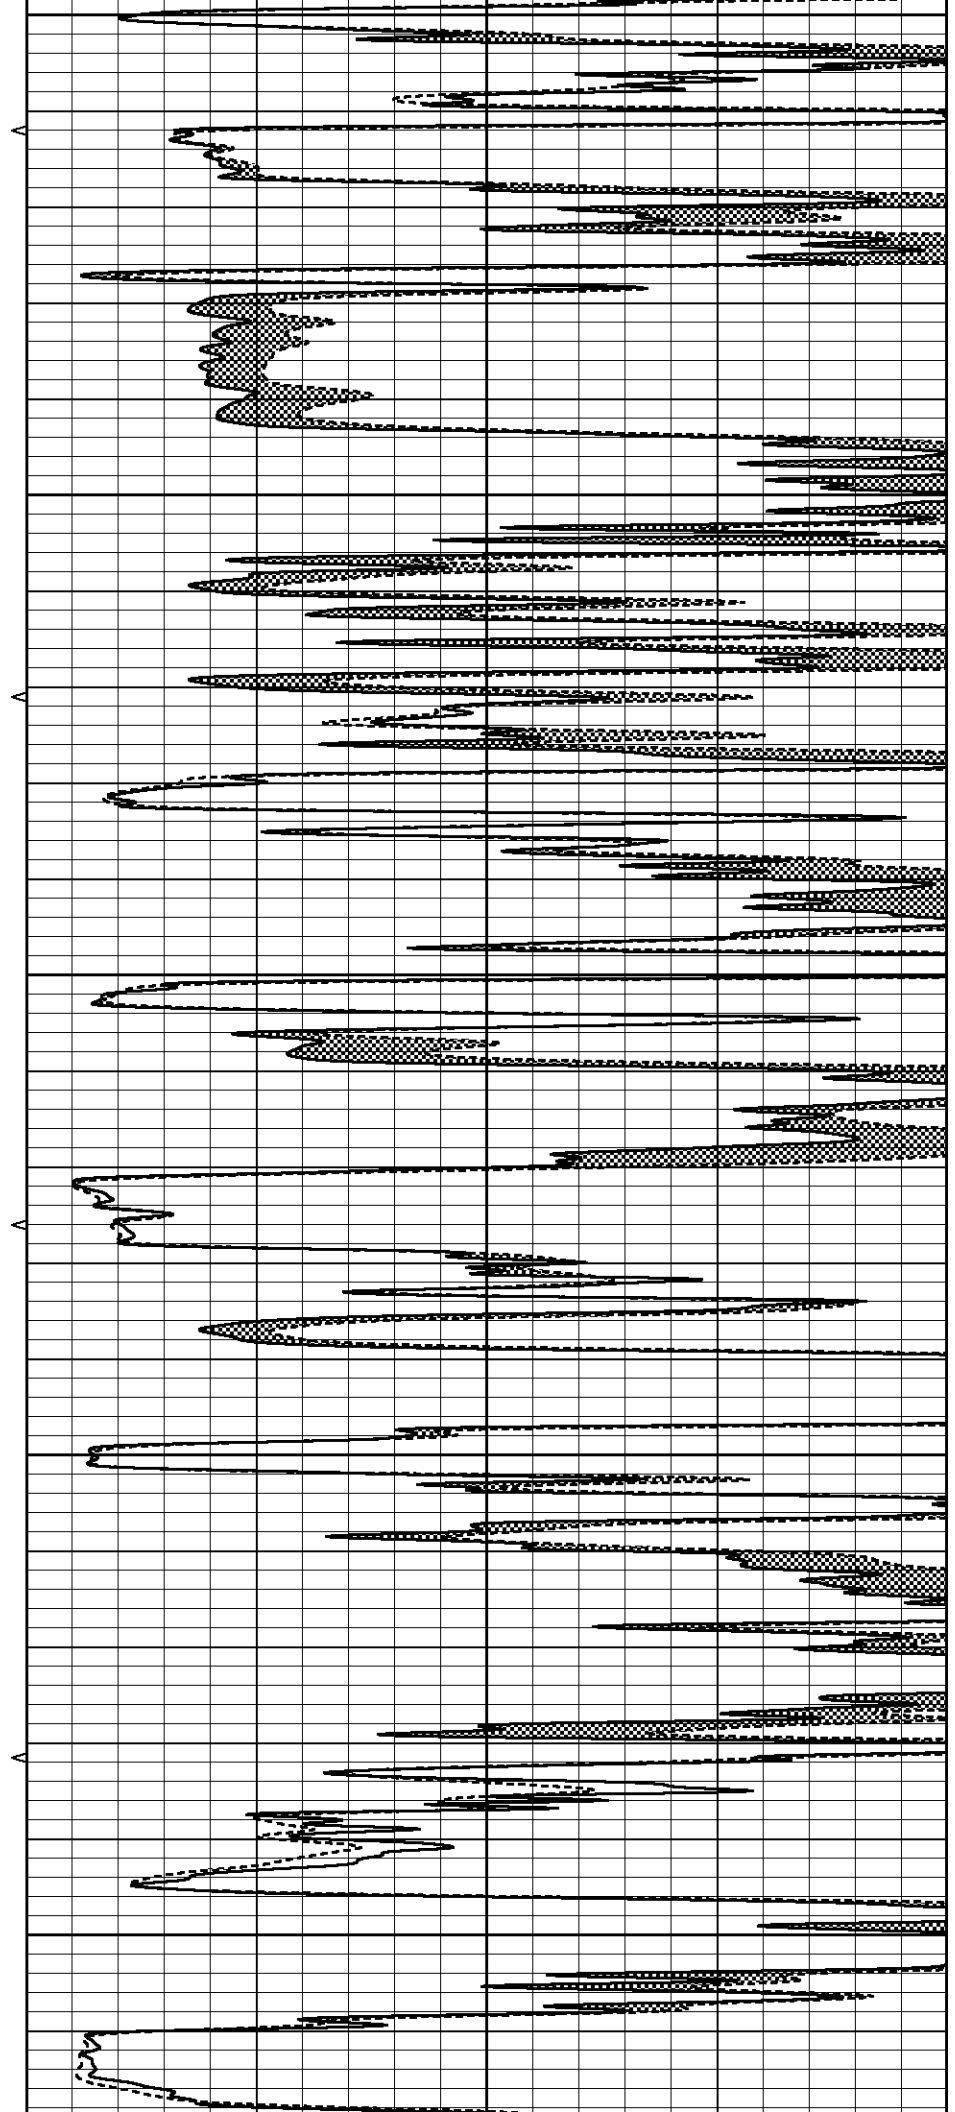

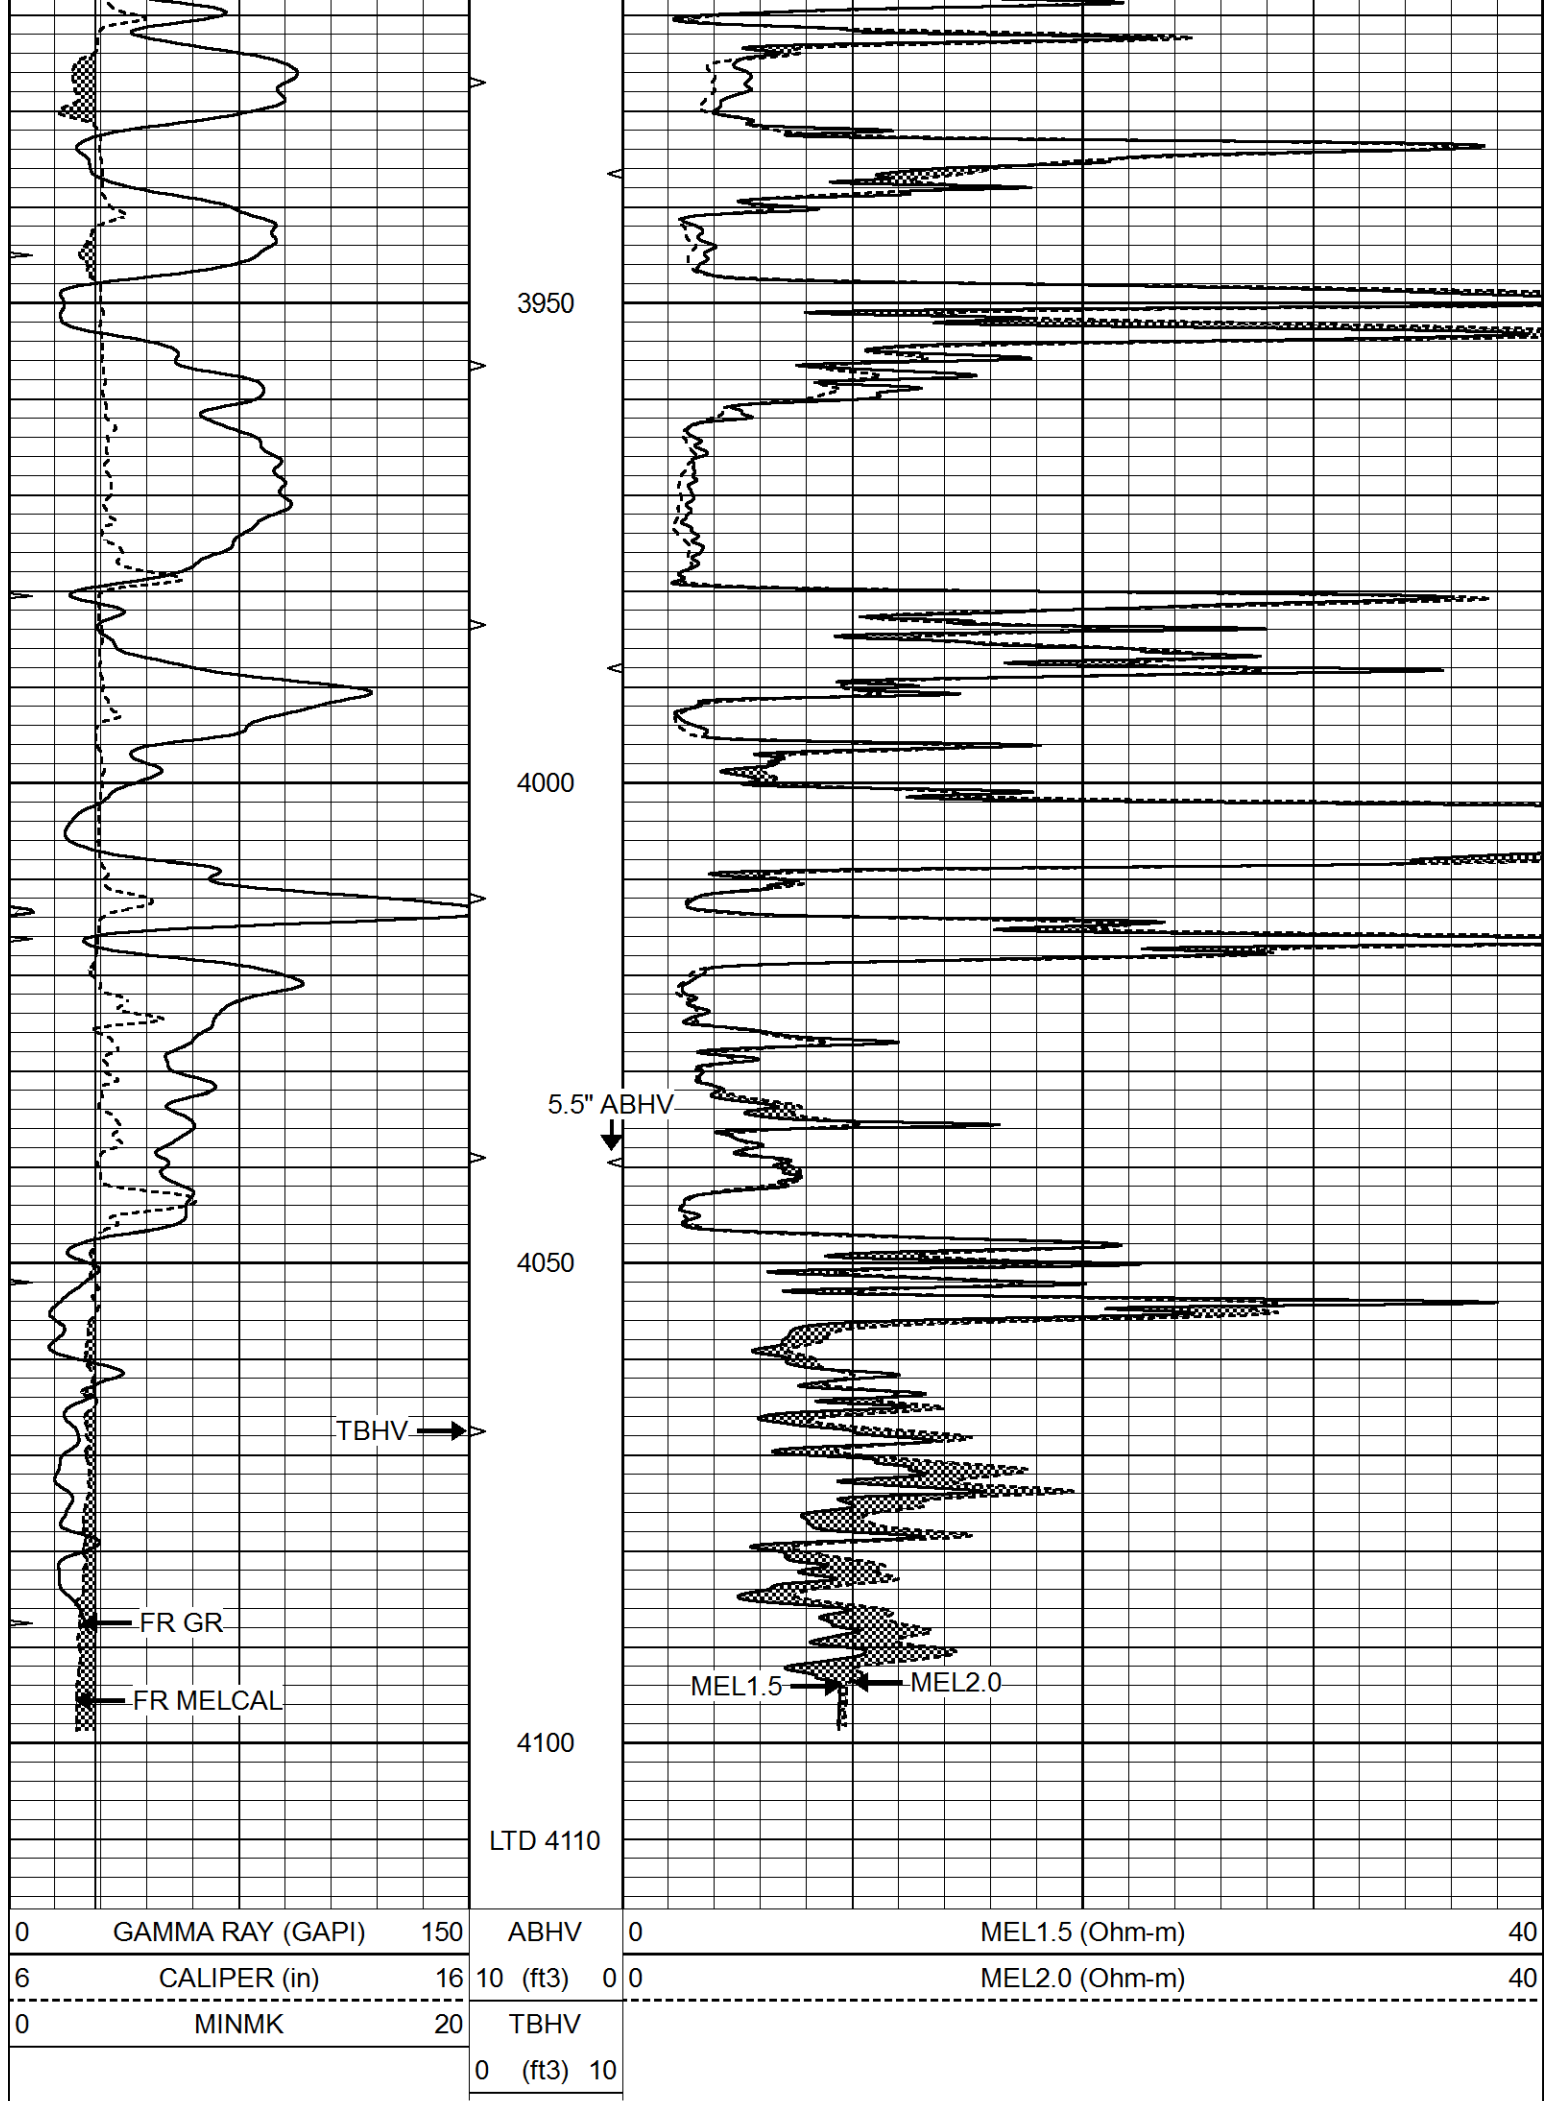





REPEAT SECTION

Database File 6559pe.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Sun May 29 07:00:10 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

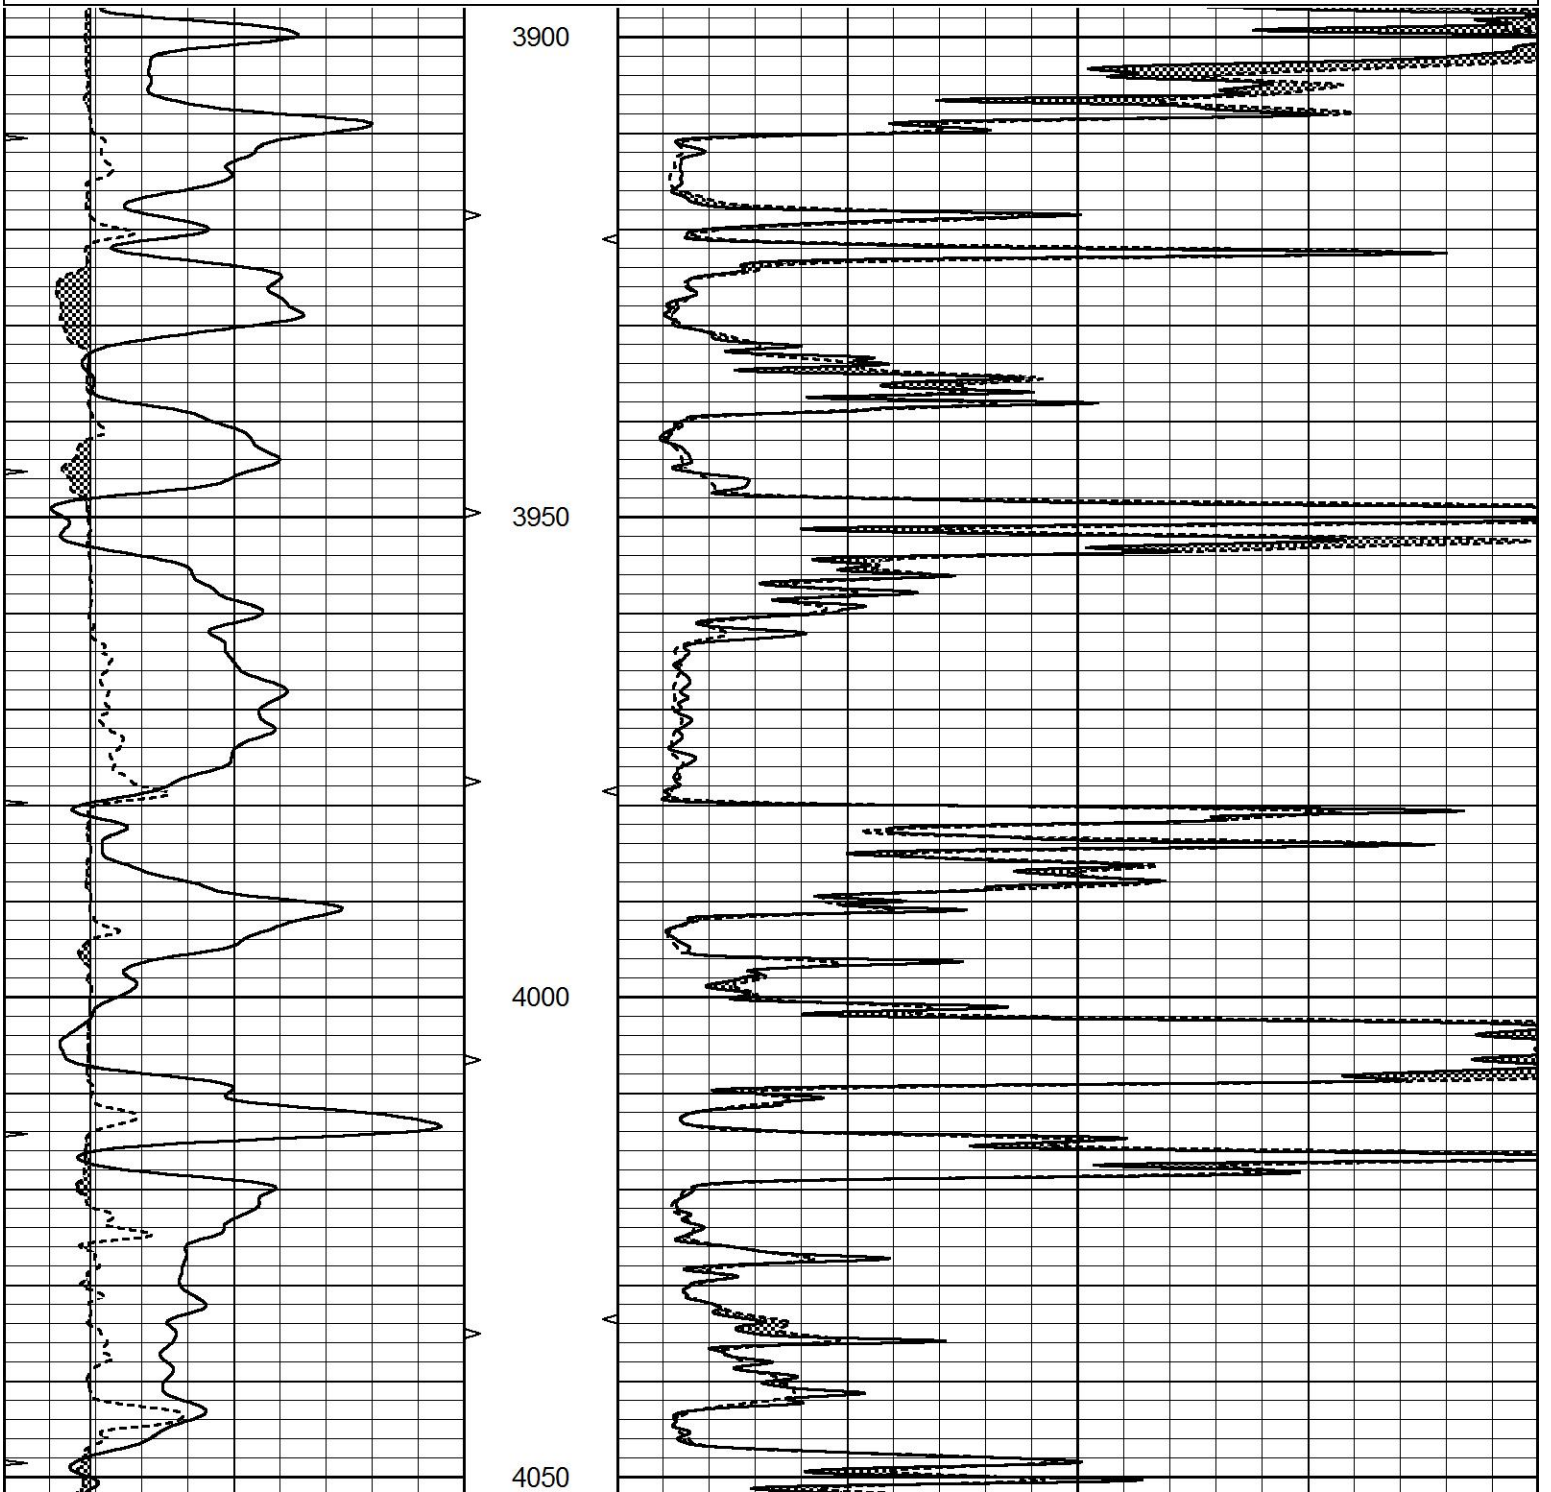

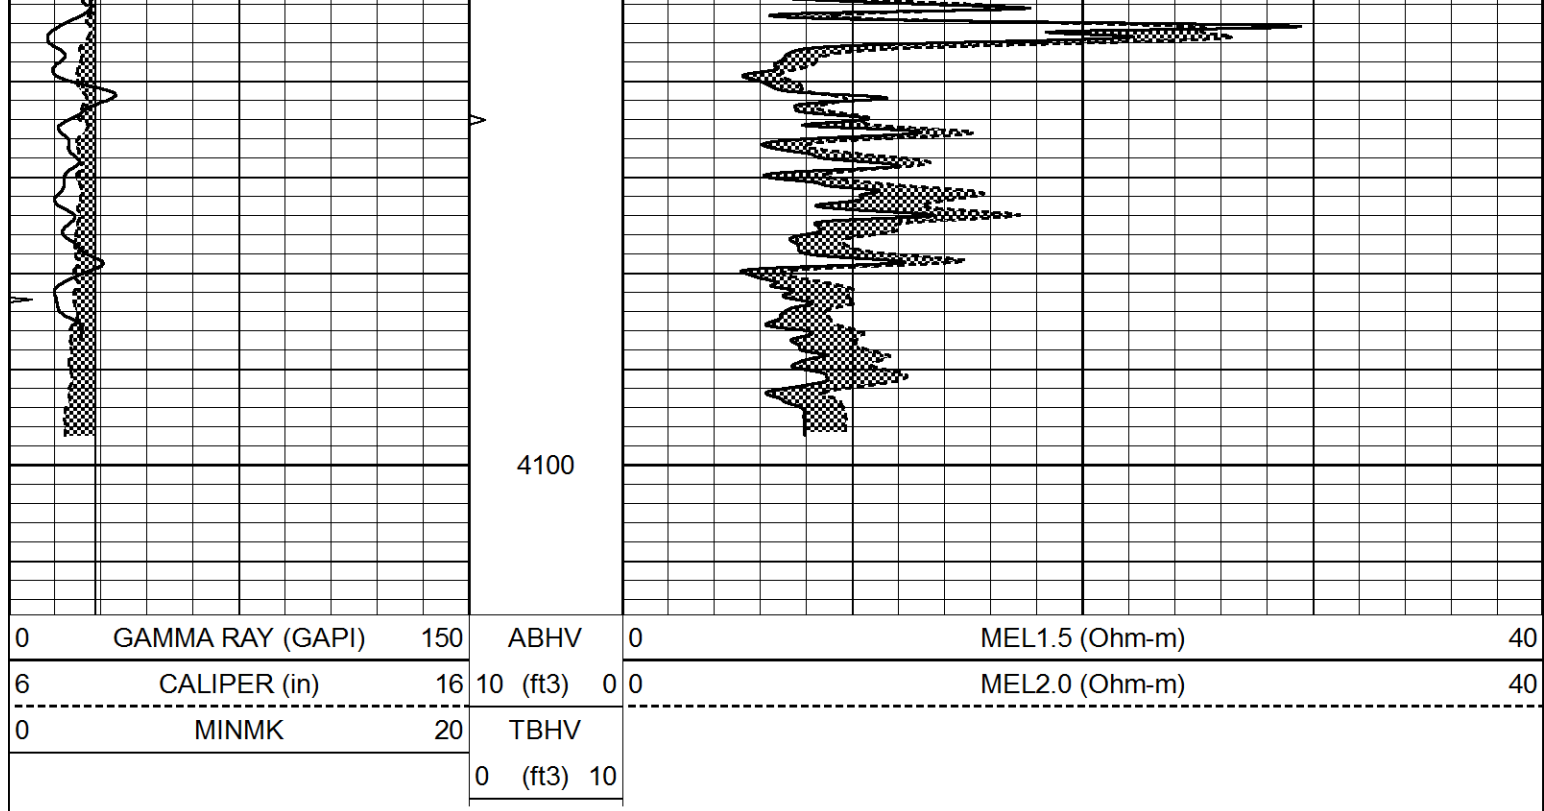

Calibration Report			
Database File	6559pe.db		
Dataset Pathname	pass6.2		
Dataset Creation	Sun May 29 07:07:59 2022		
MICRO Calibration Report			
Serial Number:	MICRO6		
Tool Model:	PROBE		
Performed:	Fri May 27 01:03:42 2022		
Caliper Calibration:	Gain=4.571	Offset=2.286	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	1.250	3.000	
1.5" Calibration:	Gain=38.000	Offset=0.300	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.002	0.624	
2" Calibration:	Gain=42.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.006	0.468	

Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Thu May 26 15:25:20 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	

Sensitivity:

0.5500

GAPI/cps