MICRO LOG

Company GRAND MESA OPERATING COMPANY

Well SCHWEIZER #5-35

Field UNNAMED

County RENO State KANSAS

Location: API # : 15-155-21788-0000
340' FNL & 2204' FEL
SE - NW - NW - NE

SEC 35 TWP 22S RGE 10W

Other Services
CDL/CNL/PE
DIL/SONIC

Elevation
K.B. 1746
D.F. 1744
G.L. 1741

Permanent Datum GROUND LEVEL Elevation 1741
Log Measured From KELLY BUSHING 5' A.G.L.
Drilling Measured From KELLY BUSHING

Company GRAND MESA OPERATING CO.
Well SCHWEIZER #5-35
Field UNNAMED
County RENO
State KANSAS

Date	3/19/22		
Run Number	TWO		
Depth Driller	3820		
Depth Logger	3820		
Bottom Logged Interval	3804		
Top Log Interval	250		
Casing Driller	8 5/8"@282'		
Casing Logger	282		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4,300 PPM	
Density / Viscosity	9.3/63		
pH / Fluid Loss	11.0/6.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.400@78F		
Rmf @ Meas. Temp	.300@78F		
Rmc @ Meas. Temp	.480@78F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.273@114F		
Time Circulation Stopped	4.5 HOURS		
Time Logger on Bottom	6:15 A.M.		
Maximum Recorded Temperature	114F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS	COLE ROBBEN	
Witnessed By	KENT MATSON		

<<< Fold Here >>>

Comments

15-155-21788-0000

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395

DIRECTIONS

GREAT BEND KS., S. ON 281 HWY TO K19, 16 E TO "RAYMOND RD", 5 .S TO "30TH AVE", 3 E TO "NETHERLAND RD", 1/2 N, E INTO @ TANK BATTERY

MAIN SECTION

Database File	6265pe.db
Dataset Pathname	pass6.1
Presentation Format	micro
Dataset Creation	Sat Mar 19 08:14:09 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

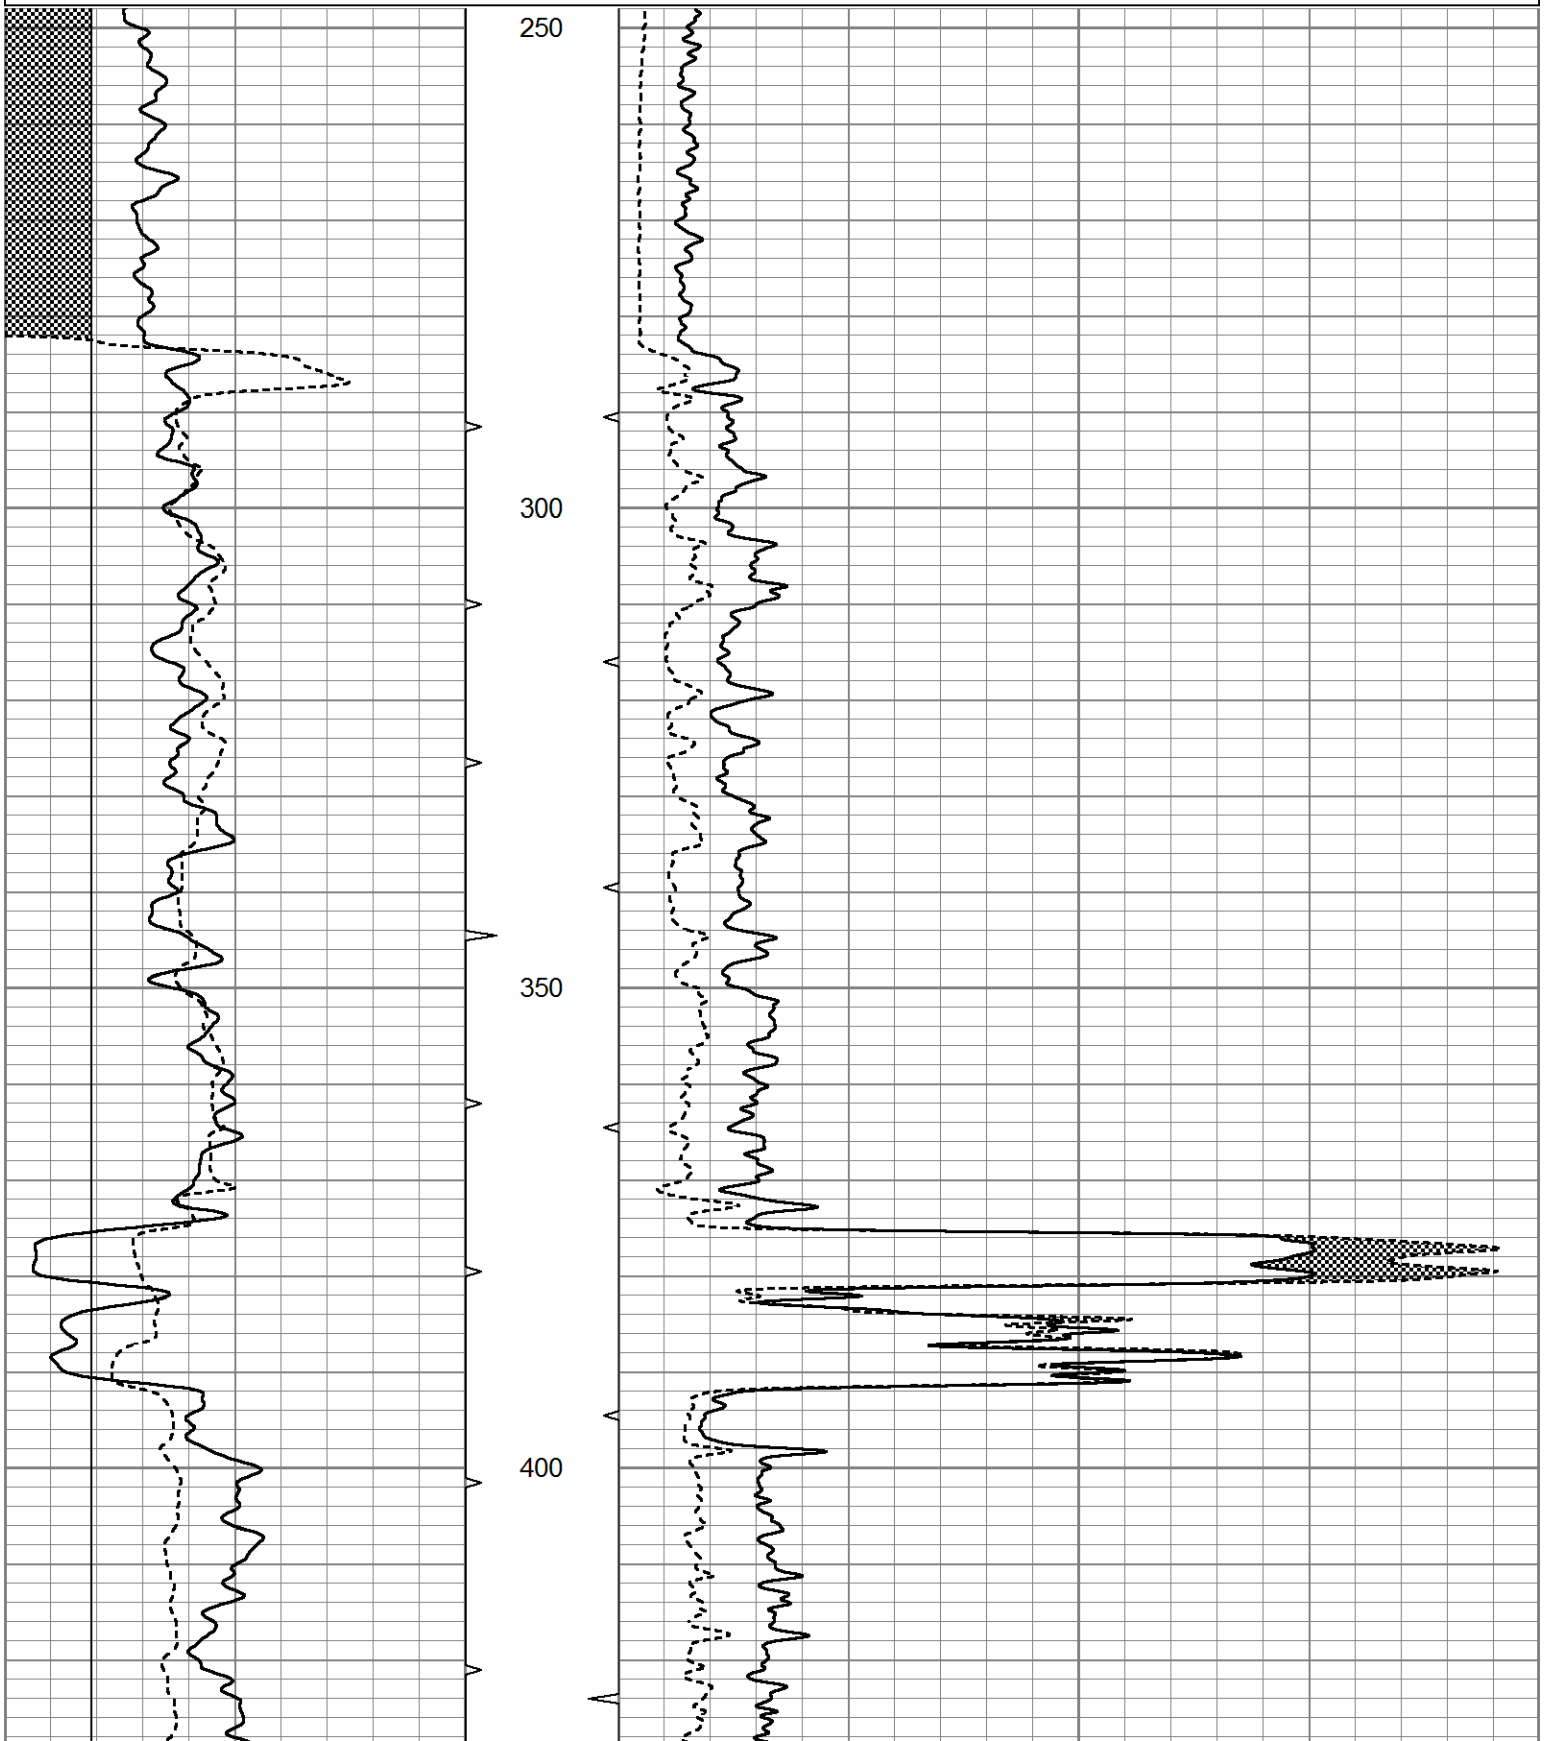

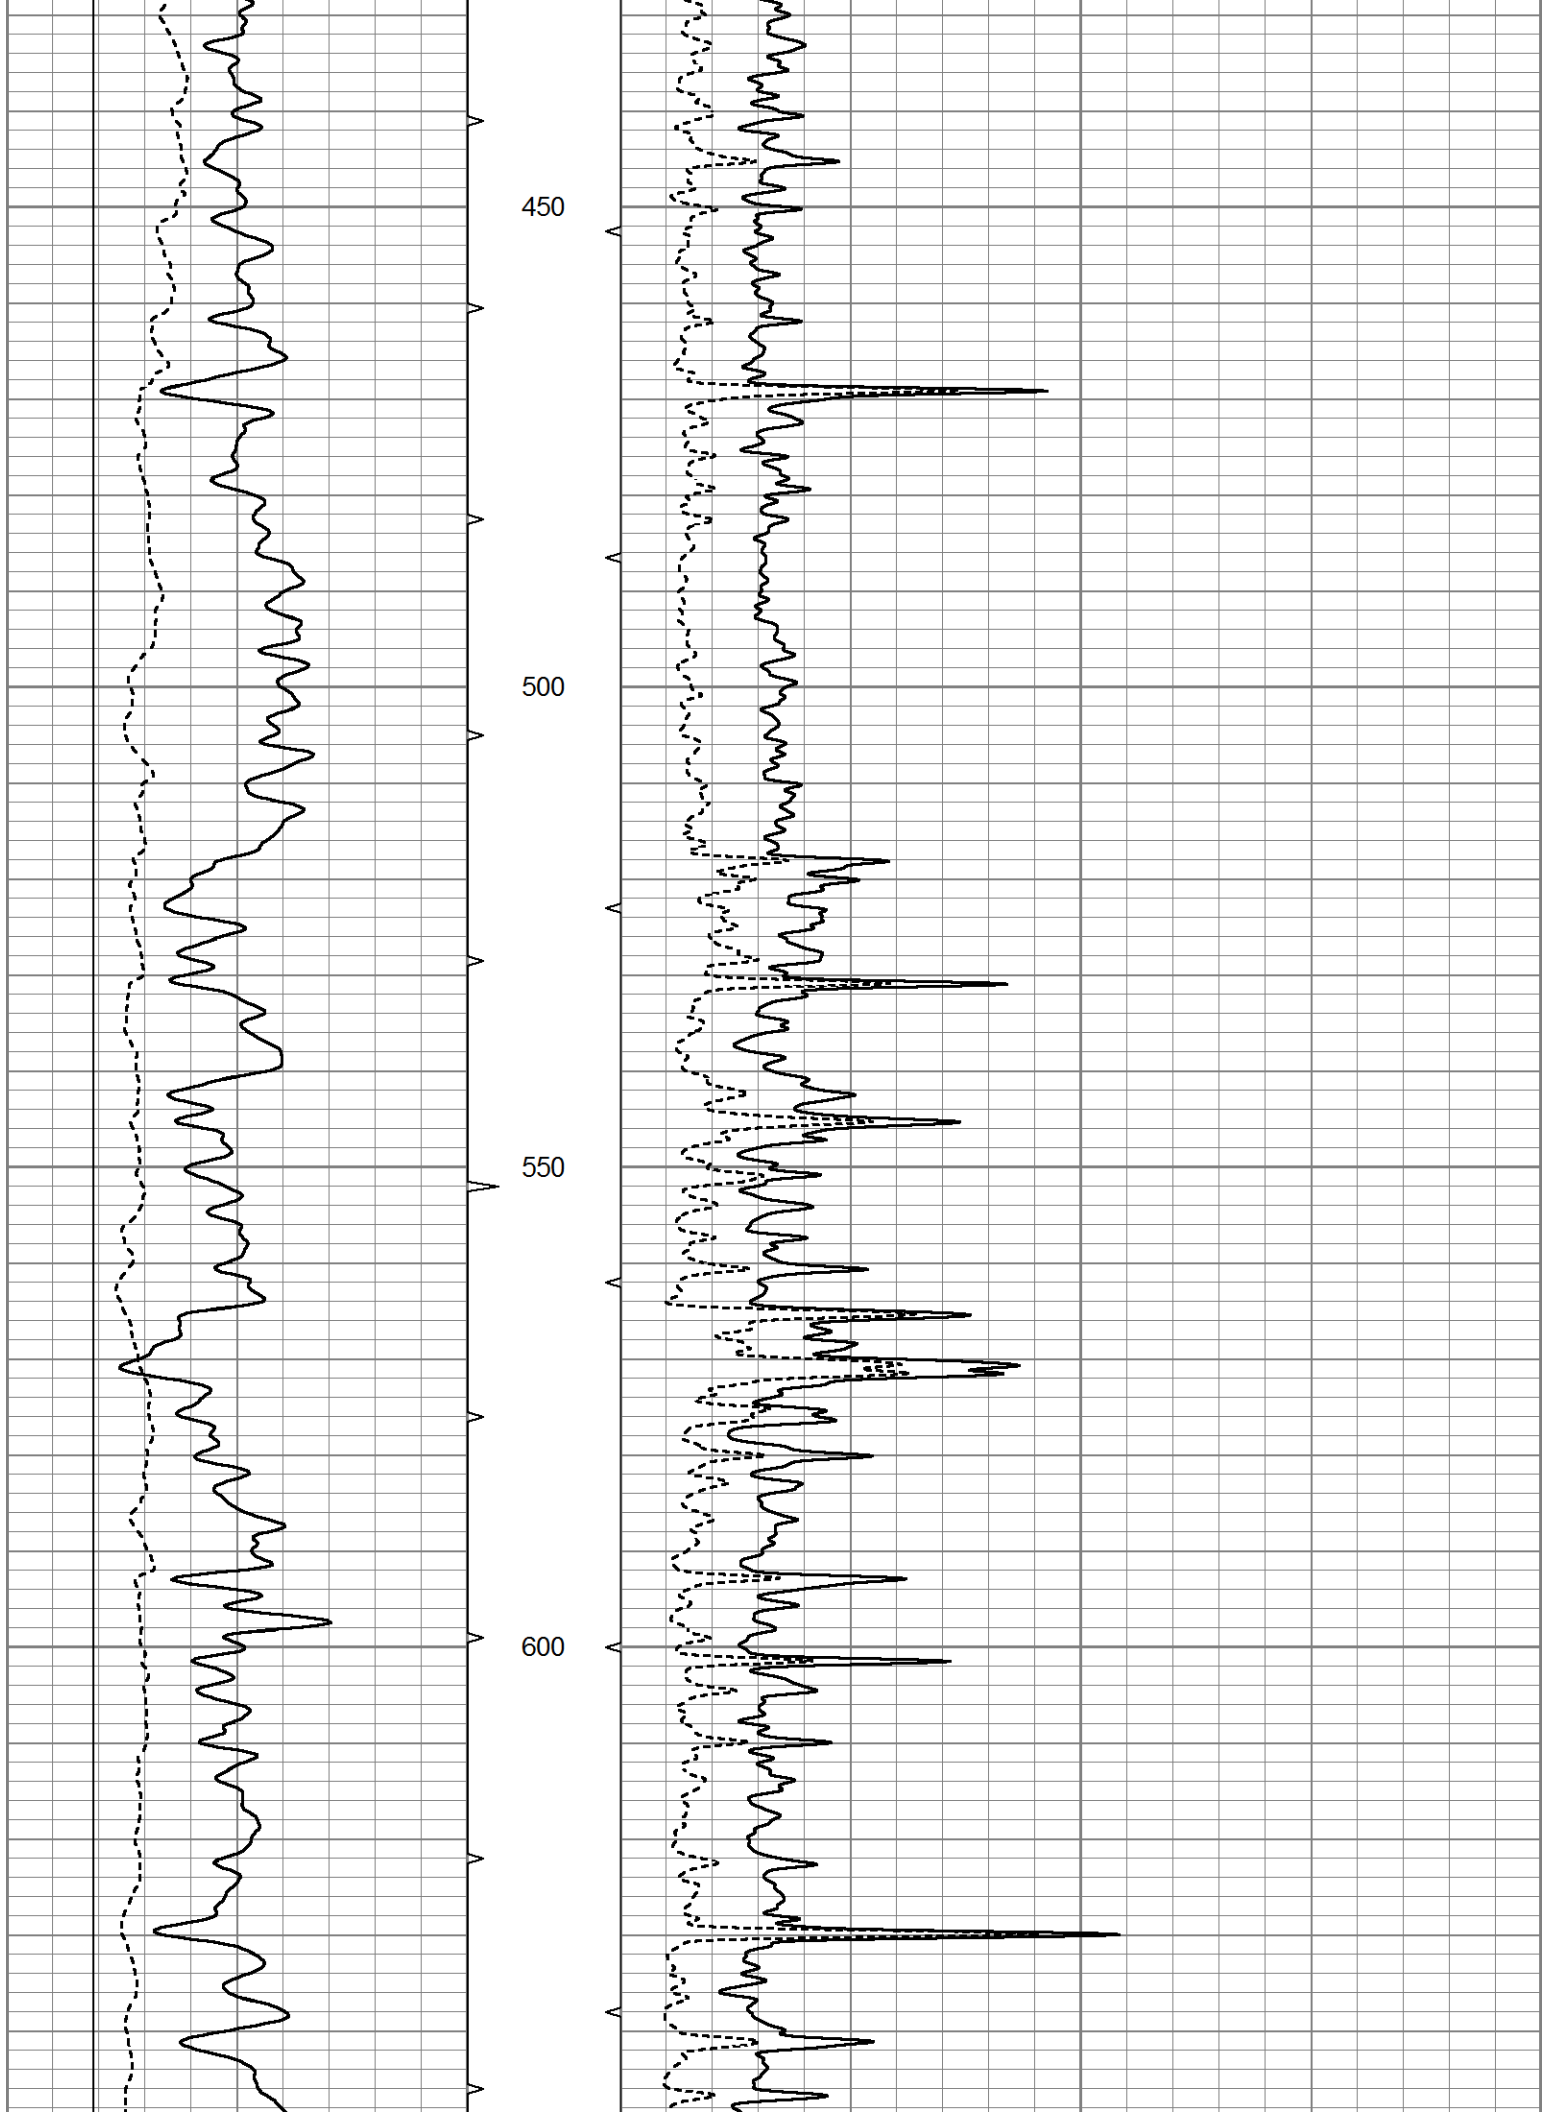
450
500
550
600

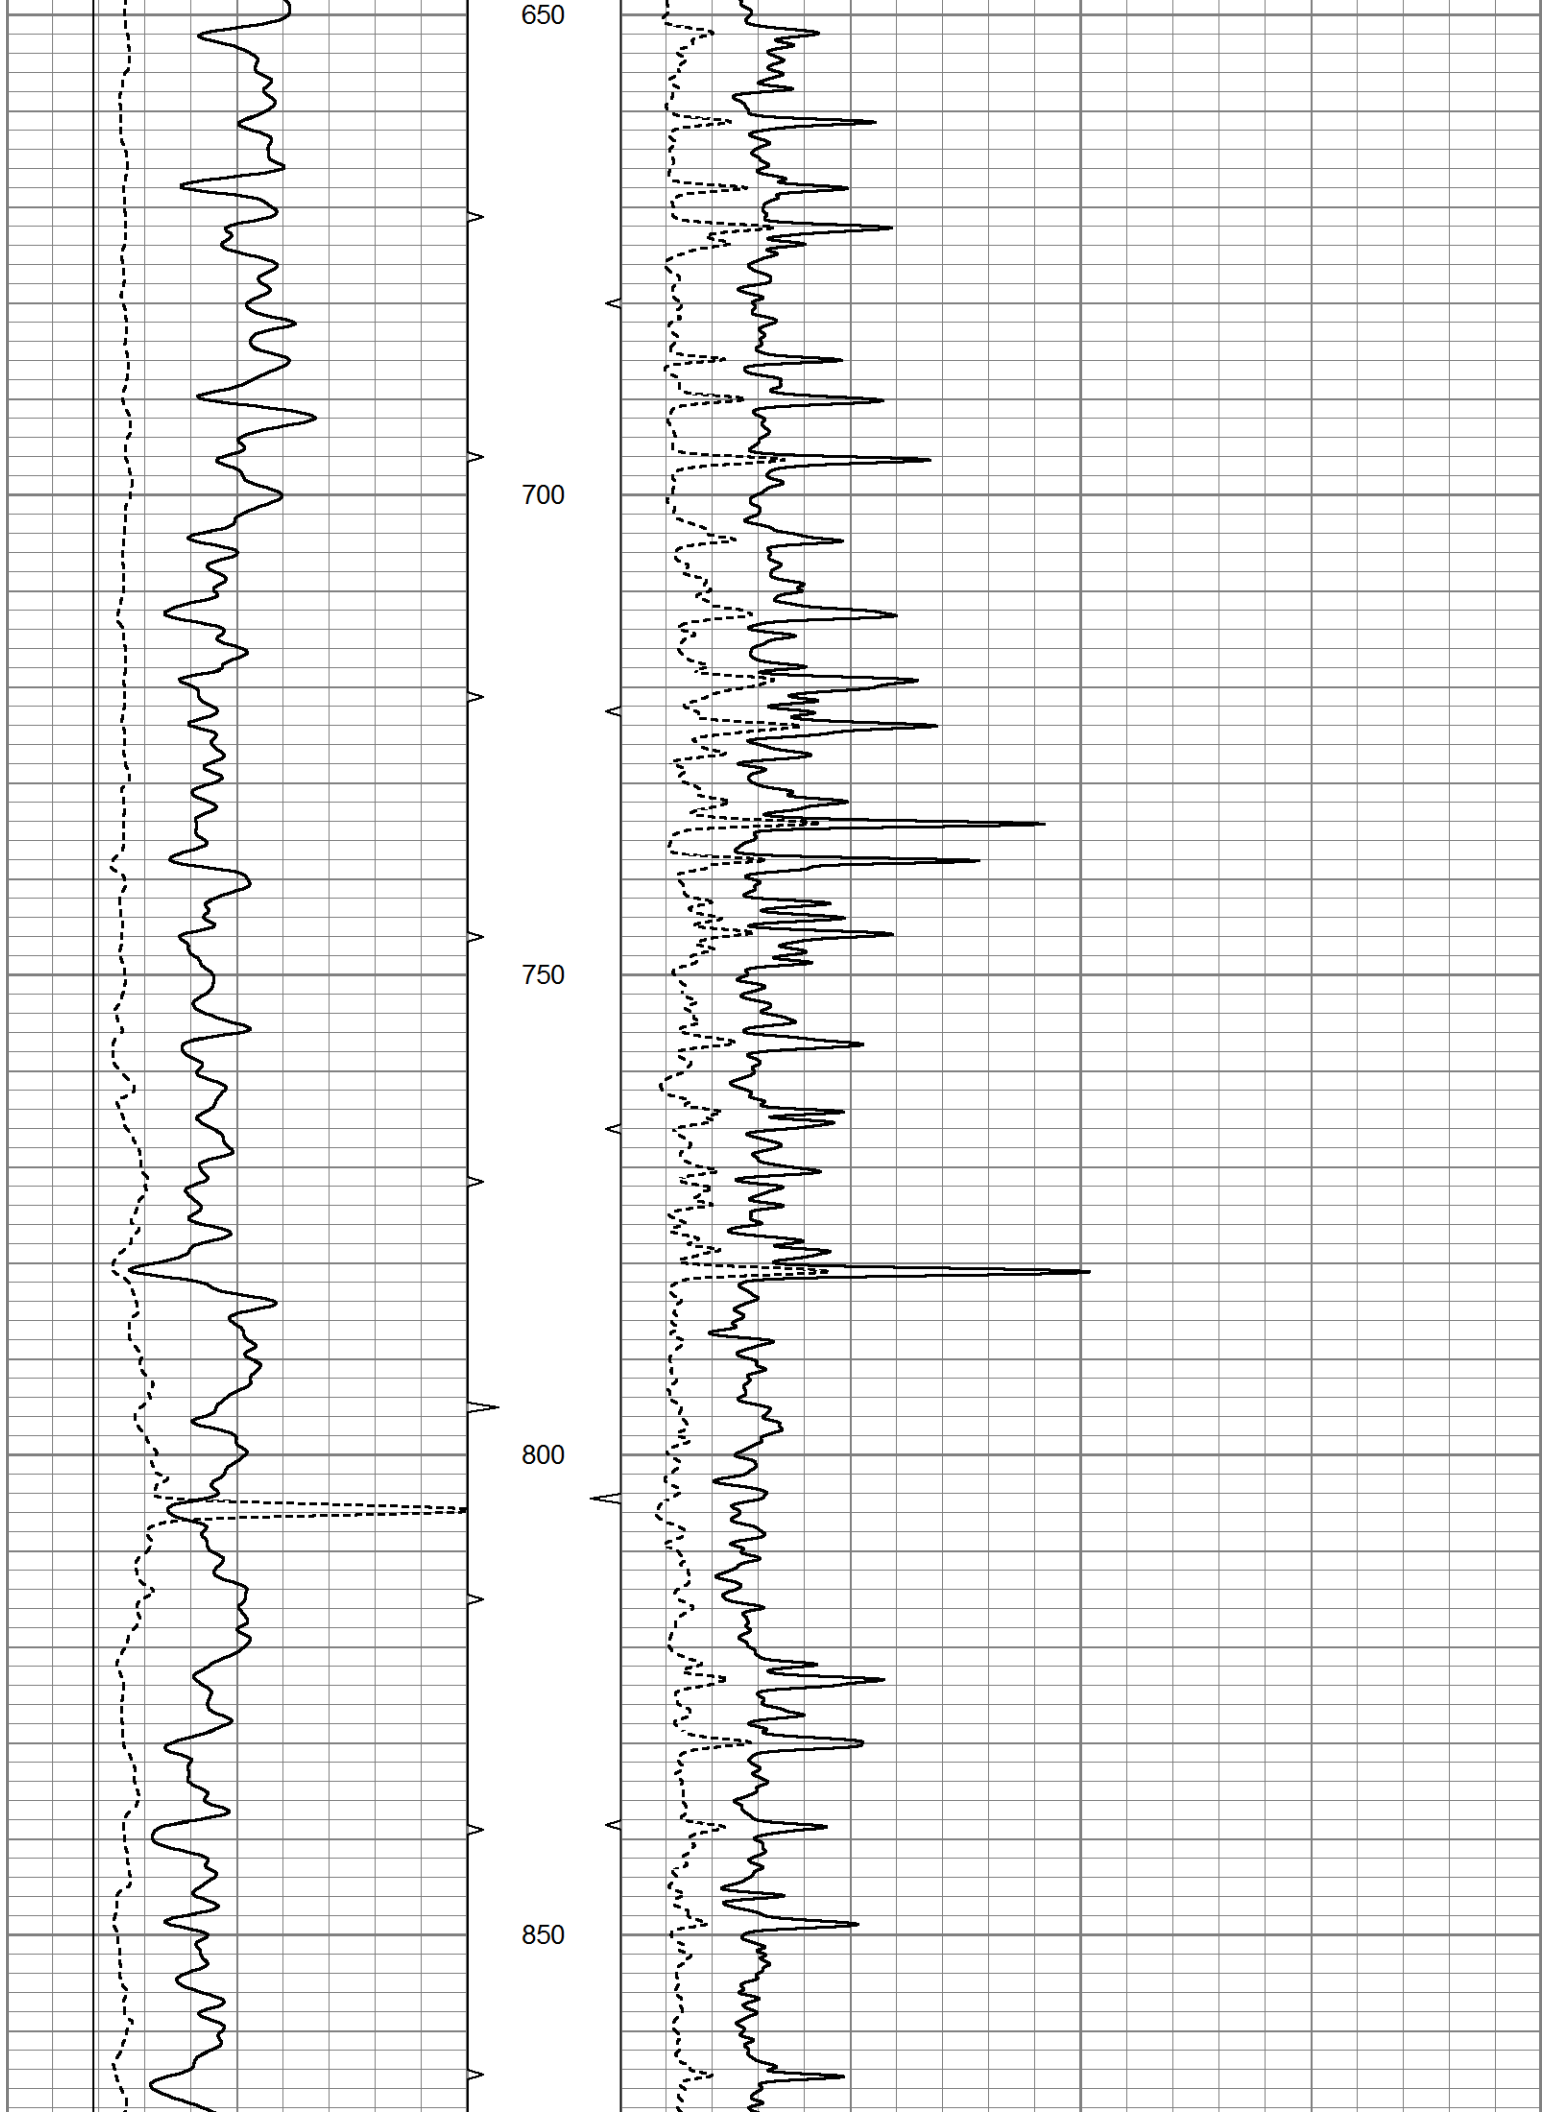
650
700
750
800
850

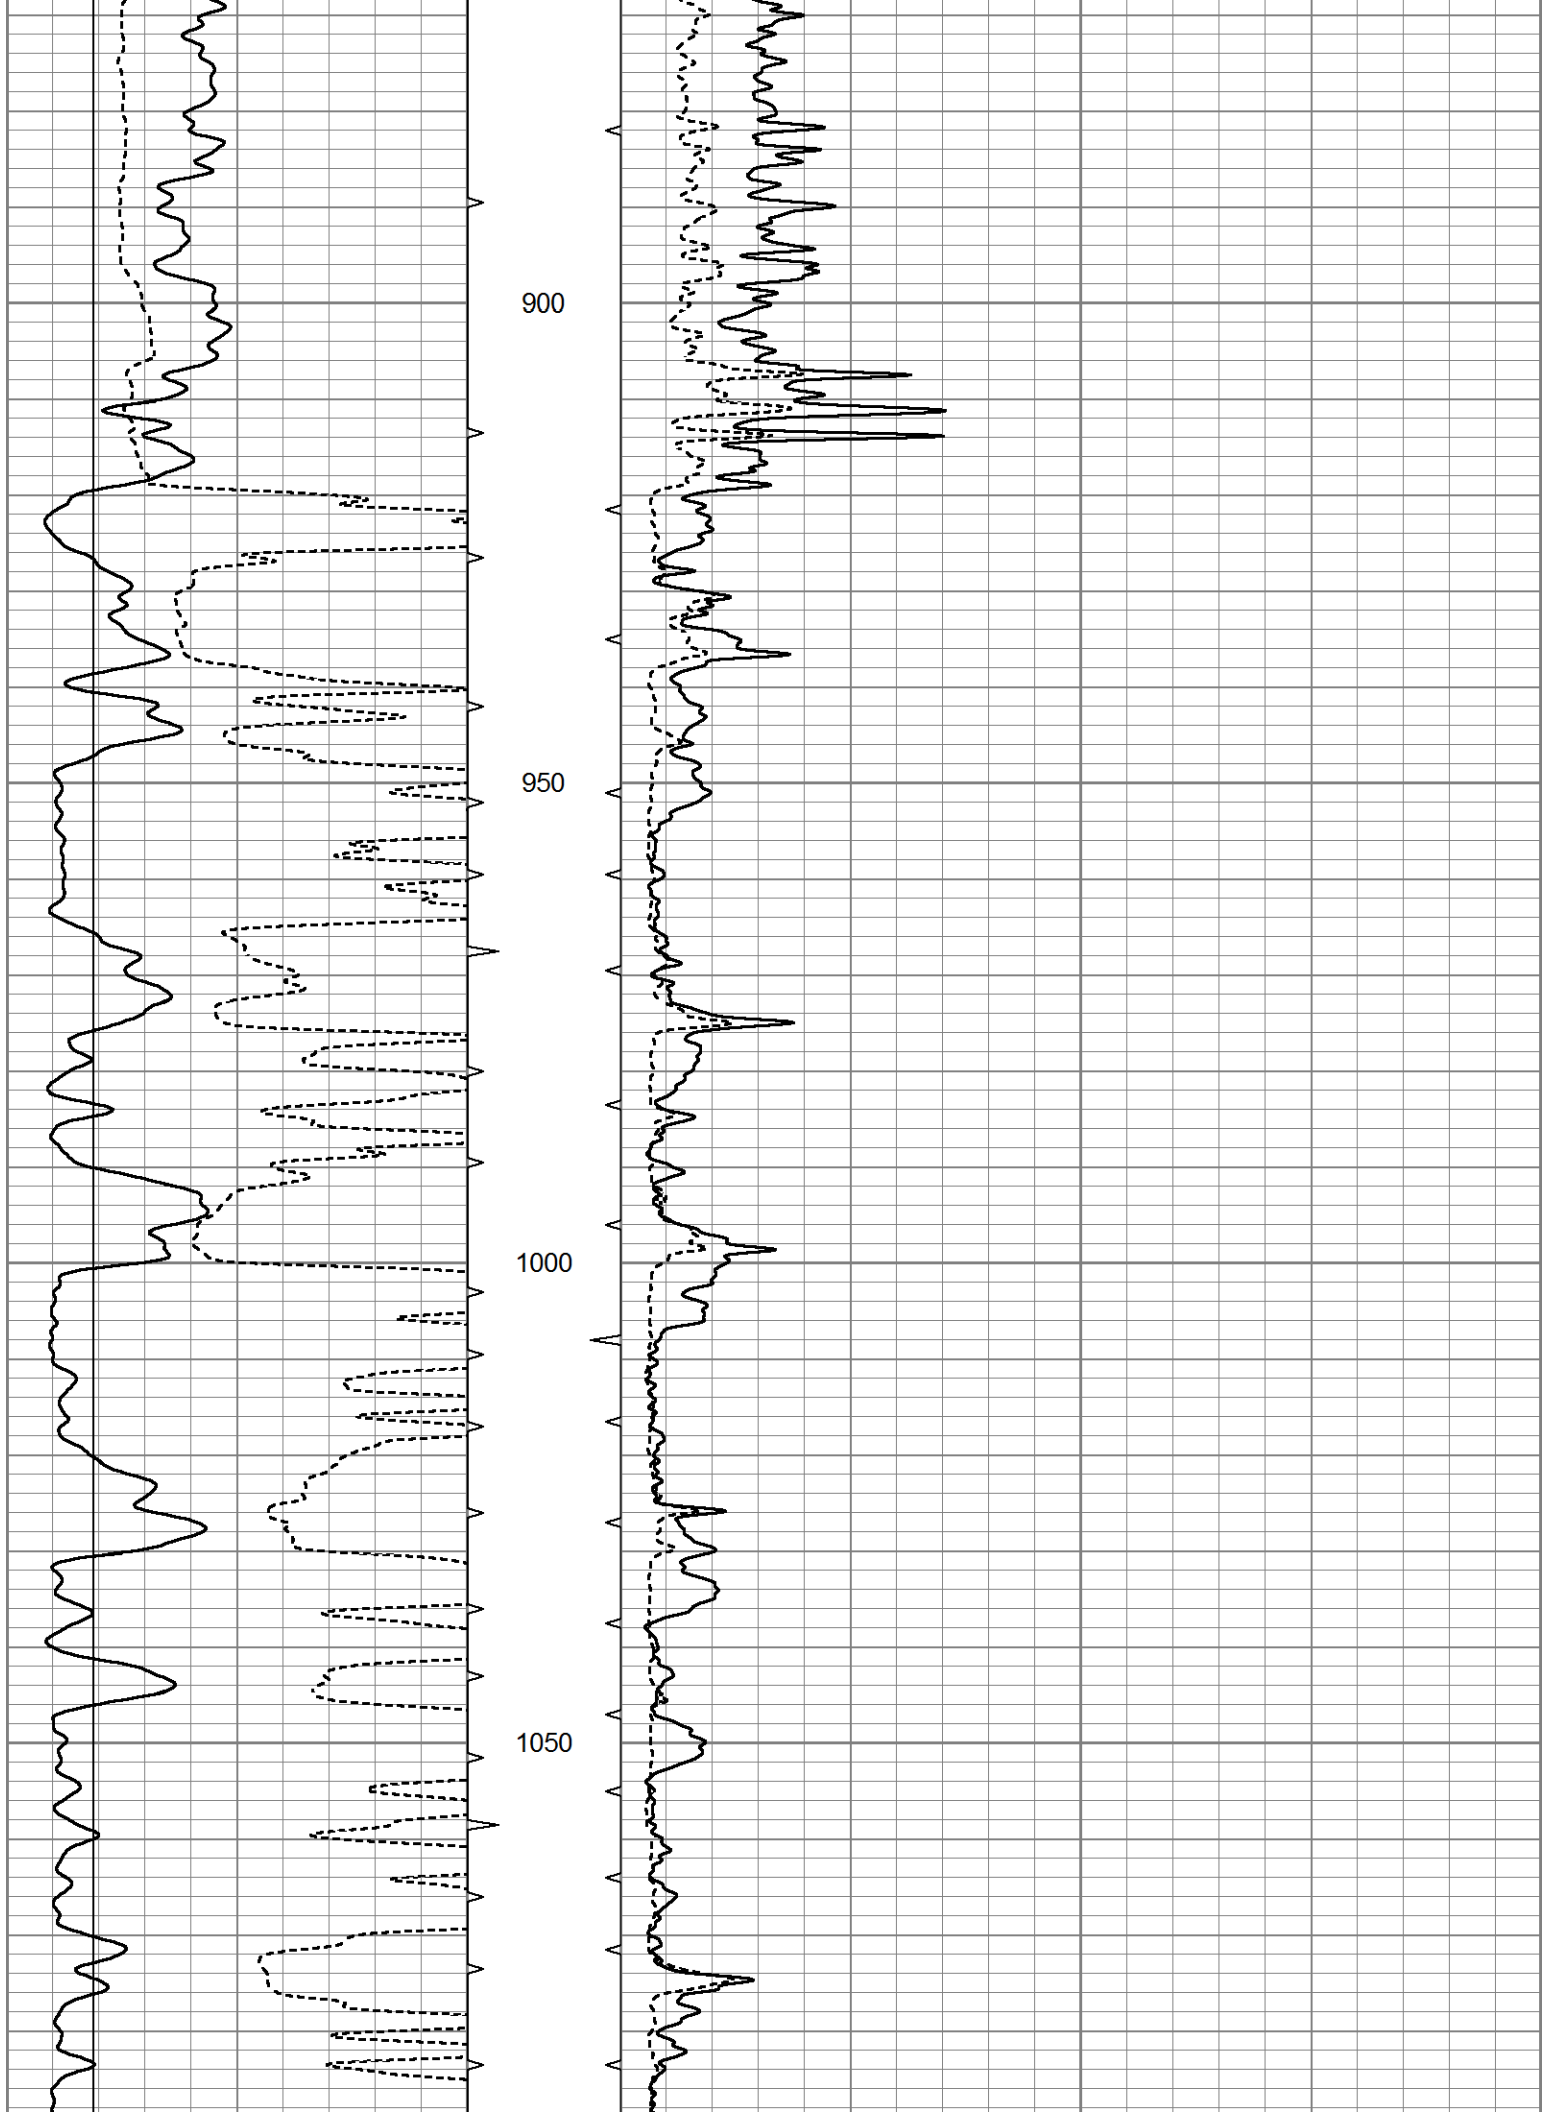
900
950
1000
1050

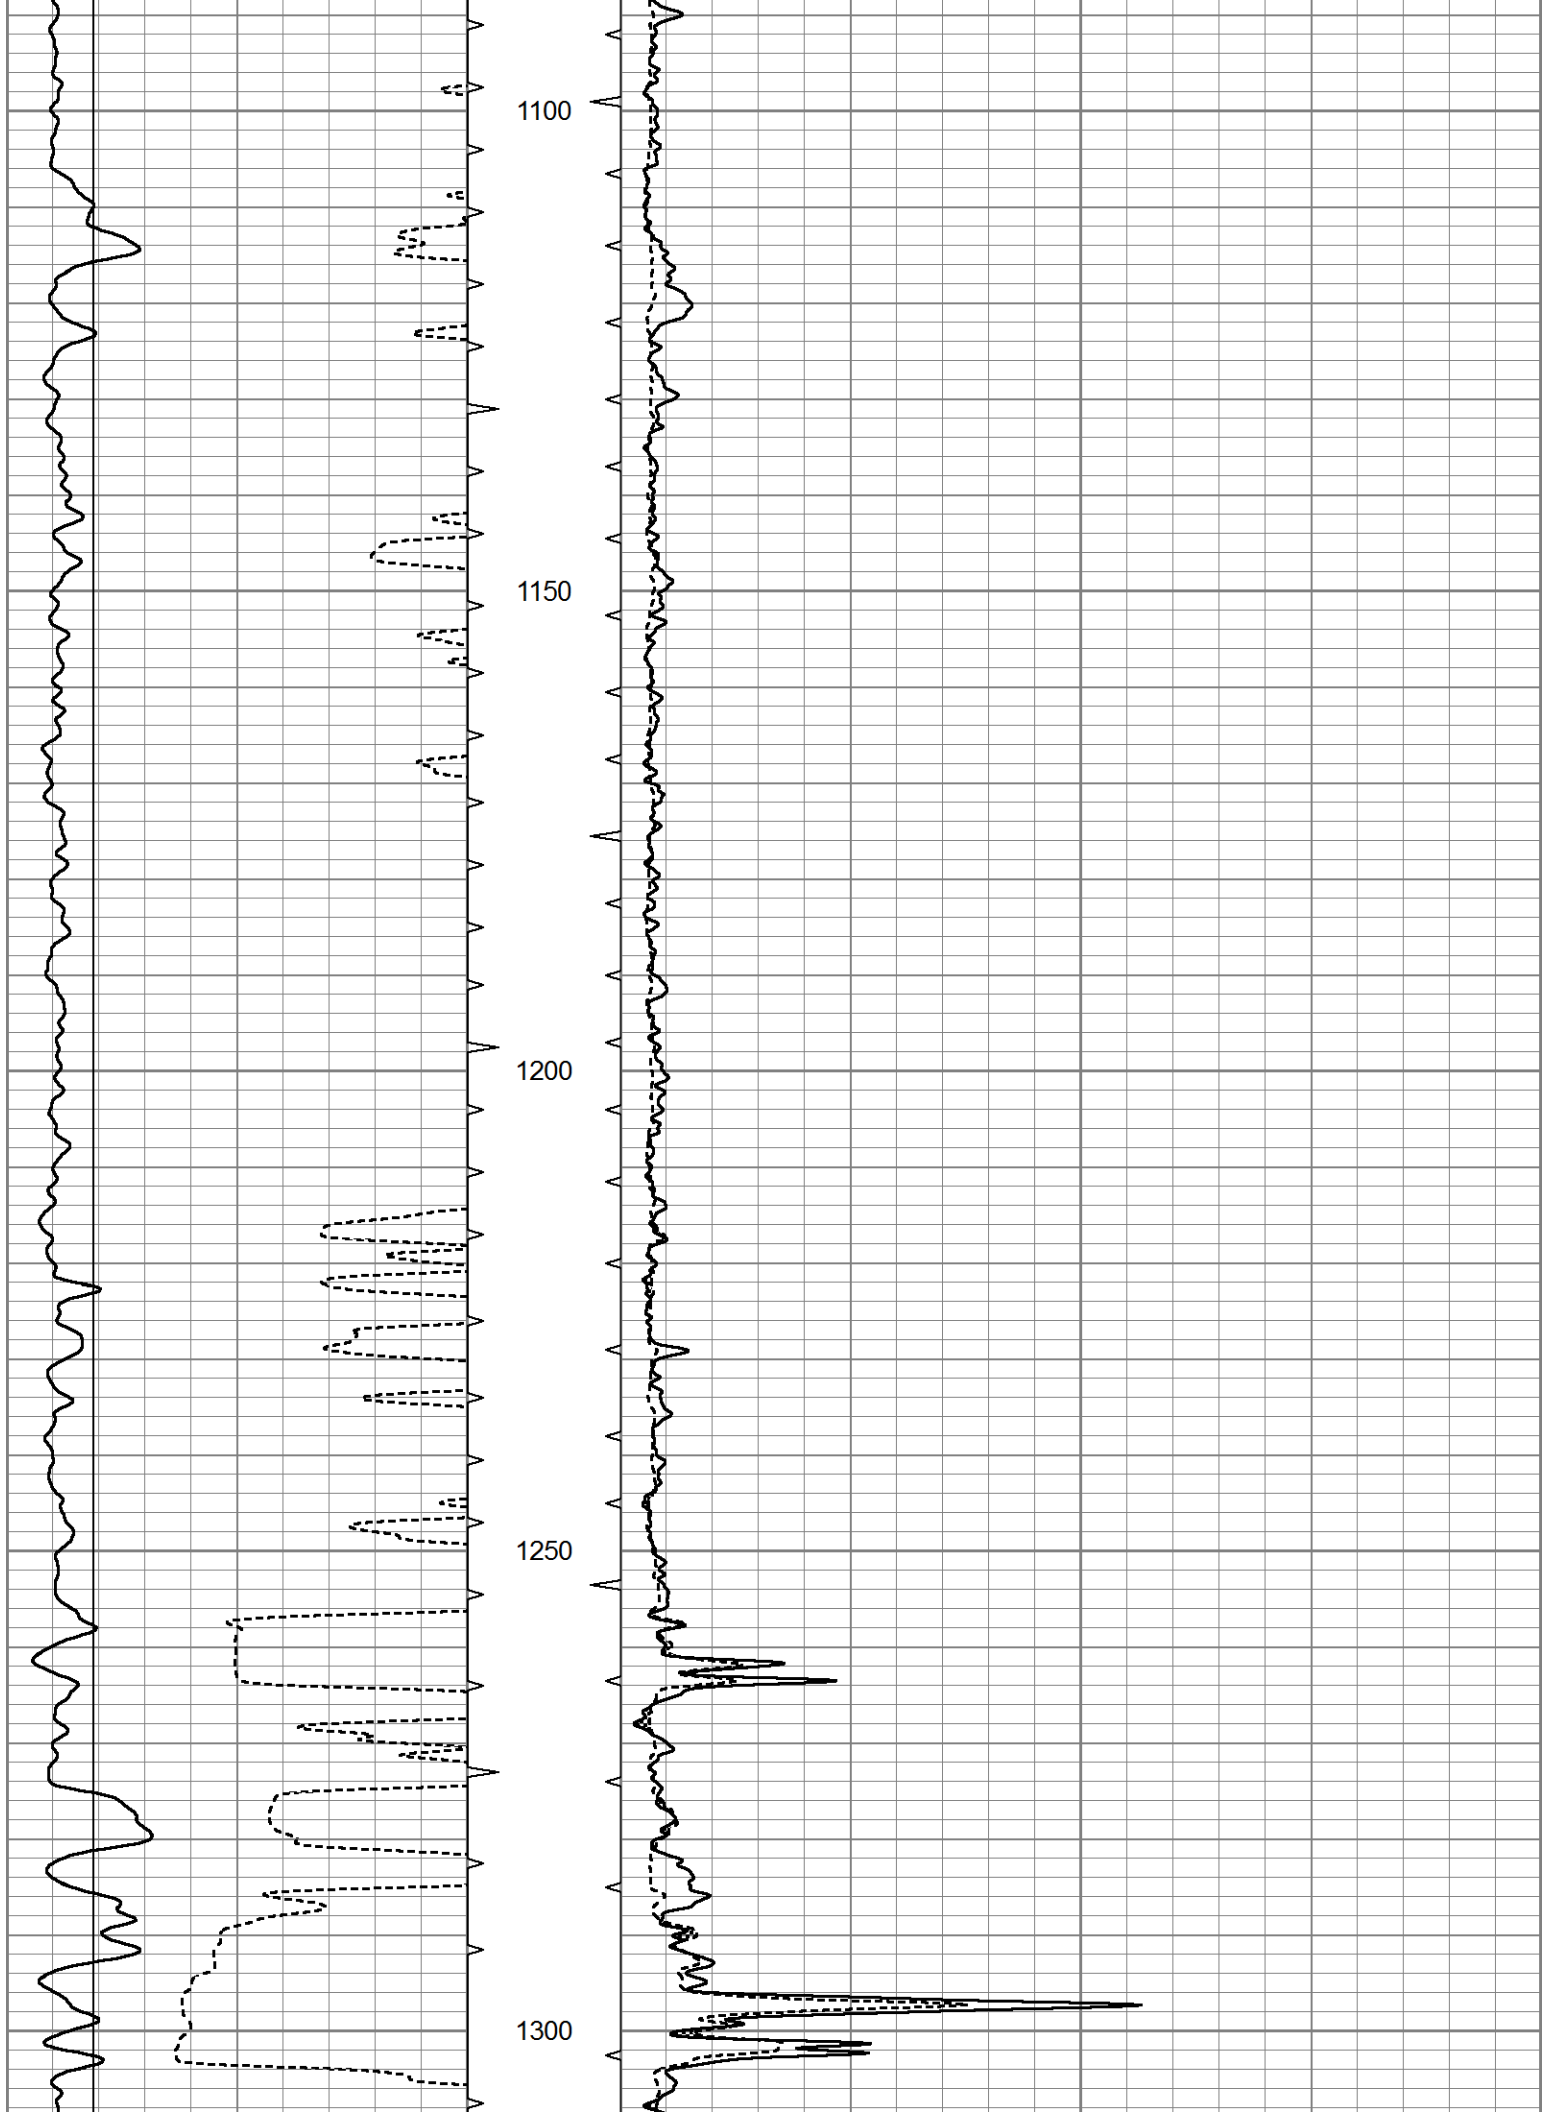
1100
1150
1200
1250
1300

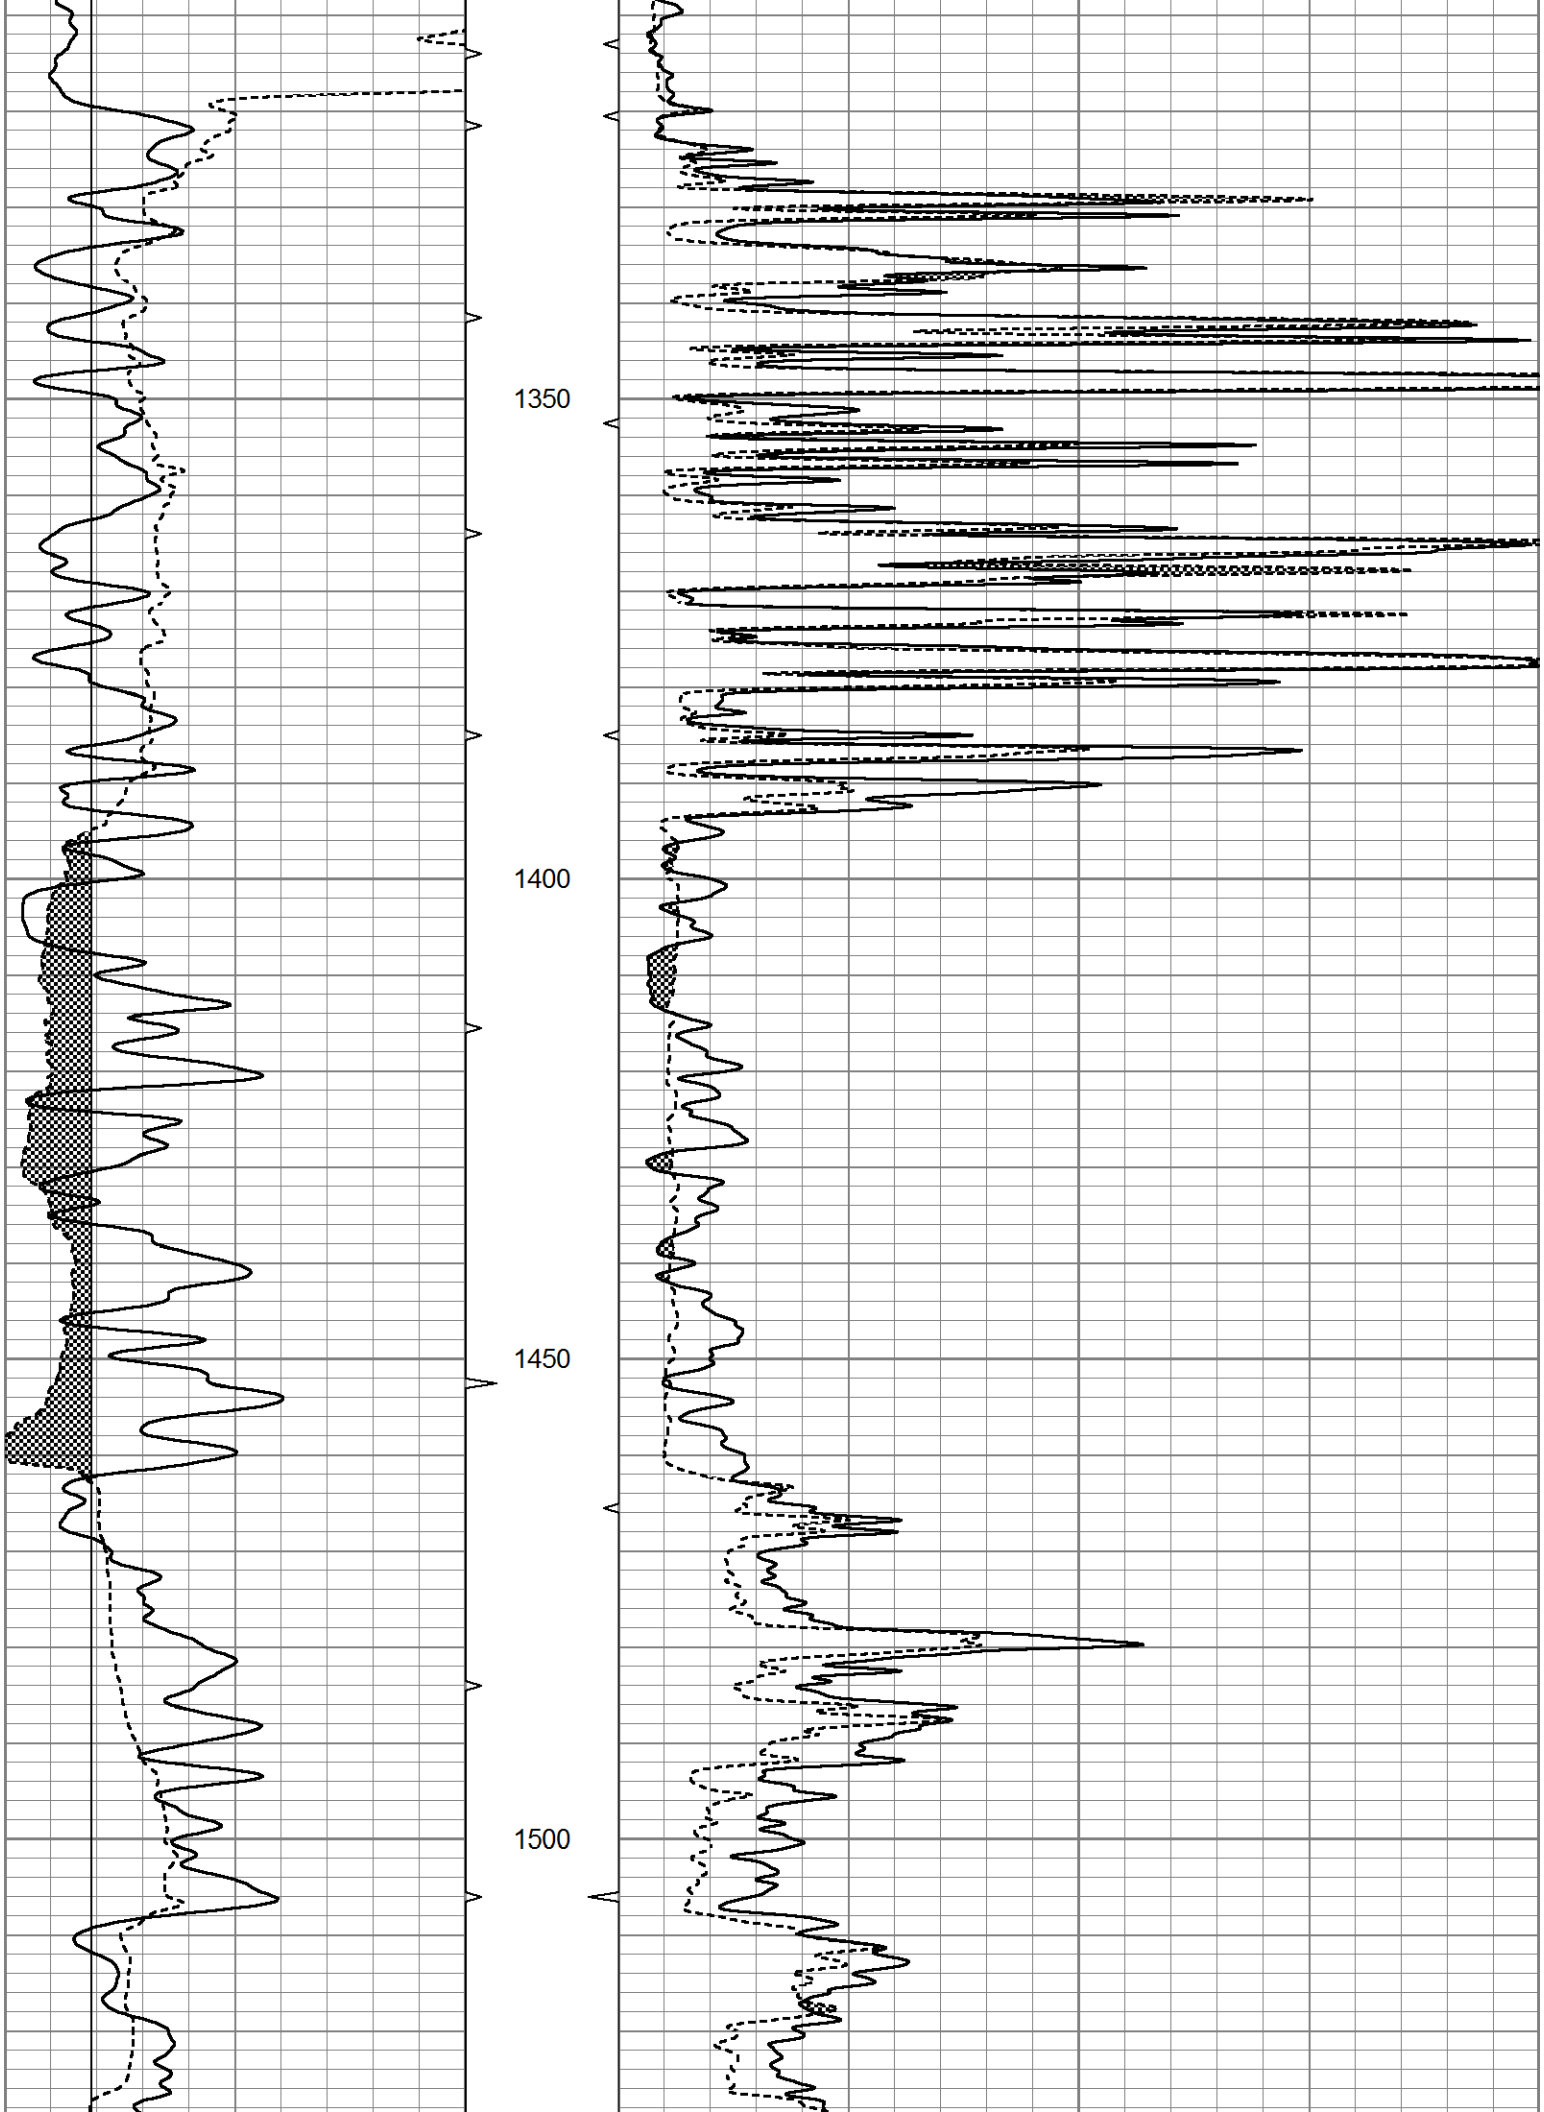
1350
1400
1450
1500

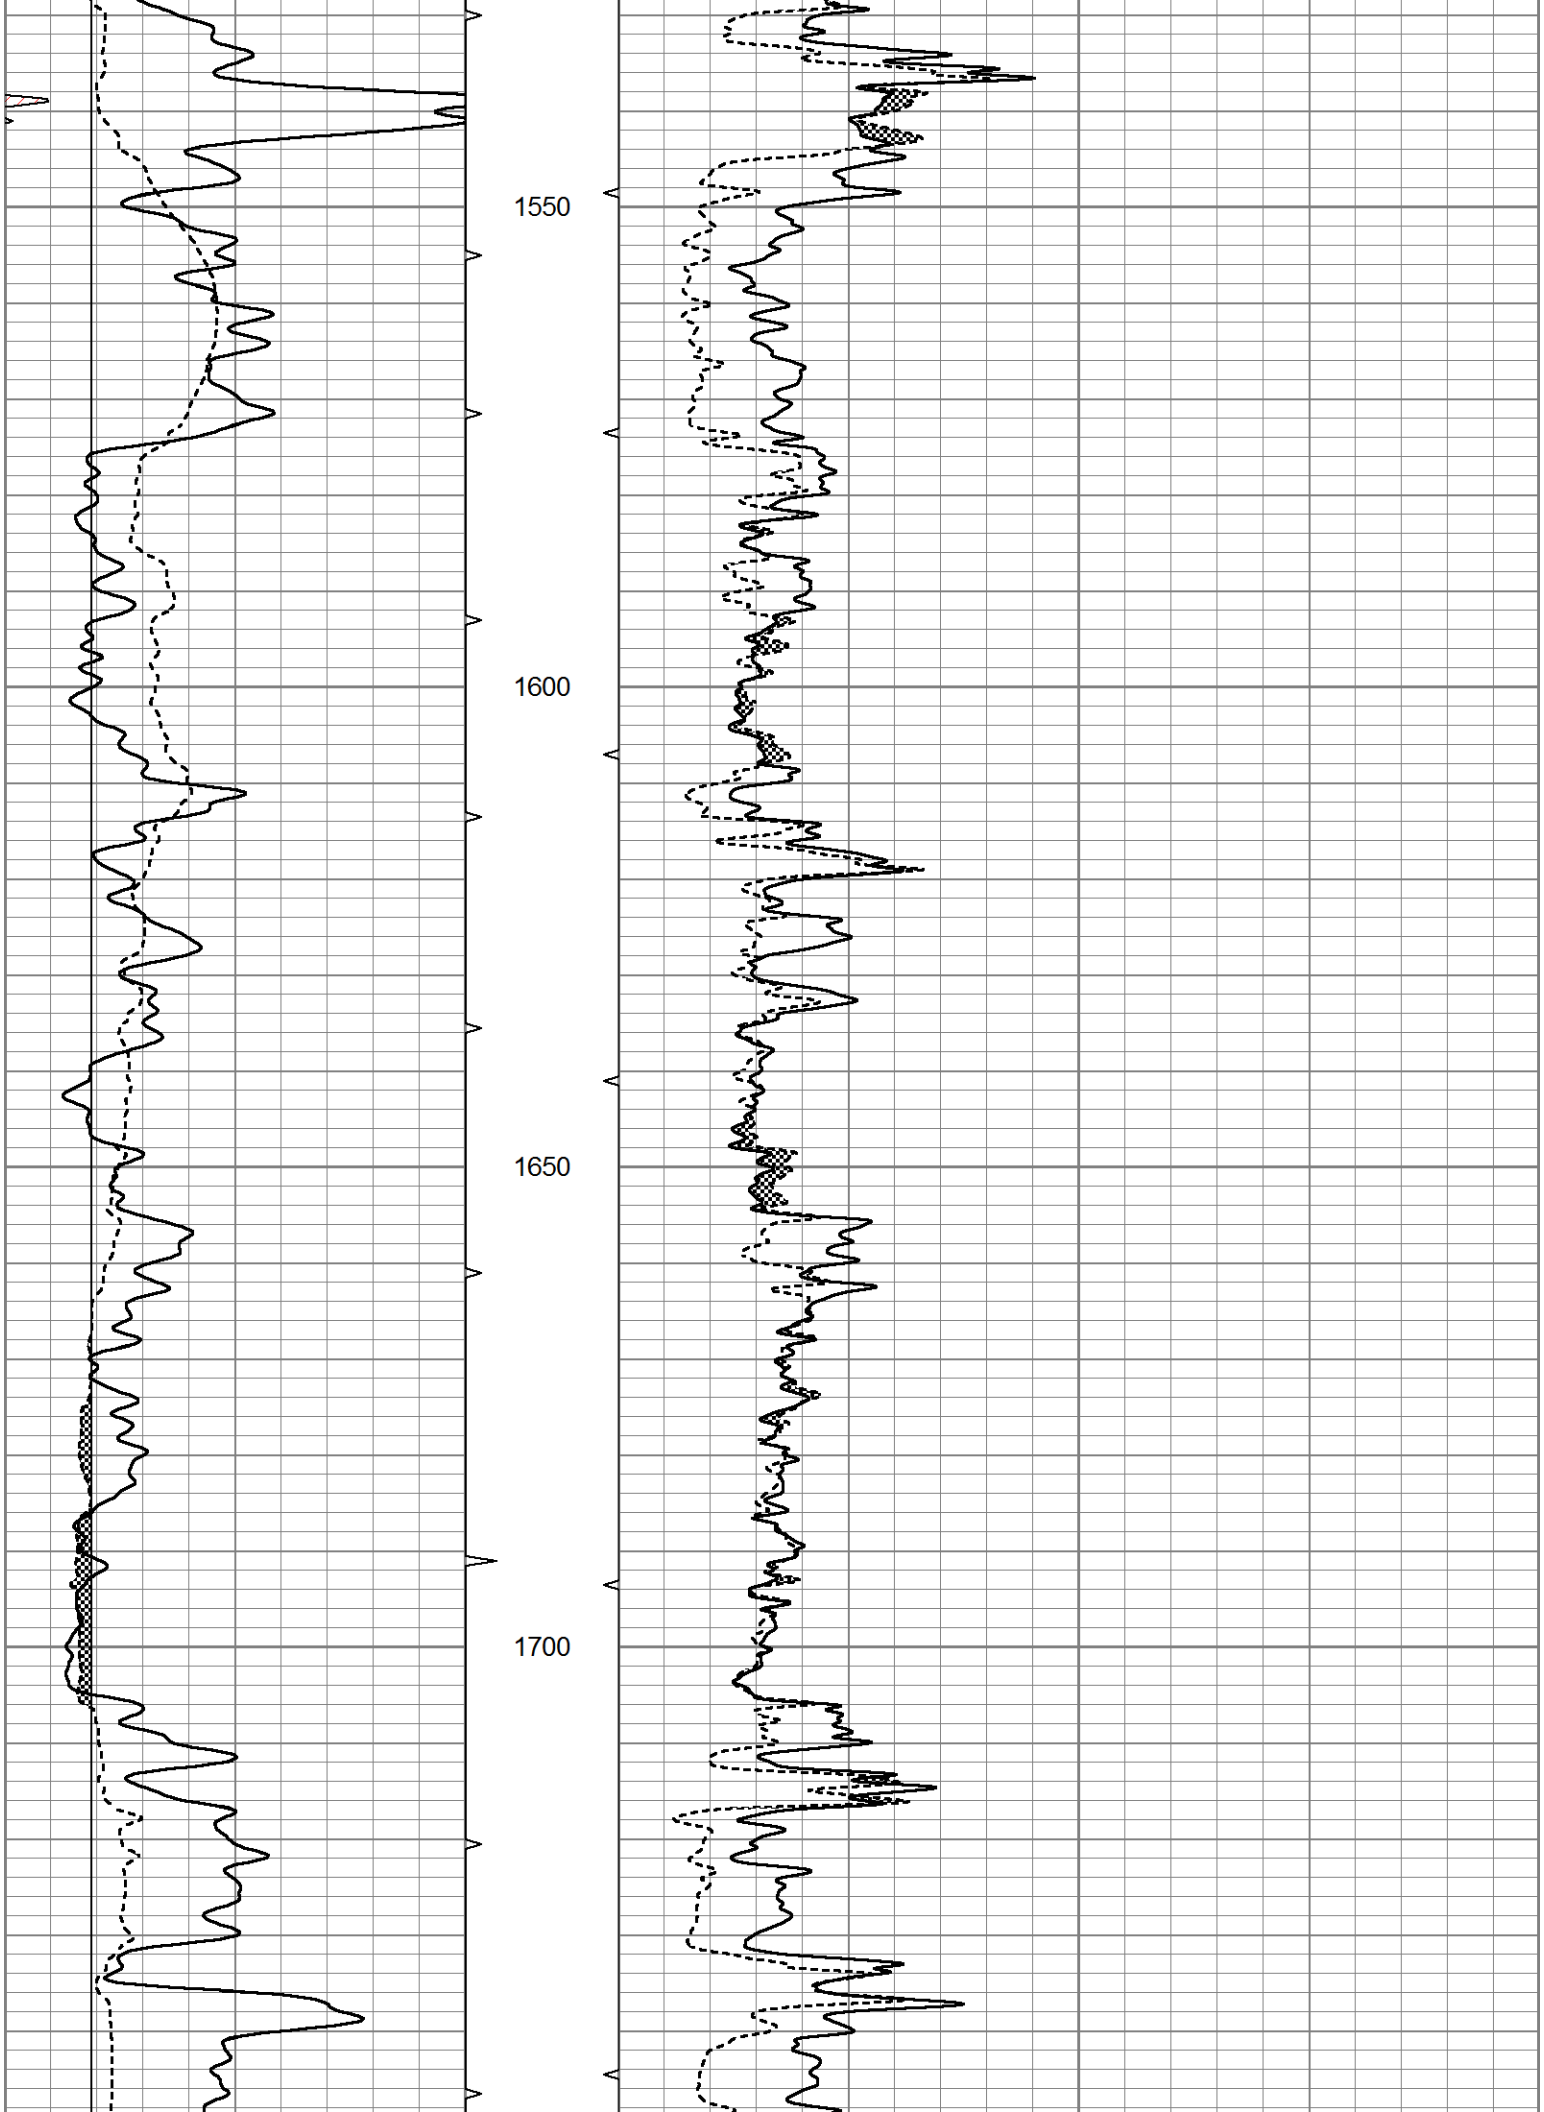
1550
1600
1650
1700

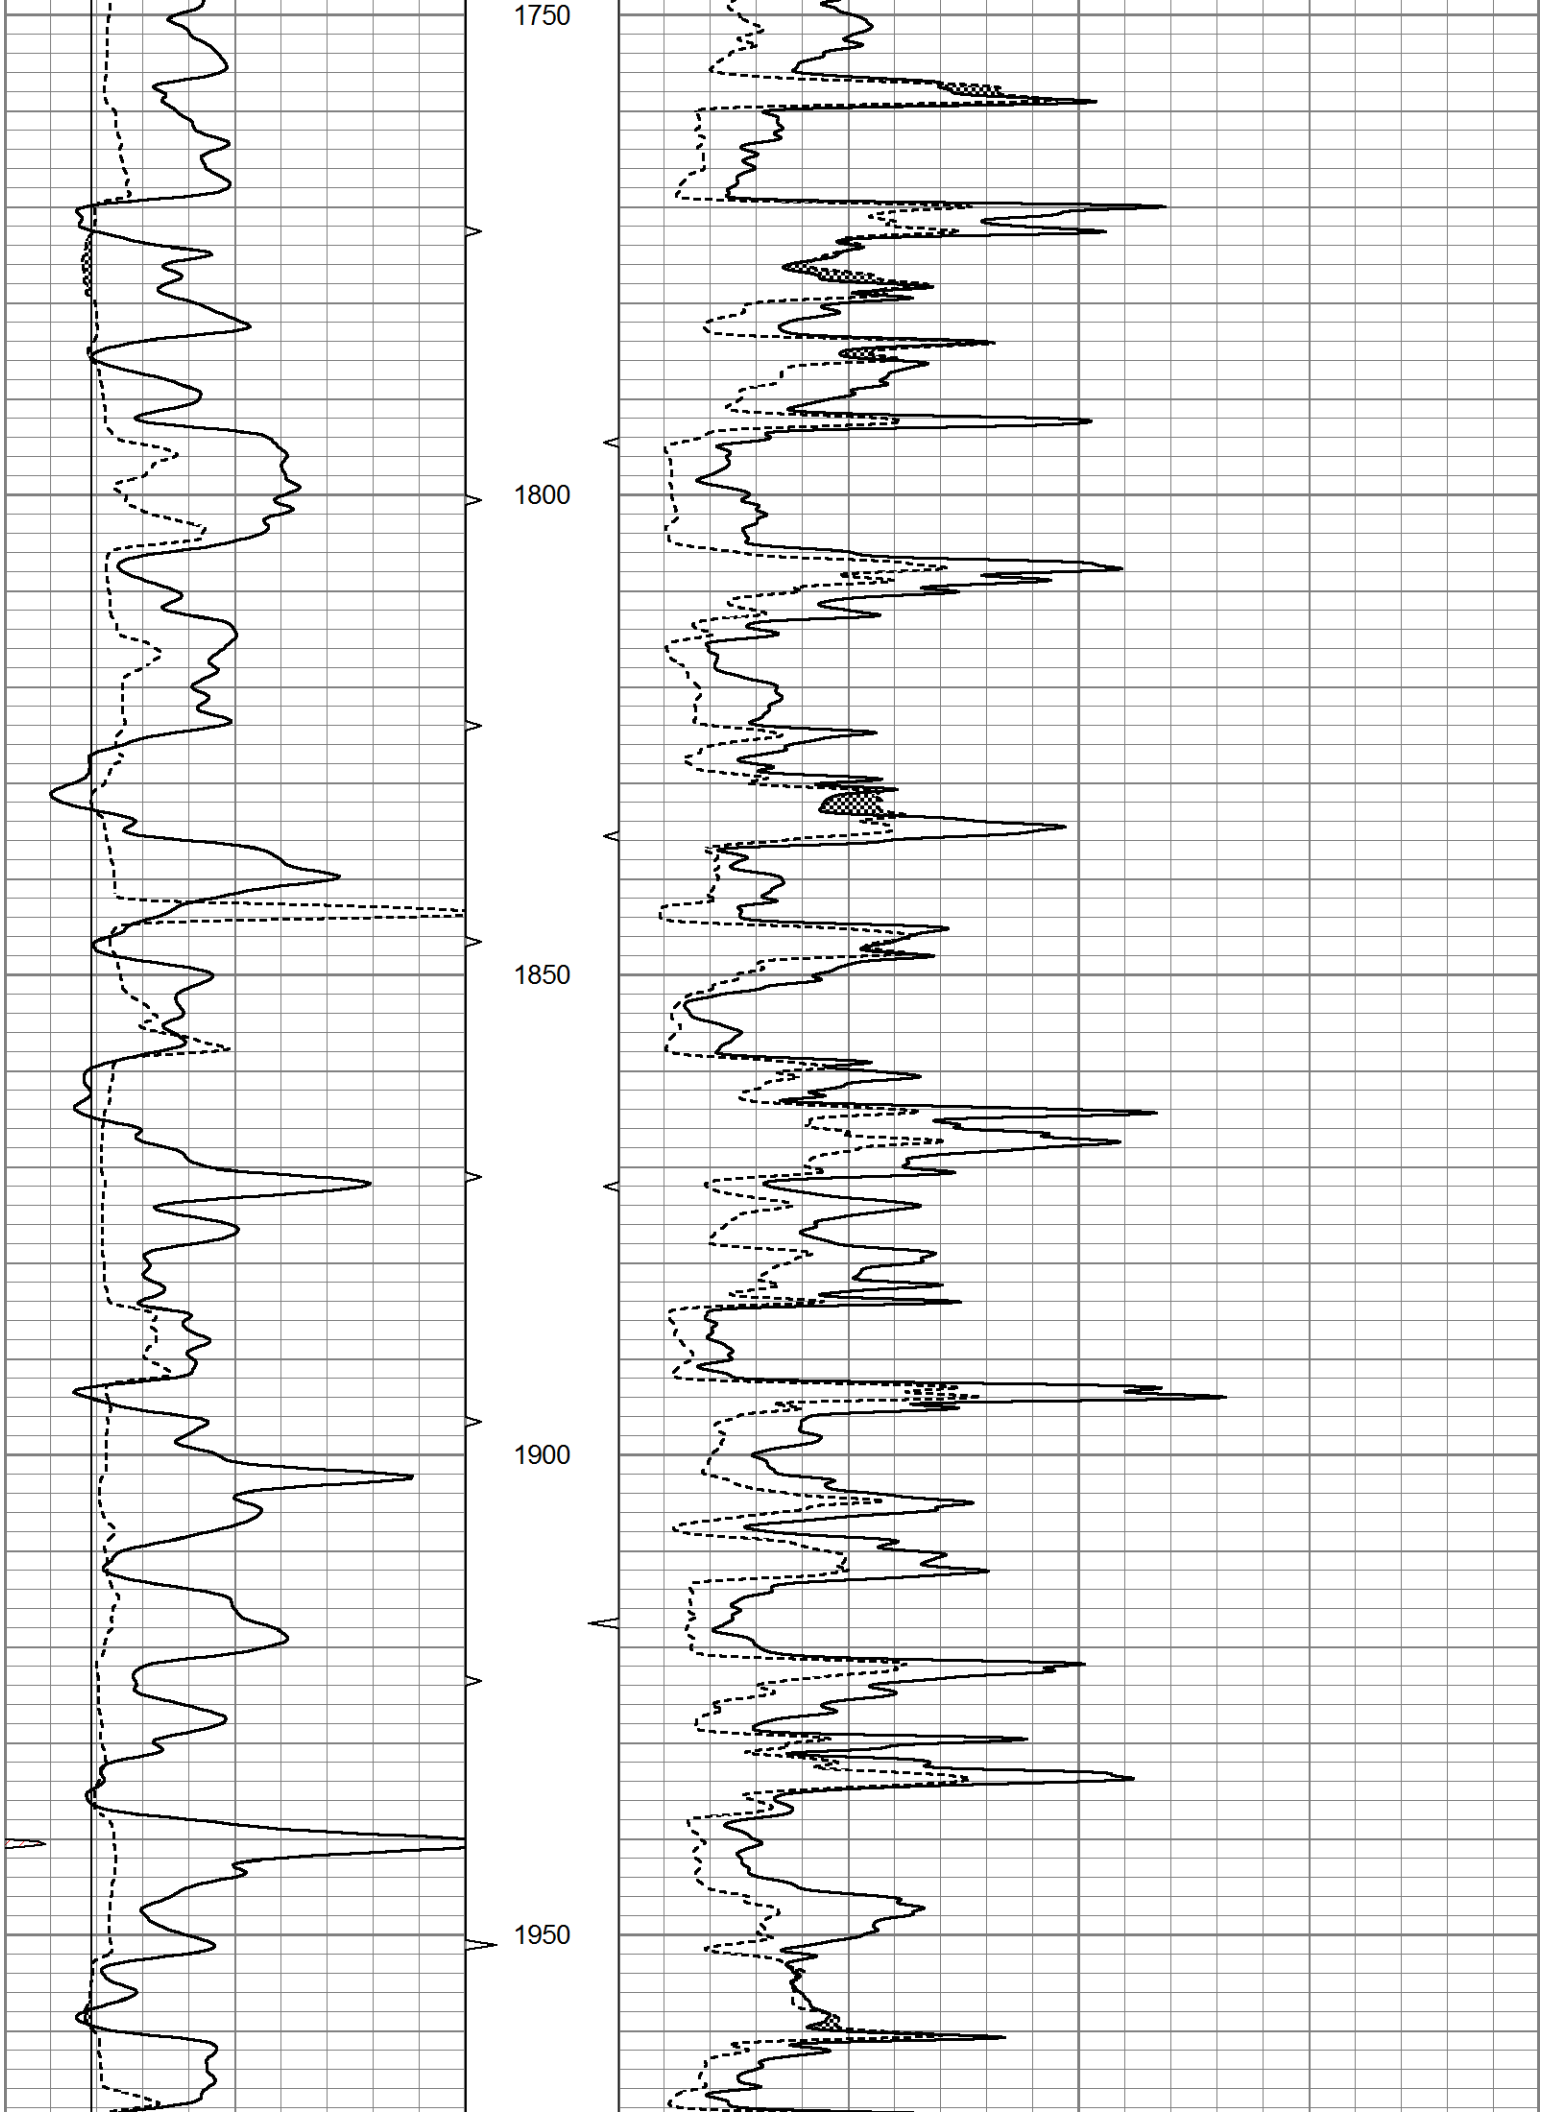
1750
1800
1850
1900
1950

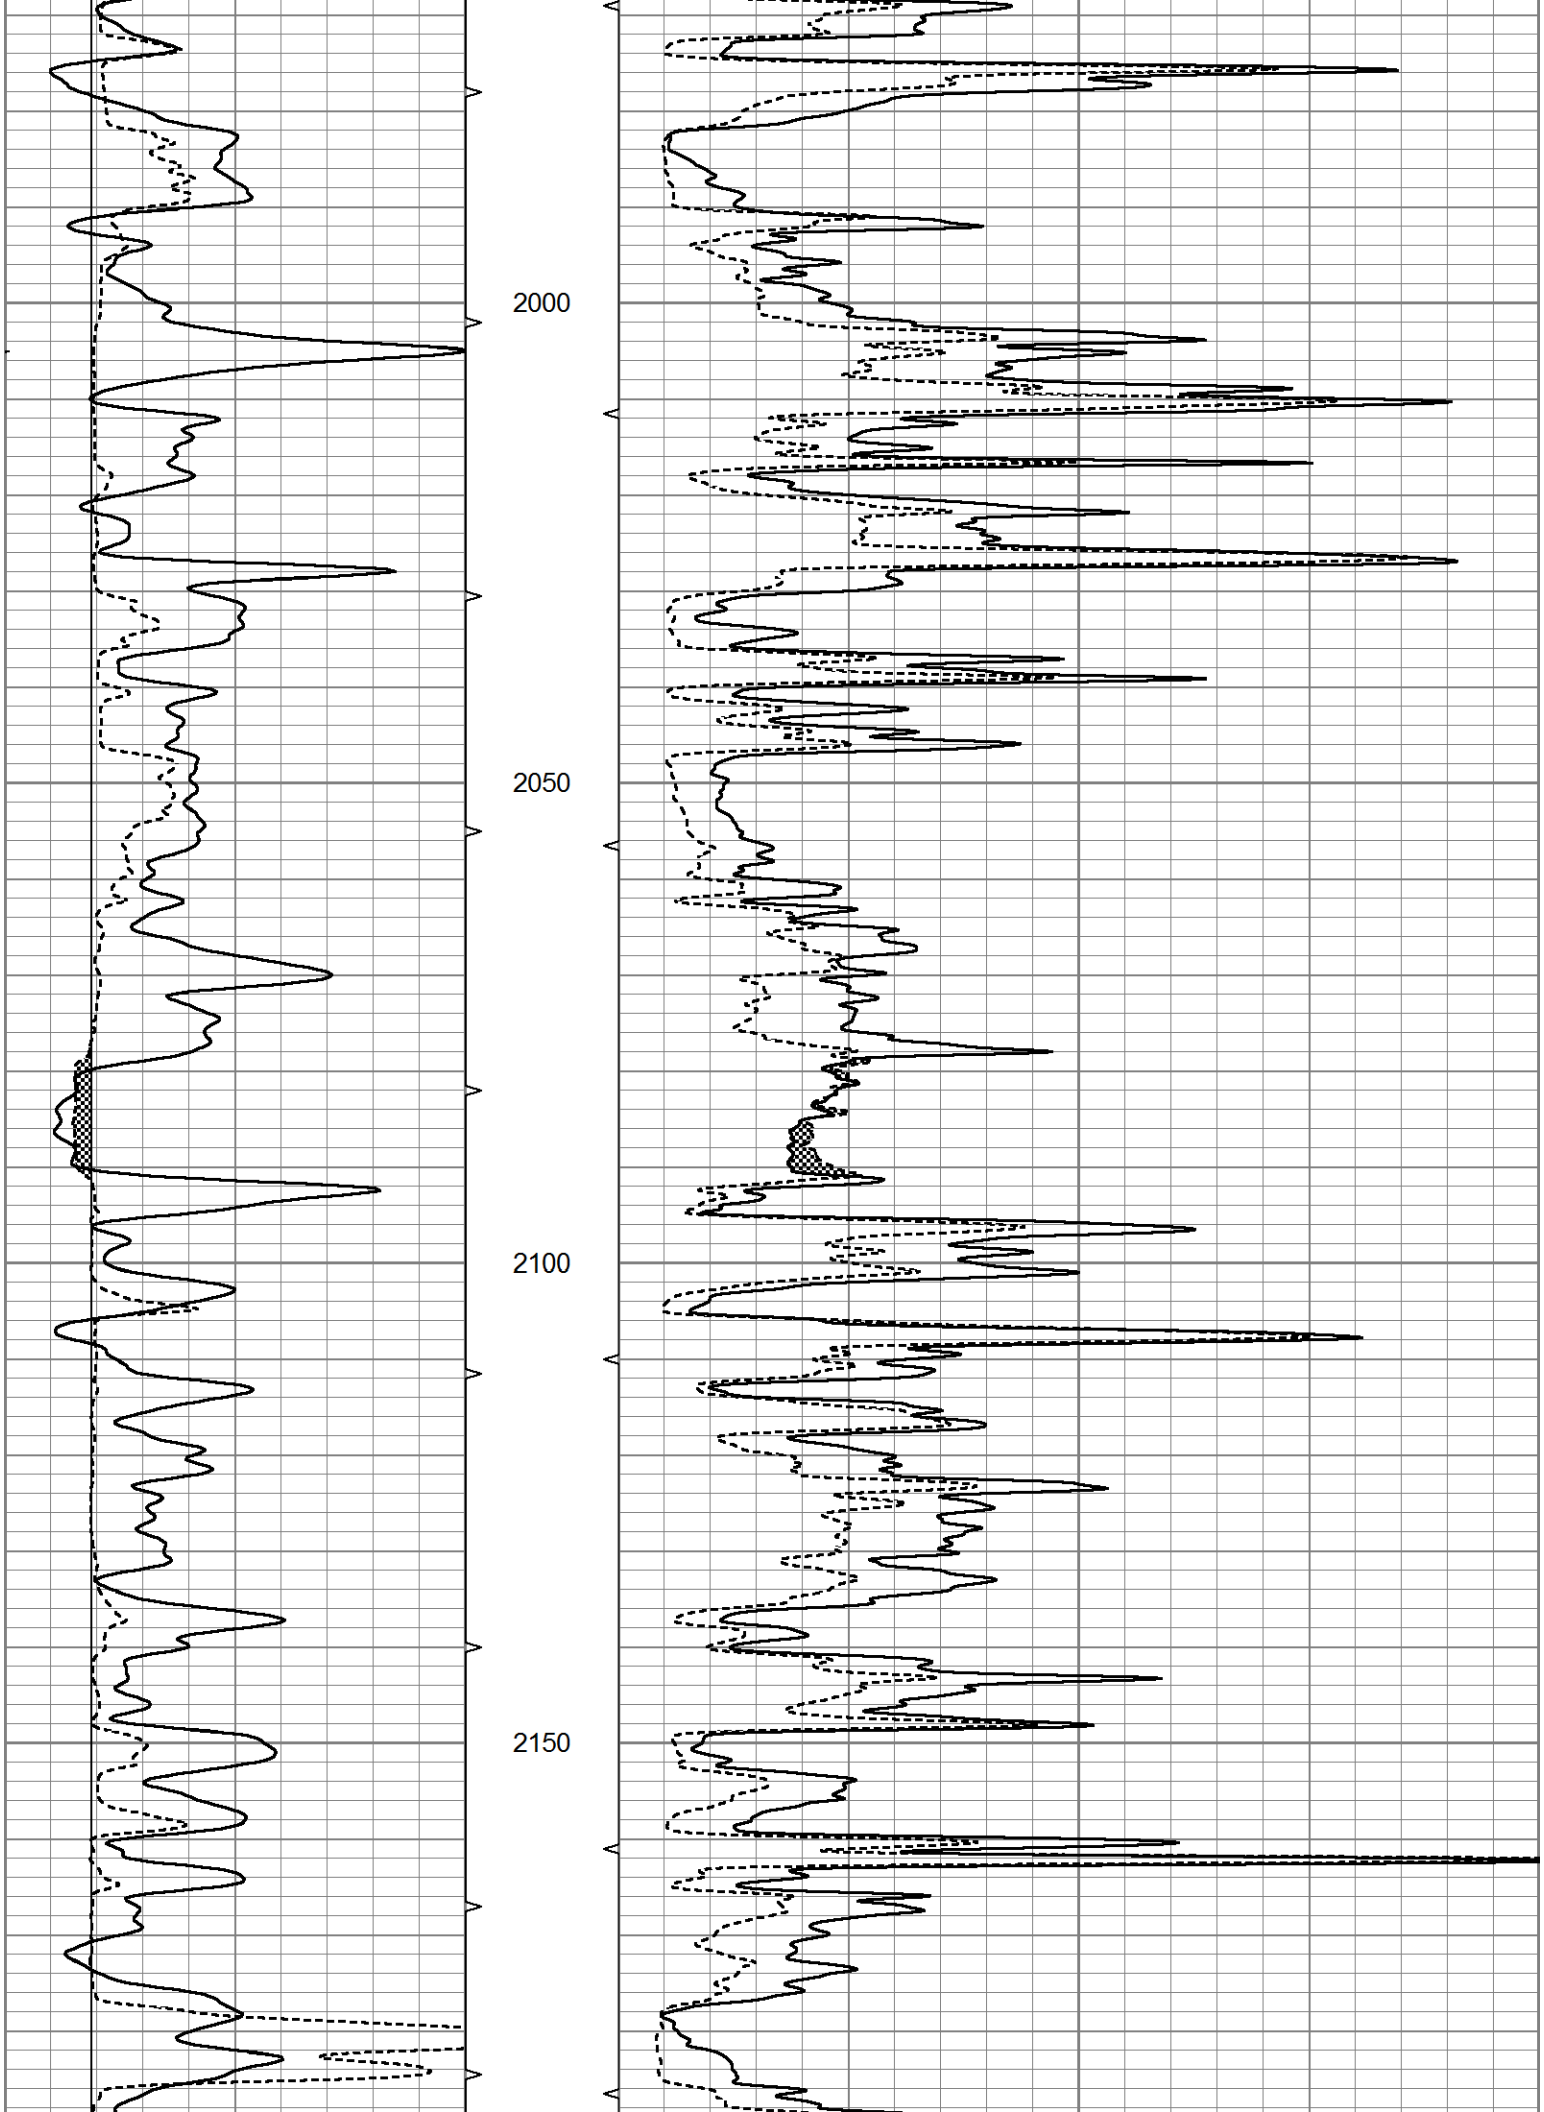
2000
2050
2100
2150

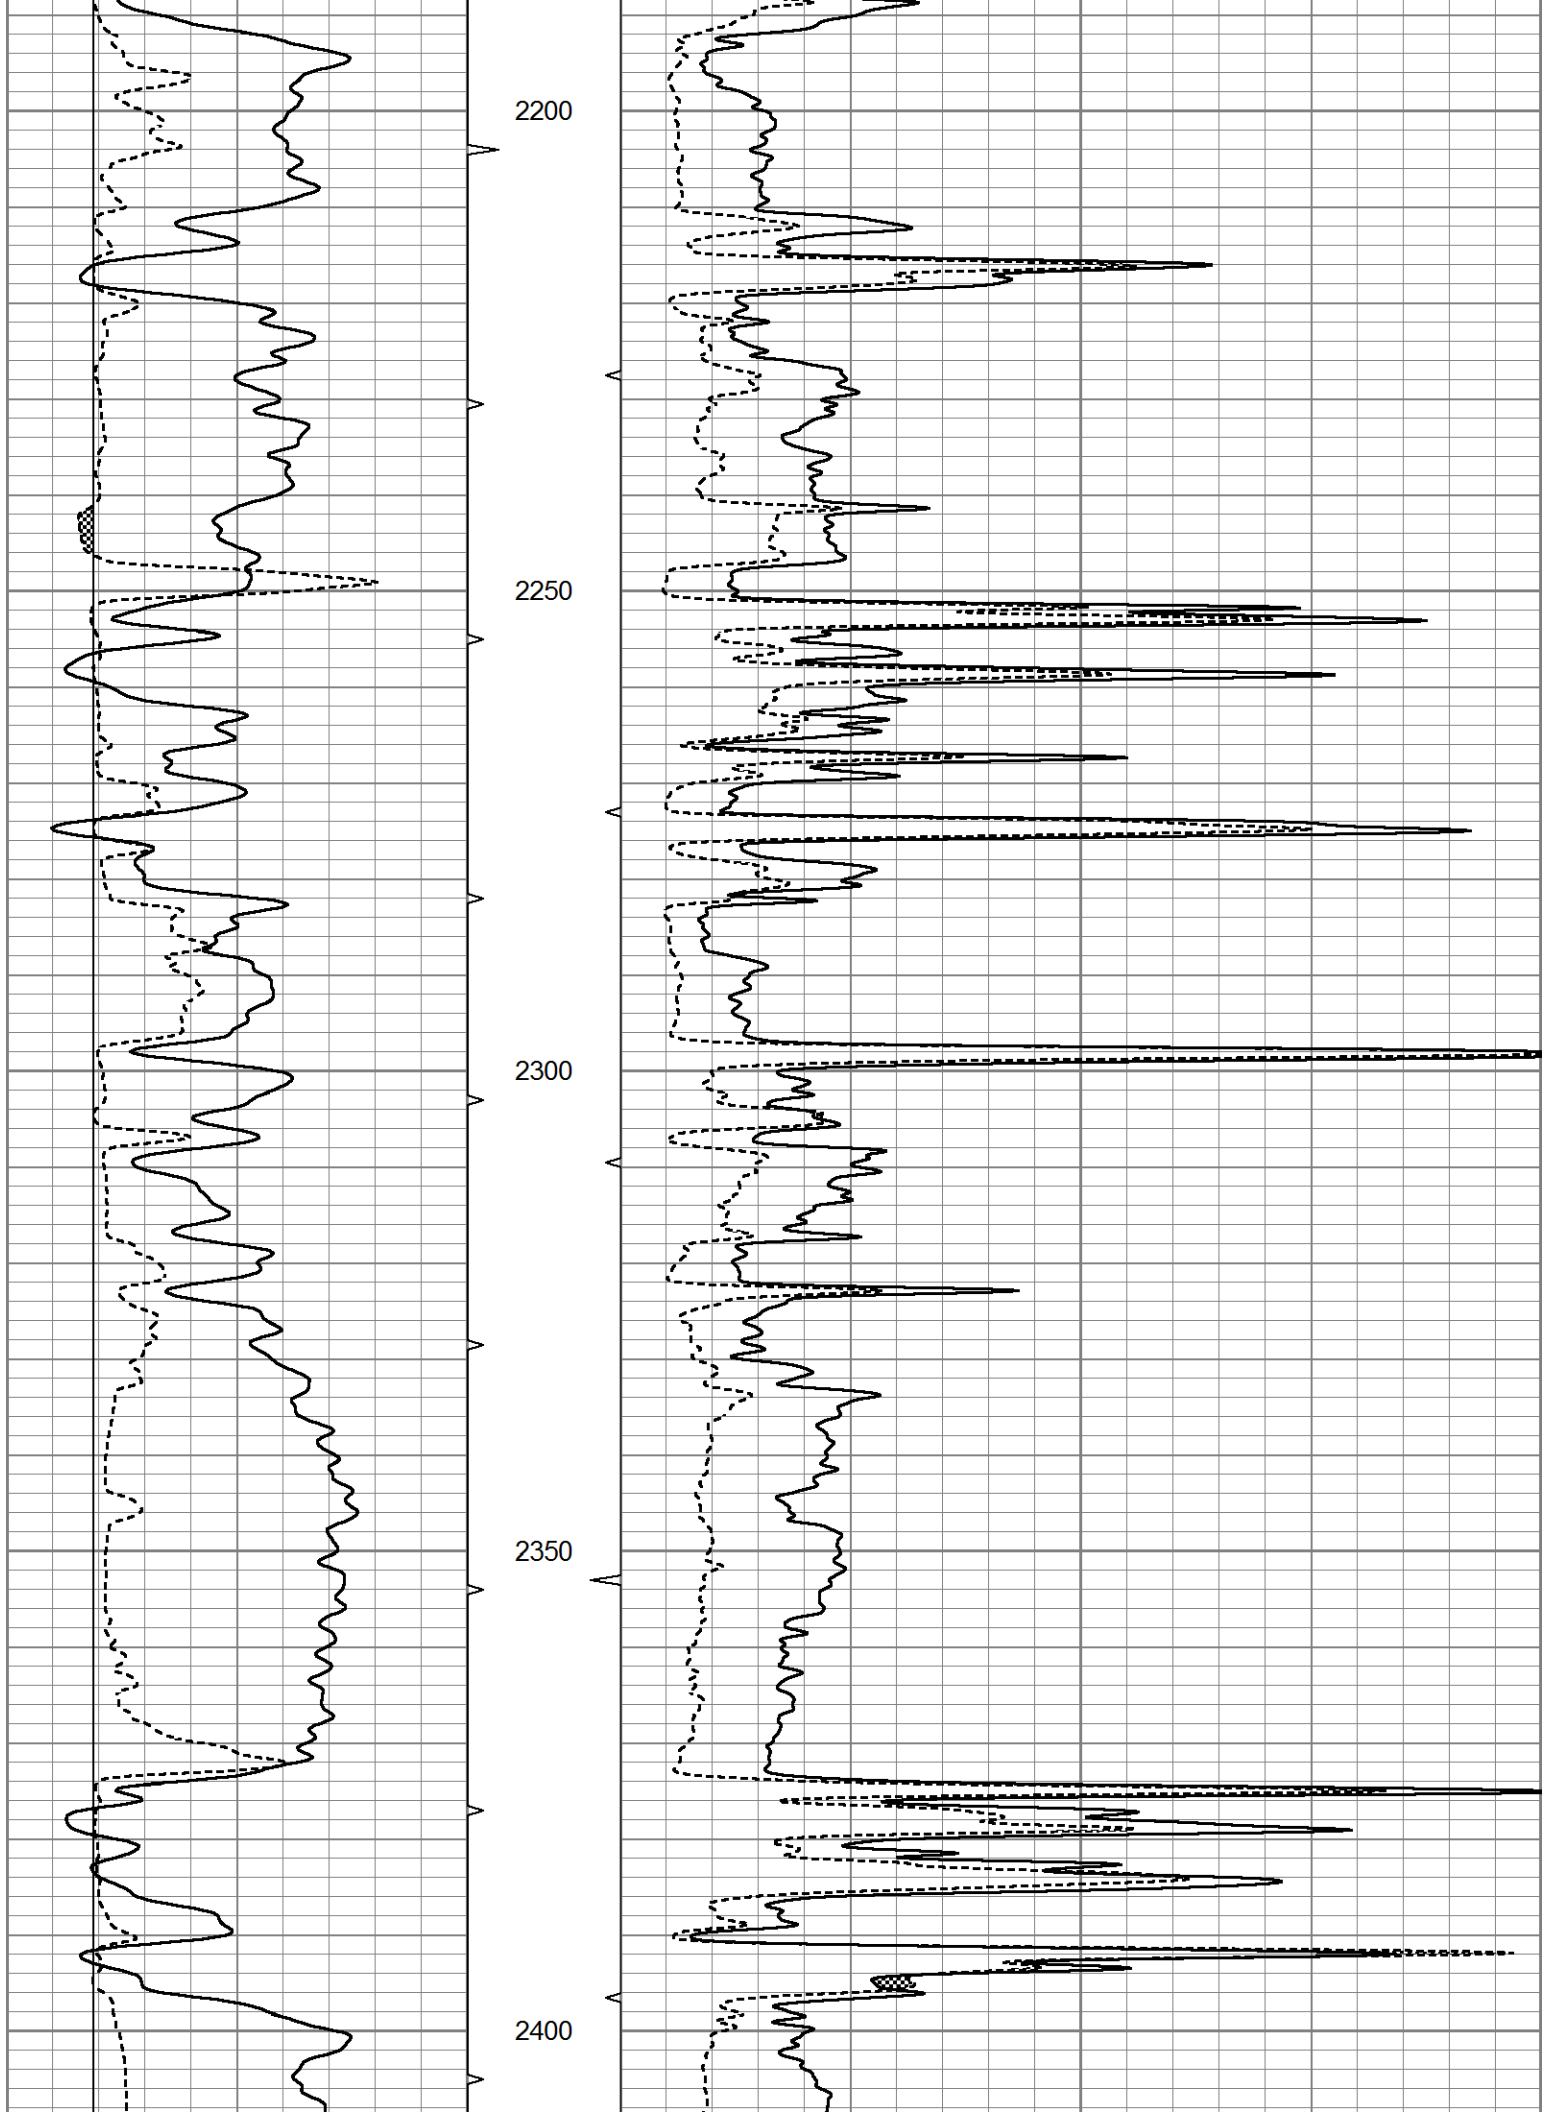
2200
2250
2300
2350
2400

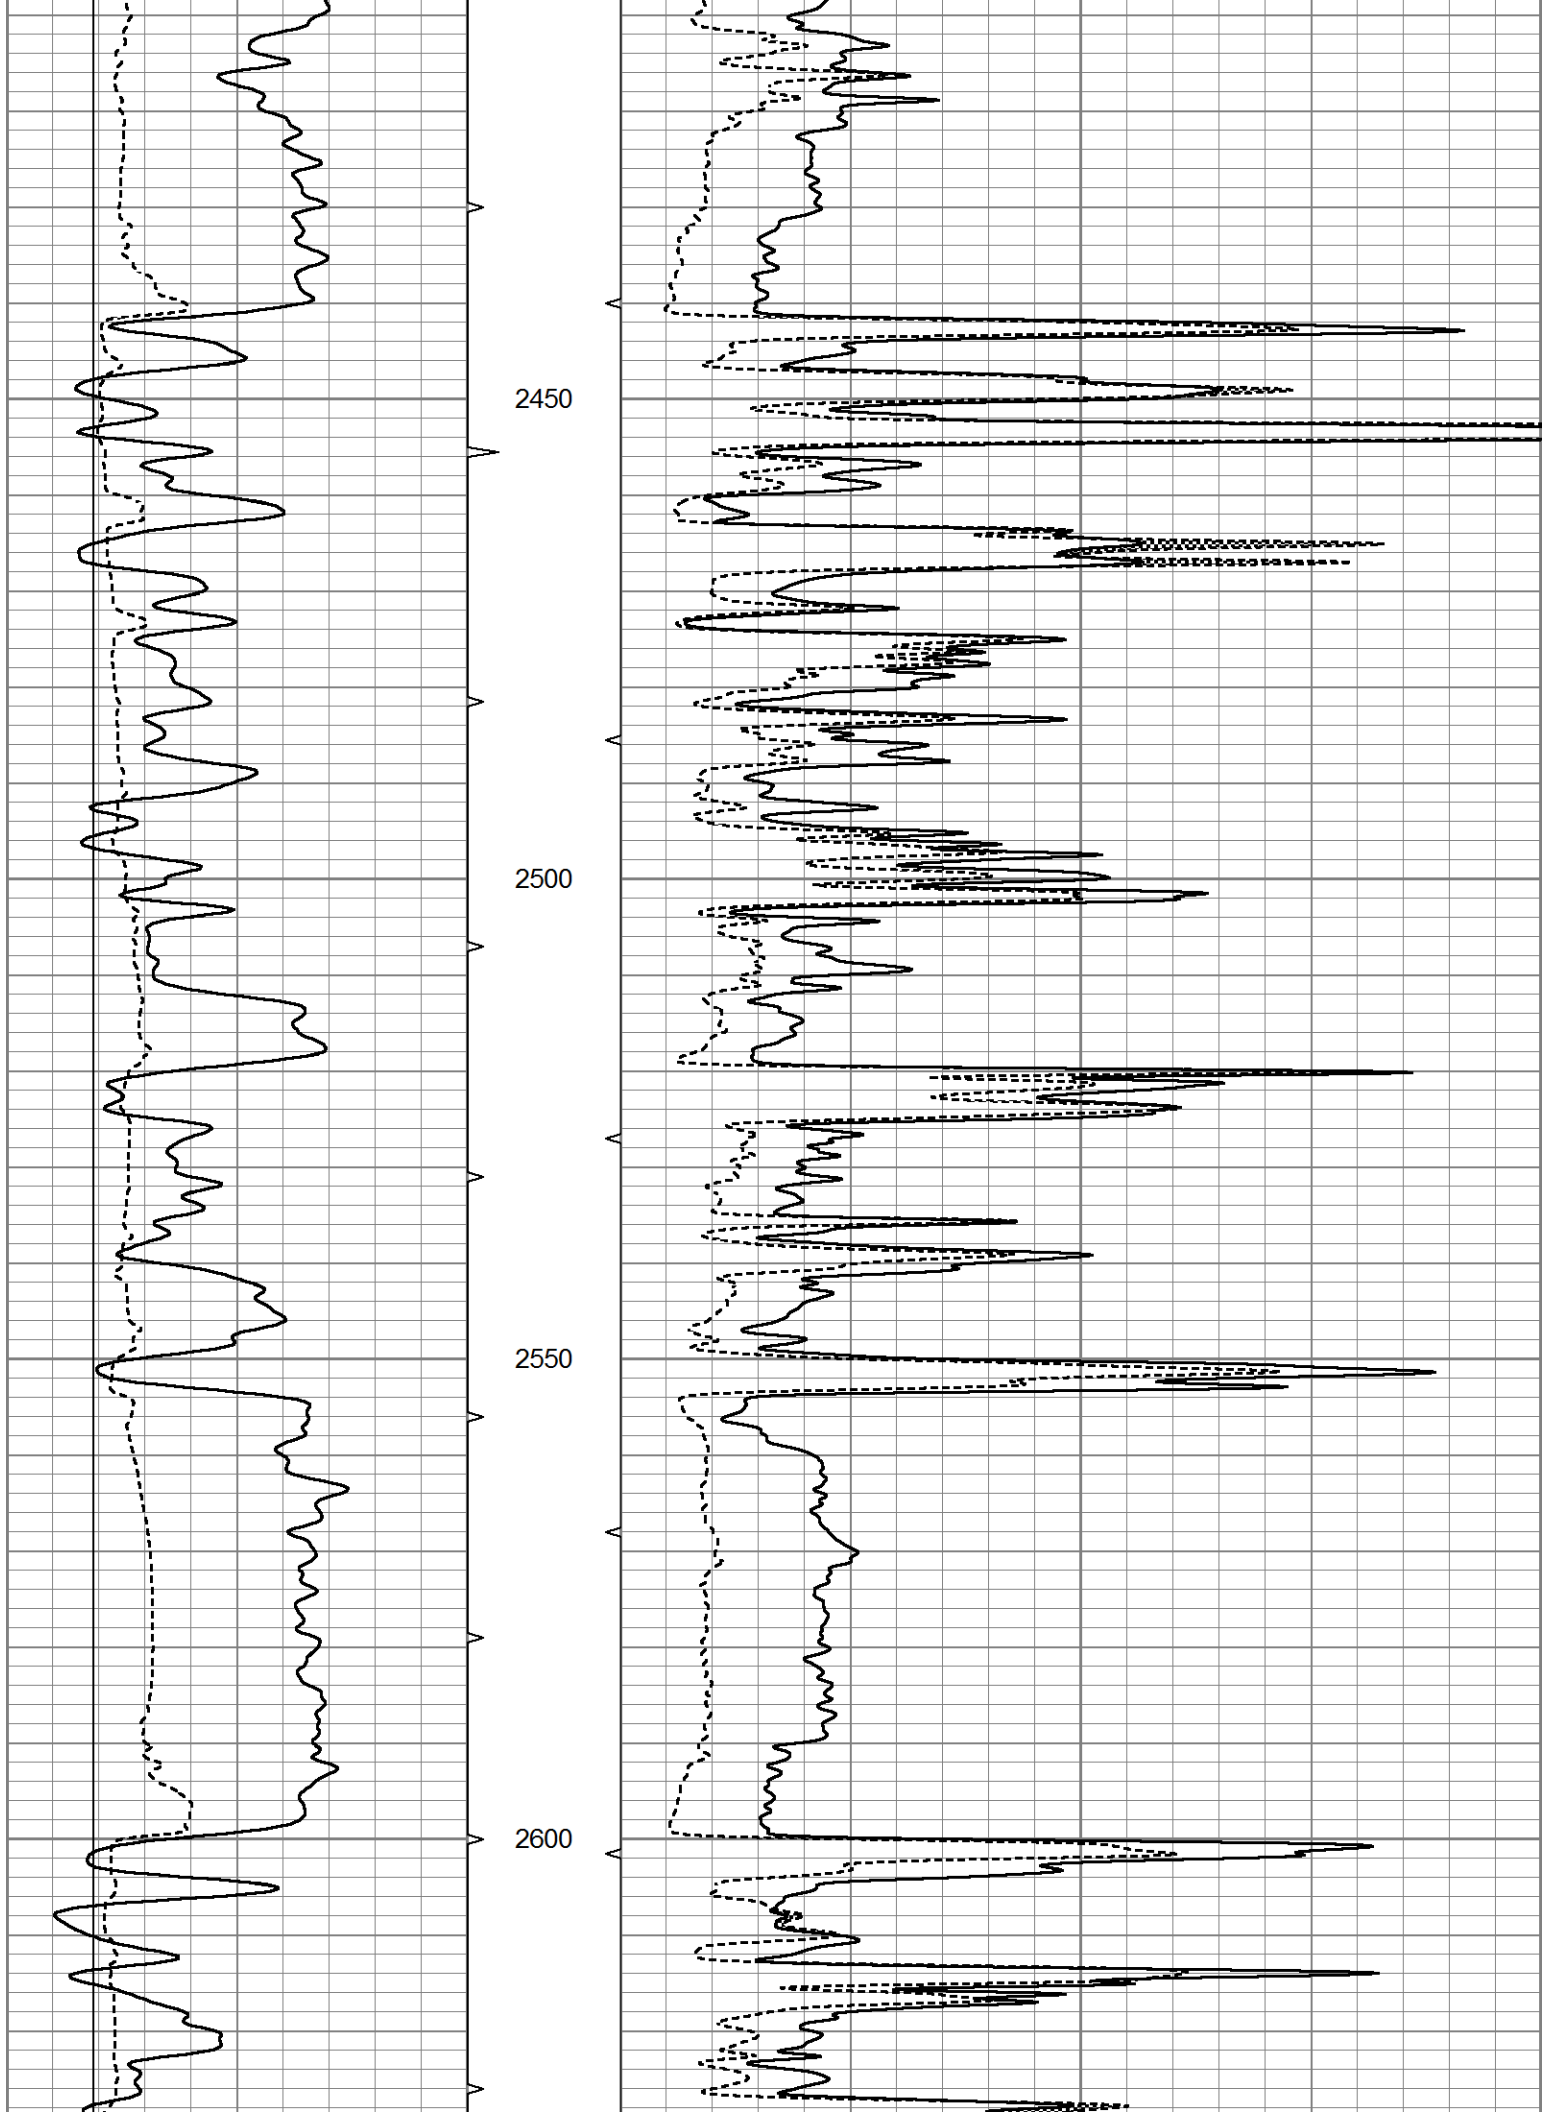
2450
2500
2550
2600

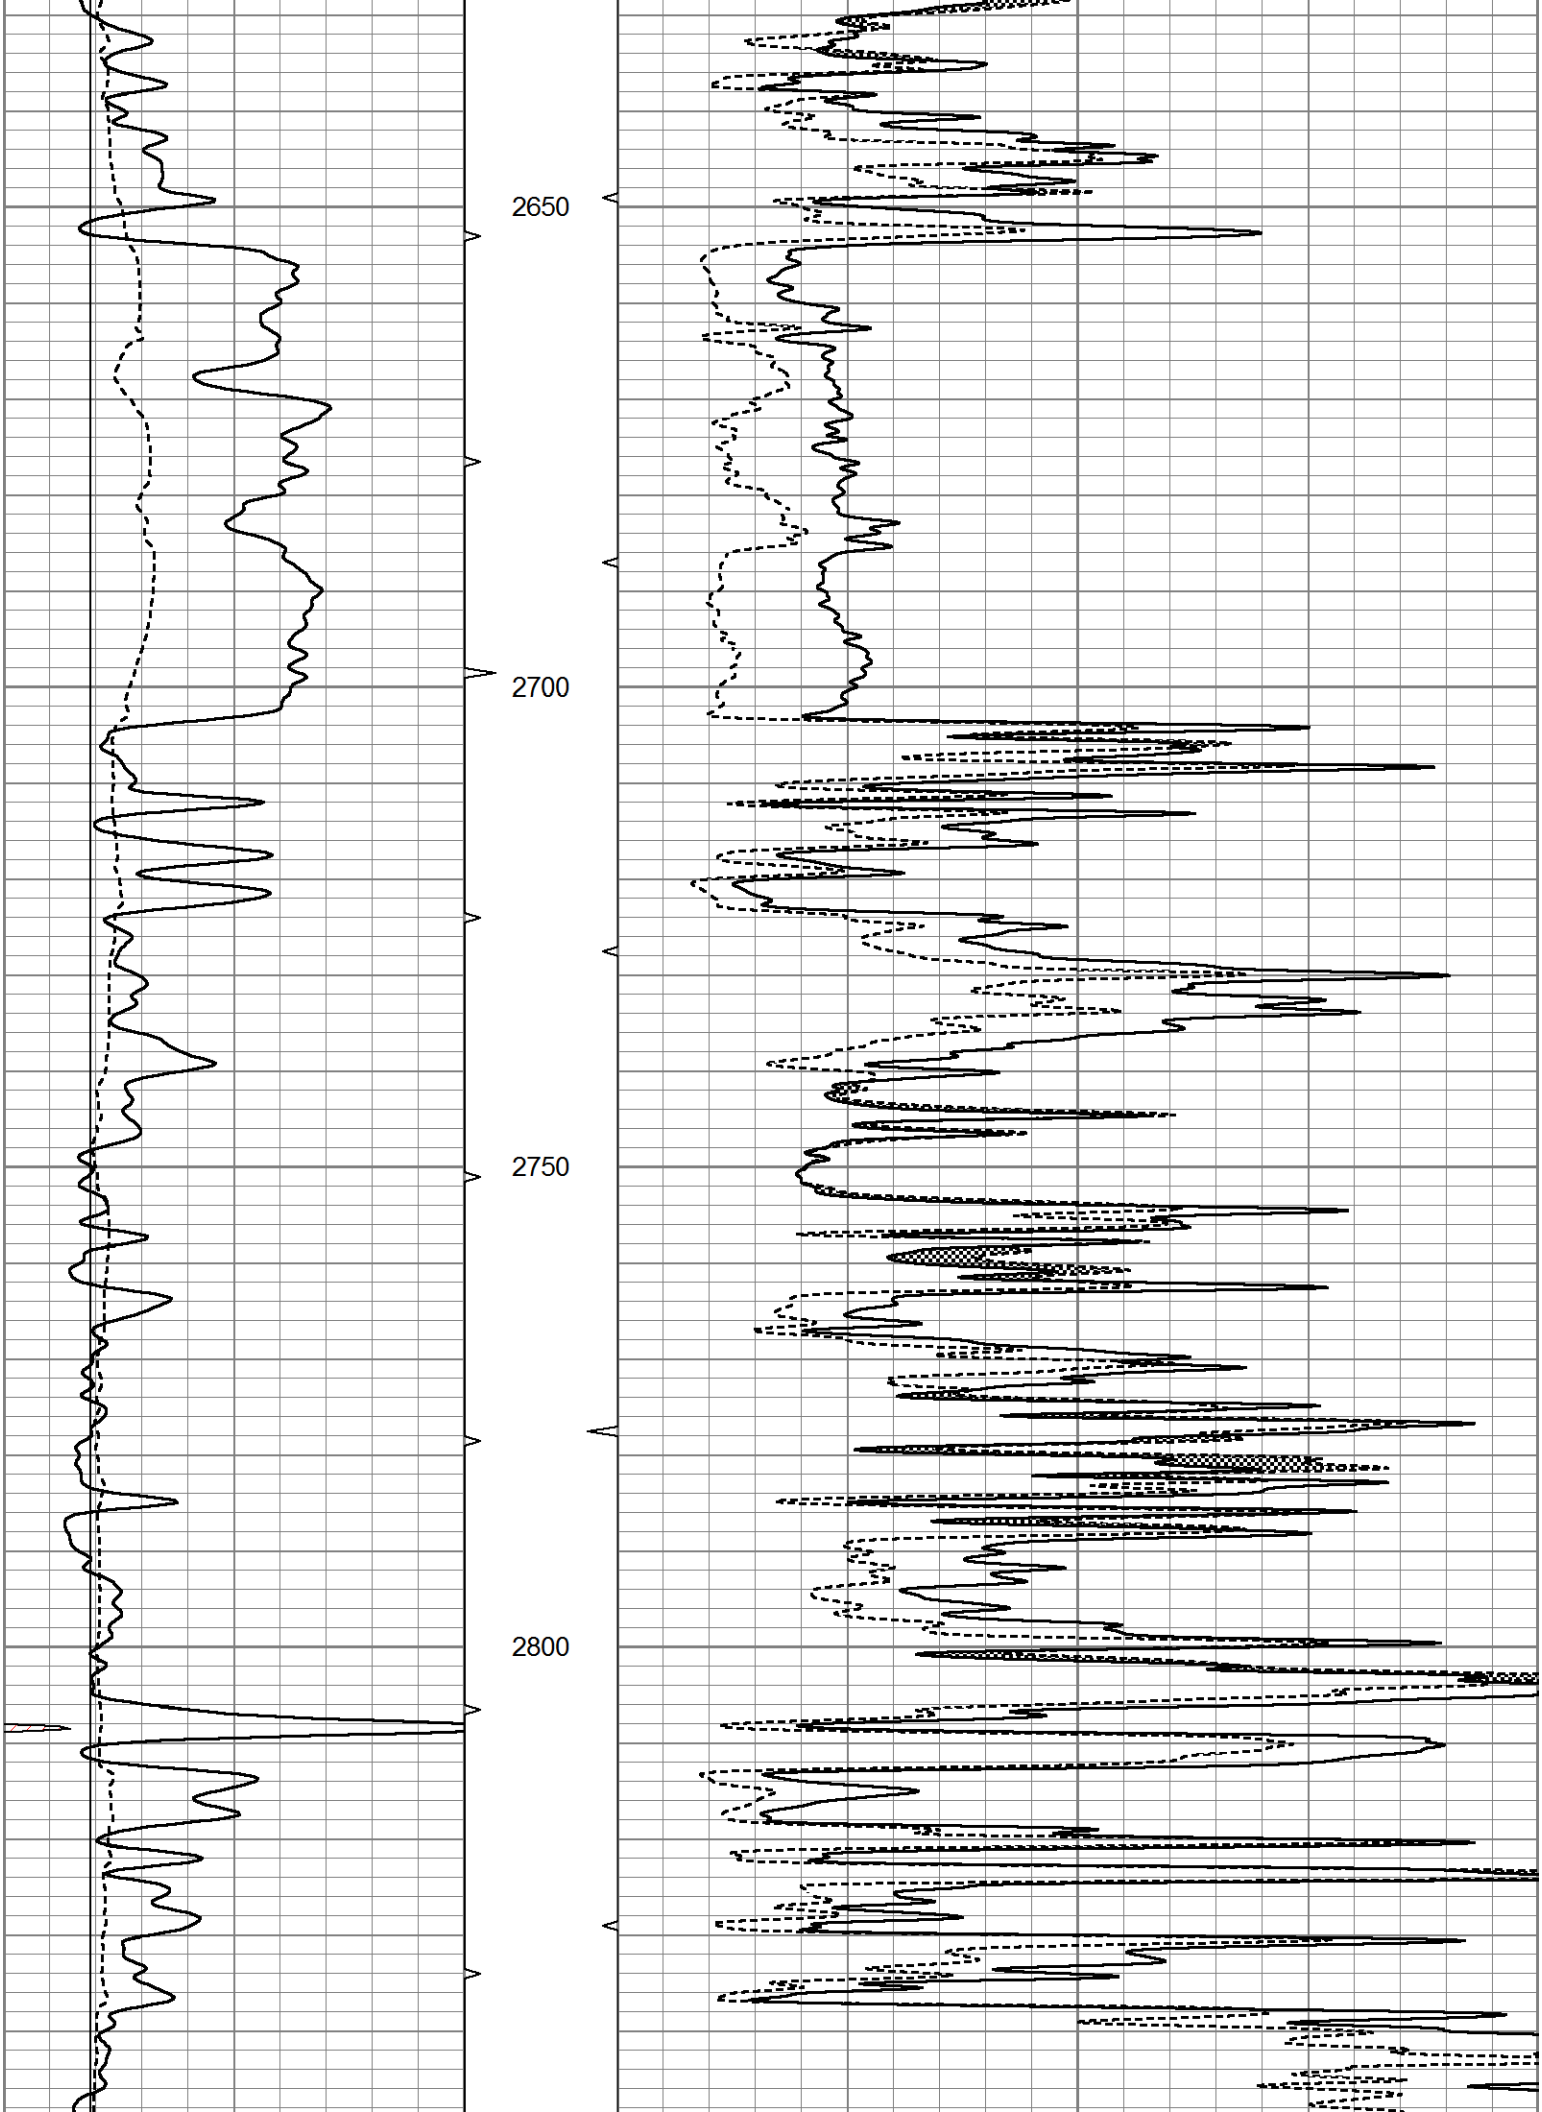
2650
2700
2750
2800

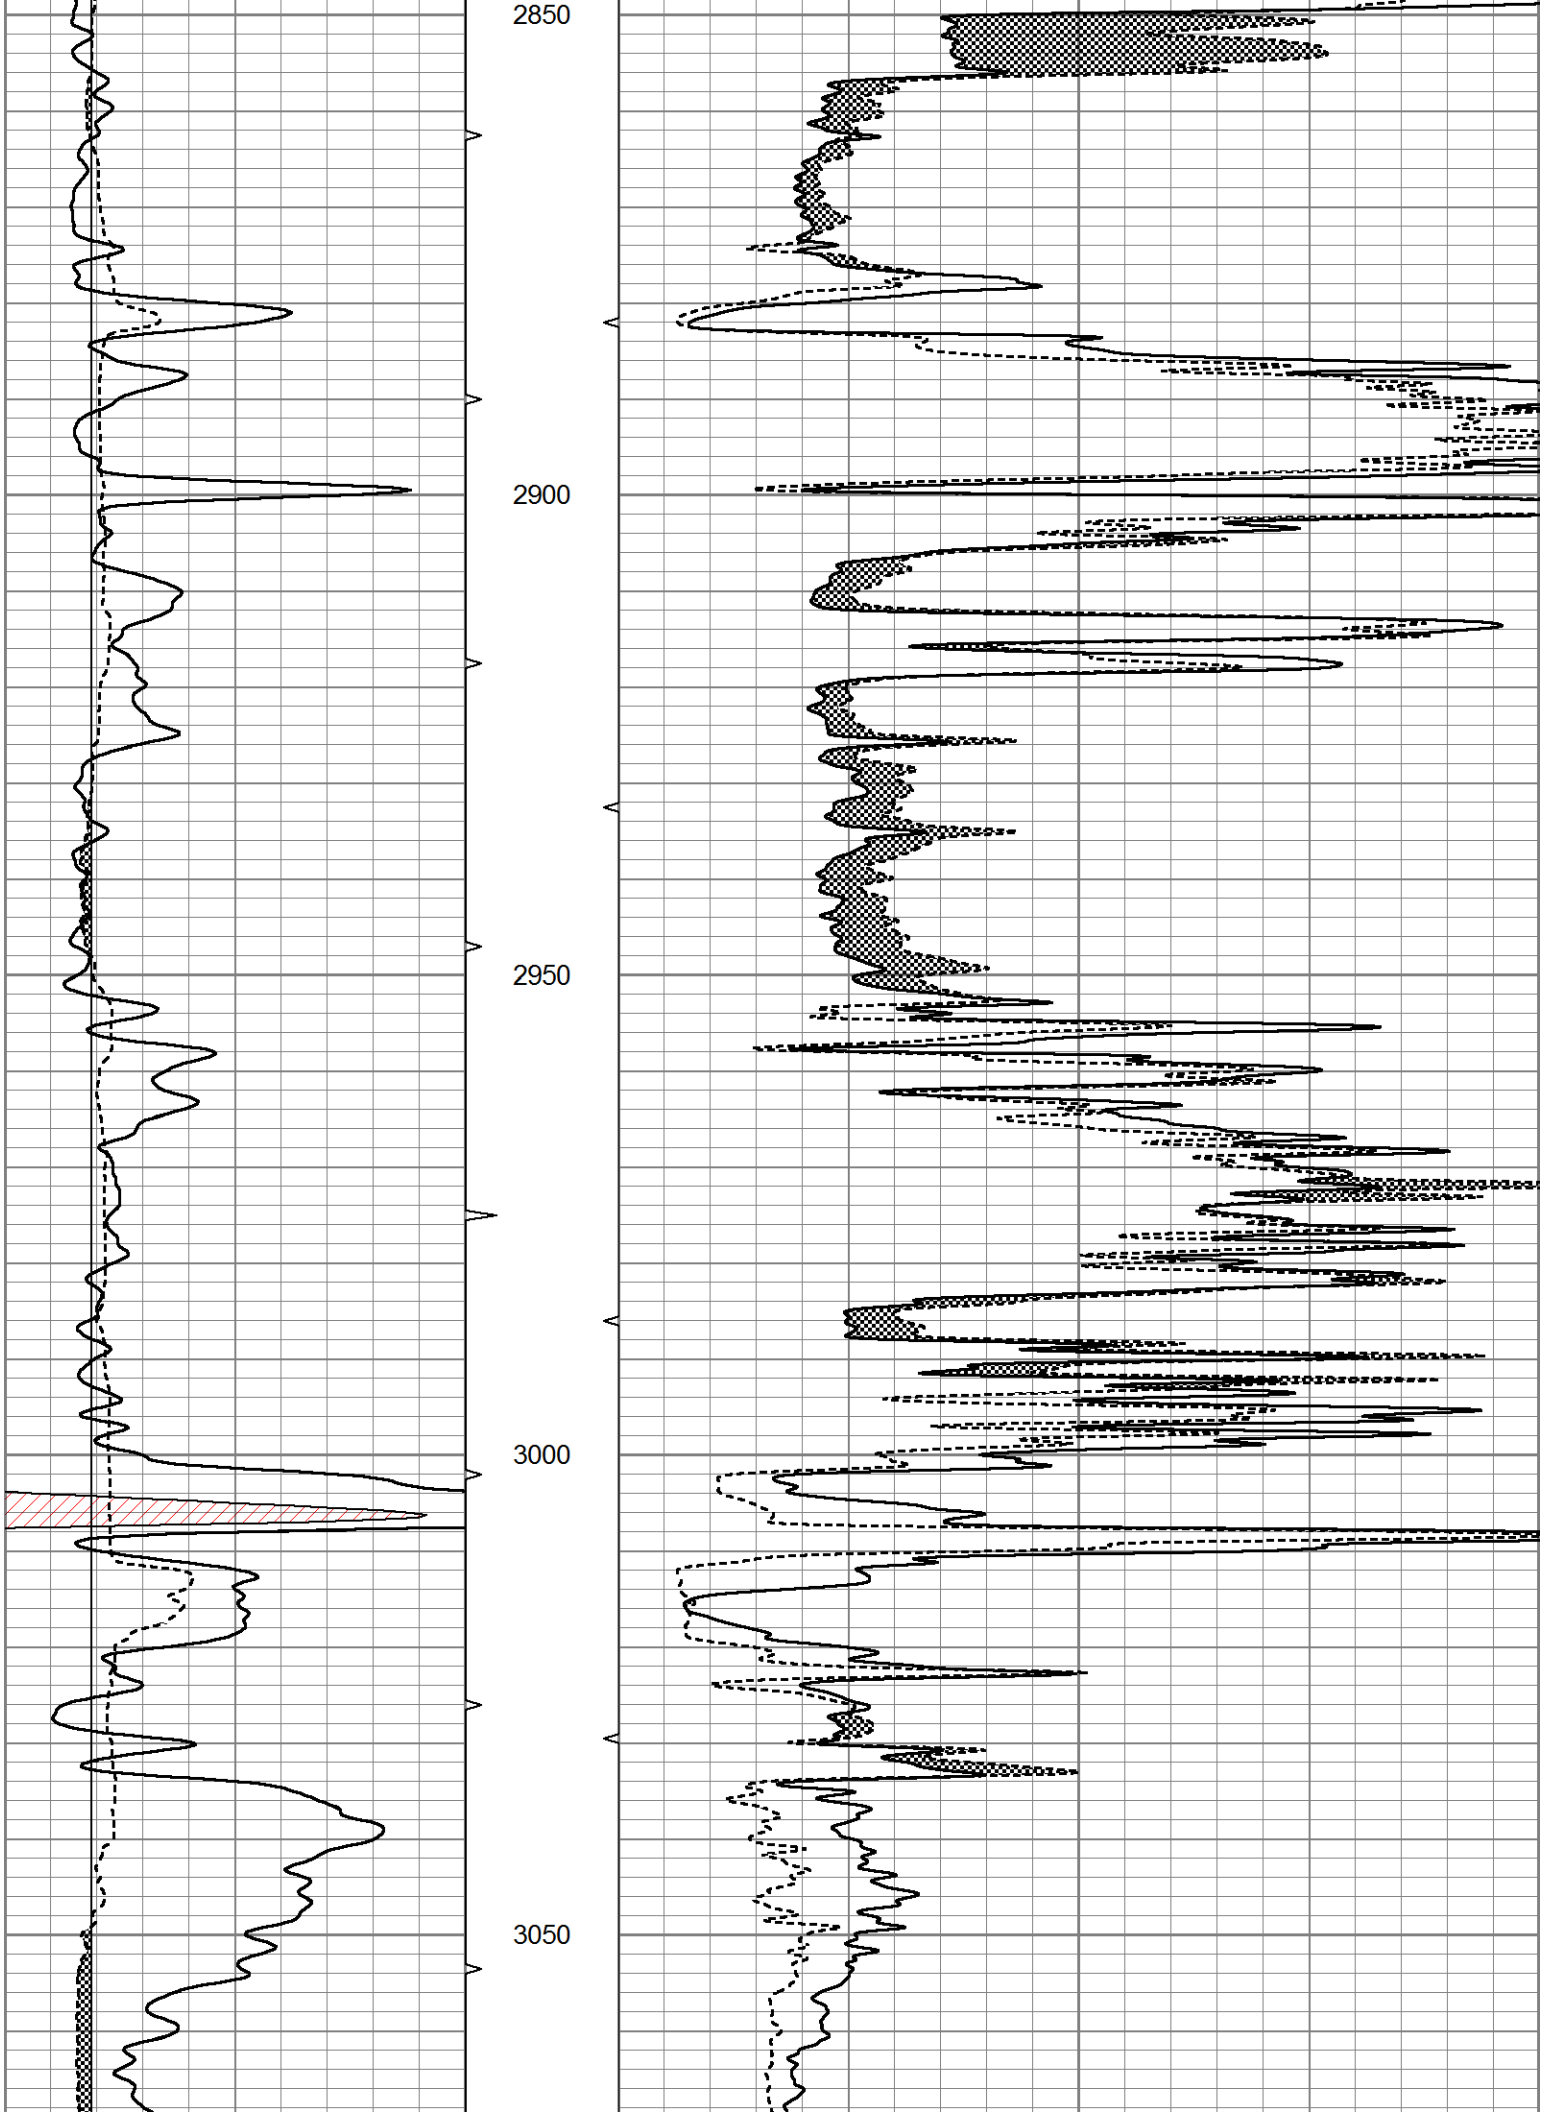
2850
2900
2950
3000
3050

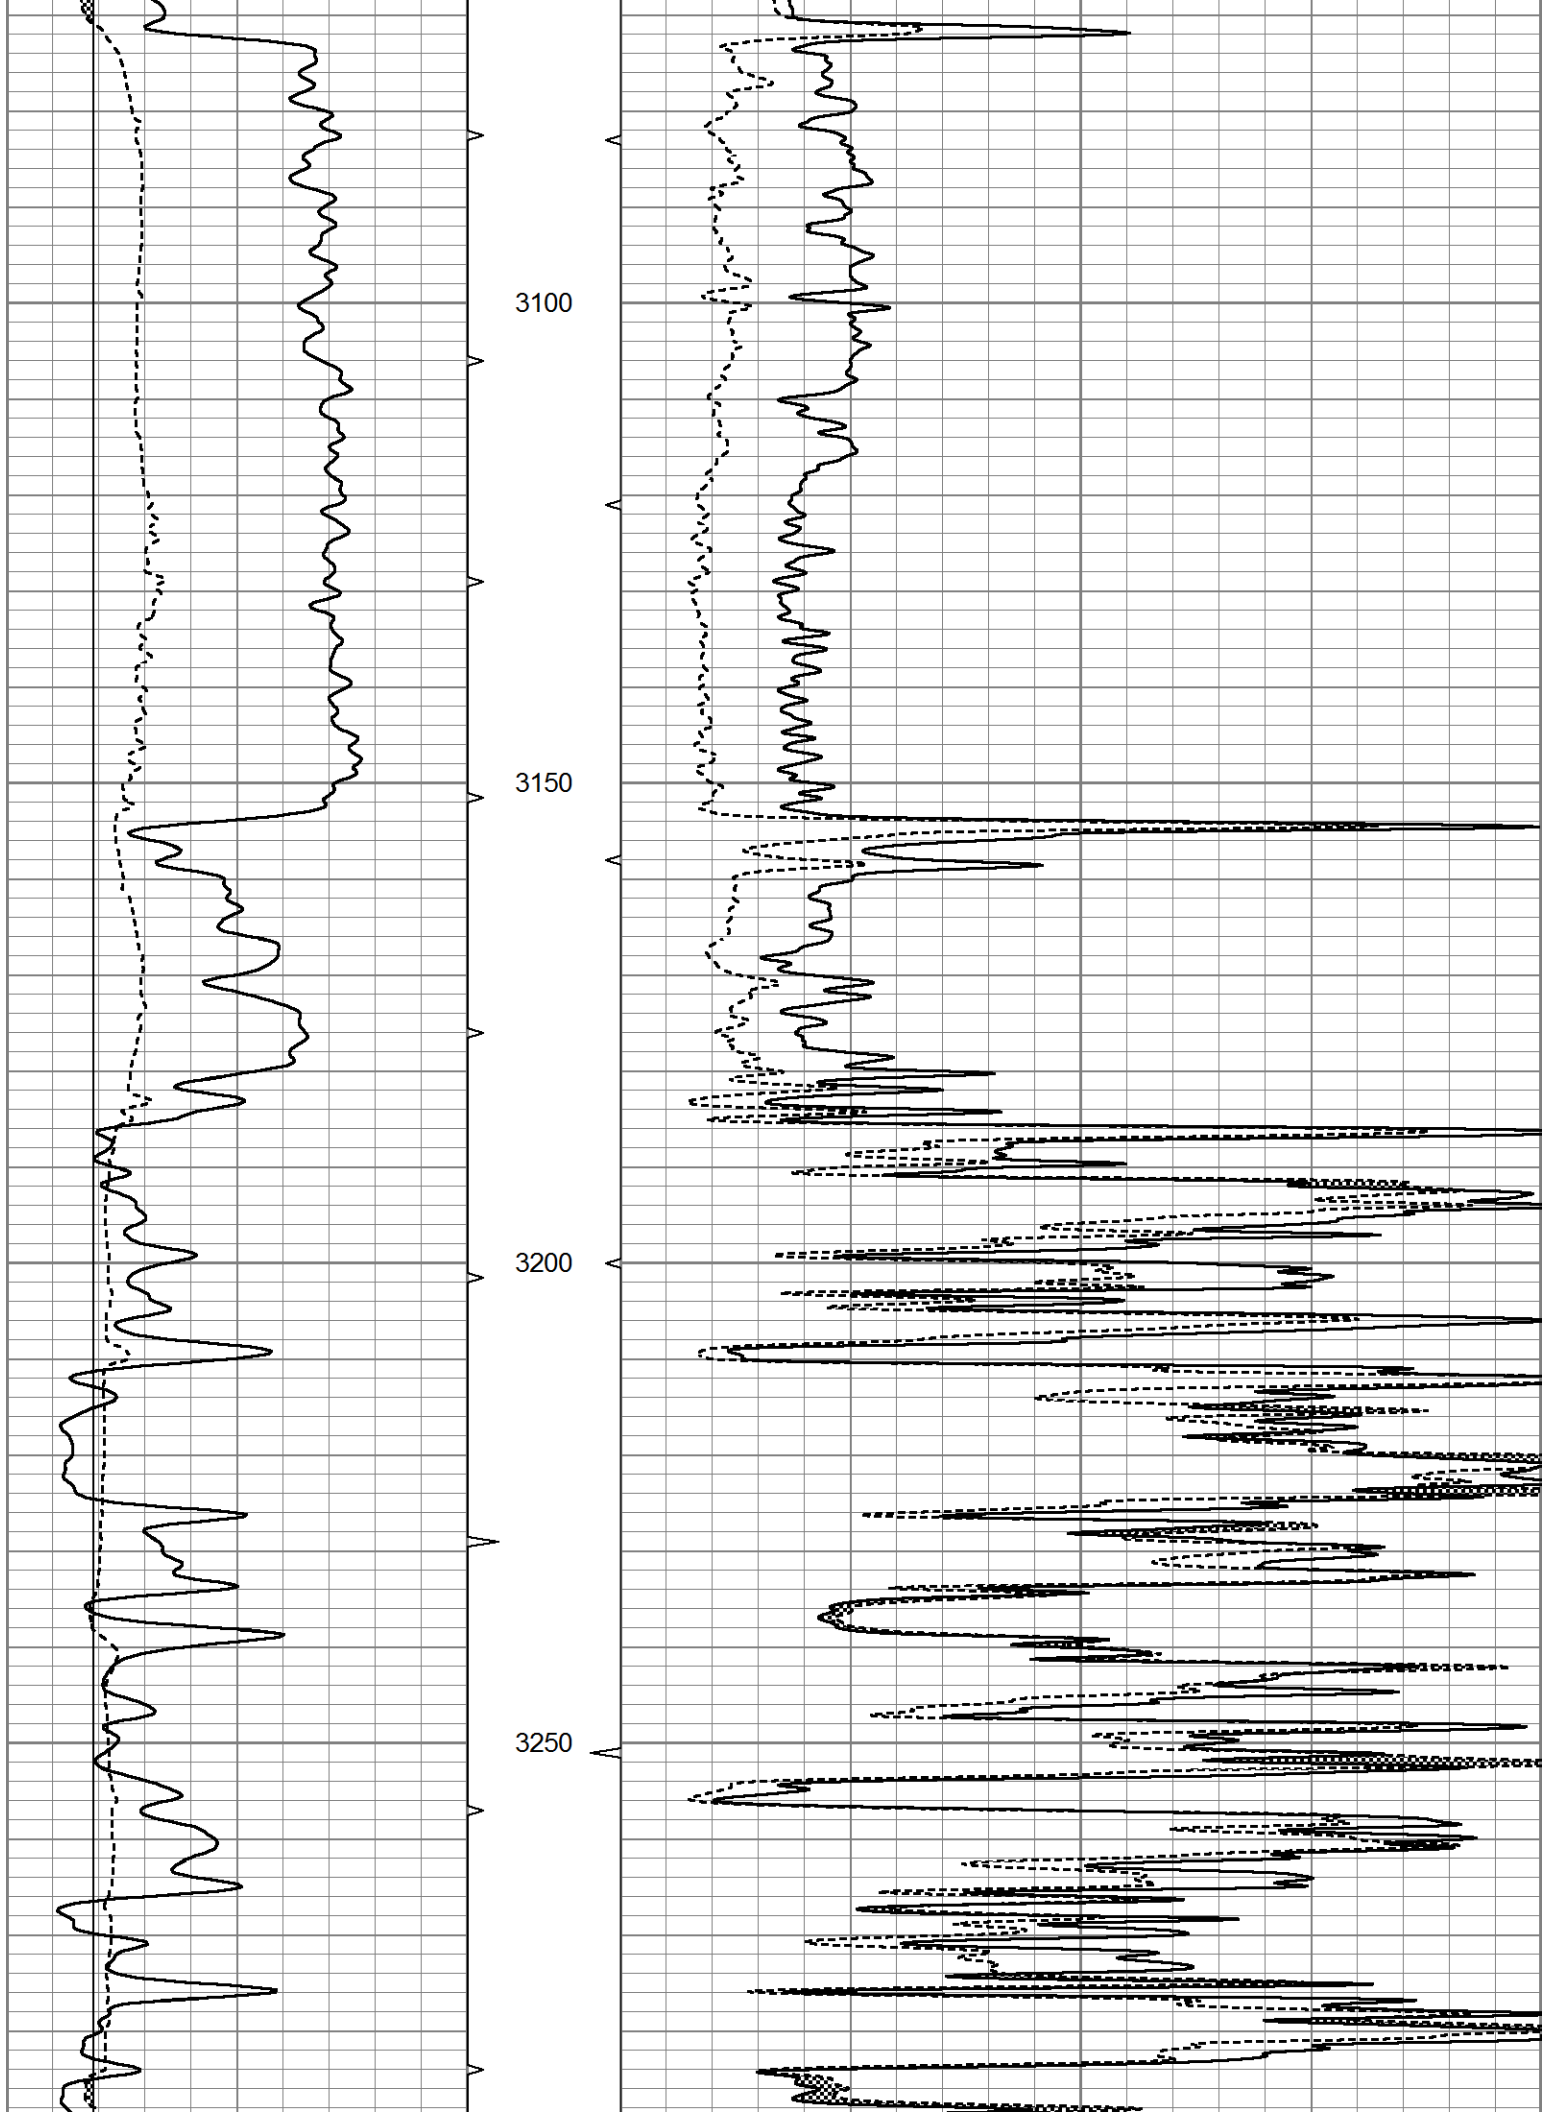
3100
3150
3200
3250

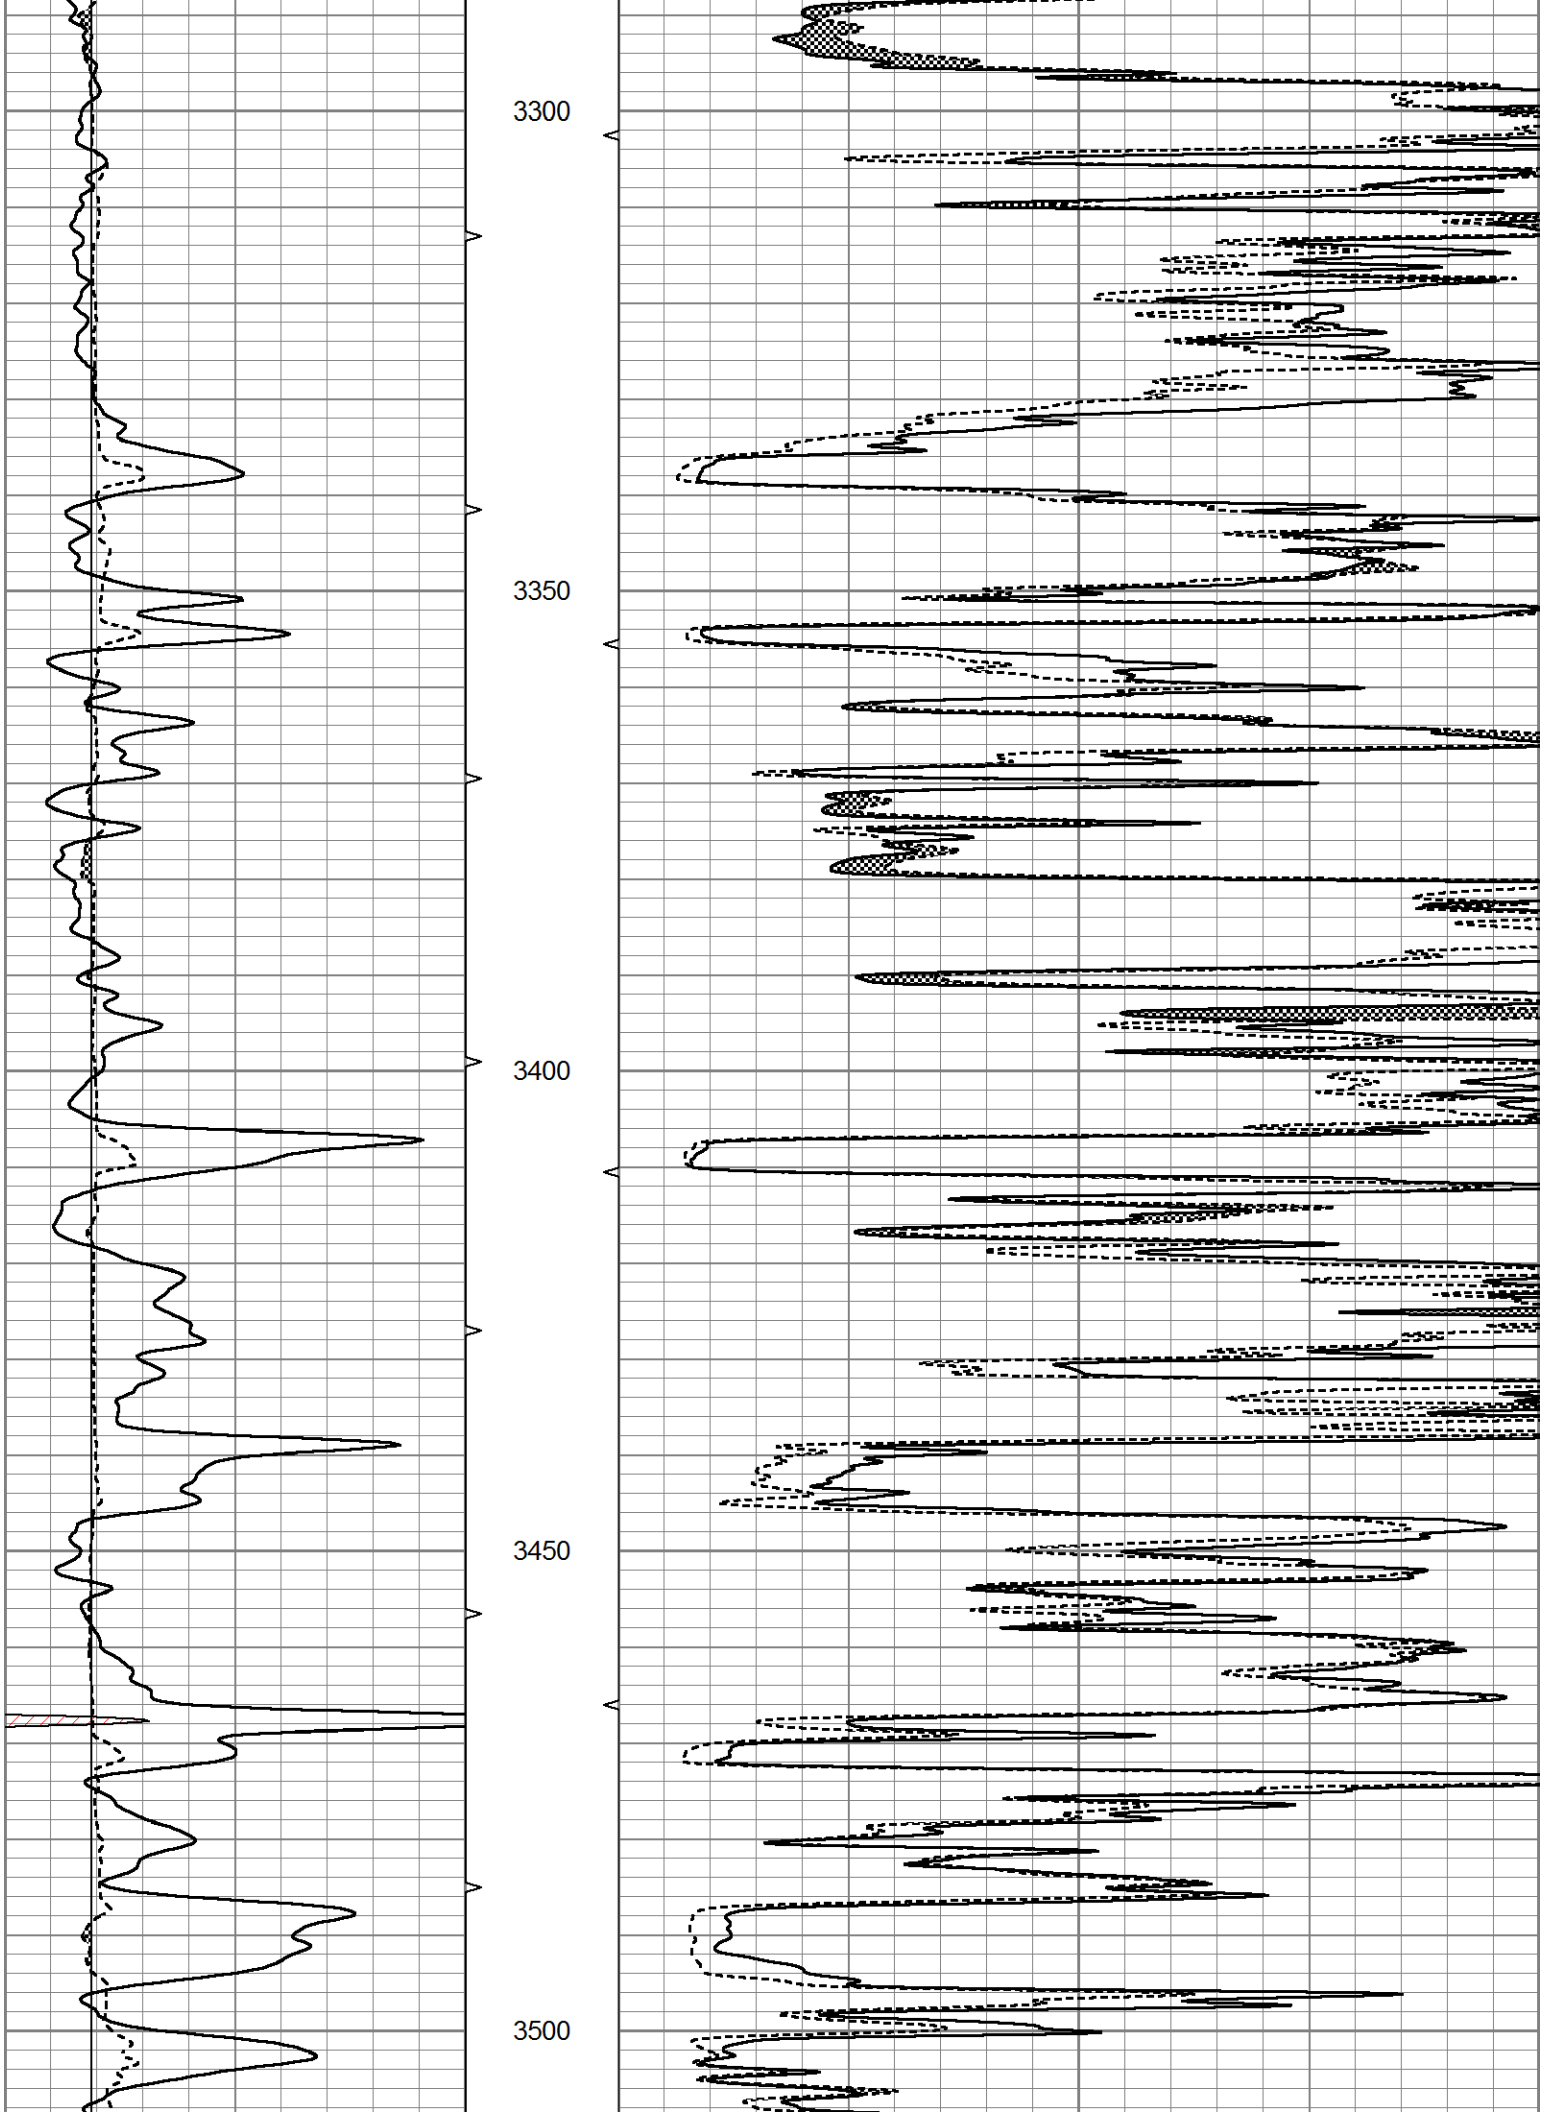
3300
3350
3400
3450
3500

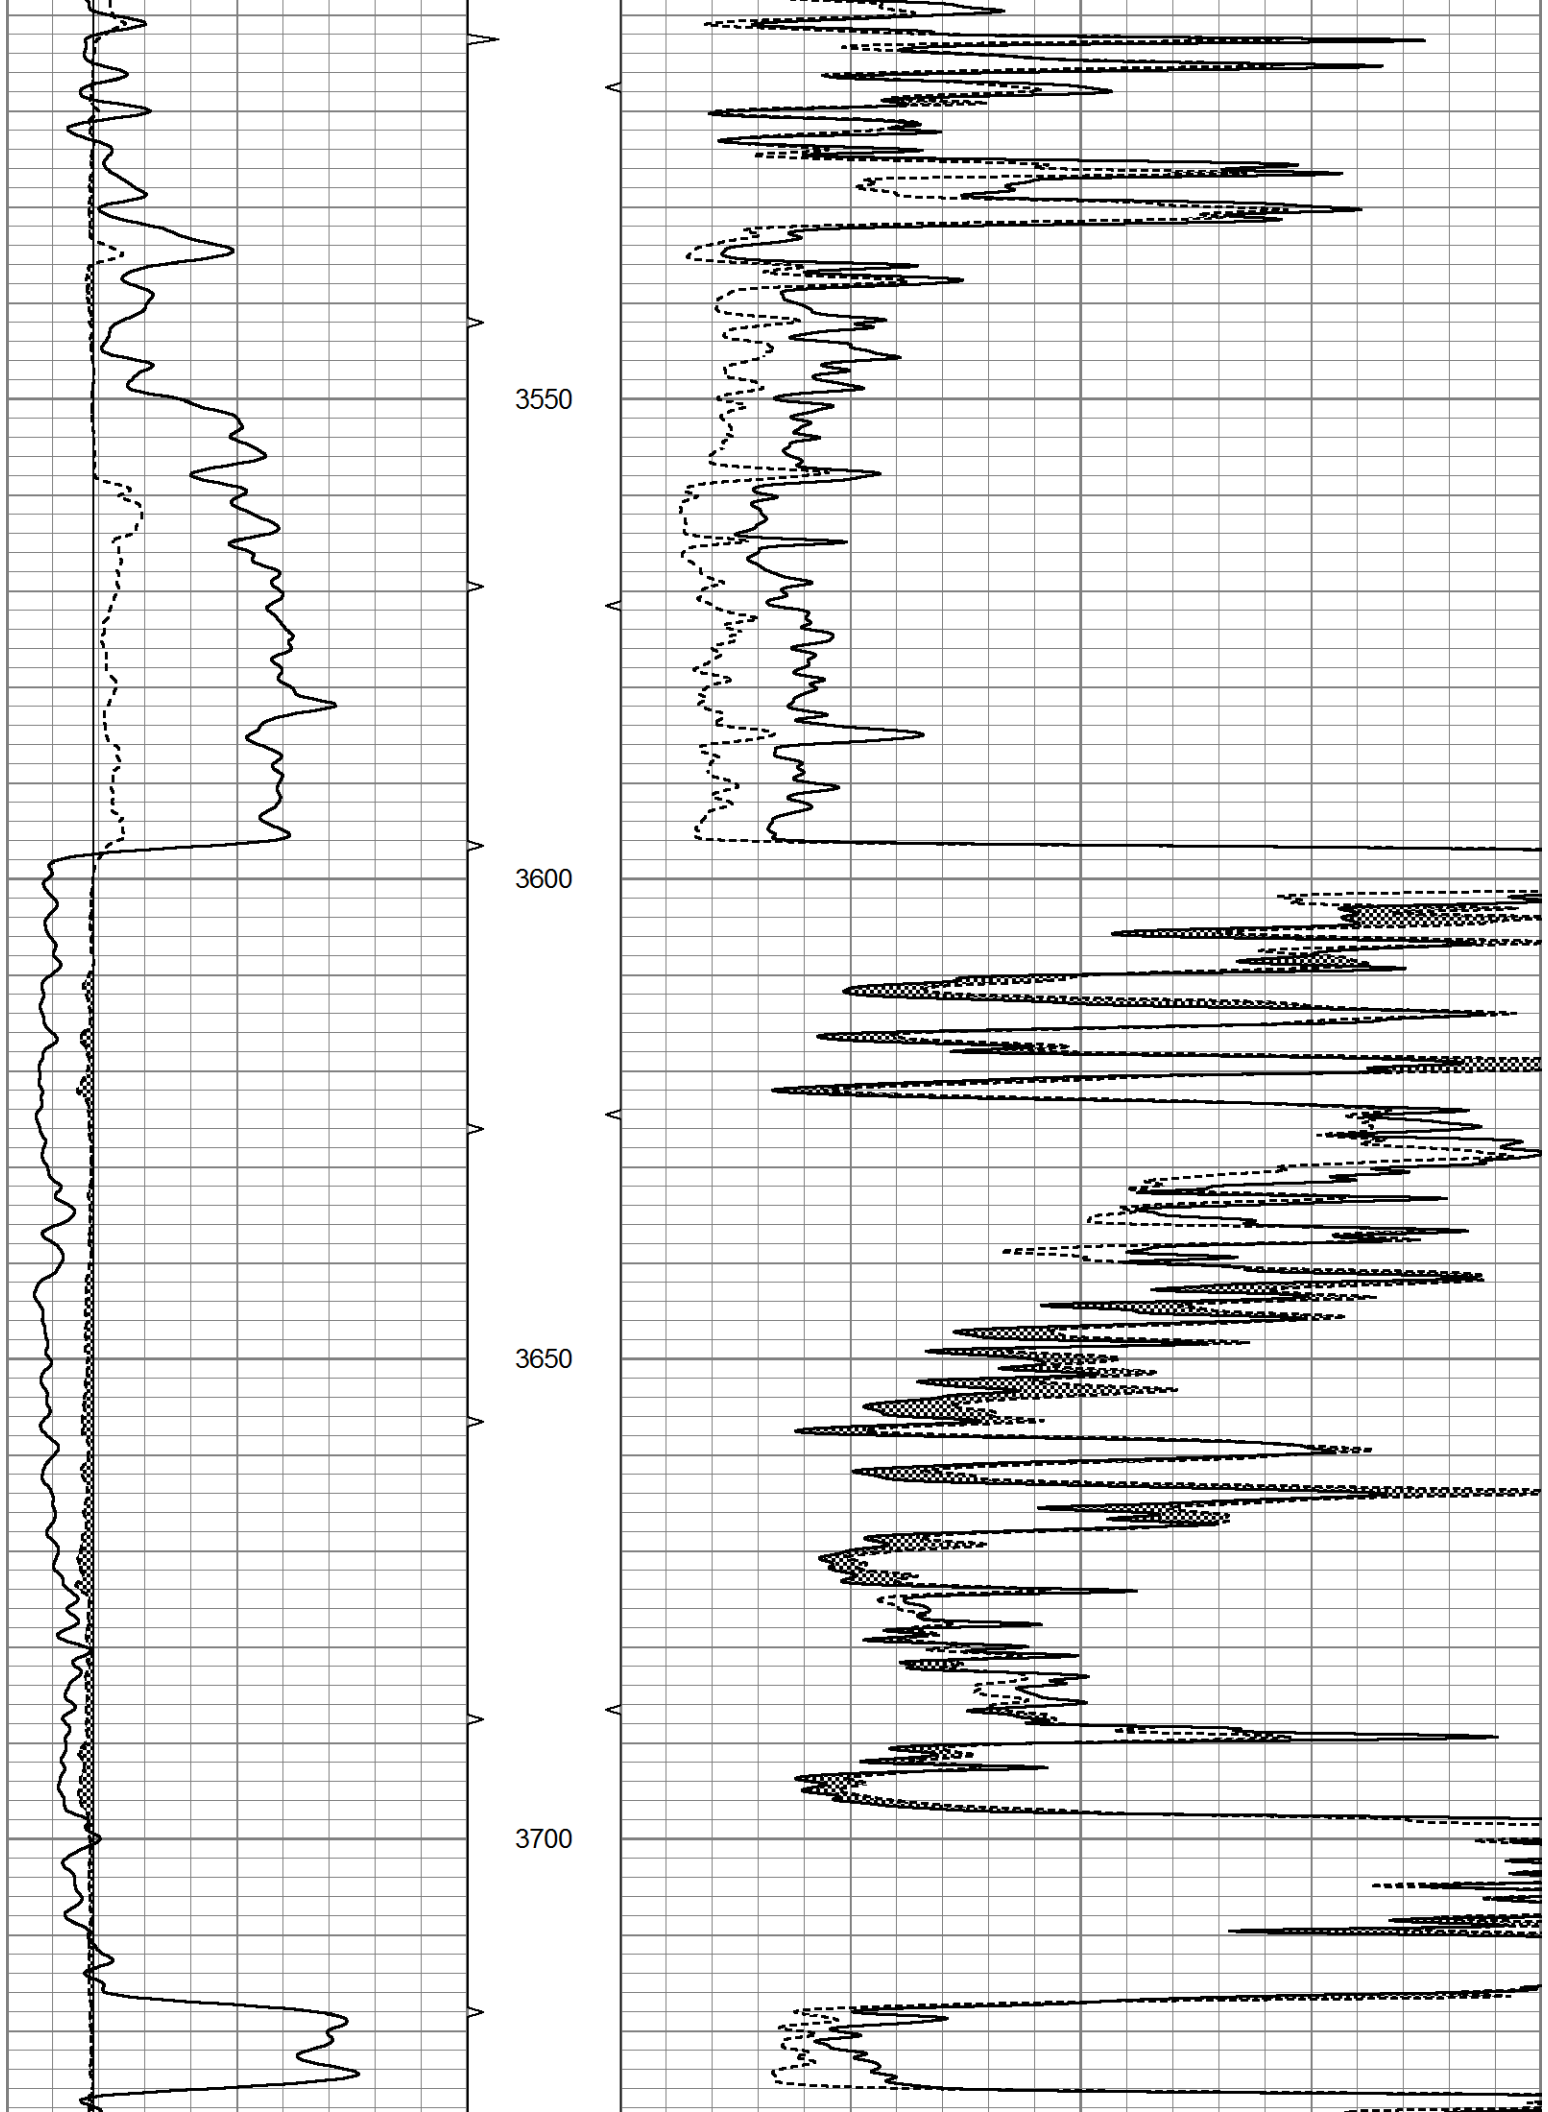
3550
3600
3650
3700

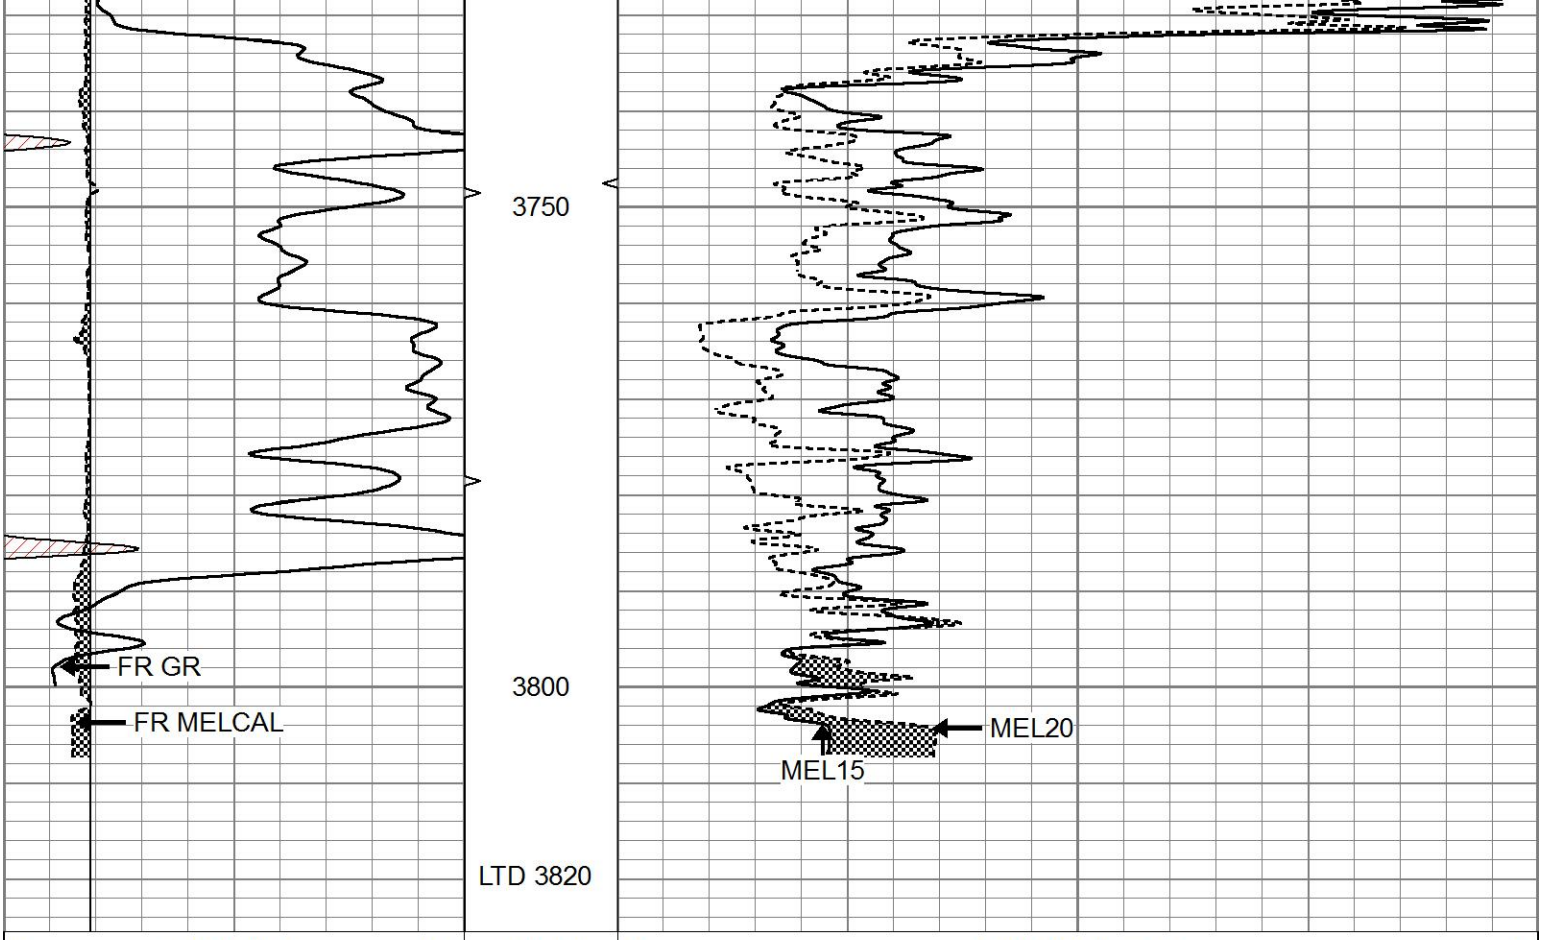

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m) 40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m) 40
			ABHV 0 (ft3) 10		

REPEAT SECTION

Database File	6265pe.db
Dataset Pathname	pass5.1
Presentation Format	micro
Dataset Creation	Sat Mar 19 08:11:36 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m) 40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m) 40
			ABHV 0 (ft3) 10		

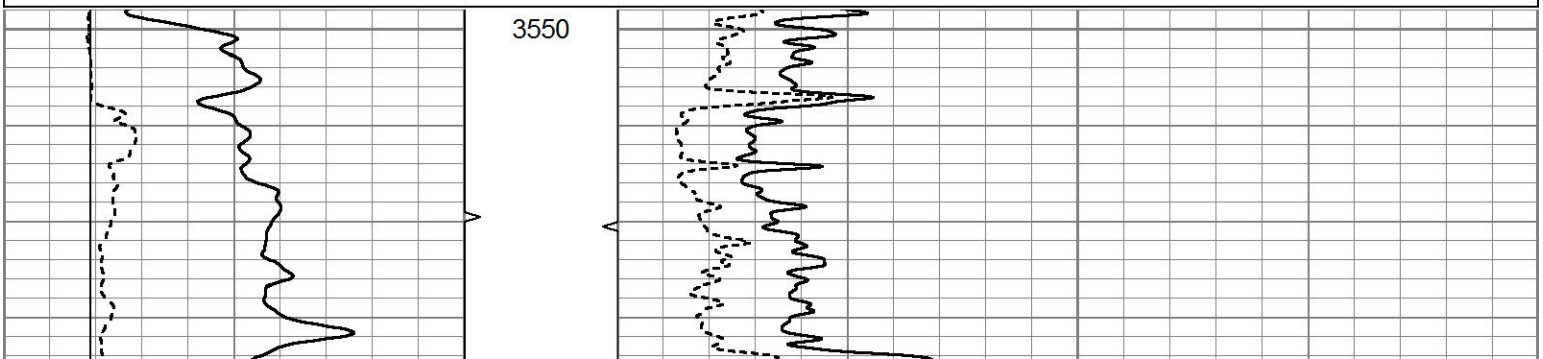

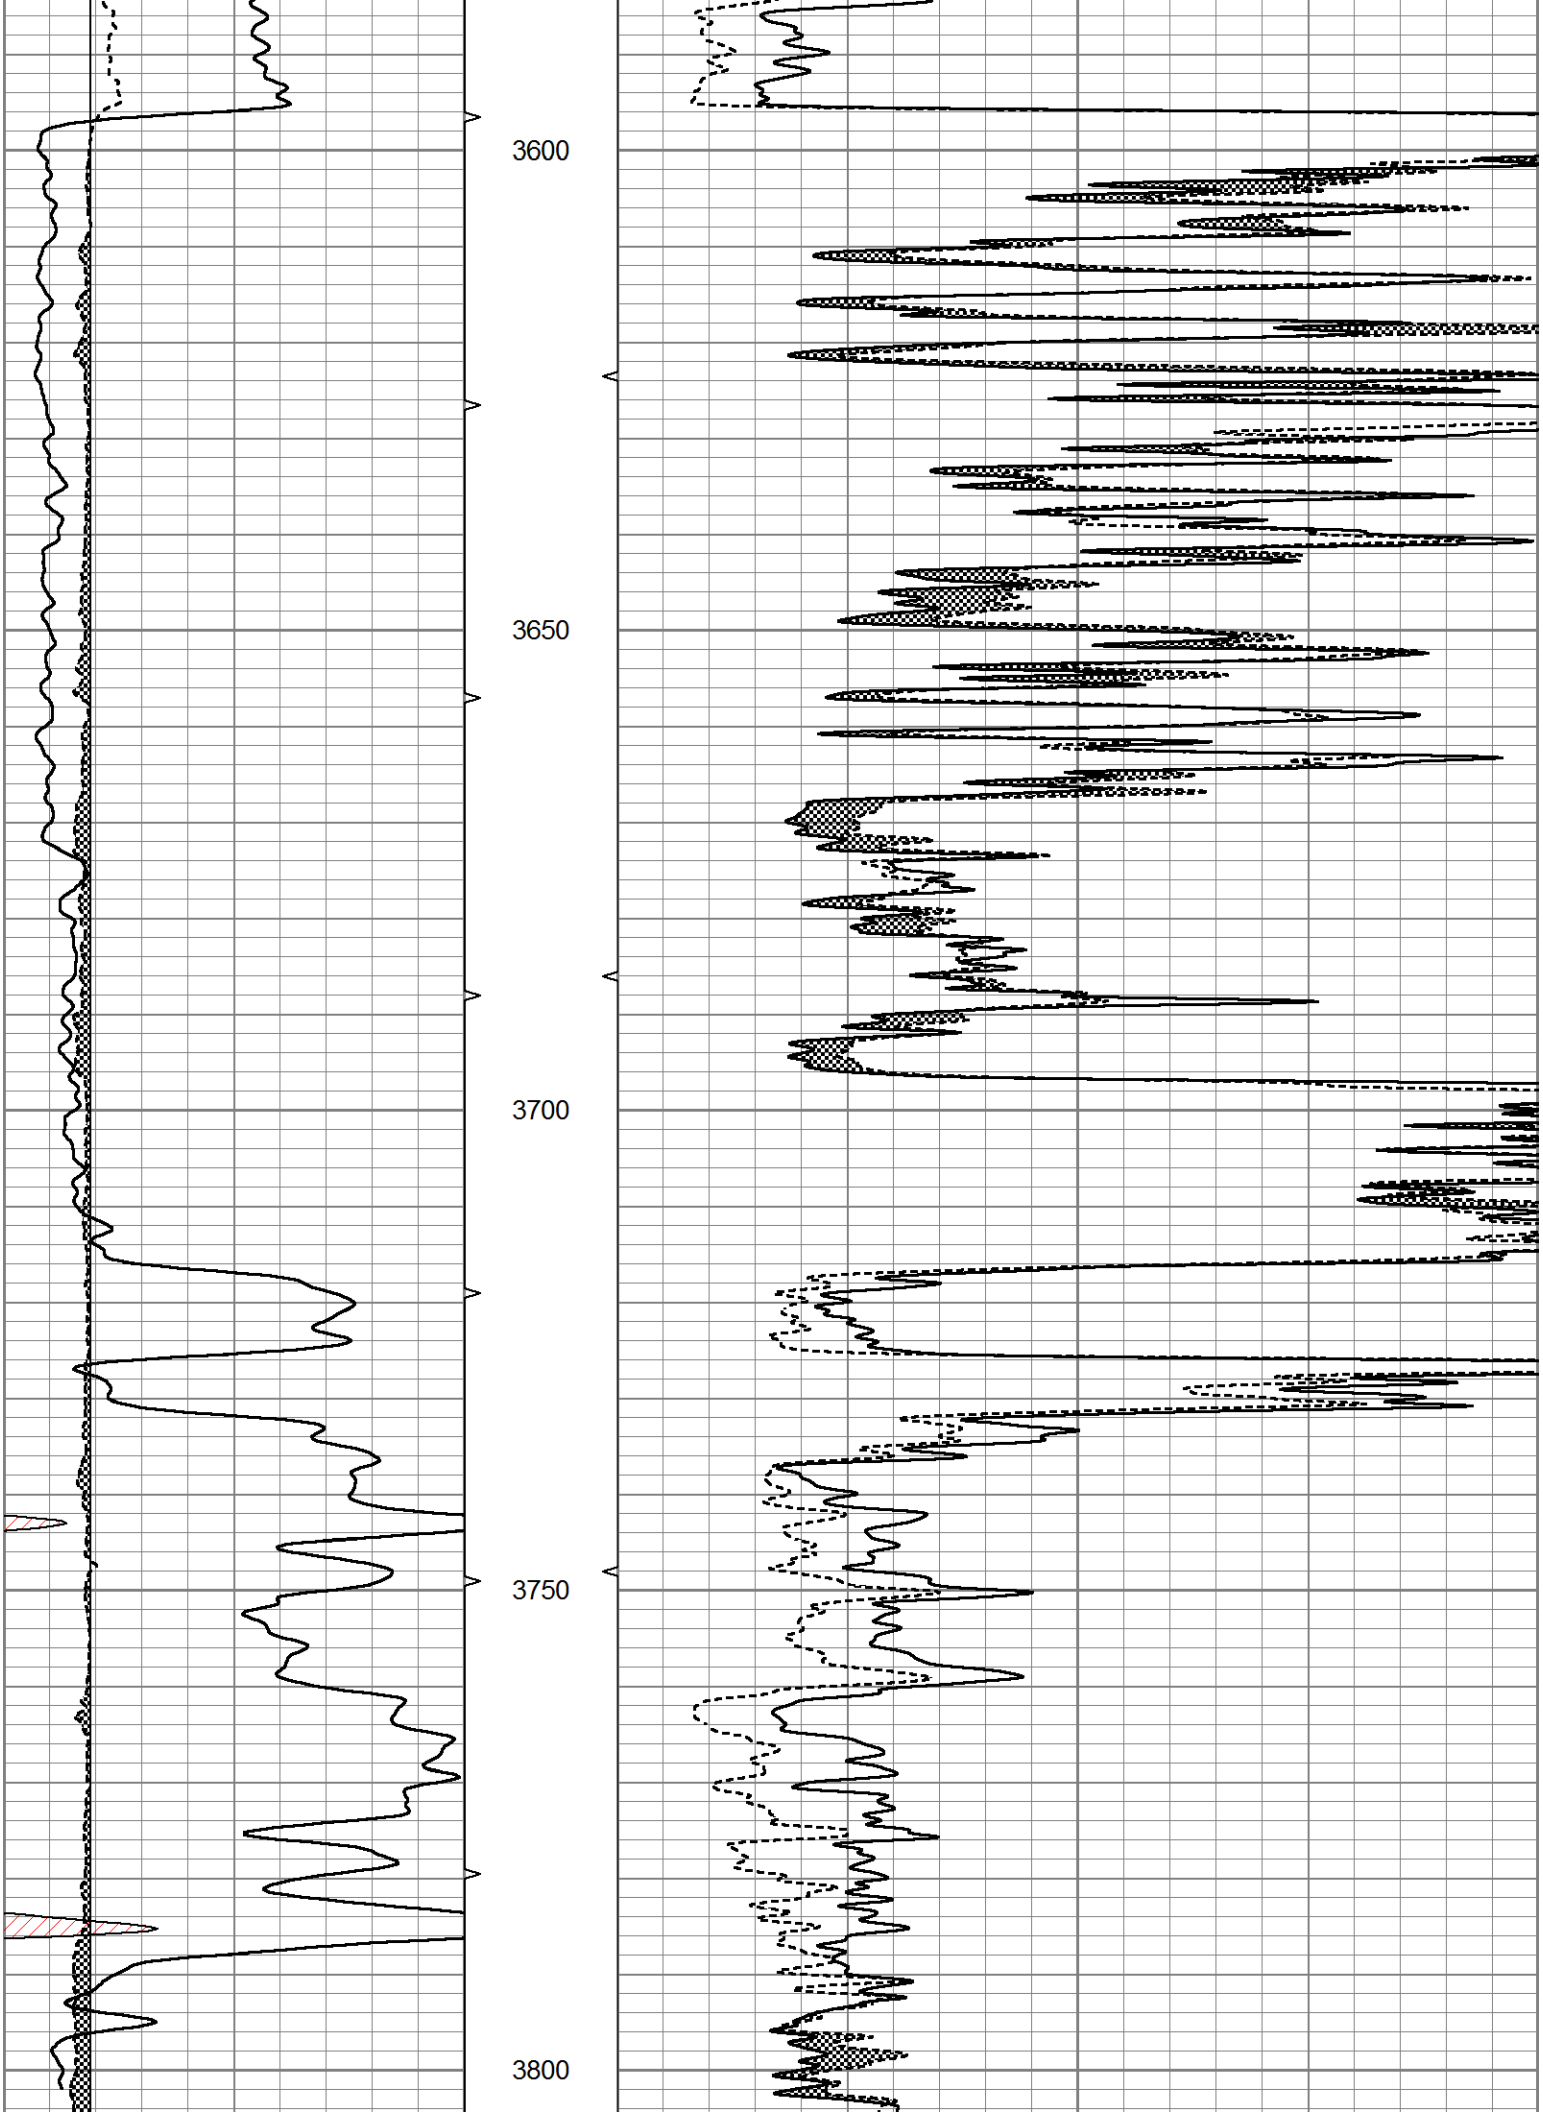
3600
3650
3700
3750
3800

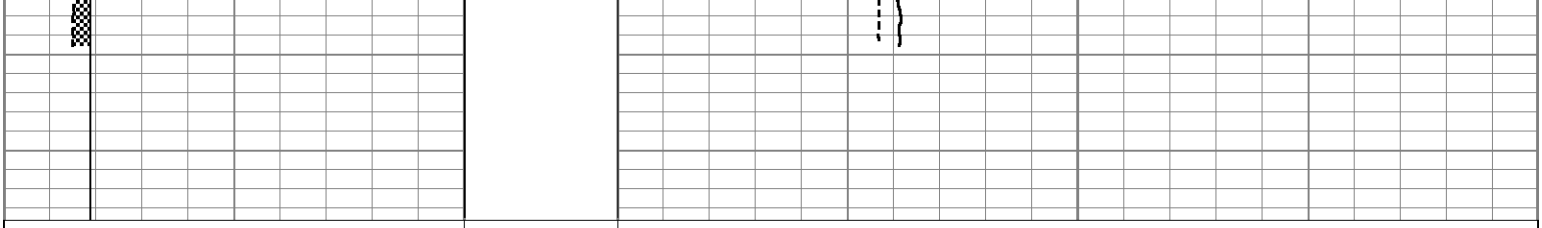

Calibration Report

Database File	6265pe.db
Dataset Pathname	pass6.1
Dataset Creation	Sat Mar 19 08:14:09 2022

MICRO Calibration Report

Serial Number:	070912	
Tool Model:	ProbeN	
Performed:	Sat Mar 12 10:00:44 2022	
Caliper Calibration:	Gain=3.404	Offset=0.681
	Low Cal	High Cal
References	8.000	16.000
Readings	2.150	4.500
1.5" Calibration:	Gain=32.000	Offset=0.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.002	1.239
2" Calibration:	Gain=40.000	Offset=1.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.003	1.075

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	OPEN_GR	
Performed:	Wed Mar 16 17:42:55 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps