


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.,  
245 North Water  
Wichita, KS 67202

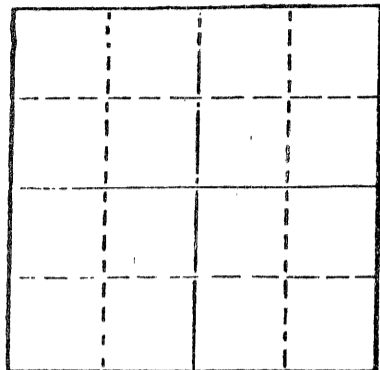

Locate well correctly on above  
Section Plot

Rooks \_\_\_\_\_ County. Sec. 8 Twp. 9 Rge. 18W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines \_\_\_\_\_  
SW/SW/SW  
Lease Owner Frontier Oil Company  
Lease Name Hilgers Well No. 2  
Office Address 1437 Franklin, Russell, KS 67665  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Oil  
Date Well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced September 22 1980  
Plugging completed September 26 1980  
Reason for abandonment of well or producing formation \_\_\_\_\_  
Depleted  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3576'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	285'	None
				4-1/2"	3574'	1807.34'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dump sand to 3394' and 4 sacks cement.  
Shot casing at 2600', 2400', 2200', 2000', 1900', and 1800'.  
Pulled 44 joints 4-1/2" casing.  
Squeezed well with 3 sacks hulls, 10 sacks gel, 70 sacks 50/50 poxmix cement with 6% added gel, 8 sacks gel, 1 sack hulls and 70 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
10/1/80  
OCT - 1 1980

CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet.)  
Name of Plugging Contractor Rockhold Engineering, Inc. Wichita, Kansas

STATE OF Kansas COUNTY OF Barton, ss.  
James W. Rockhold (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold  
James W. Rockhold, Box 698, Great Bend, KS  
(Address) 67530

SUBSCRIBED AND SWORN TO before me this 30th day of September, 1980

Ruth G. Sloan  
Notary Public.

My commission expires September 27, 1981