



MICRO LOG

Company PALOMINO PETROLEUM, INC.

Well GOLDENEYE #1

Field WILDCAT

County NESS State KANSAS

Location: API #: 15-135-26117-0000

1198' FNL & 897' FWL

Other Services
CDL/CNL
DIL

SEC 14 TWP 19S RGE 25W

Elevation

Permanent Datum GROUND LEVEL Elevation 2396
Log Measured From KELLY BUSHING 5' A.G.L.
Drilling Measured From KELLY BUSHING

K.B. 2401
D.F. 2399
G.L. 2396

Date 8/25/21

Run Number TWO

Depth Driller 4560

Depth Logger 4560

Bottom Logged Interval 4558

Top Log Interval 3500

Casing Driller 8 5/8" @ 218

Casing Logger 218

Bit Size 7 7/8

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.3/59

pH / Fluid Loss 10.5/6.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .95 @ 82F

Rmf @ Meas. Temp .71 @ 82F

Rmc @ Meas. Temp 1.14 @ 82F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .64 @ 121F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom

Maximum Recorded Temperature 121F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By JASON CAPPELLUCCI

Witnessed By RYAN SEIB

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
NESS CITY, KS. - WEST TO LAIRD ELEVATOR - 1 WEST TO J RD. - 3 SOUTH - EAST INTO




MAIN SECTION

Database File	5645ddn.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Wed Aug 25 03:45:07 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

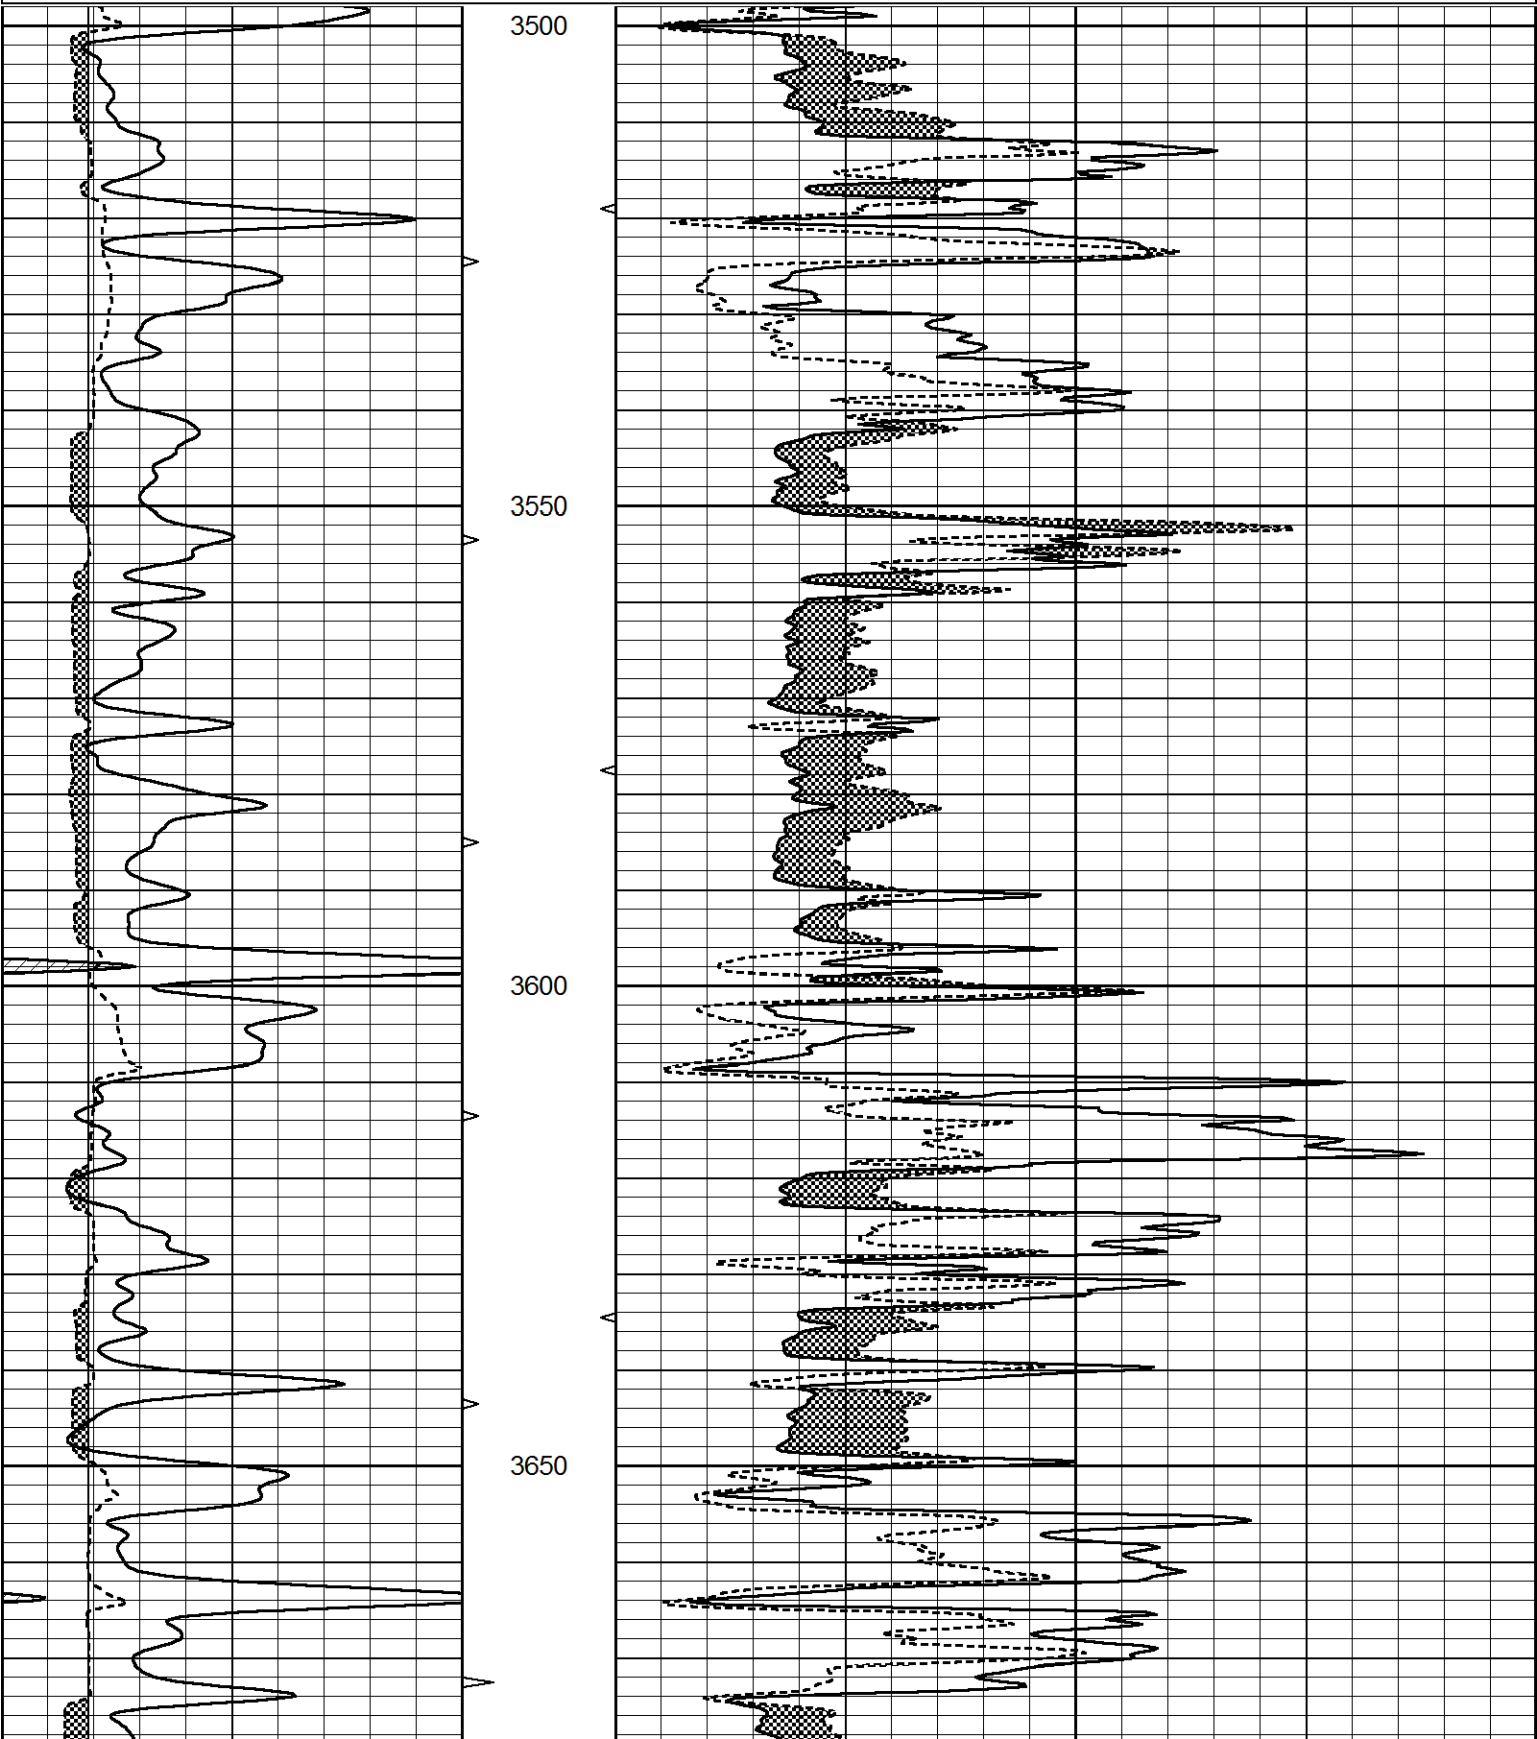

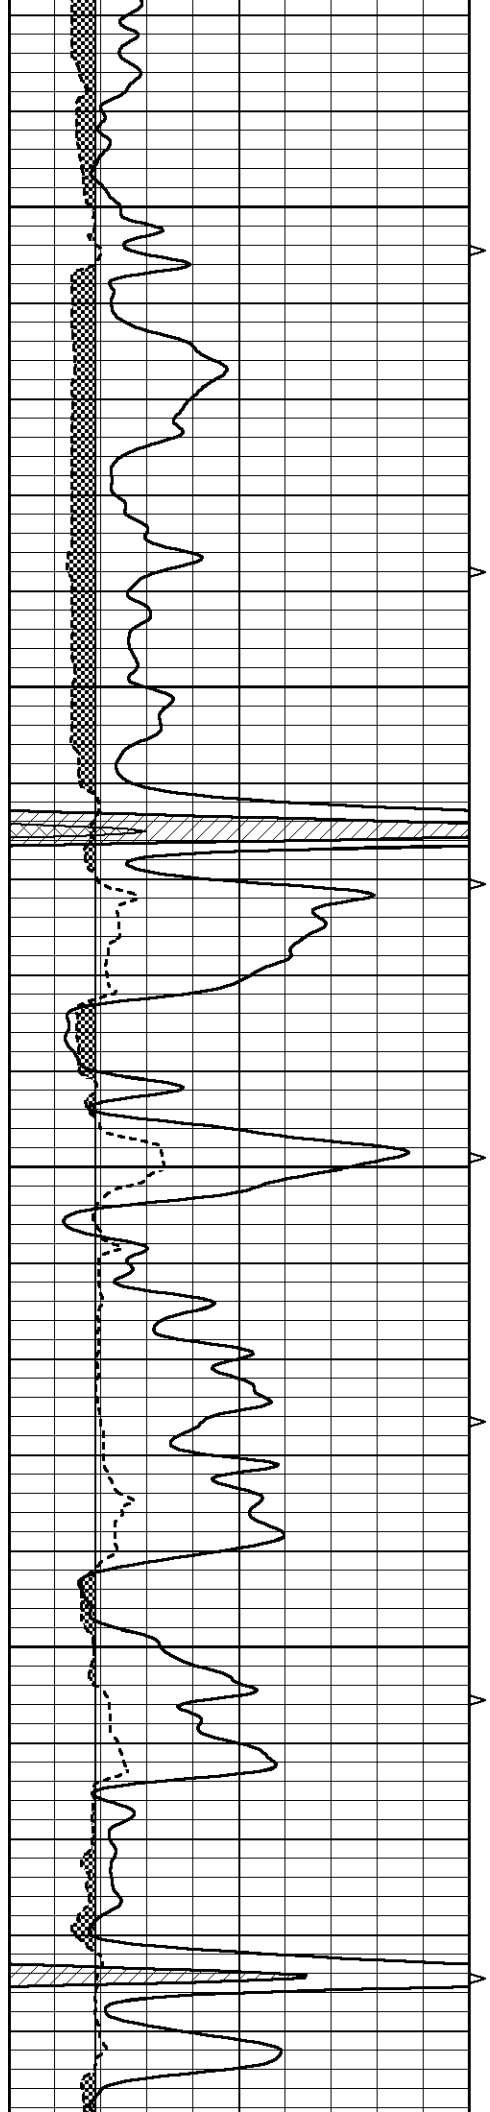



3700

3750

3800

3850

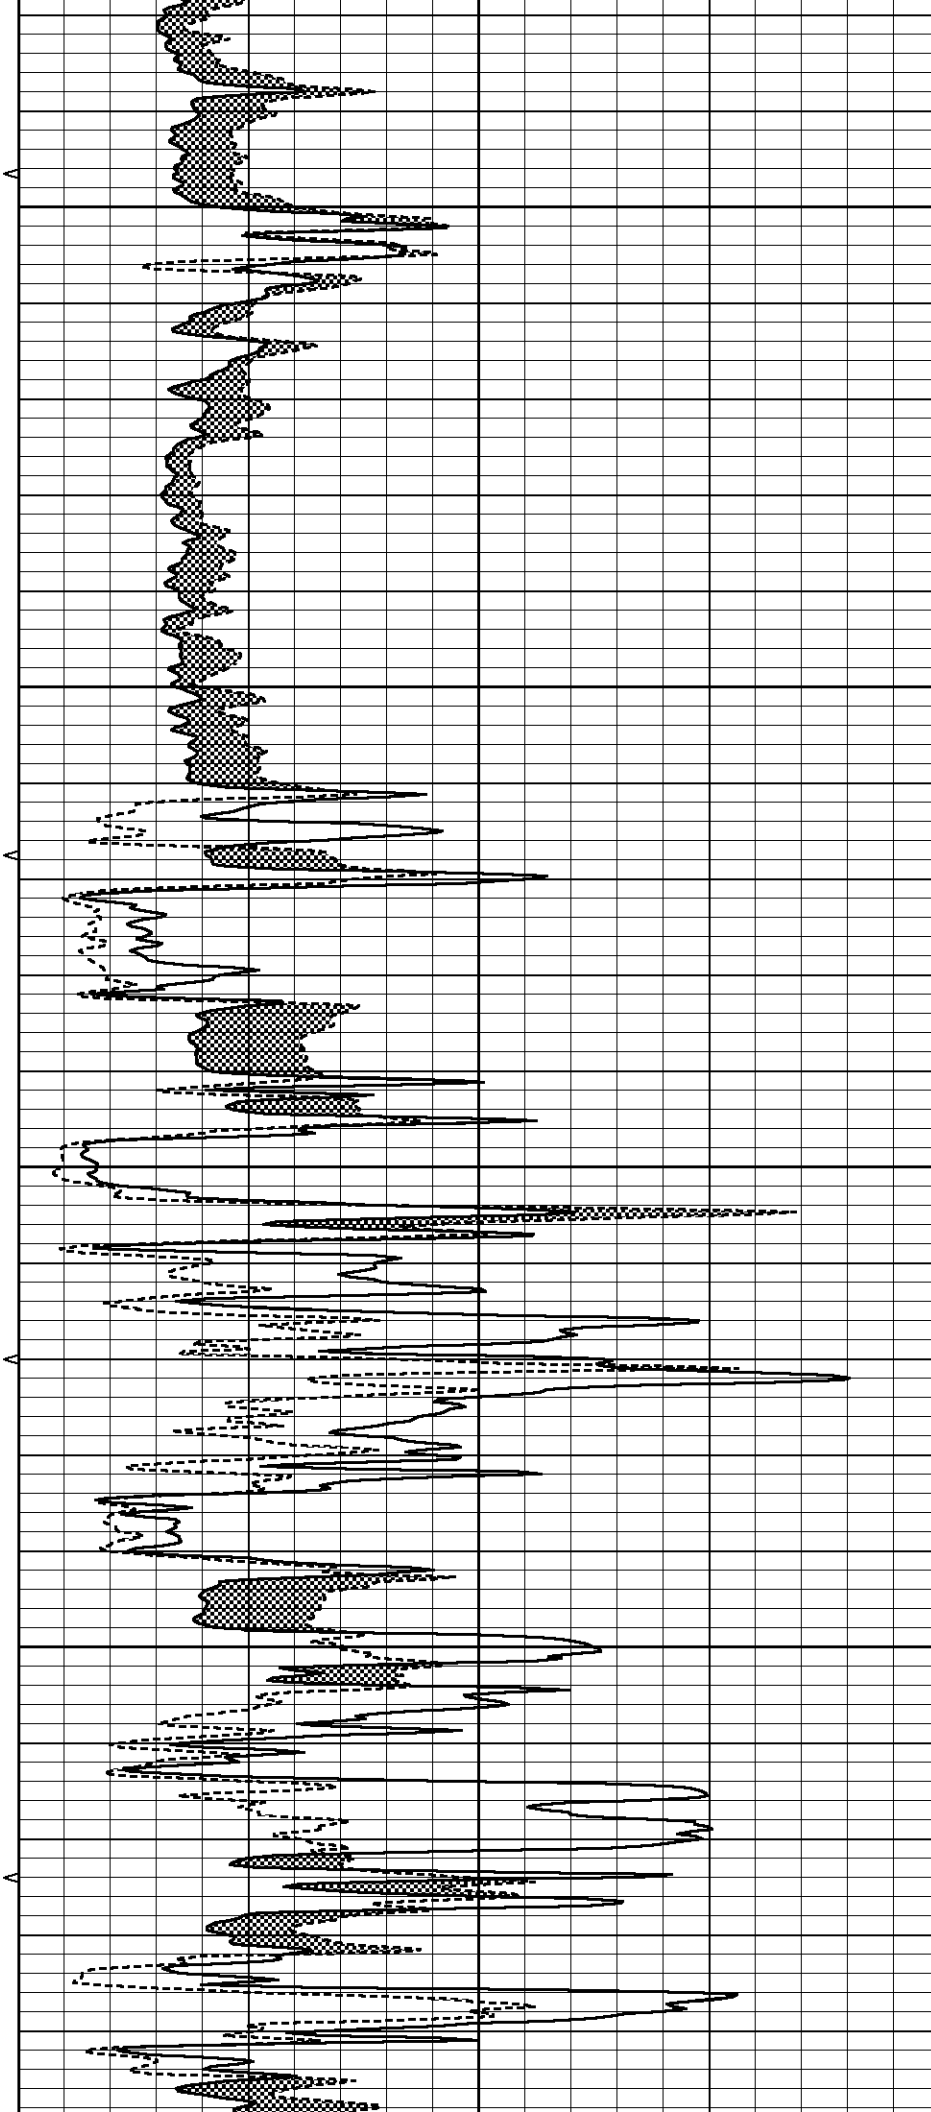

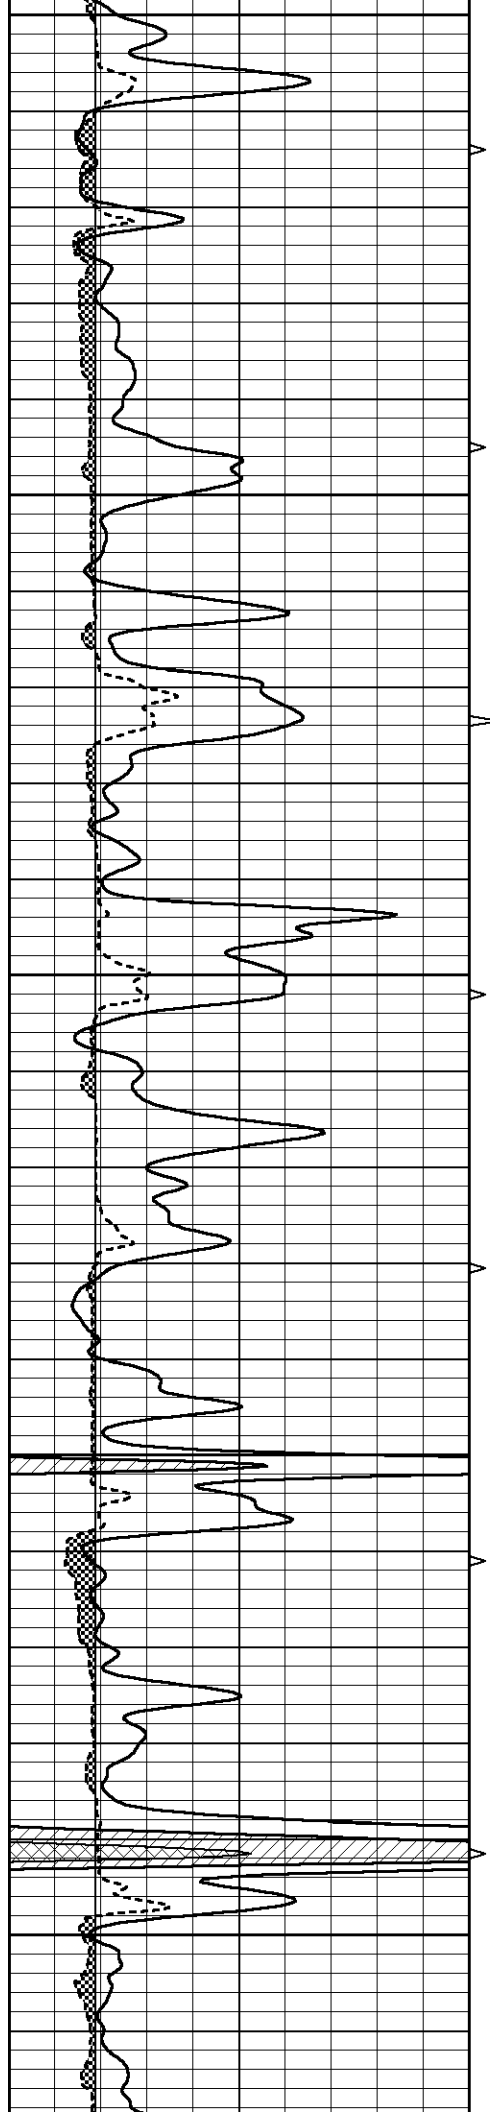


3900


3950

4000

4050

4100

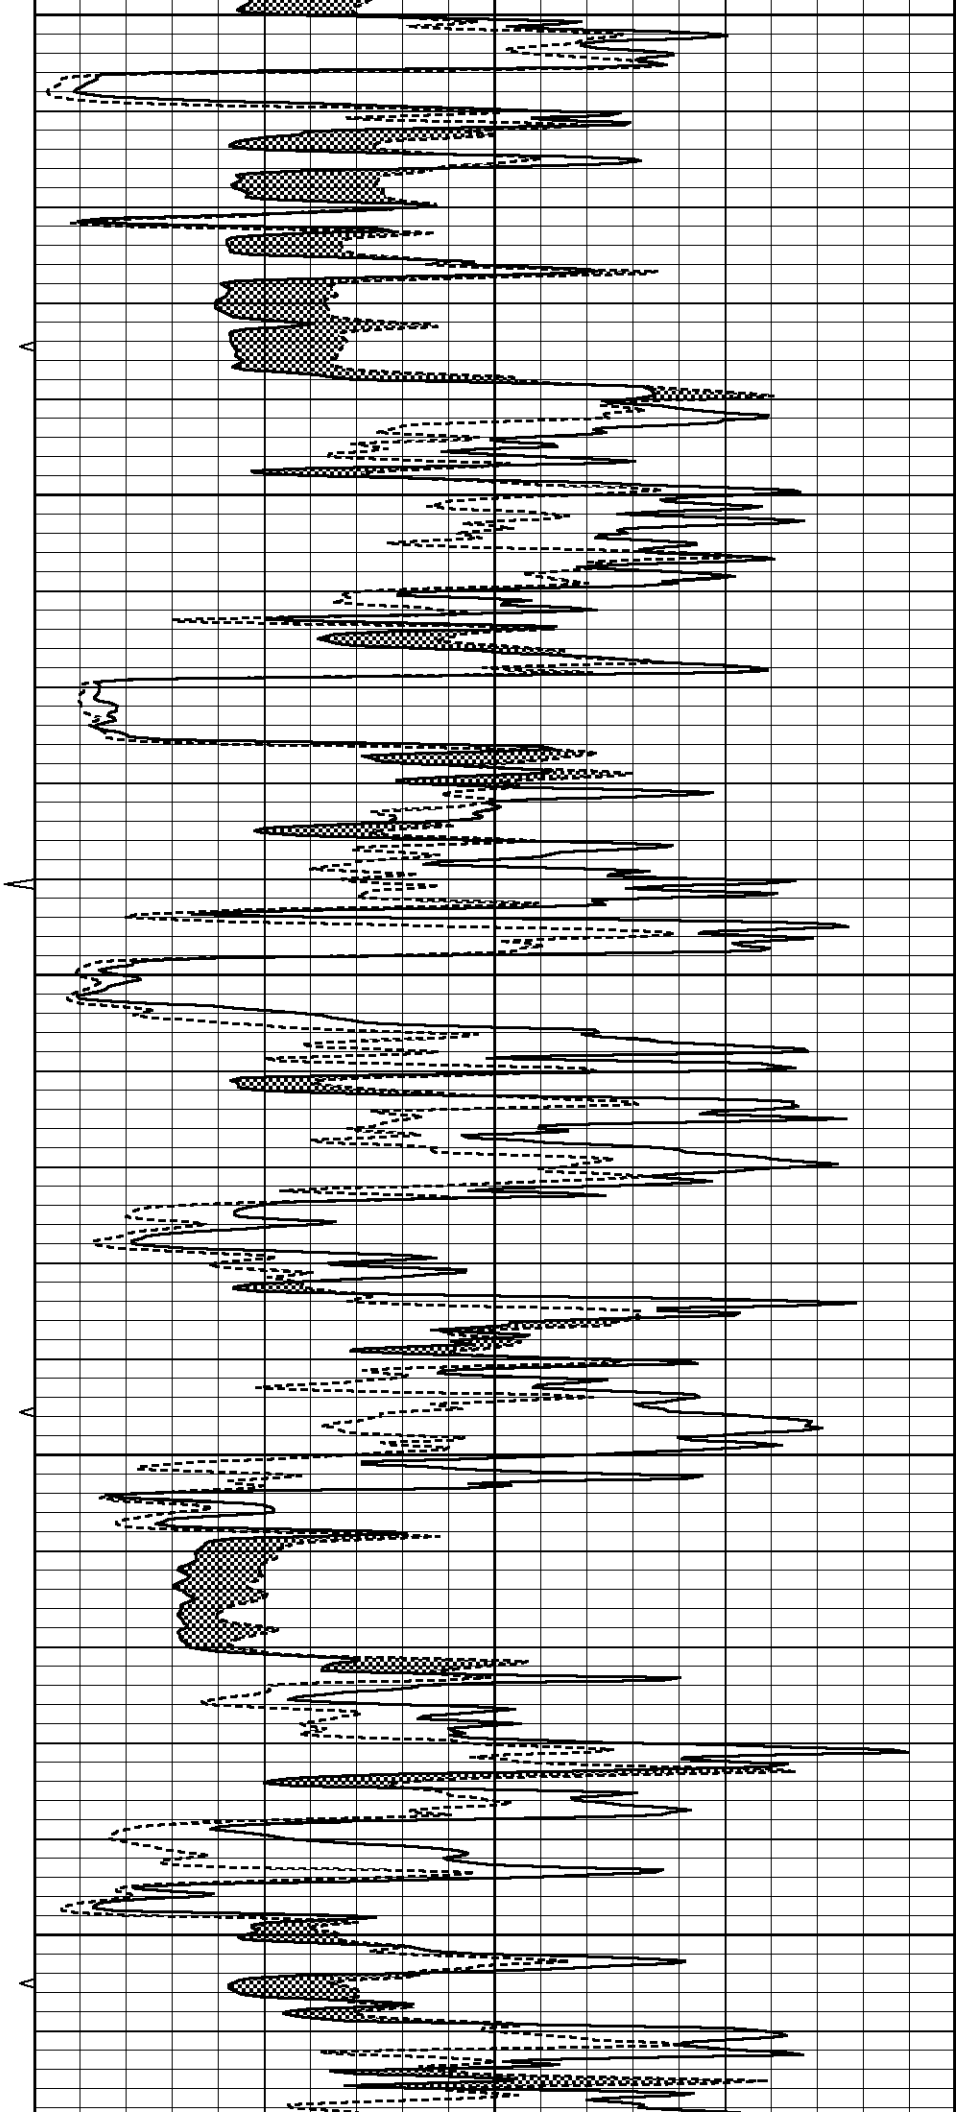

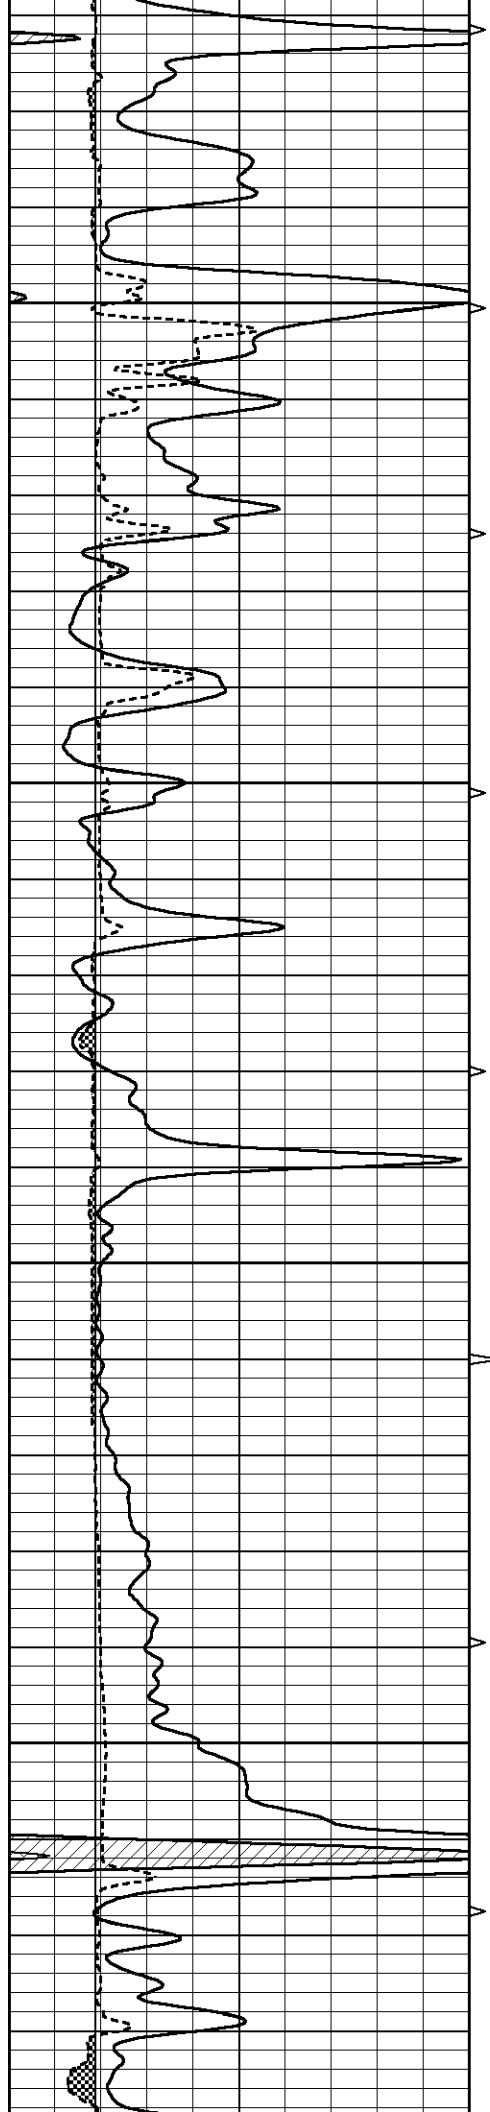



4150

4200

4250

4300

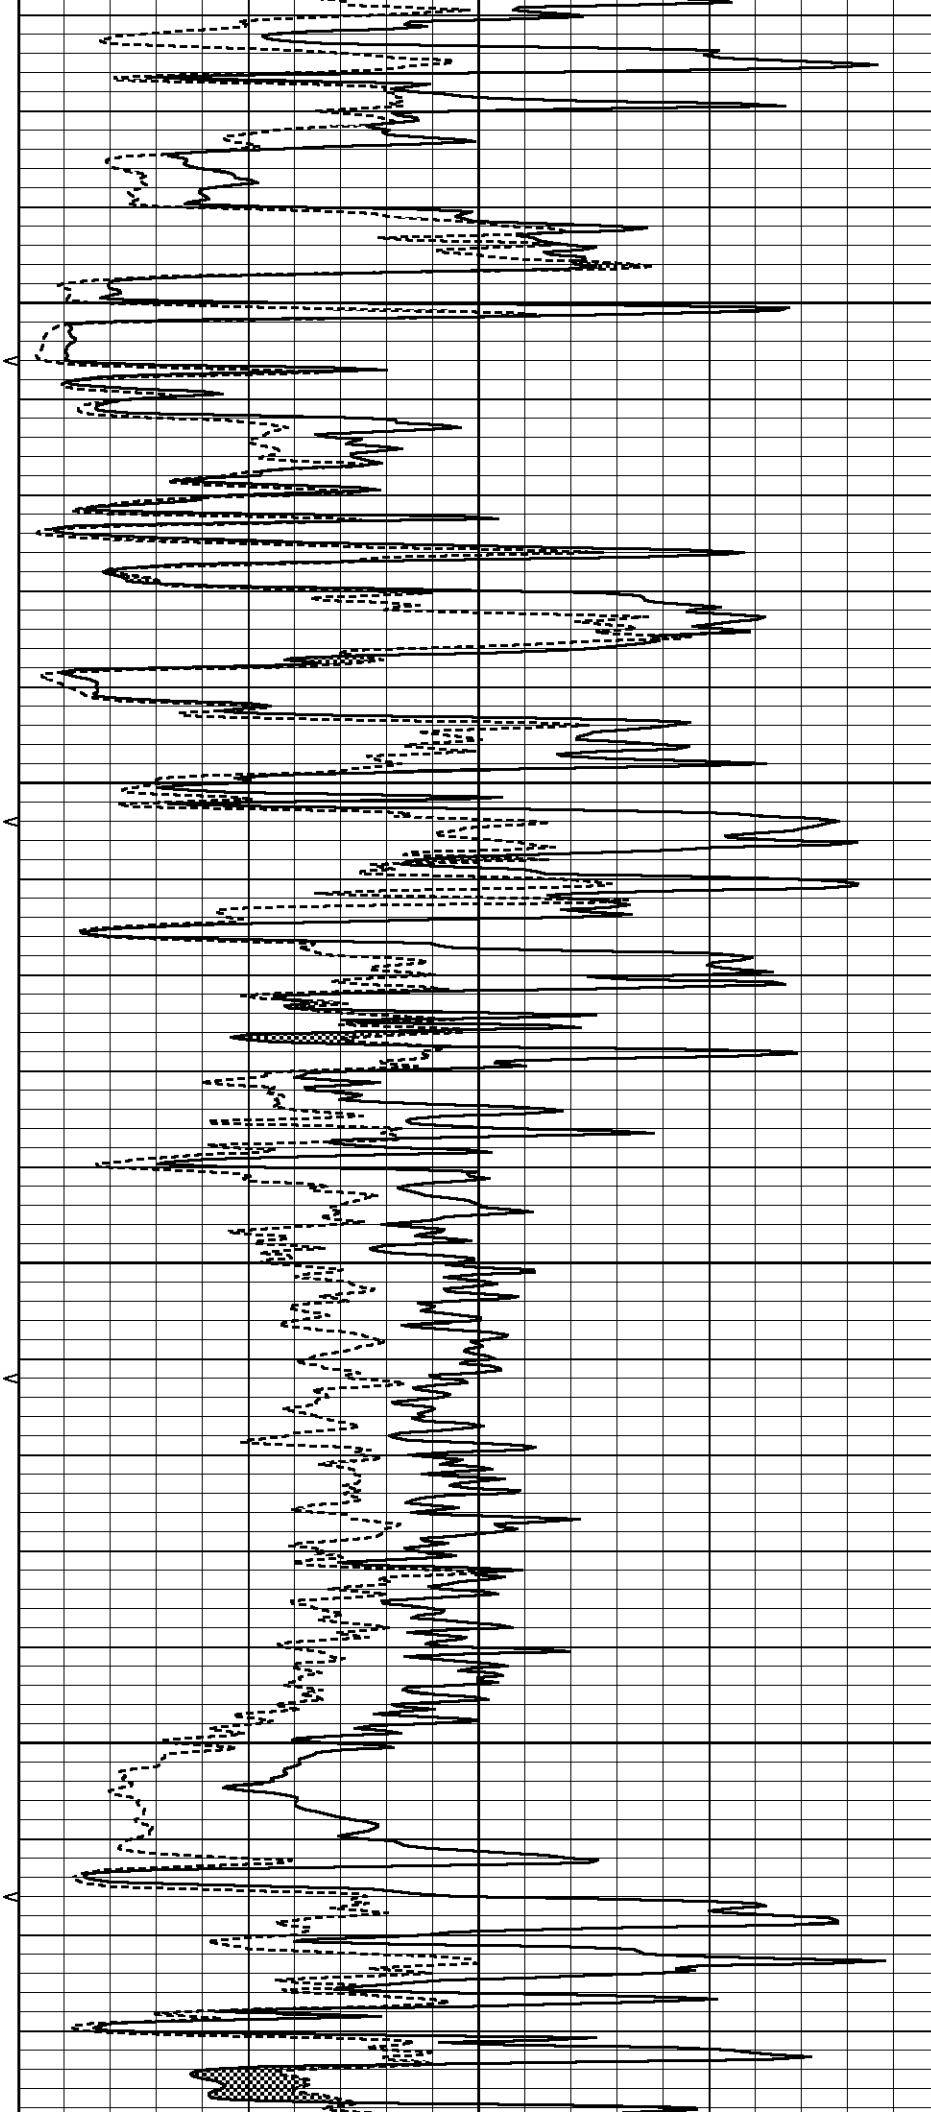

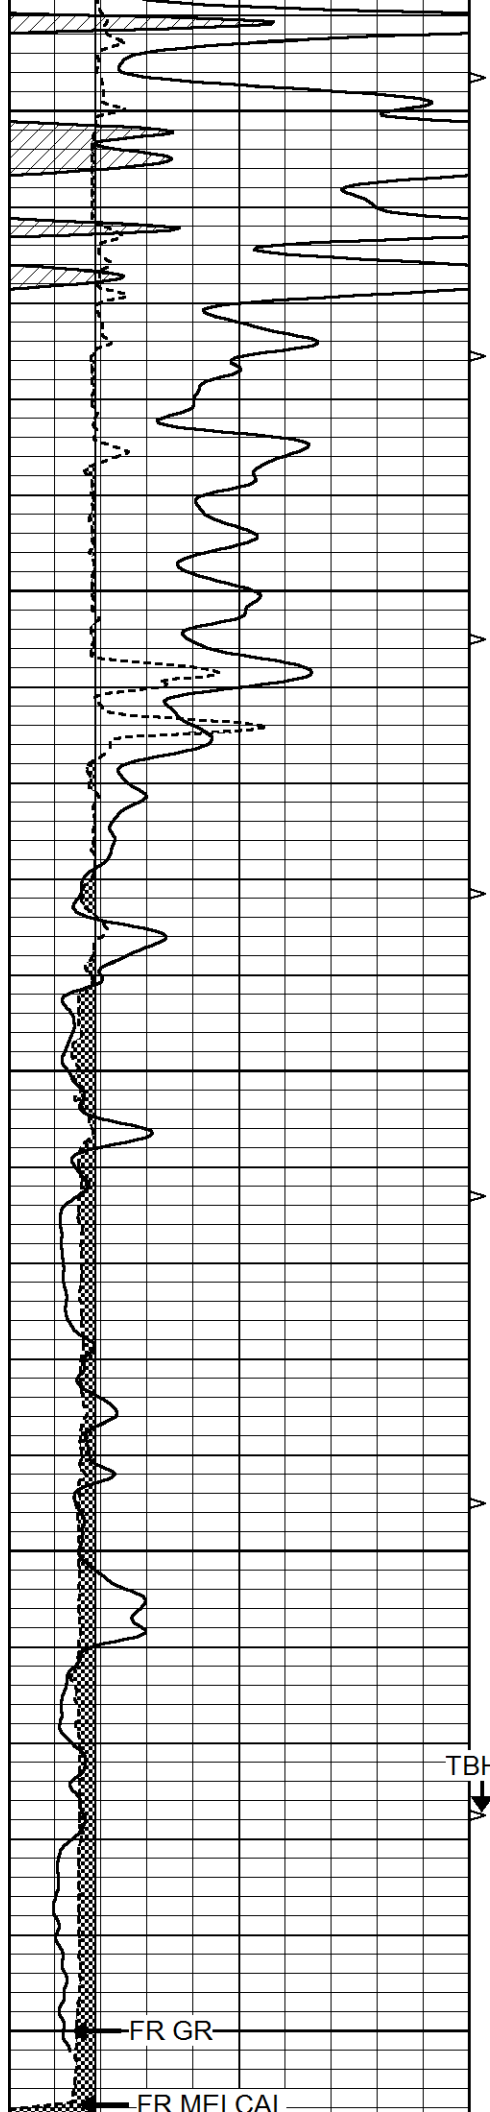

4350

4400

4450

4500


4550

TBHV

FR GR

FR MFL CAL

5.5" CSG
ABHV

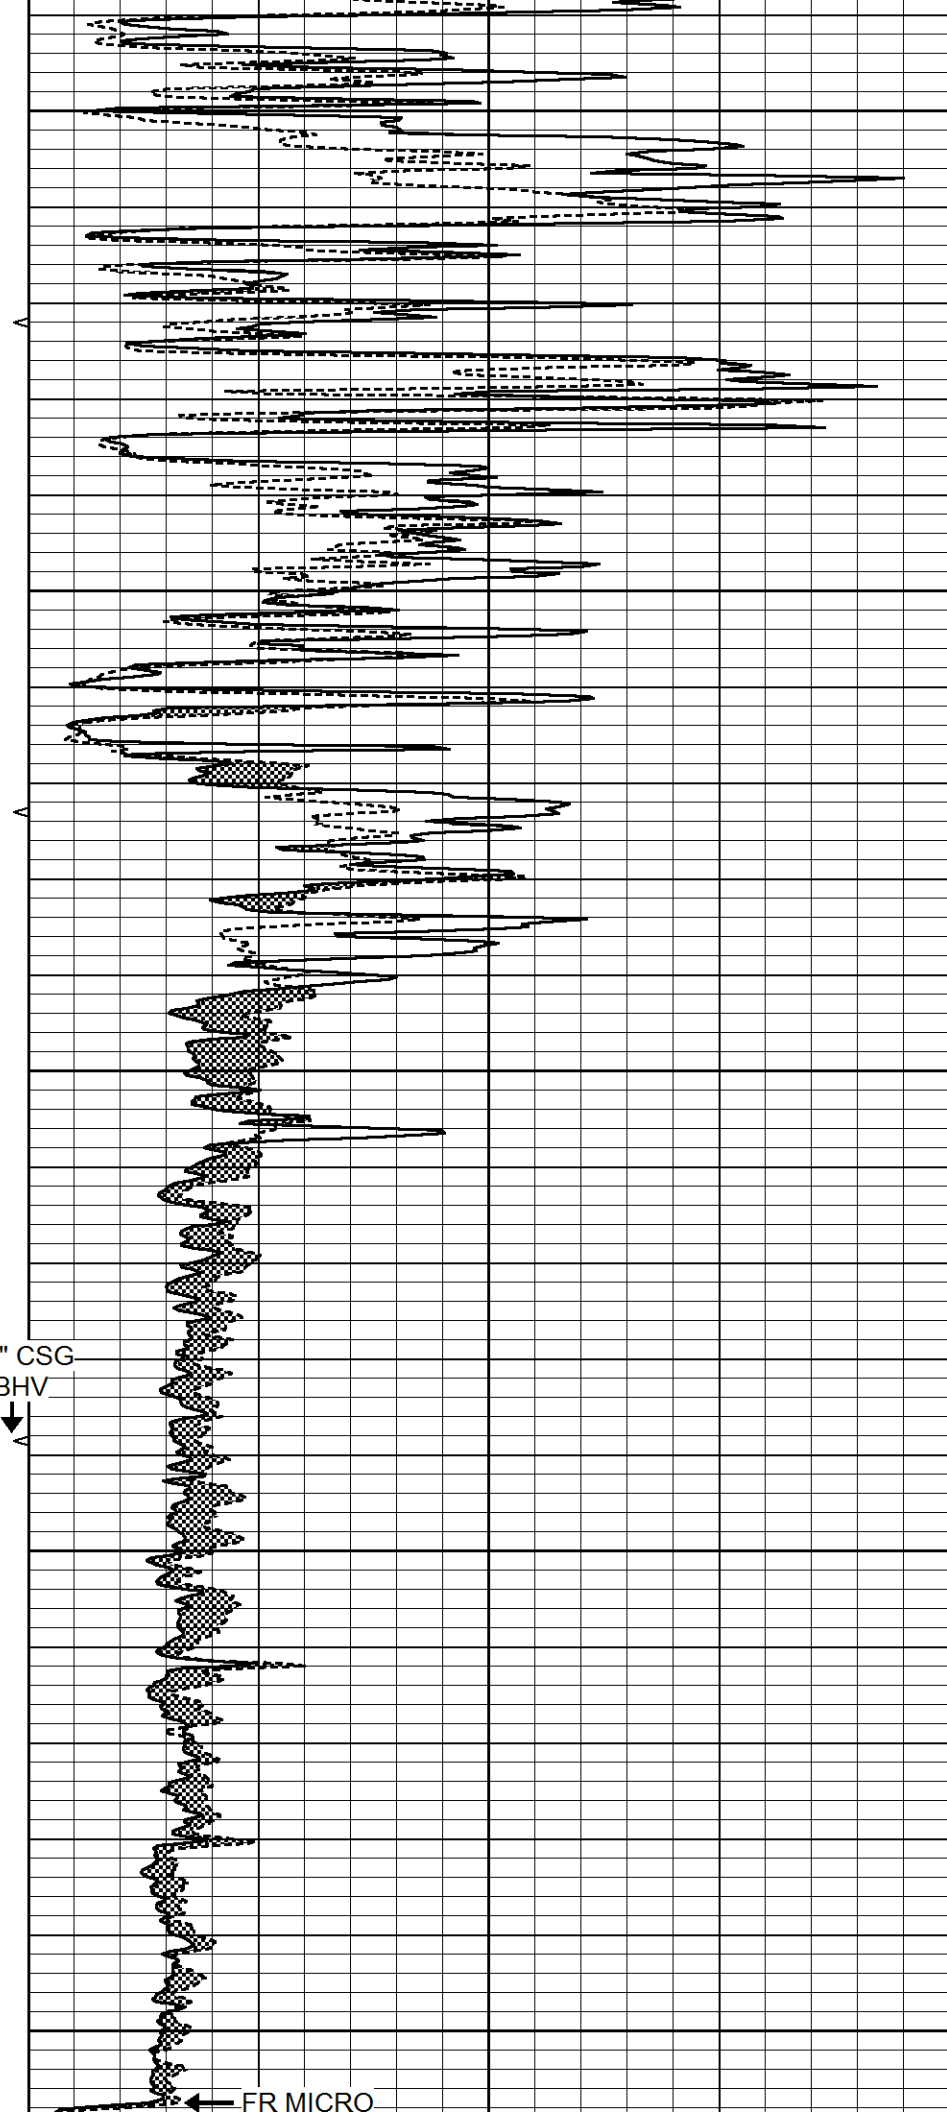

FR MICRO


				LTD 4560																			
0	GAMMA RAY (GAPI)			150	ABHV	0	MEL1.5 (Ohm-m)															40	
6	CALIPER (in)			16	10 (ft3)	0	0	MEL2.0 (Ohm-m)															40
					TBHV																		
					0 (ft3)	10																	




REPEAT SECTION

Database File	5645ddn.db
Dataset Pathname	pass5.1
Presentation Format	_micro
Dataset Creation	Wed Aug 25 03:43:56 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

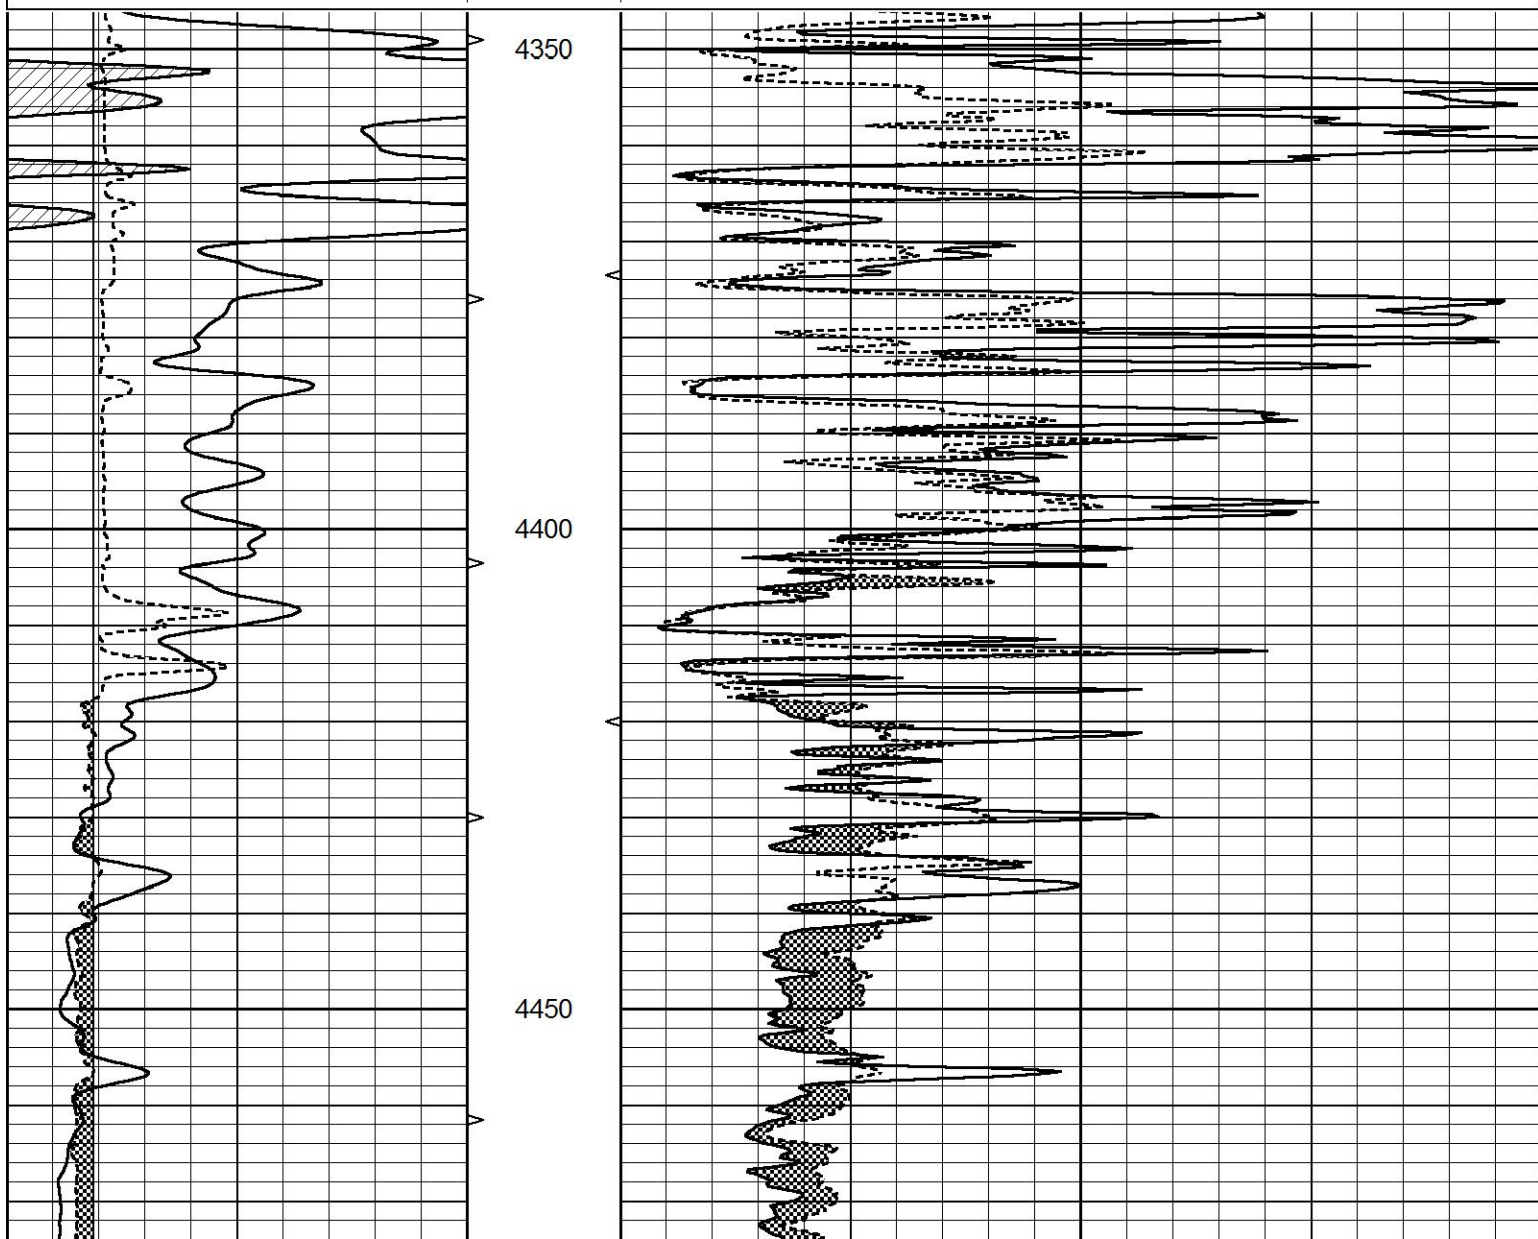

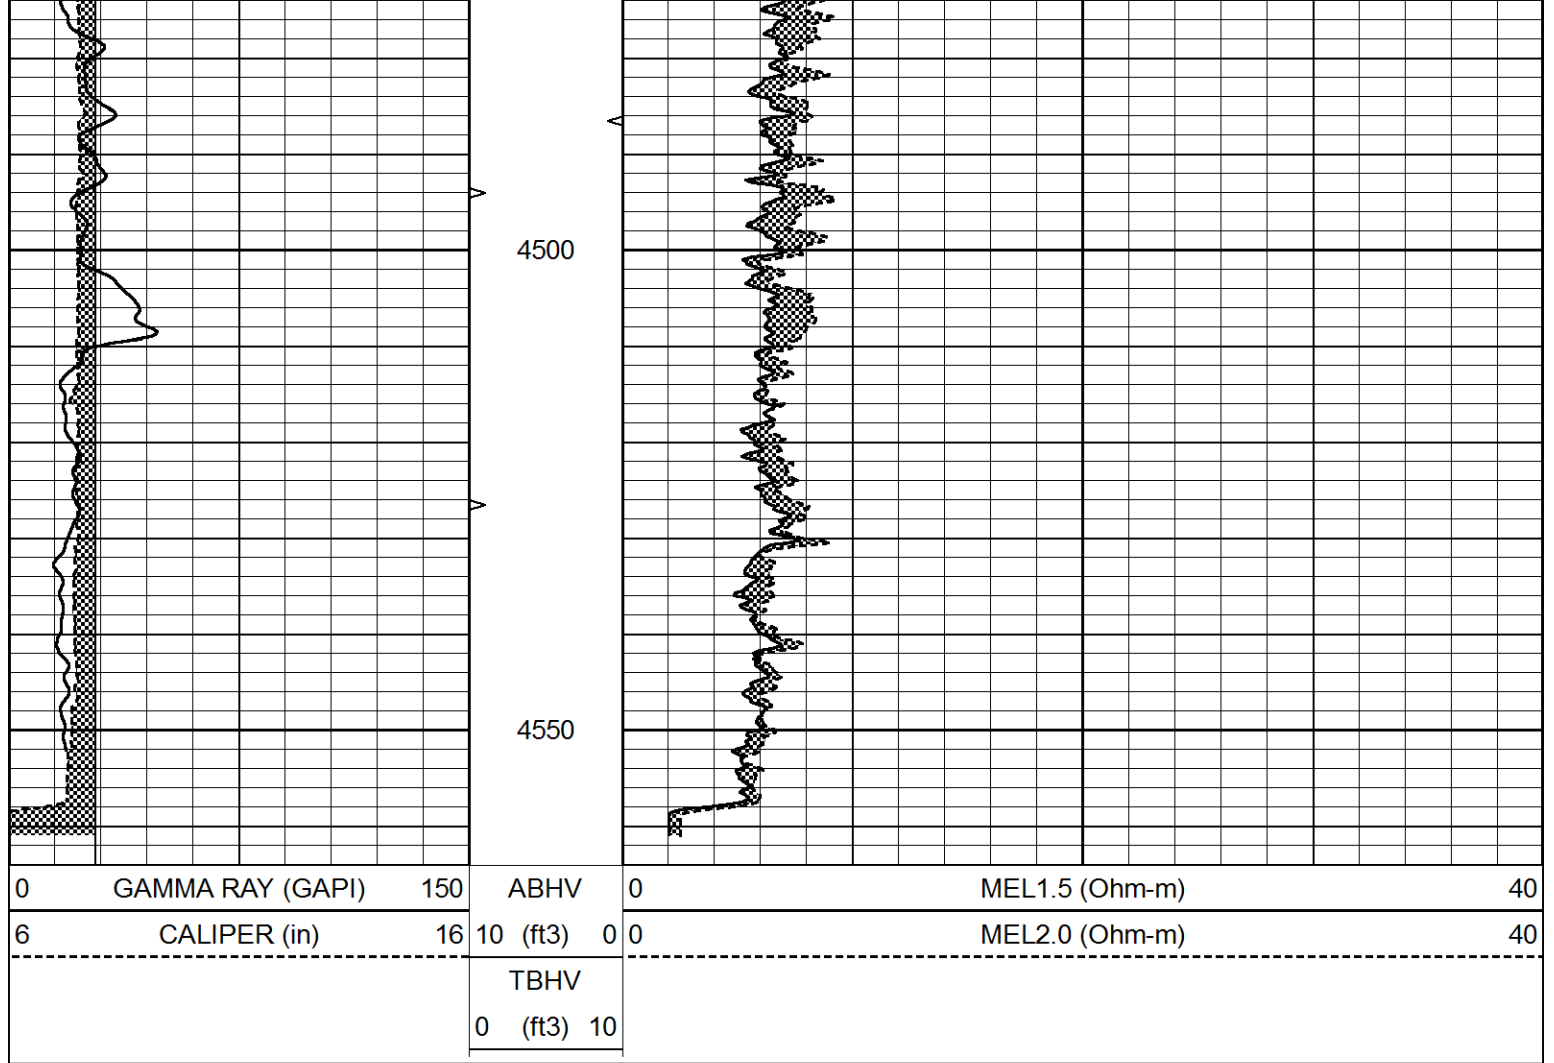

Calibration Report			
Database File	5645ddn.db		
Dataset Pathname	pass6.1		
Dataset Creation	Wed Aug 25 03:45:07 2021		
MICRO_USR Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeL		
Performed:	Thu Jun 10 10:36:57 2021		
Caliper Calibration:	Gain=7.192	Offset=3.002	
	Low Cal	High Cal	
References	8.000	14.000	
Readings	0.723	1.557	
1.5" Calibration:	Gain=50.000	Offset=-0.567	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.004	1.335	
2" Calibration:	Gain=75.000	Offset=-2.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.004	1.029	
Microlog Calibration Report			
Serial-Model:	070910-ProbeL		

Performed: (Not Performed)

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558
Tool Model:	Probe1
Performed:	Fri Oct 30 21:32:56 2020
Calibrator Value:	1.0 GAPI
Background Reading:	0.0 cps
Calibrator Reading:	1.0 cps
Sensitivity:	0.2700 GAPI/cps