

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-19018-00-02
Spot: SWNENW Sec/Twnshp/Rge: 6-27S-12W
4290 feet from S Section Line, 3670 feet from E Section Line
Lease Name: MCFADDEN C Well #: 9
County: PRATT Total Vertical Depth: 4288 feet

Operator License No.: 31980
Op Name: LOTUS OPERATING COMPANY, L.L.C.
Address: 100 S. MAIN, STE 420
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4286	1630	WITH 190 SX CMT
SURF	8.625	430		WITH 425 SX CMT

\$139.30

Well Type: EOR UIC Docket No: E24268.1 Date/Time to Plug: 02/01/2007 10:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: AL BALMARO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: RUN TUBING TO 3600' & SPOT 25 SX CMT. PLUG AT 750' WITH 10 SX GEL & 50 SX CMT. PLUG AT 460' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: JERRY W. STAPLETON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/01/2007 11:00 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

UNABLE TO GET BAILER THROUGH TIGHT SPOT IN 4 1/2" CASING AT 1650'. RUN 1" TUBING INTO 3600' & SPOTTED 25 SX CMT. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 750' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 460' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.


Perfs:

Top	Bot	Thru	Comments
3991	3994		
3906	3910		
3870	3873		

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND.

Plugged through: CSG

District: 01

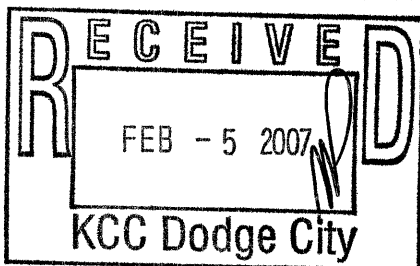

Signed

Stephen J. Pfeifer
(TECHNICIAN)

RECEIVED

FEB 12 2007

KCC WICHITA

Form 01-3

RET