



MICRO LOG

Company RL INVESTMENT, LLC
Well PRATT 'A' #6-35
Field HOXIE WEST
County SHERIDAN State KANSAS

Location: API #: 15-179-21483-0000
2305' FNL & 1048' FWL
E/2-SE-SW-NW
SEC 35 TWP 8S RGE 29W
Permanent Datum GROUND LEVEL Elevation 2818
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
CNL/CDL
DIL
Elevation
K.B. 2825
D.F. 2823
G.L. 2818


Date	4/1/22		
Run Number	TWO		
Depth Driller	4435		
Depth Logger	4435		
Bottom Logged Interval	4433		
Top Log Interval	3400		
Casing Driller	8 5/8" @266		
Casing Logger	266		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 1500 PPM	
Density / Viscosity	9.5/58		
pH / Fluid Loss	10.5/1.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.4@60F		
Rmf @ Meas. Temp	1.05@60F		
Rmc @ Meas. Temp	1.88@60F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.65@120F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	120F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	TJ DREILING		
Witnessed By	RICHARD BELL		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
-HOXIE KANSAS, - 3 MILES SOUTH TO RD. 30, - 5 MILES WEST TO RD. 50,
-1/2 MILE SOUTH, - EAST INTO


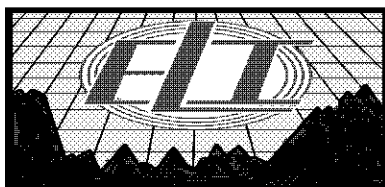



MAIN SECTION

Database File	6381ddn.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Sat Apr 02 01:44:46 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

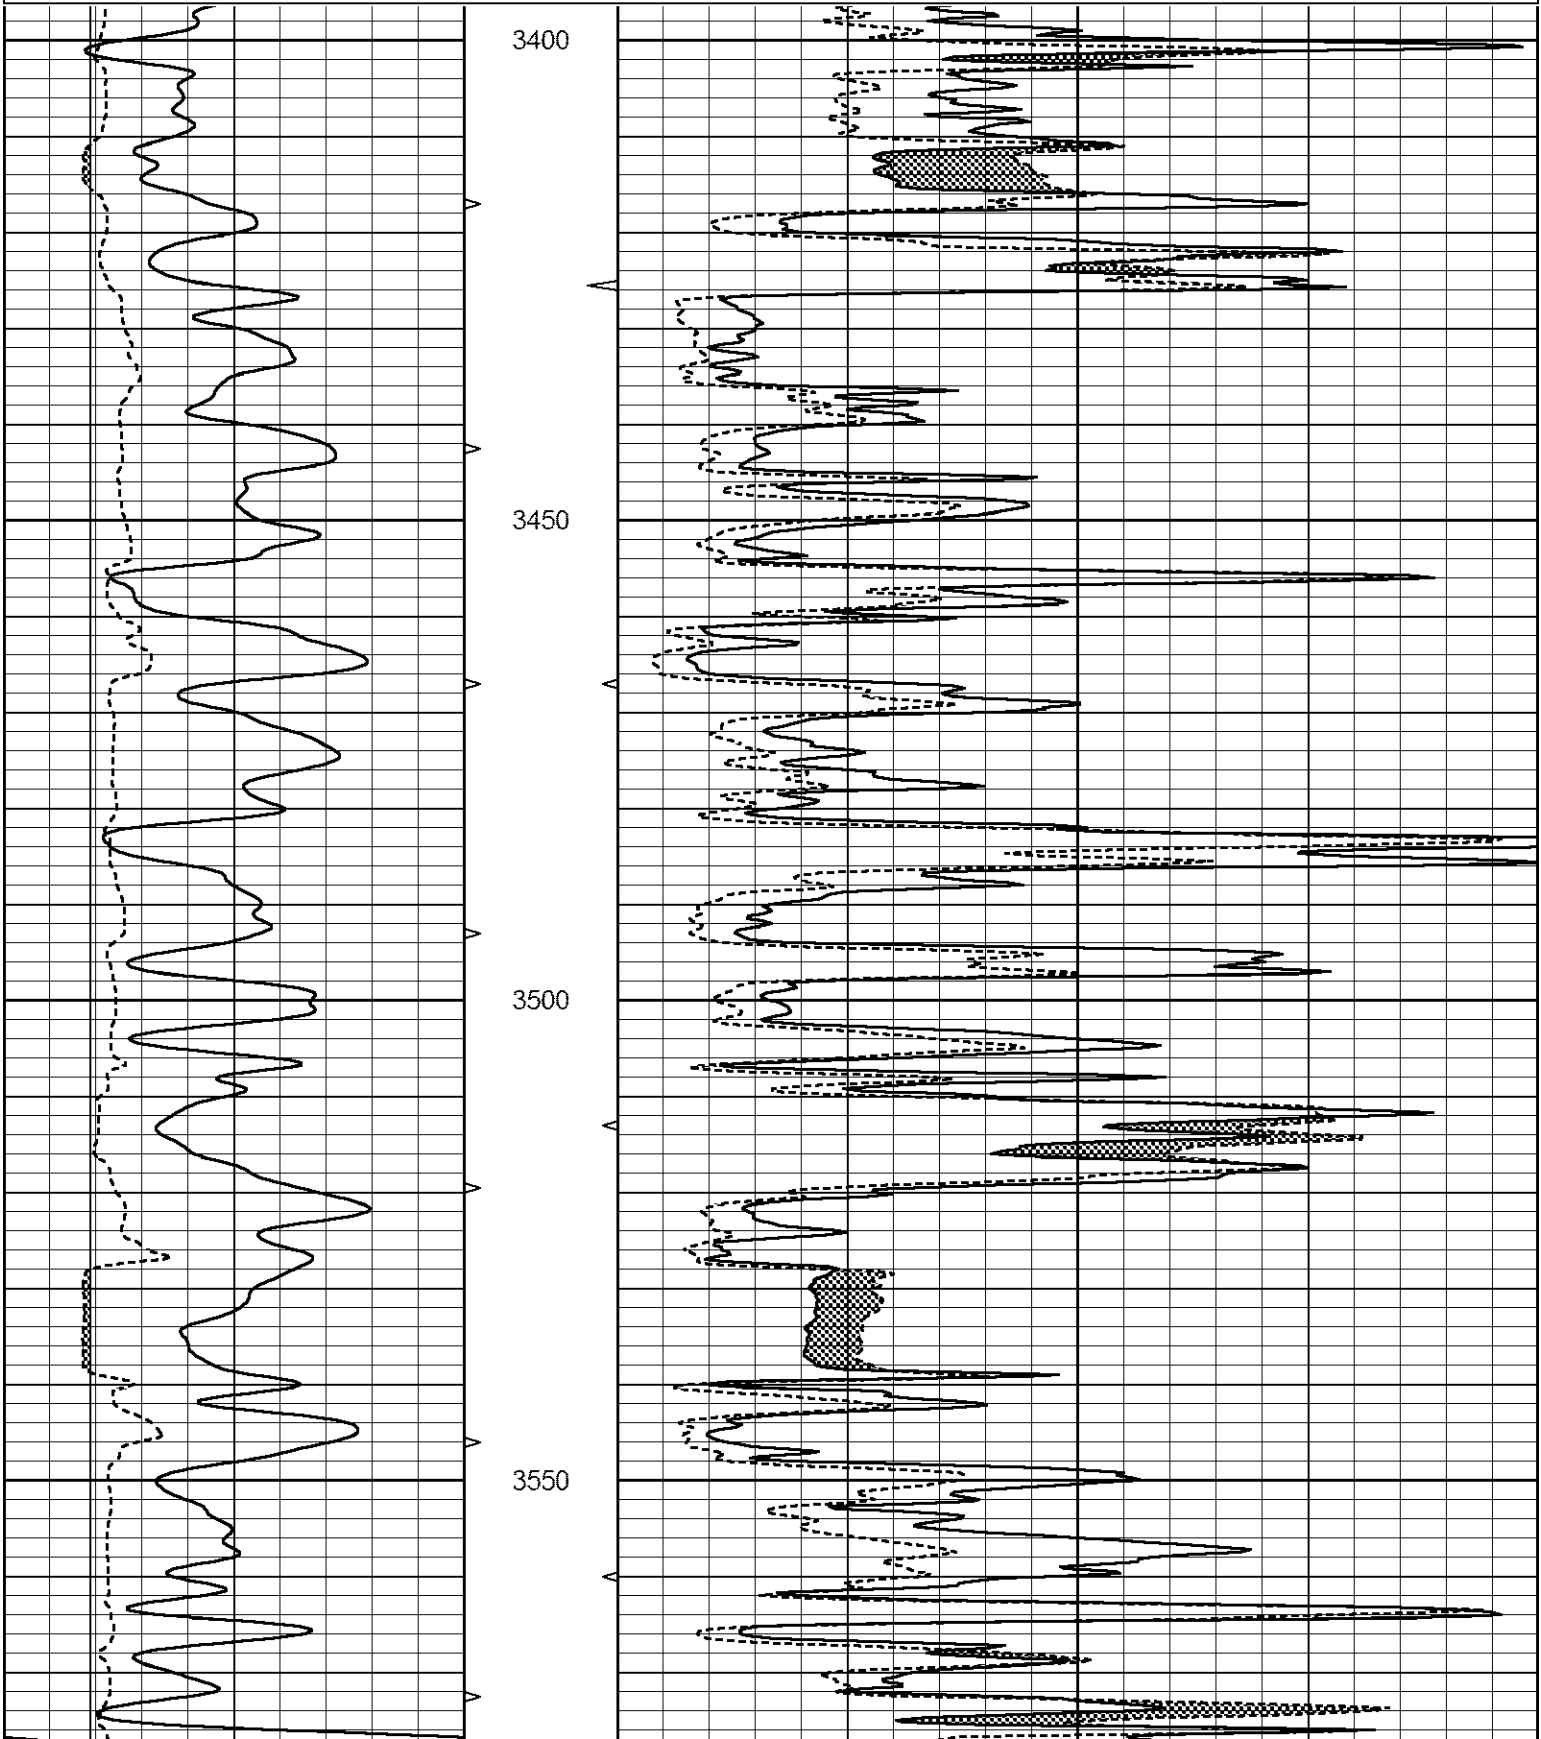

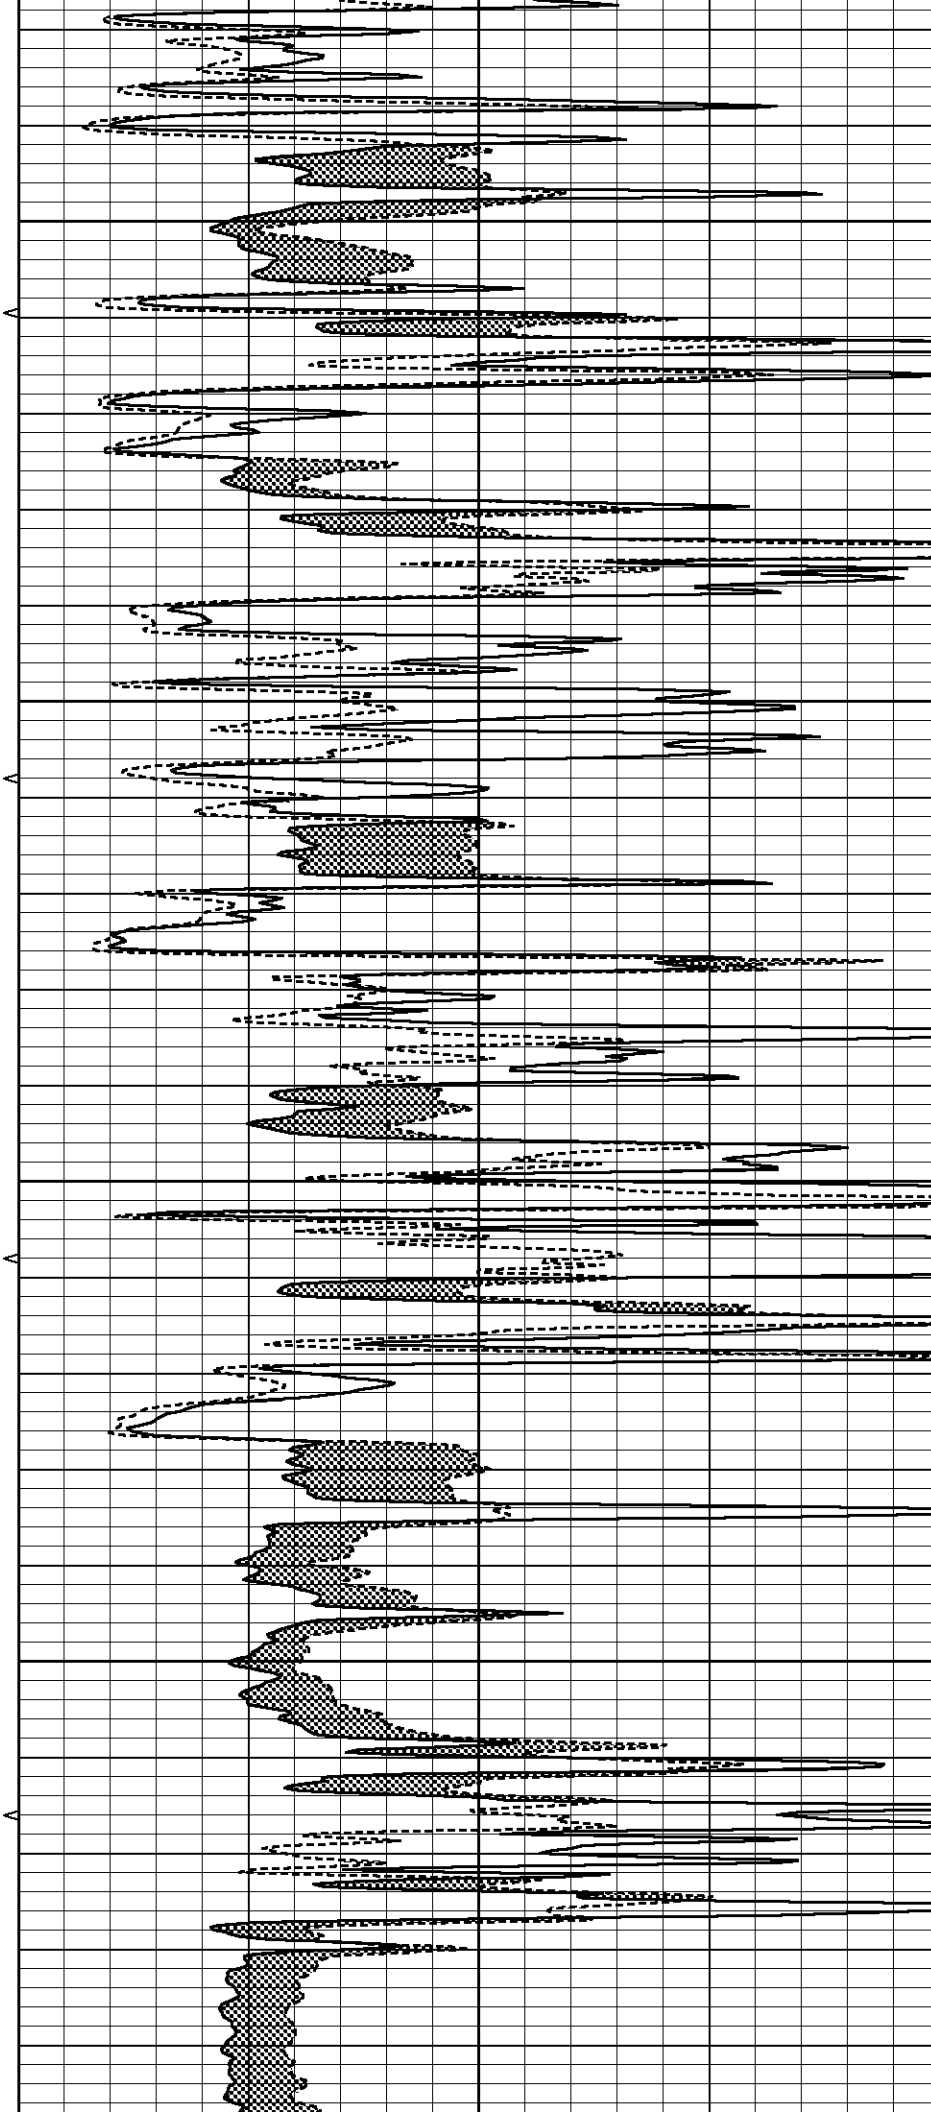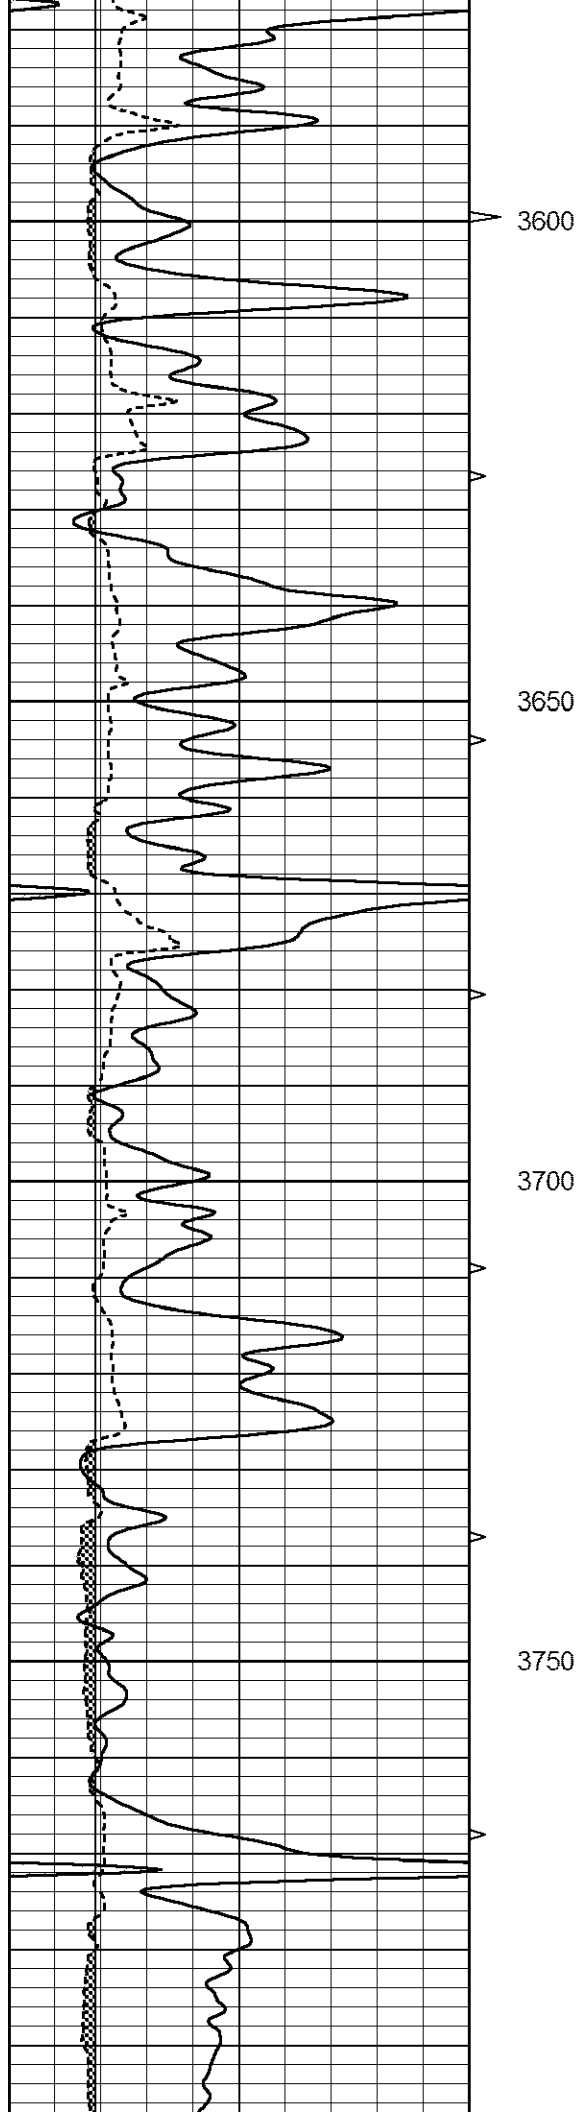

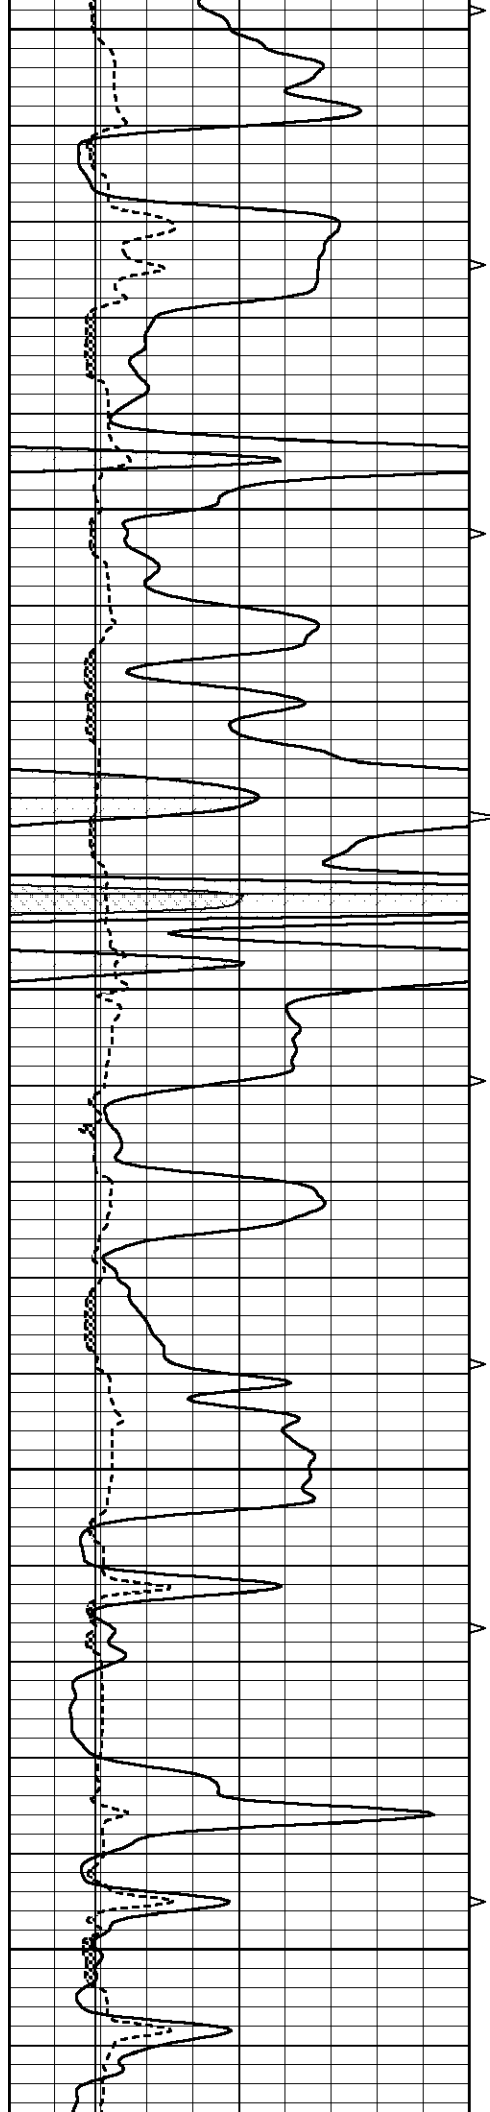


3800


3850

3900

3950

4000

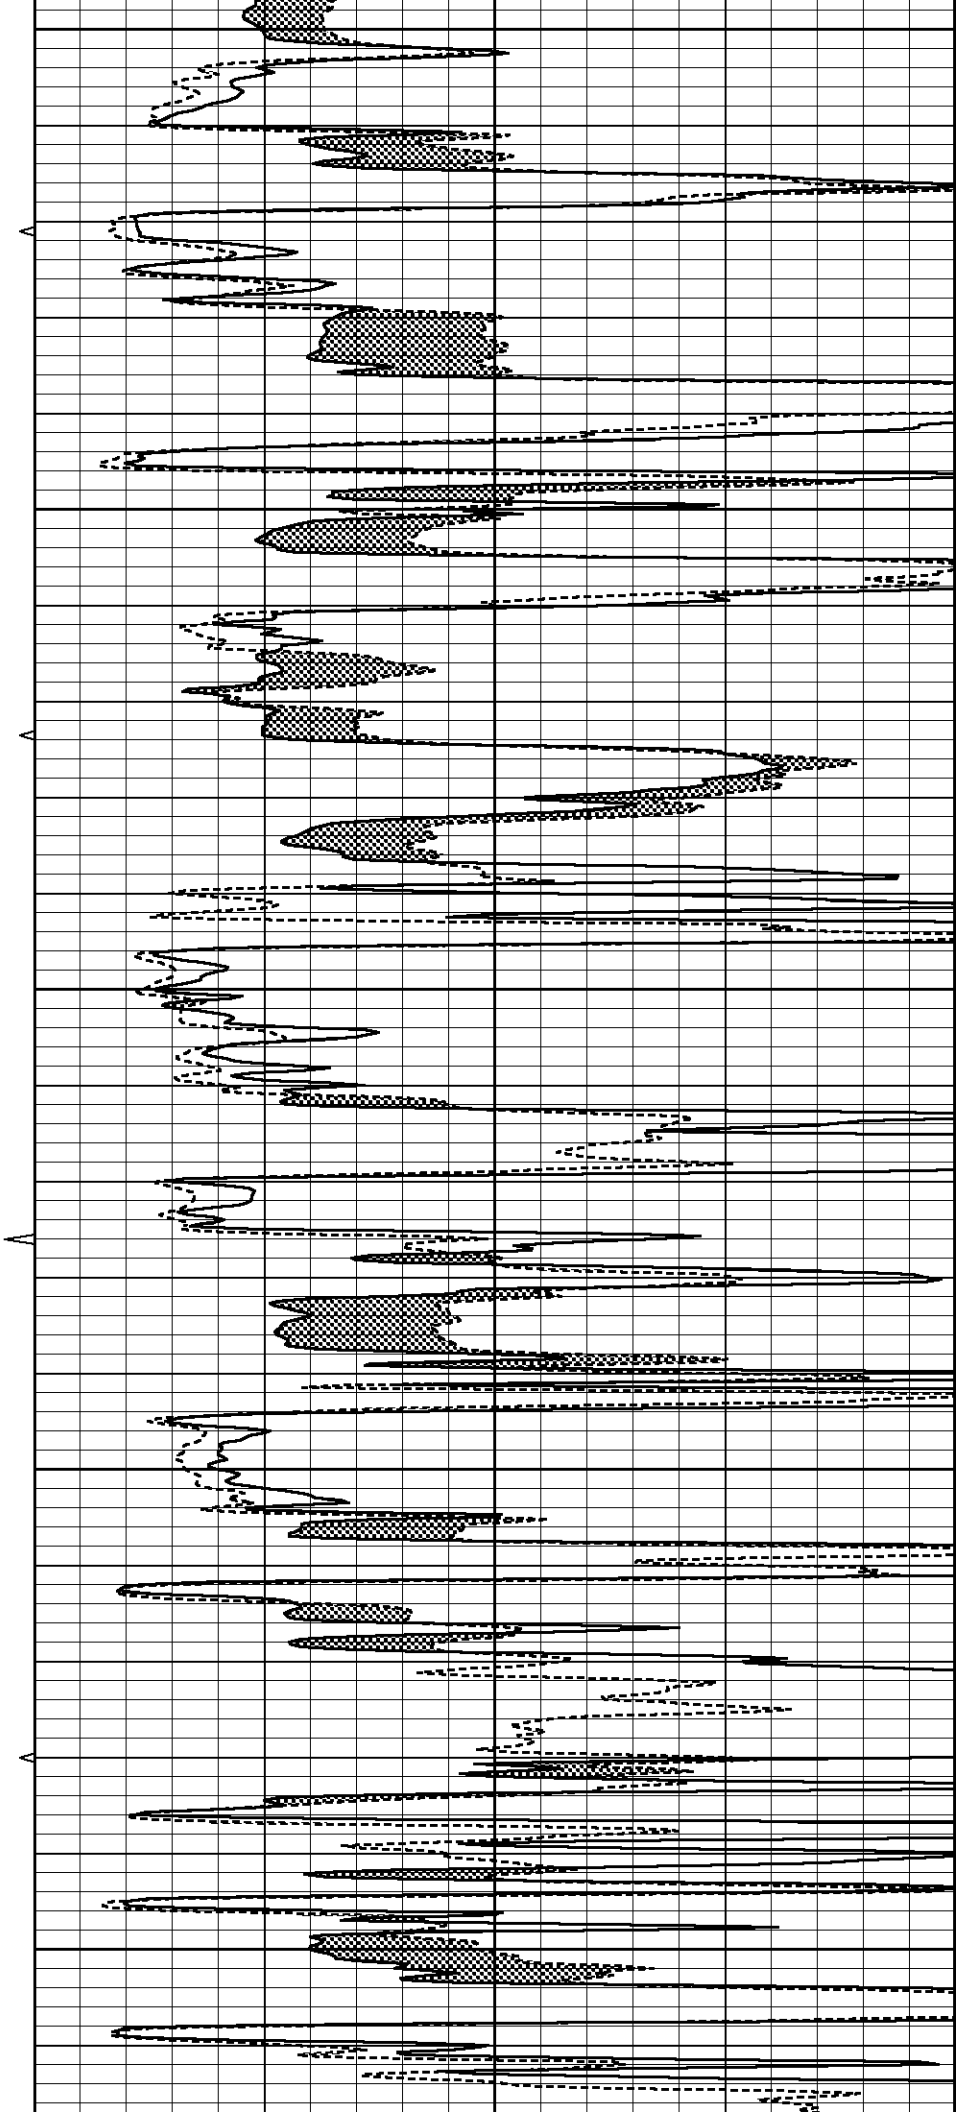

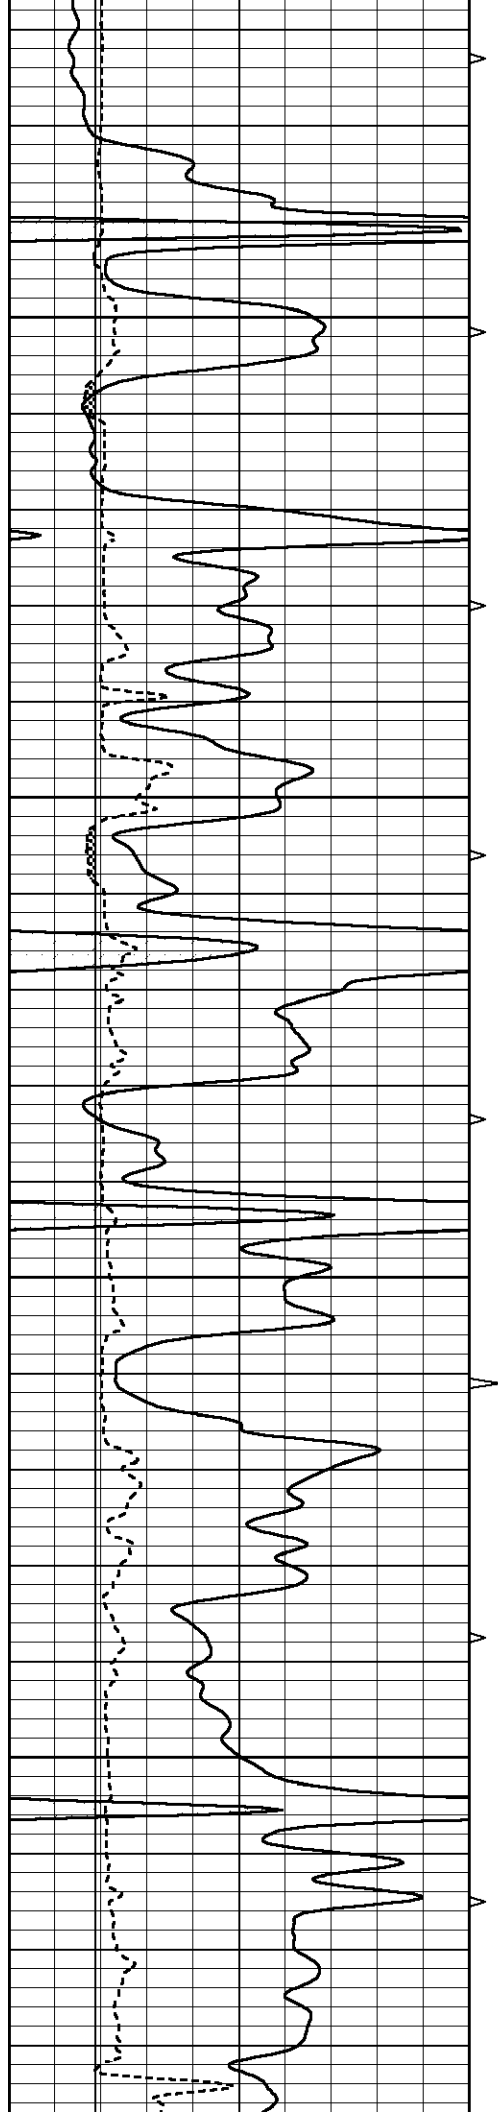



4050

4100


4150

4200

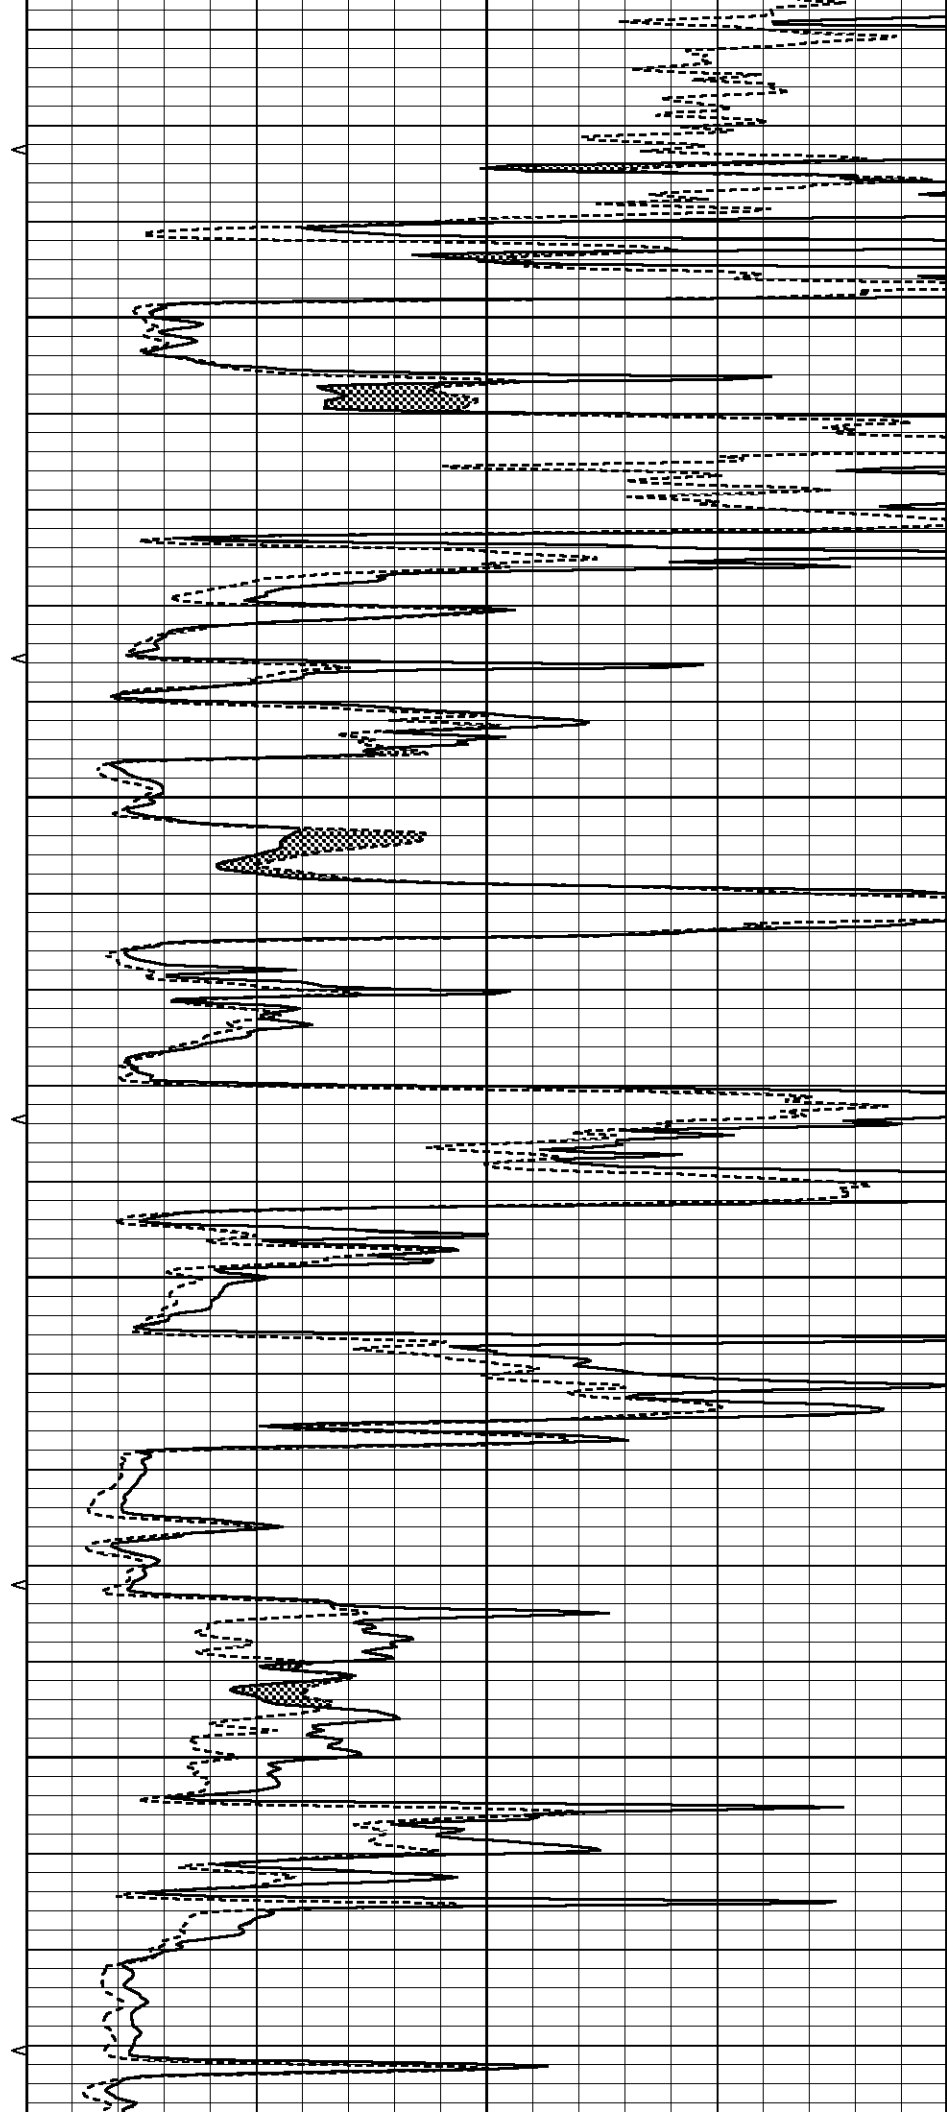

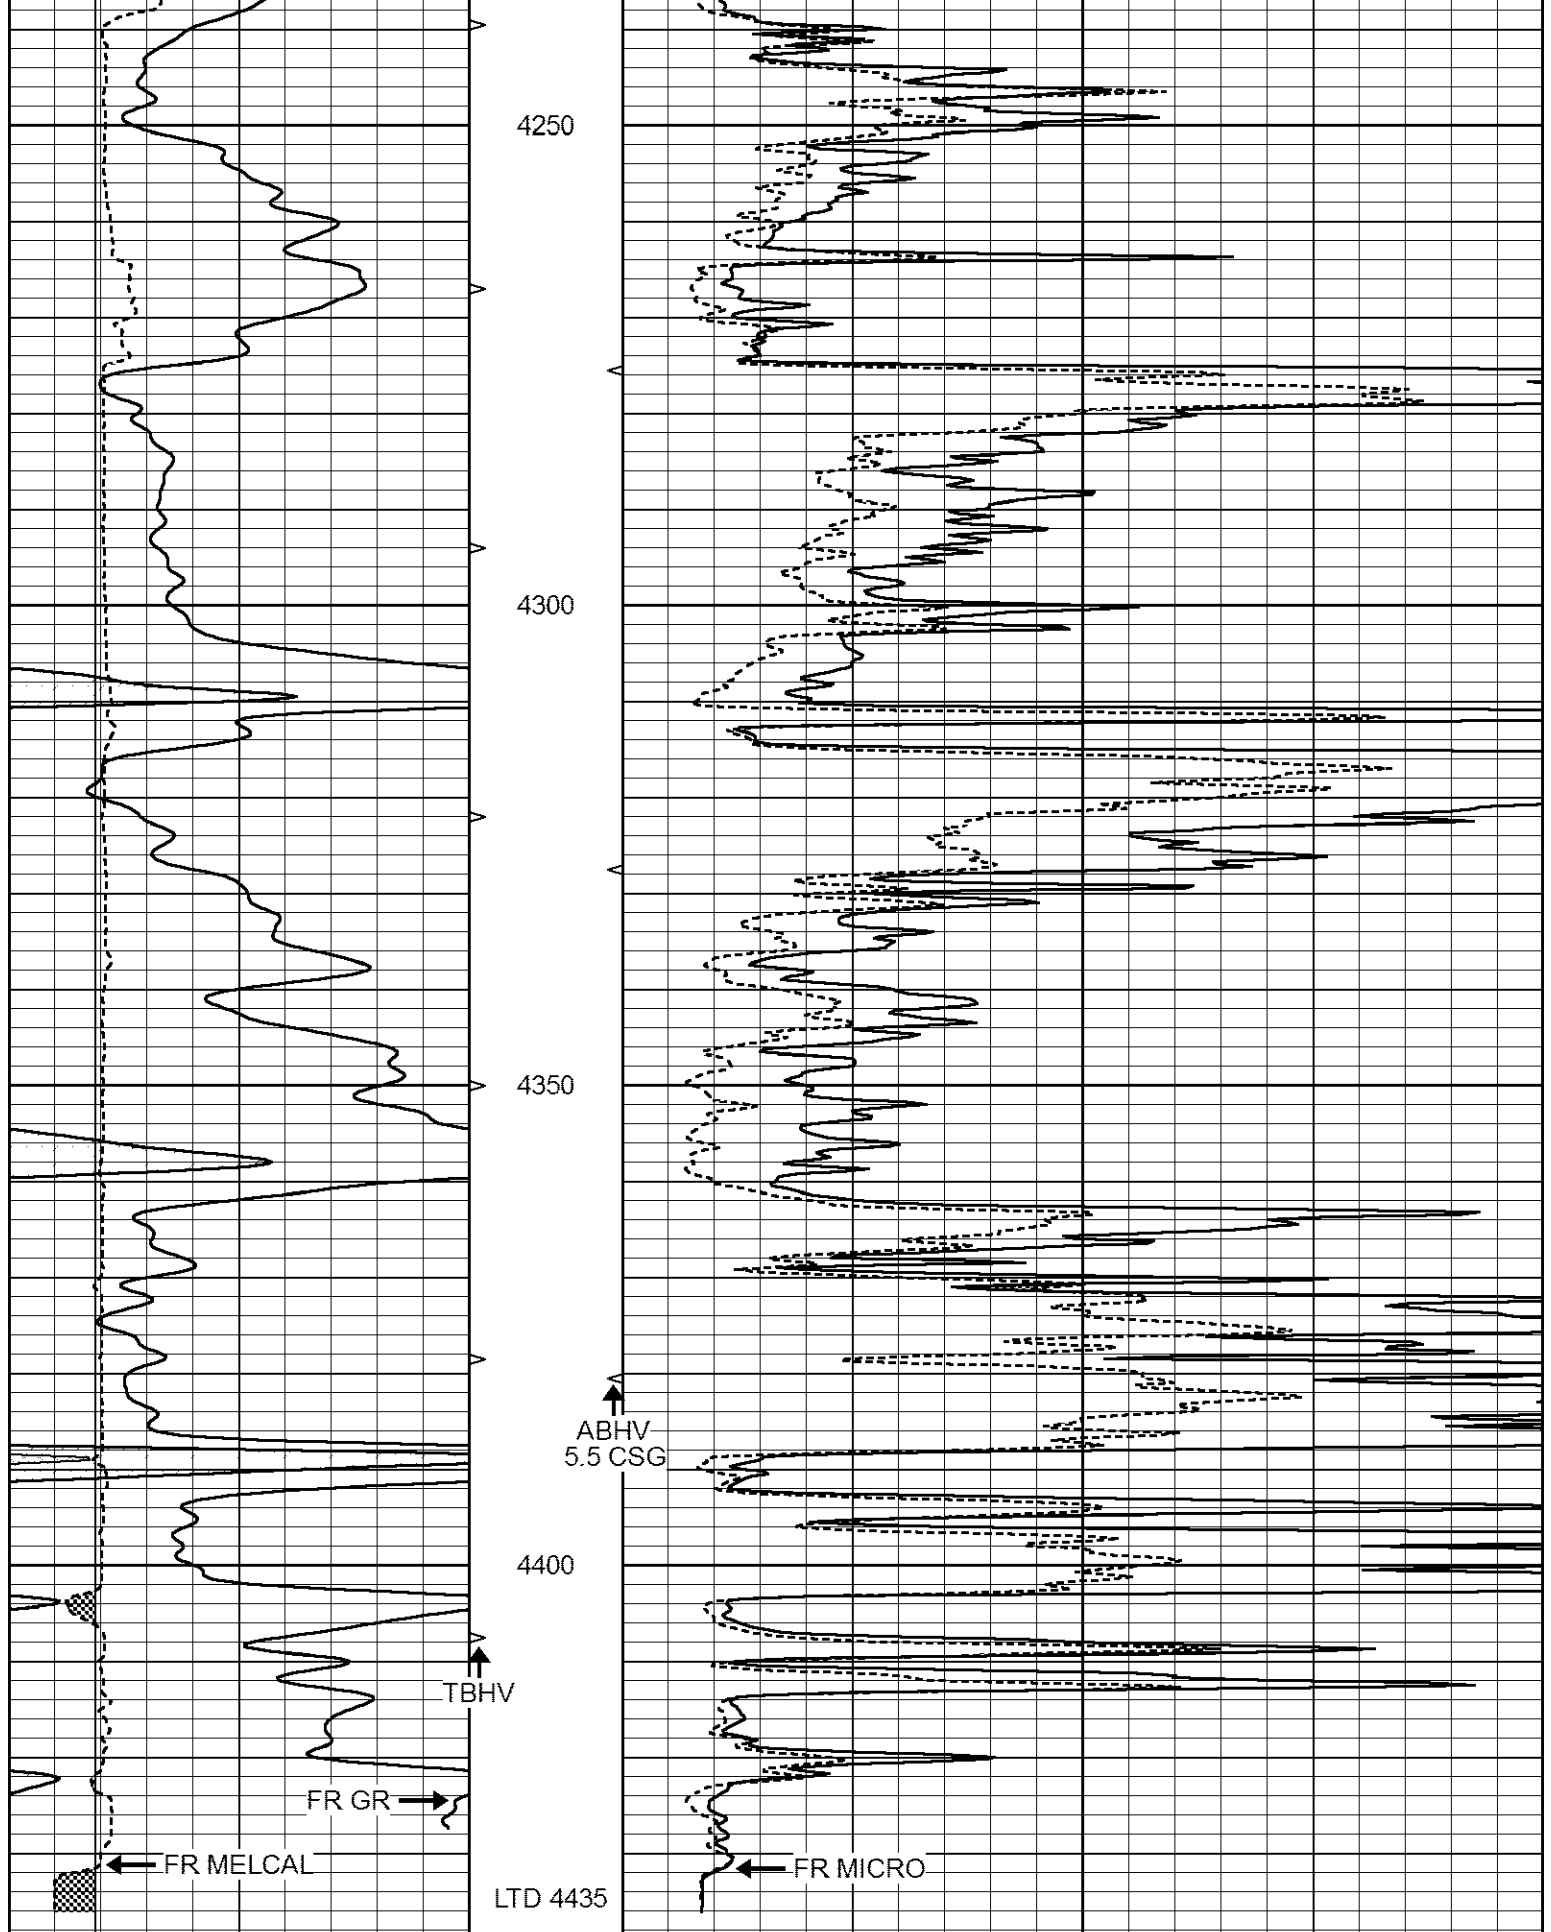


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

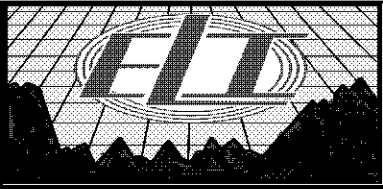


REPEAT SECTION

Database File 6381ddn.db
Dataset Pathname pass5.1
Presentation Format _micro
Dataset Creation Sat Apr 02 01:33:08 2022
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

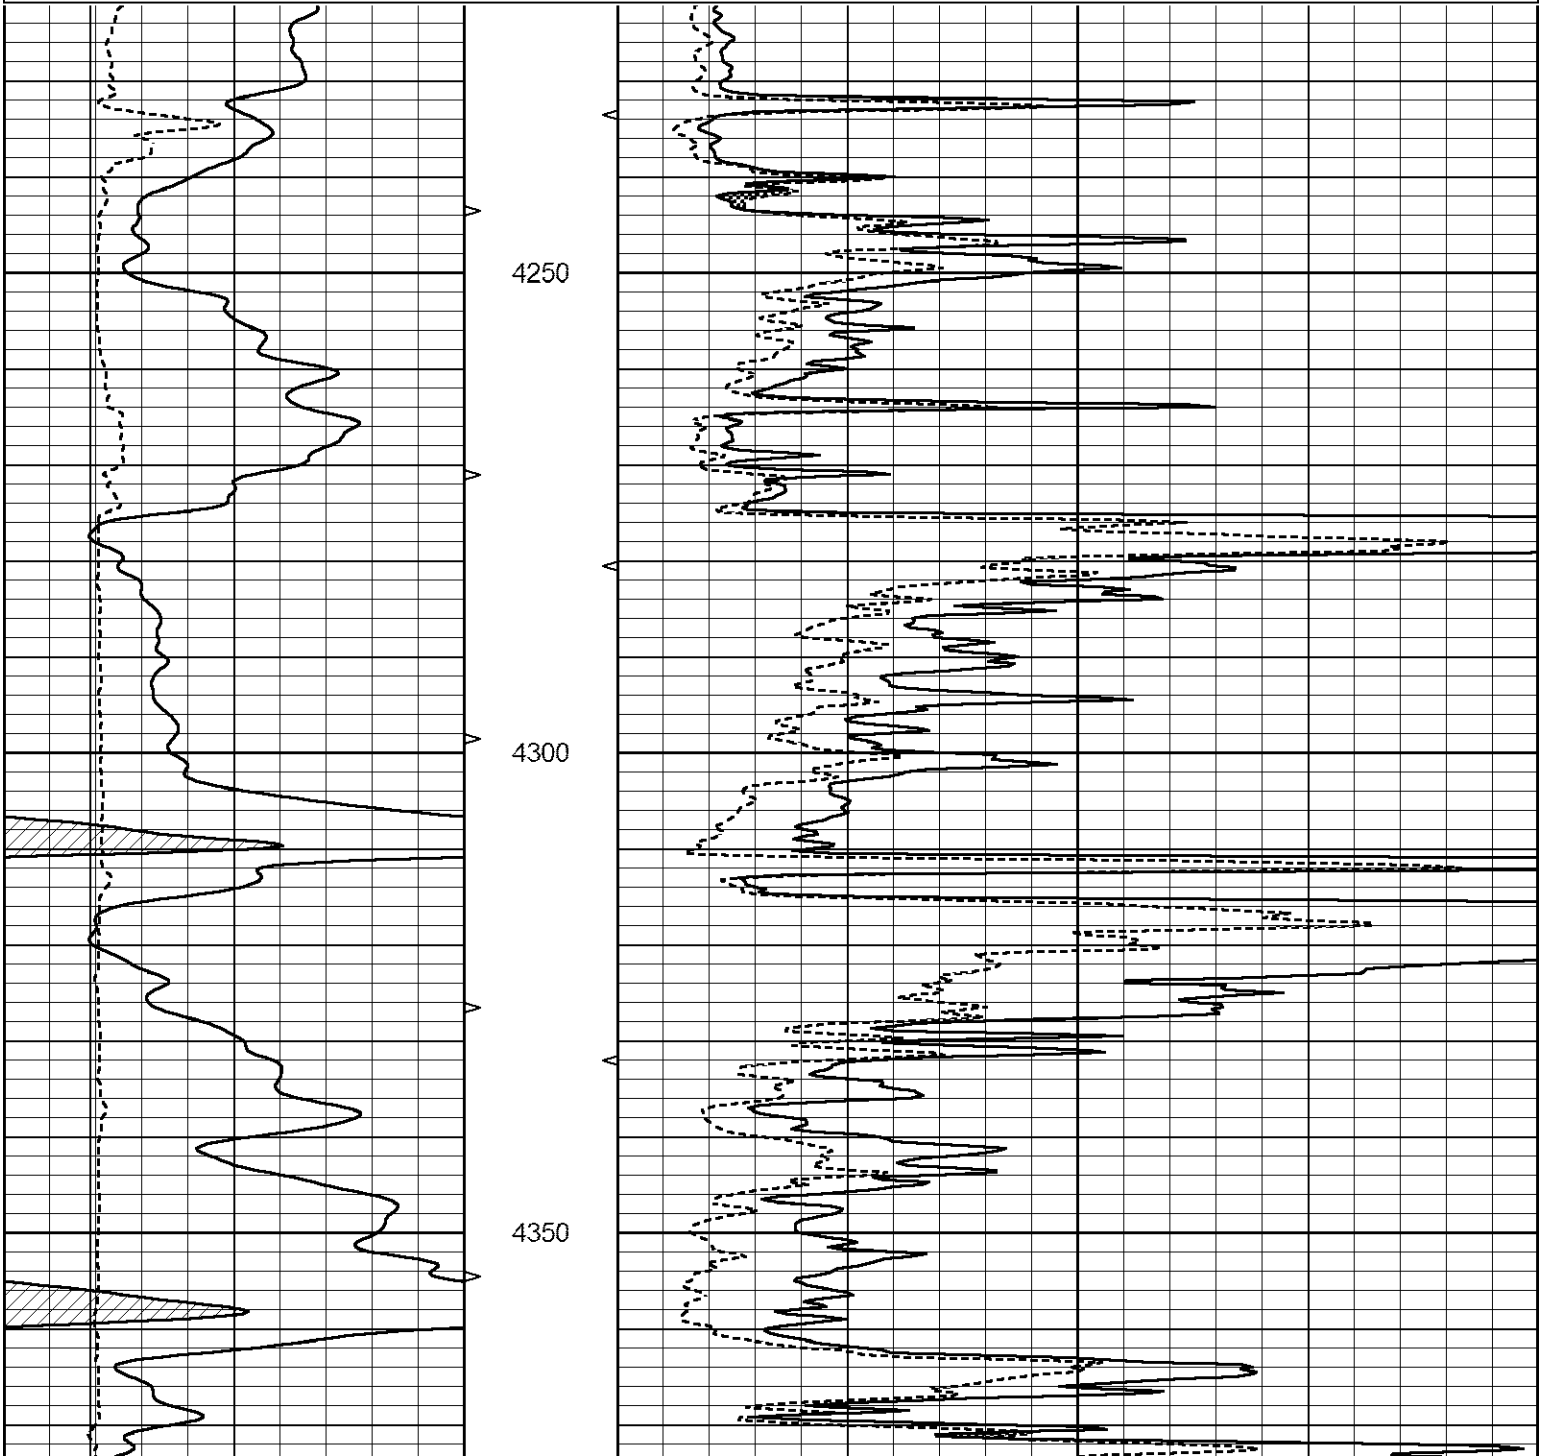

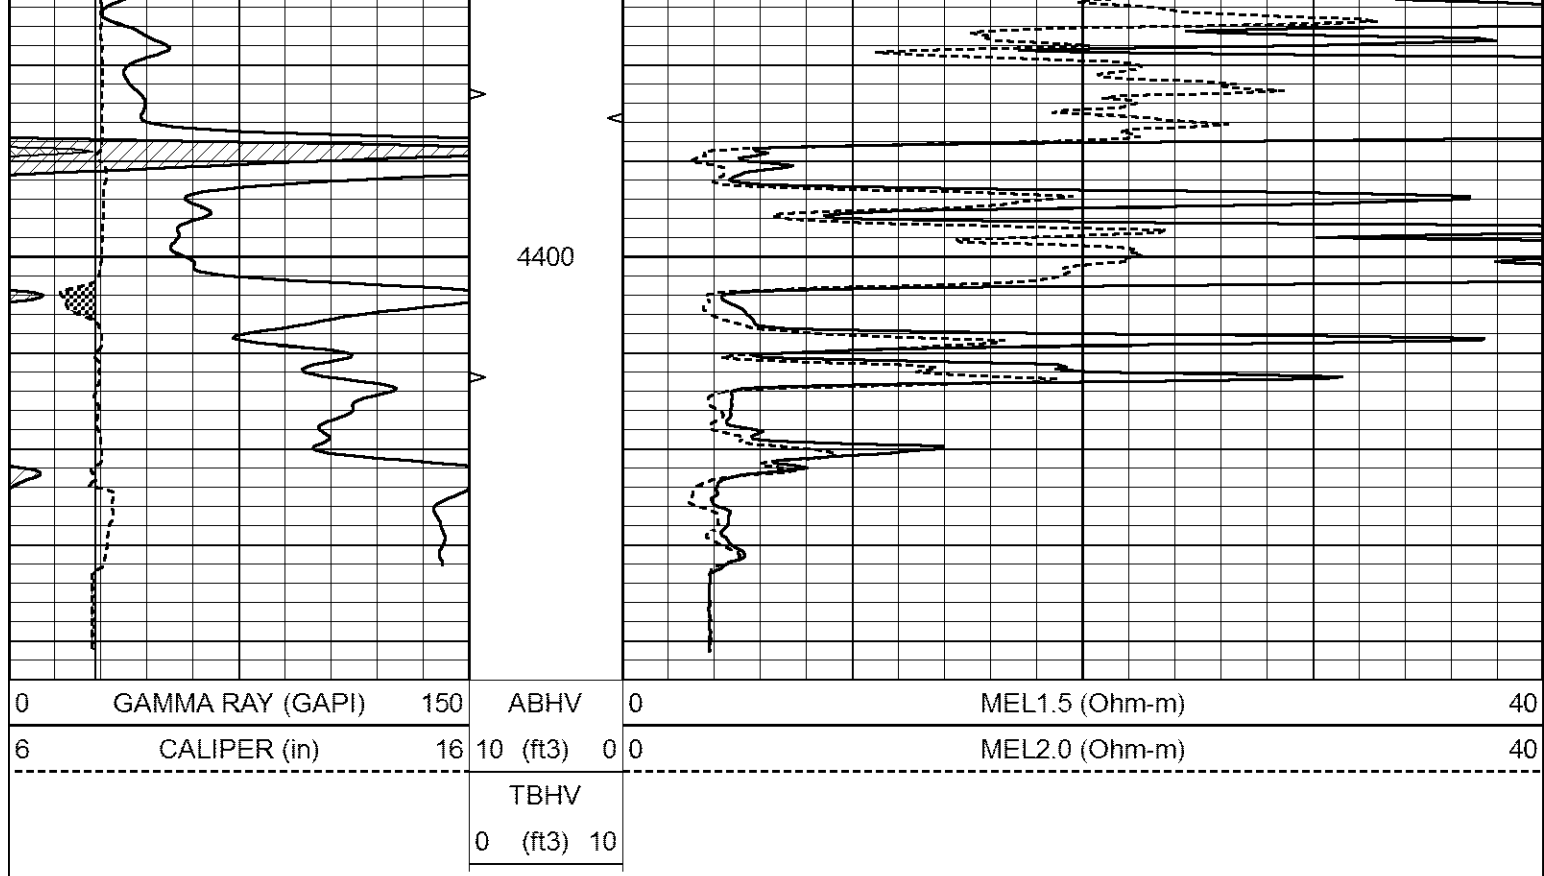

Calibration Report					
Database File	6381ddn.db				
Dataset Pathname	pass6.1				
Dataset Creation	Sat Apr 02 01:44:46 2022				
MICRO_USR Calibration Report					
Serial Number:		070910			
Tool Model:		ProbeL			
Performed:		Sun Jan 23 09:07:22 2022			
Caliper Calibration:		Gain=7.192		Offset=3.002	
References		Low Cal		High Cal	
Readings		8.000		14.000	
		0.723		1.557	
1.5" Calibration:		Gain=35.000		Offset=1.000	
References		Low Cal		High Cal	
Readings		0.000		20.000	
		0.004		1.335	
2" Calibration:		Gain=65.000		Offset=-1.000	
References		Low Cal		High Cal	
Readings		0.000		20.000	
		0.004		1.029	
Microlog Calibration Report					
Serial-Model:		070910-ProbeL			
Performed:		(Not Performed)			
Readings		References		Results	
Zero	Cal	Zero	Cal	m	b

Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Fri Oct 30 21:32:56 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2700	GAPI/cps