



MICRO LOG

Company STELBAR OIL CORPORATION
Well CHEYENNE #3-35
Field BEAUCHAMP SOUTHWEST
County STANTON State KANSAS

Location: API #: 15-187-21348-0000
1649' FNL & 1961' FWL

Other Services
CDL/CNL/PE
MEL/SONIC

SEC 35 TWP 30S RGE 41W

Elevation

Permanent Datum GROUND LEVEL Elevation 3386
Log Measured From KELLY BUSHING 11' A.G.L.
Drilling Measured From KELLY BUSHING

K.B. 3397
D.F. 3395
G.L. 3386

Date	3/21/22		
Run Number	TWO		
Depth Driller	5590		
Depth Logger	5588		
Bottom Logged Interval	5572		
Top Log Interval	1500		
Casing Driller	8 5/8"@1565'		
Casing Logger	1562		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 600 PPM	
Density / Viscosity	9.3/56		
pH / Fluid Loss	9.5/7.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.80@82F		
Rmf @ Meas. Temp	1.35@82F		
Rmc @ Meas. Temp	2.16@82F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	1.14@130F		
Time Circulation Stopped	6 HOURS		
Time Logger on Bottom	2:30 P.M.		
Maximum Recorded Temperature	130F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS	COLE ROBBEN	
Witnessed By	DAVE GOLDAK		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-187-21348-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
JOHNSON, KS., S. ON HWY 27 TO (STANTON/MORTON COUNTY LINE) 3/4W. TO TANK BATTERY,
N. TO SECOND TANK BATTERY, E. PAST PUMPING UNIT AND SOUTH






MAIN SECTION


Database File	6266pe.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Mon Mar 21 16:55:03 2022
Charted by	Depth in Feet scaled 1:240


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

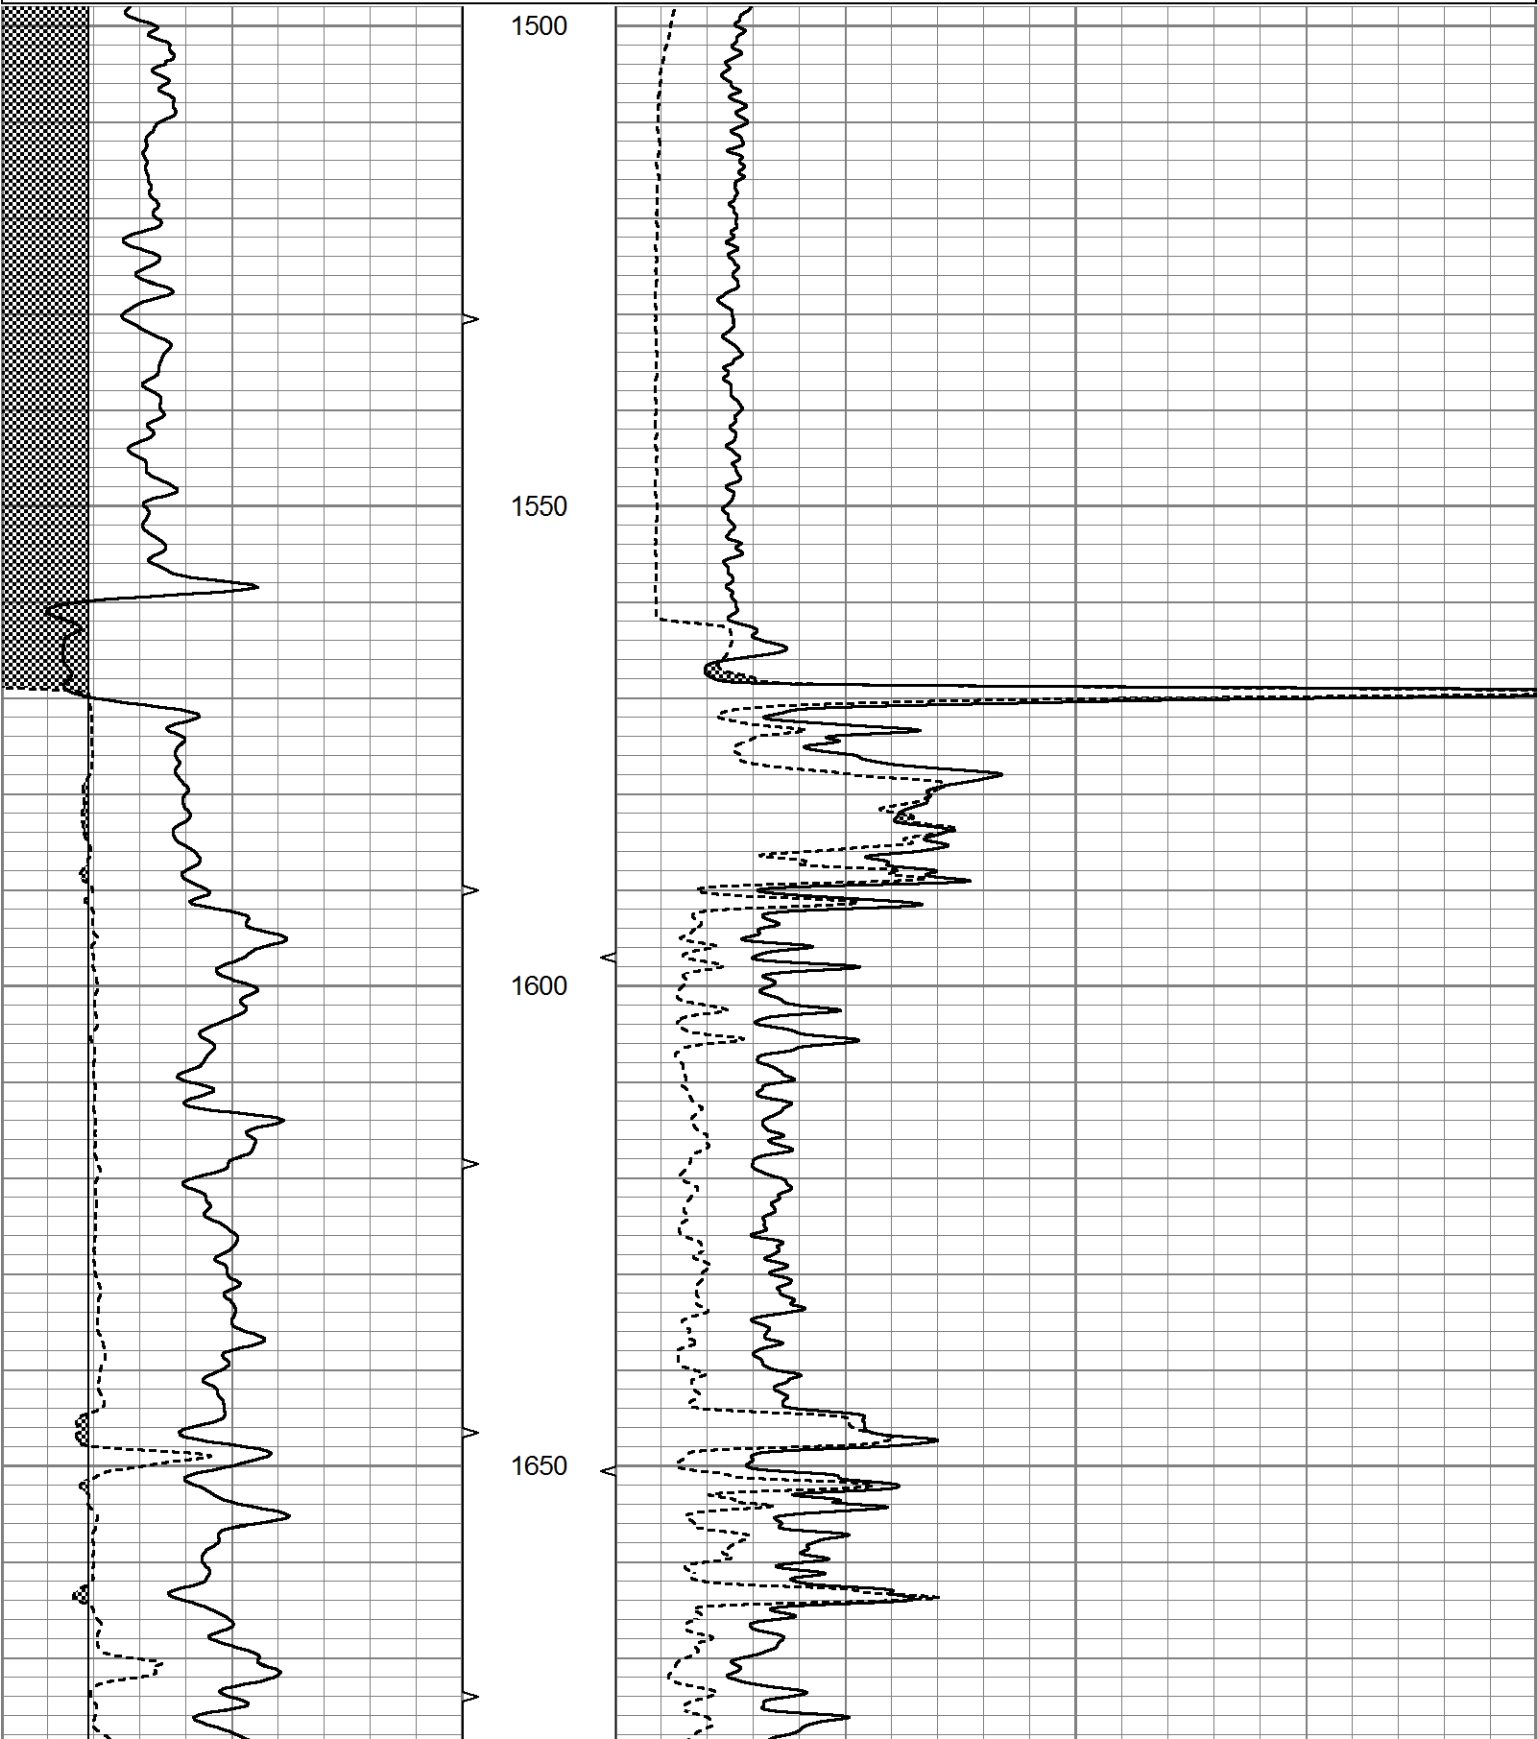


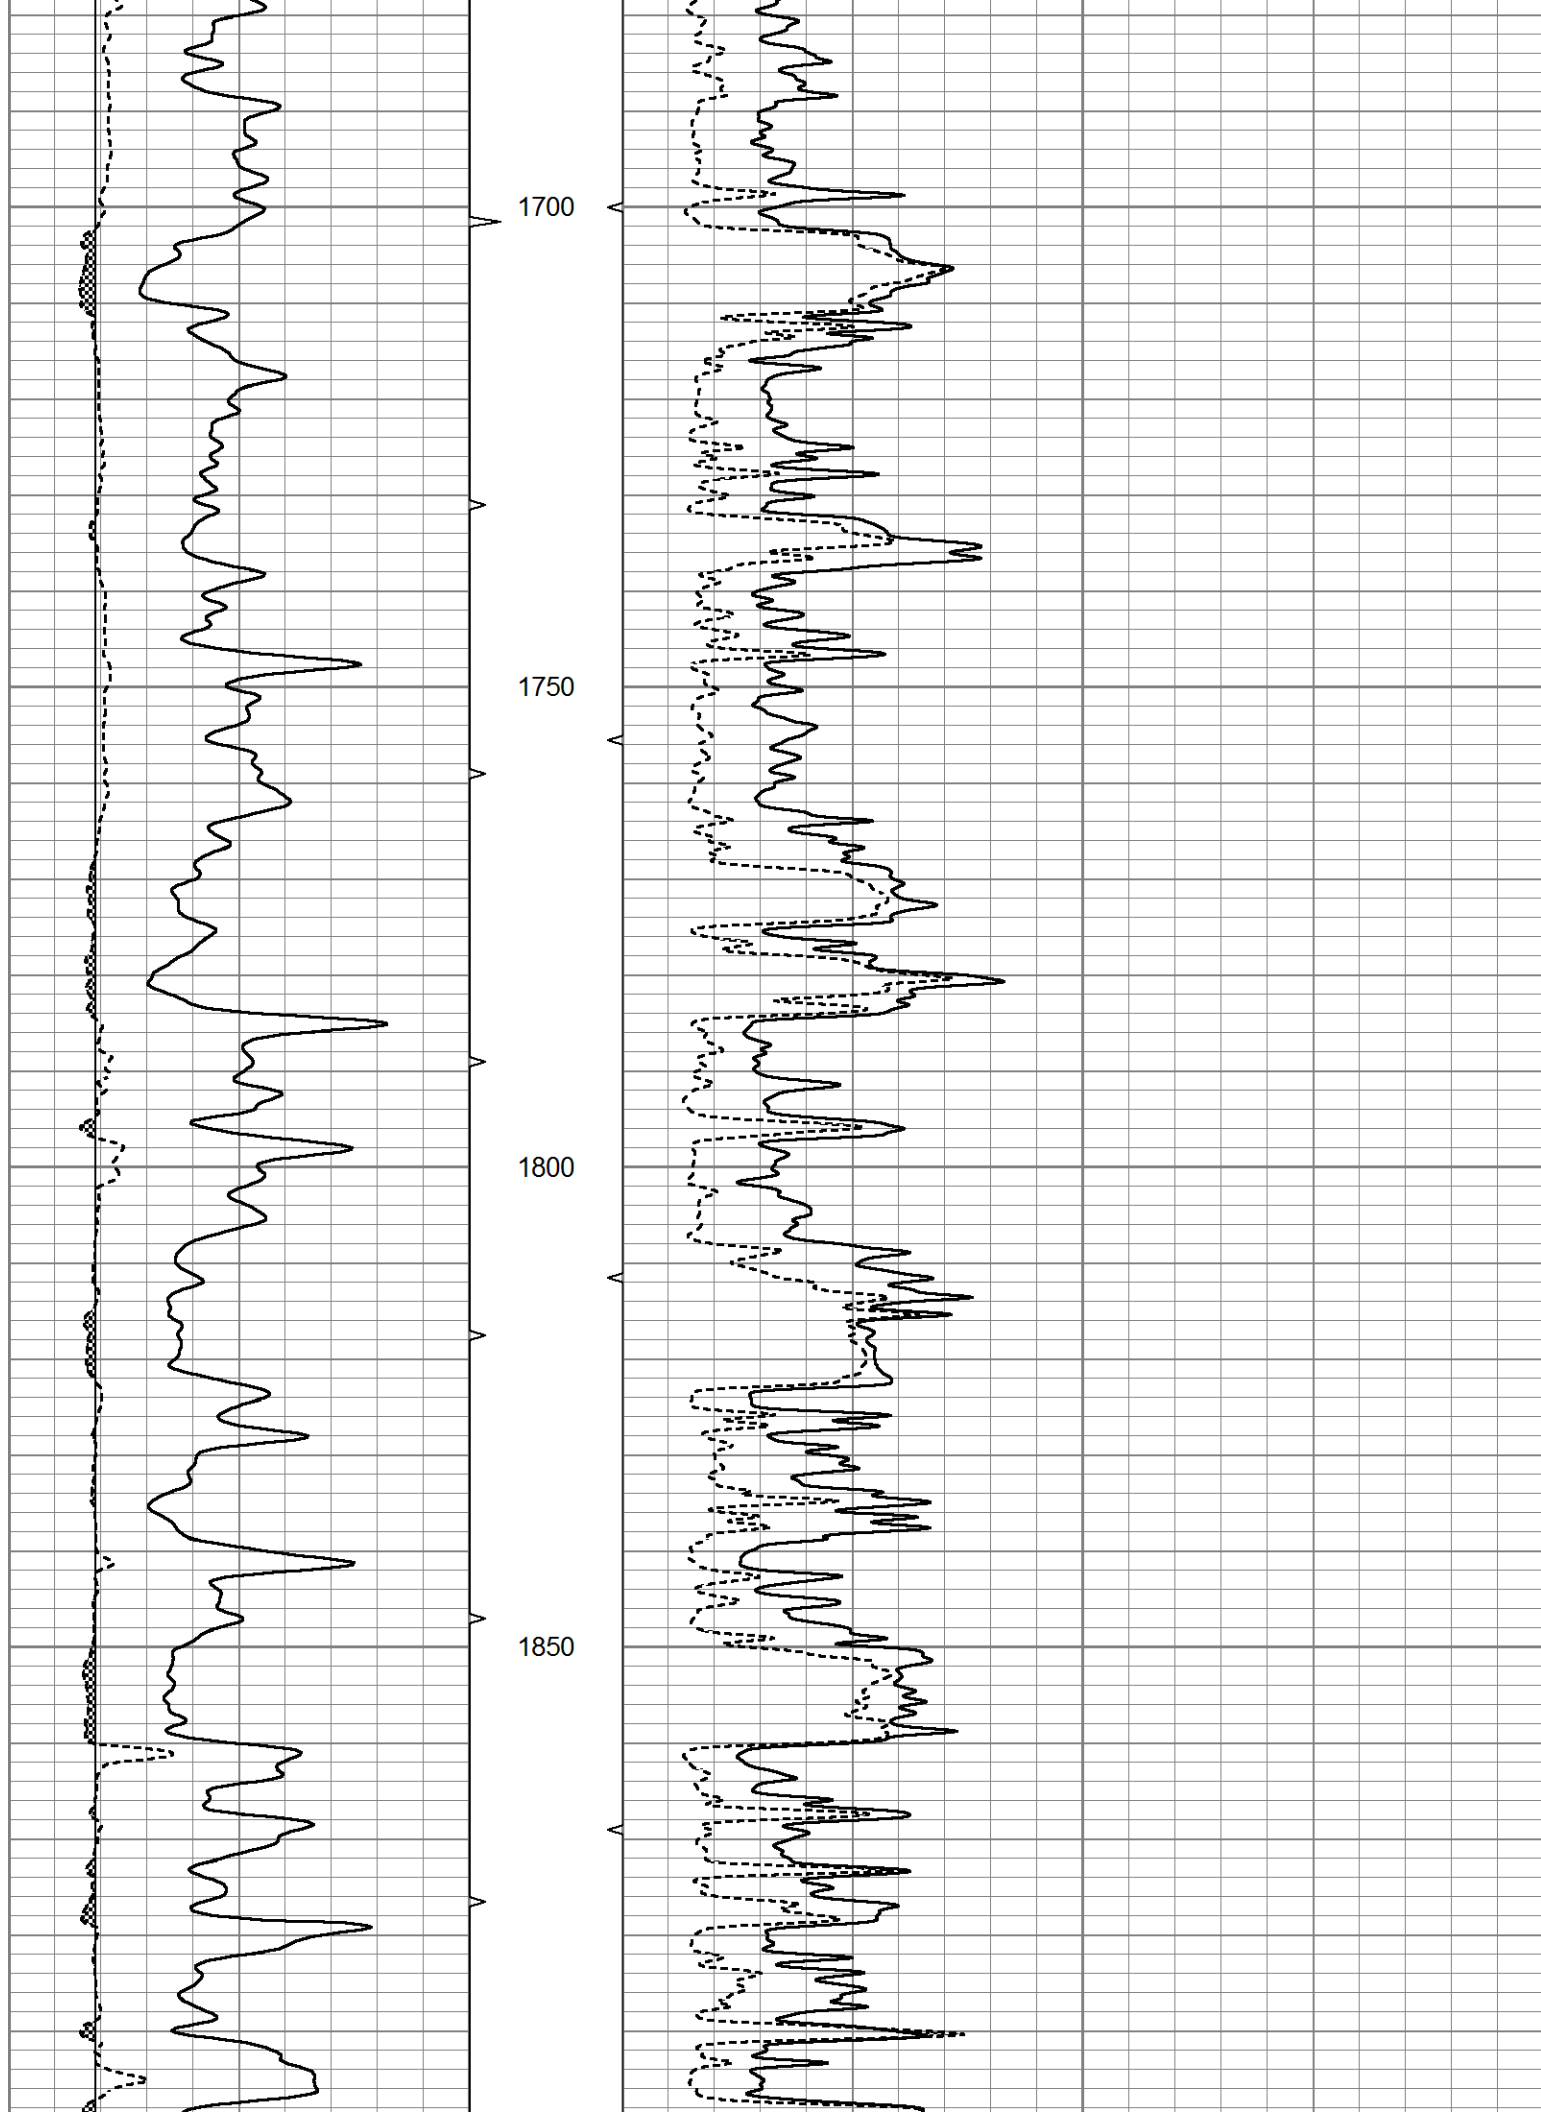


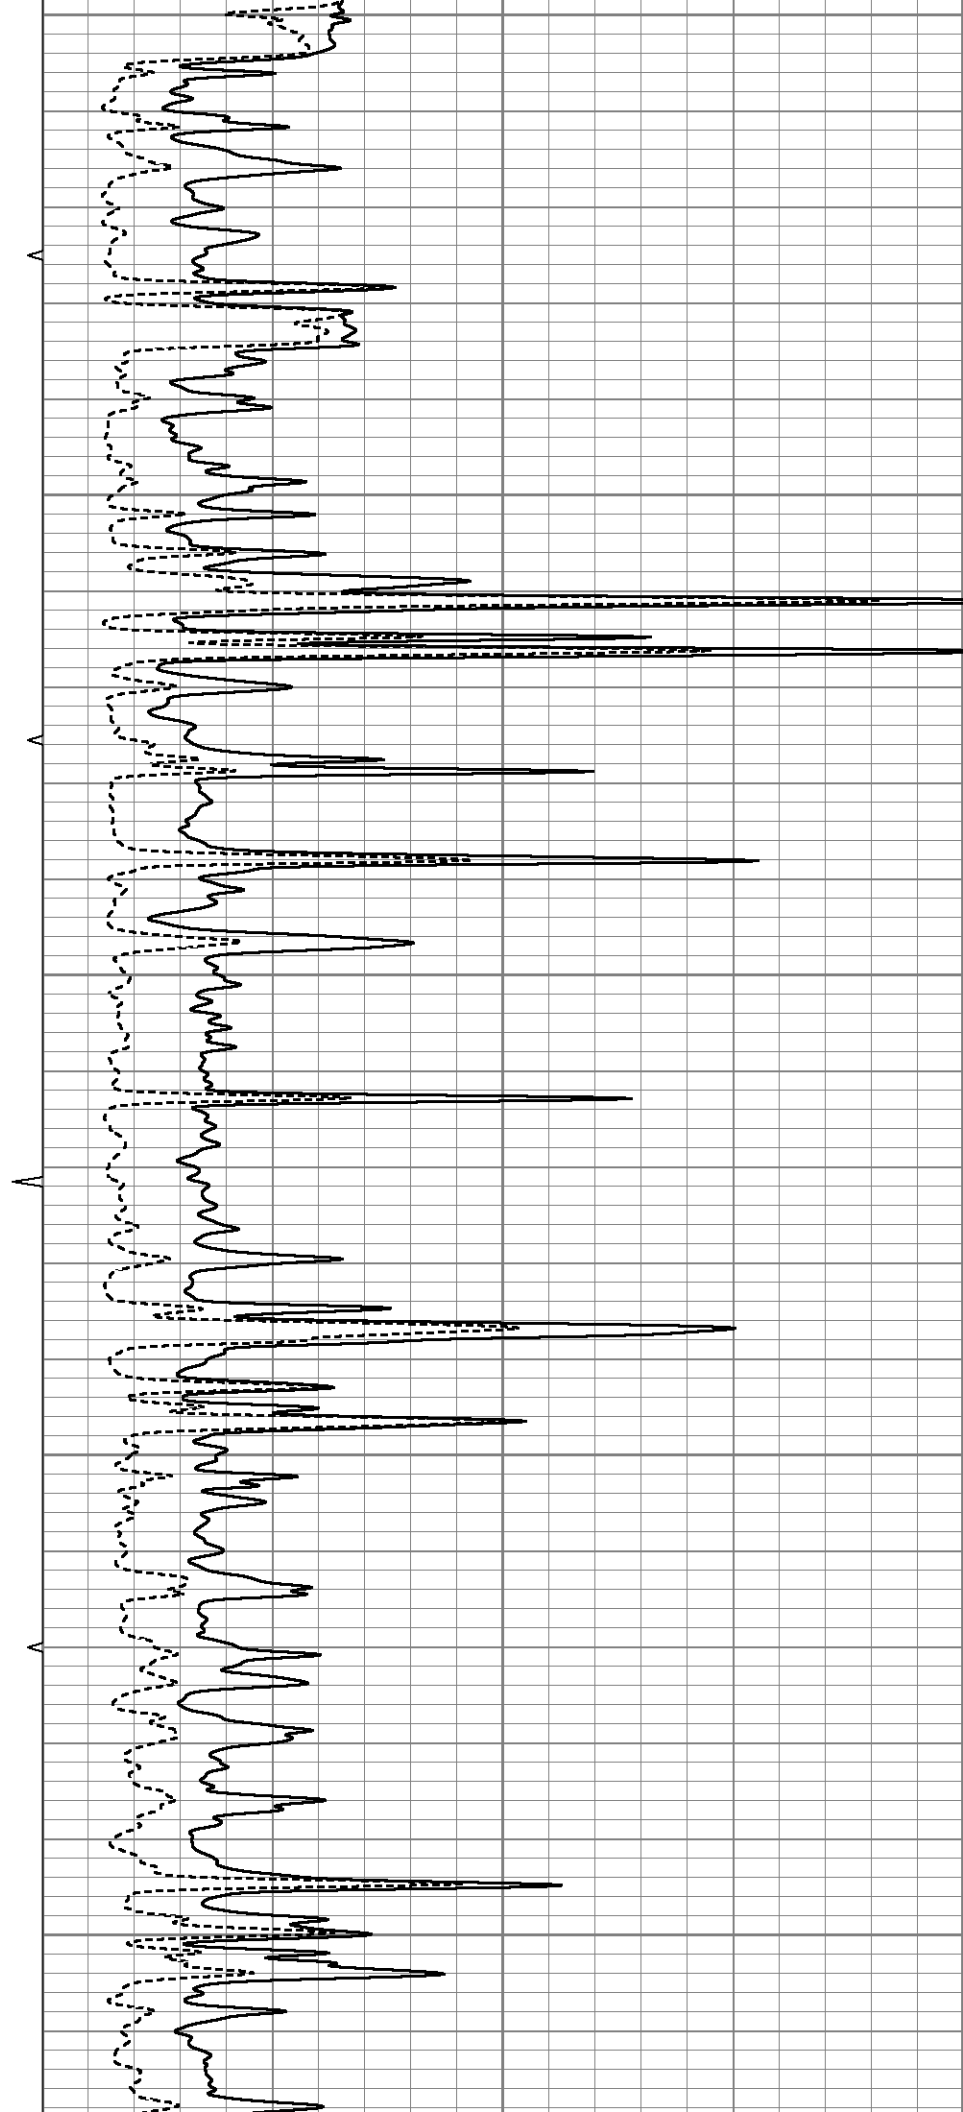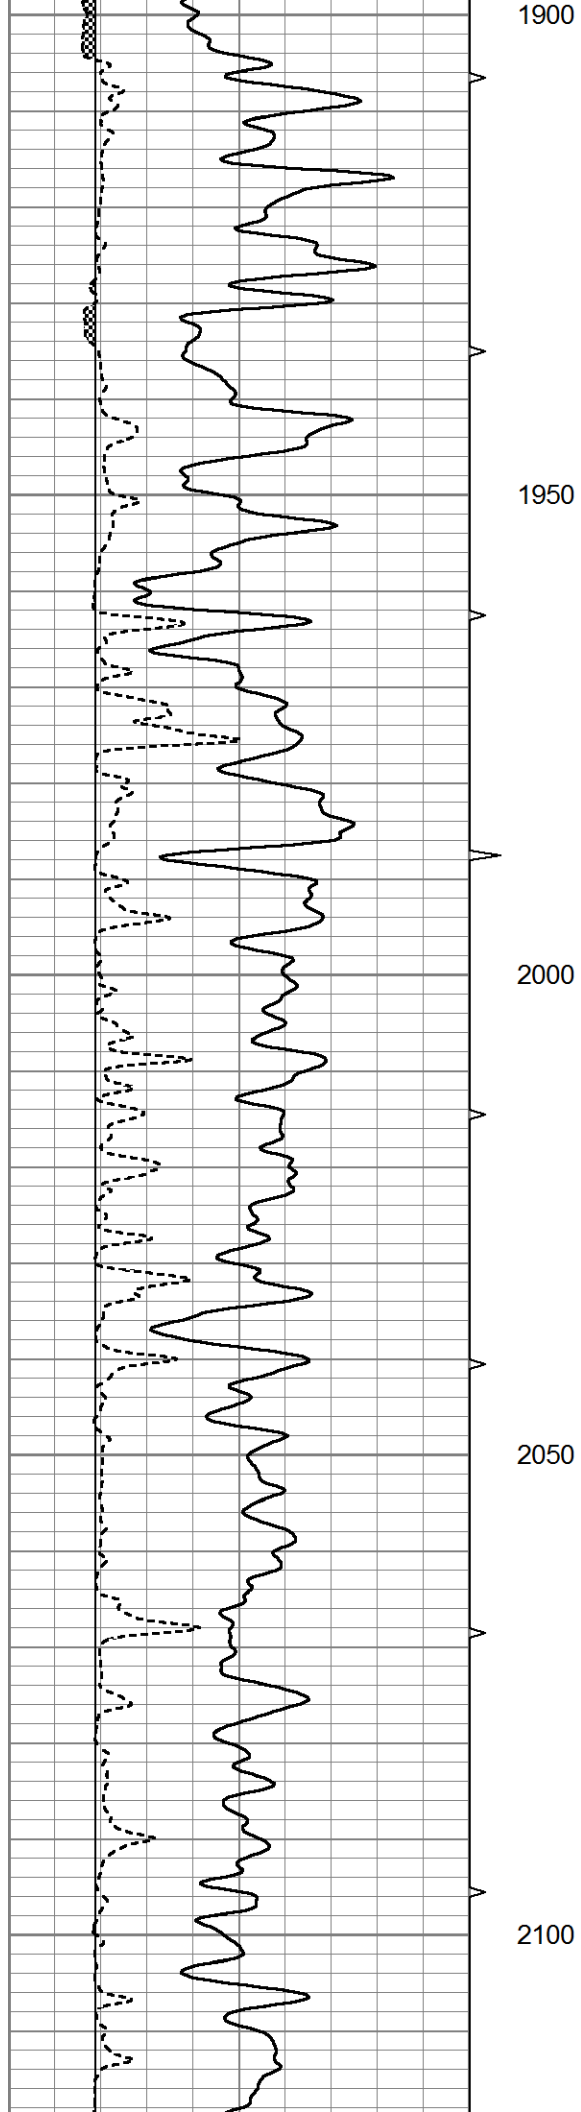

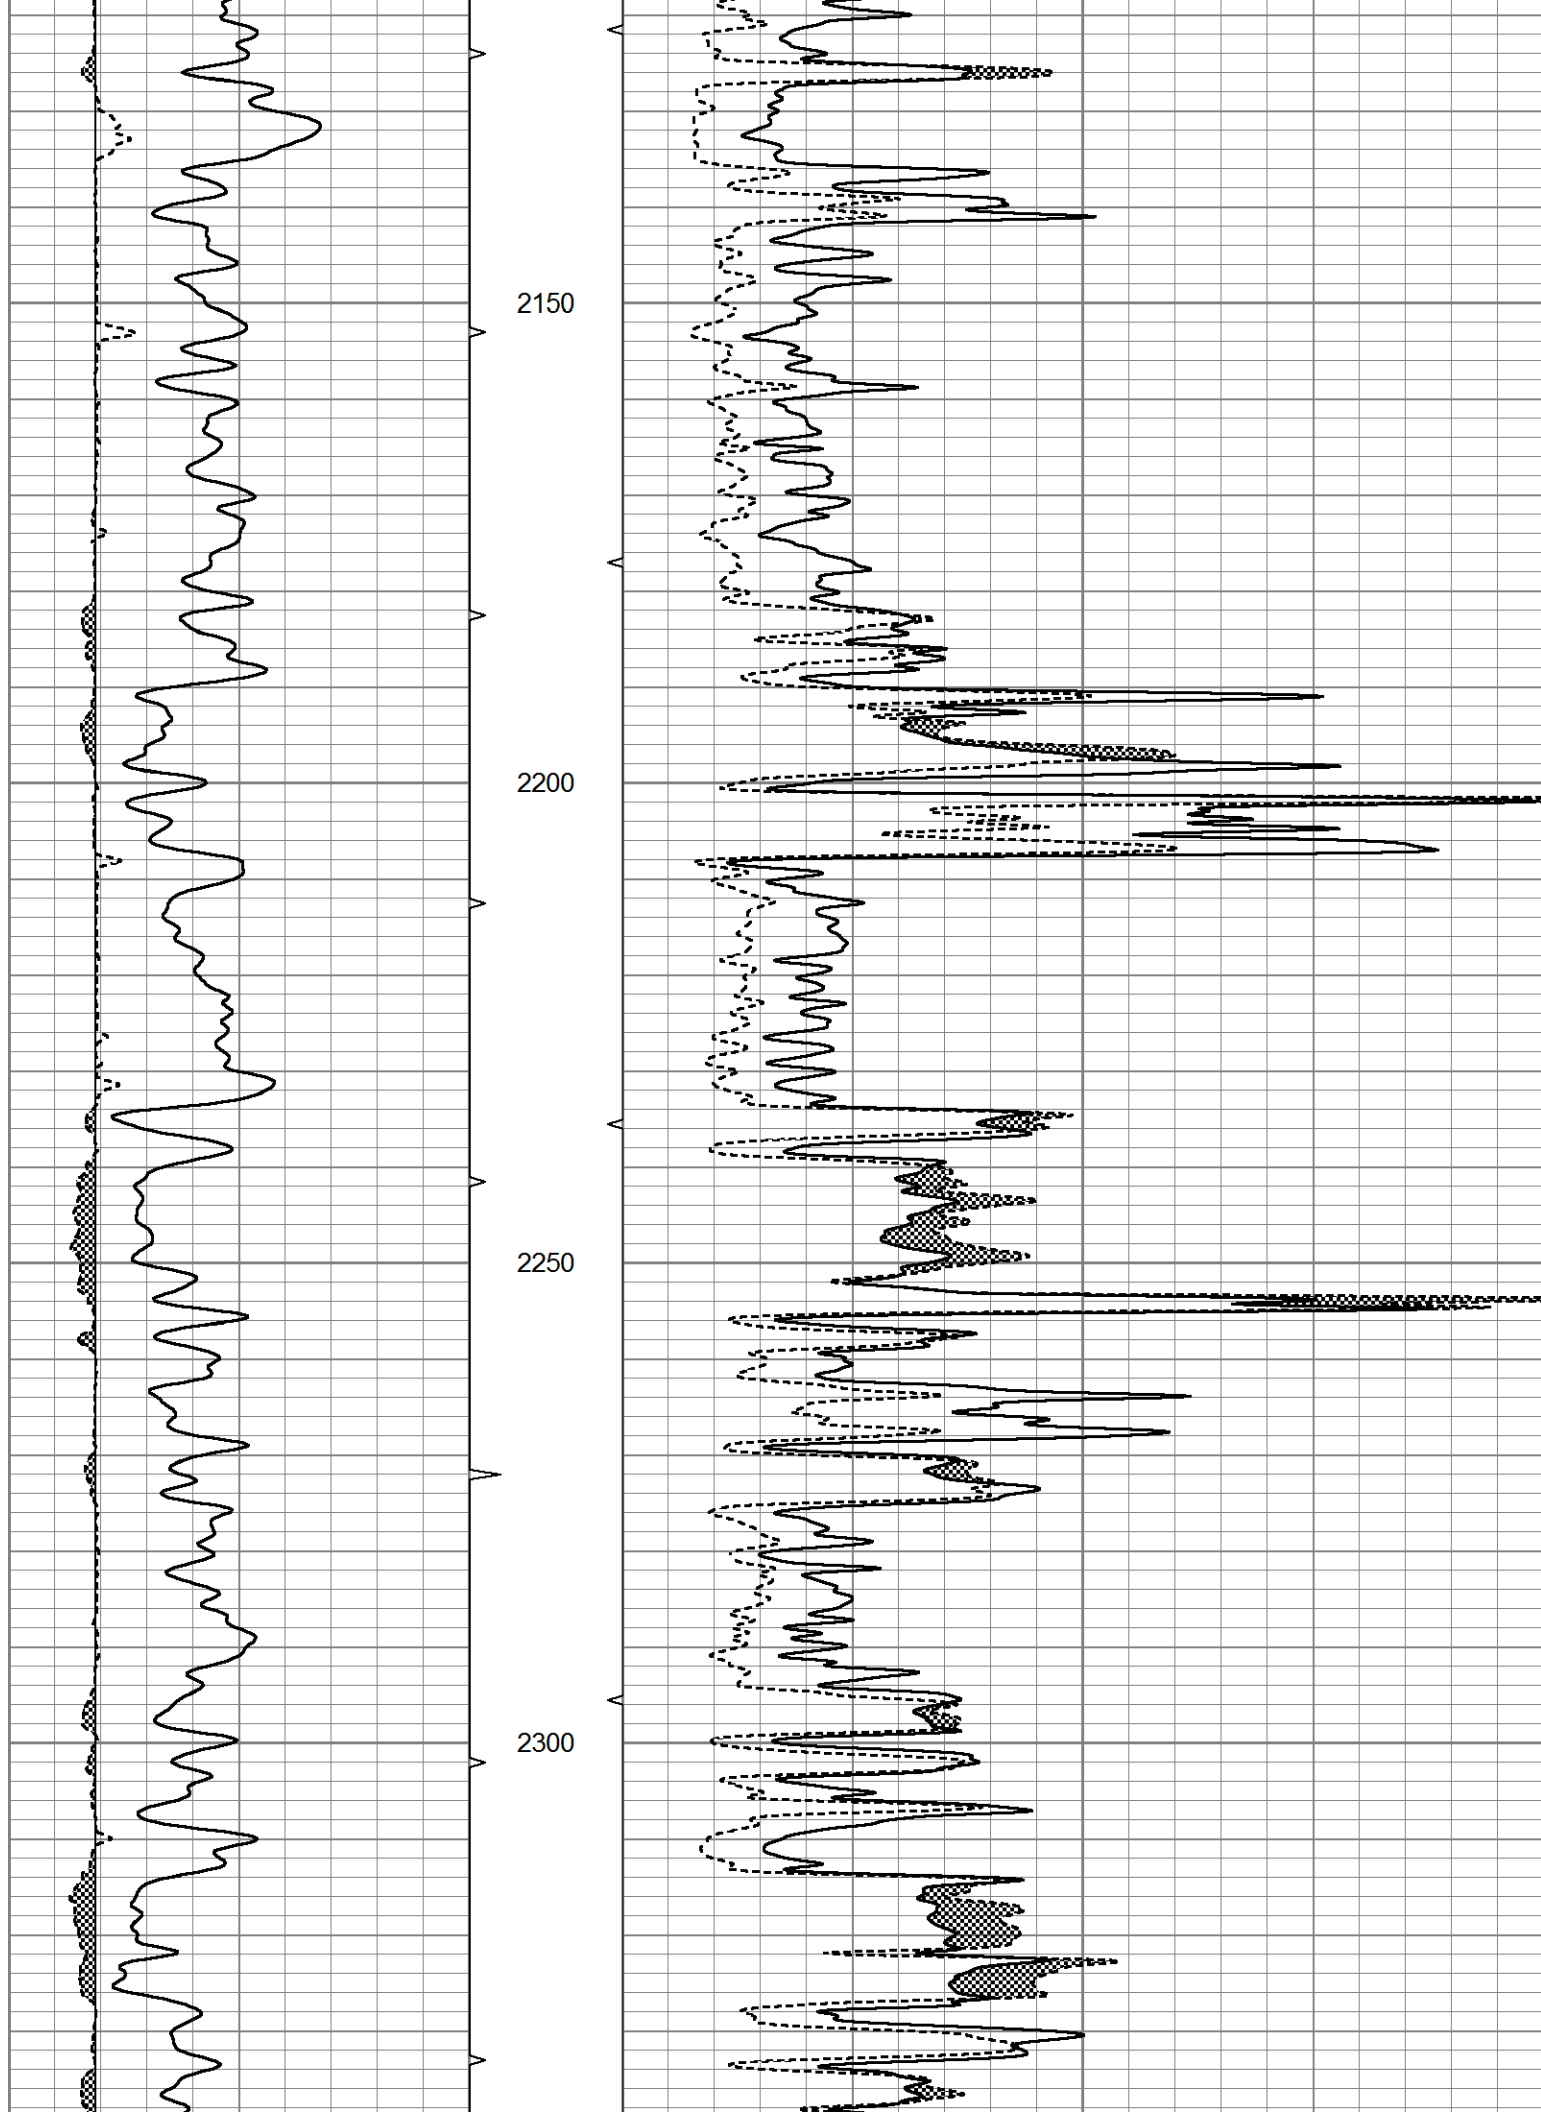

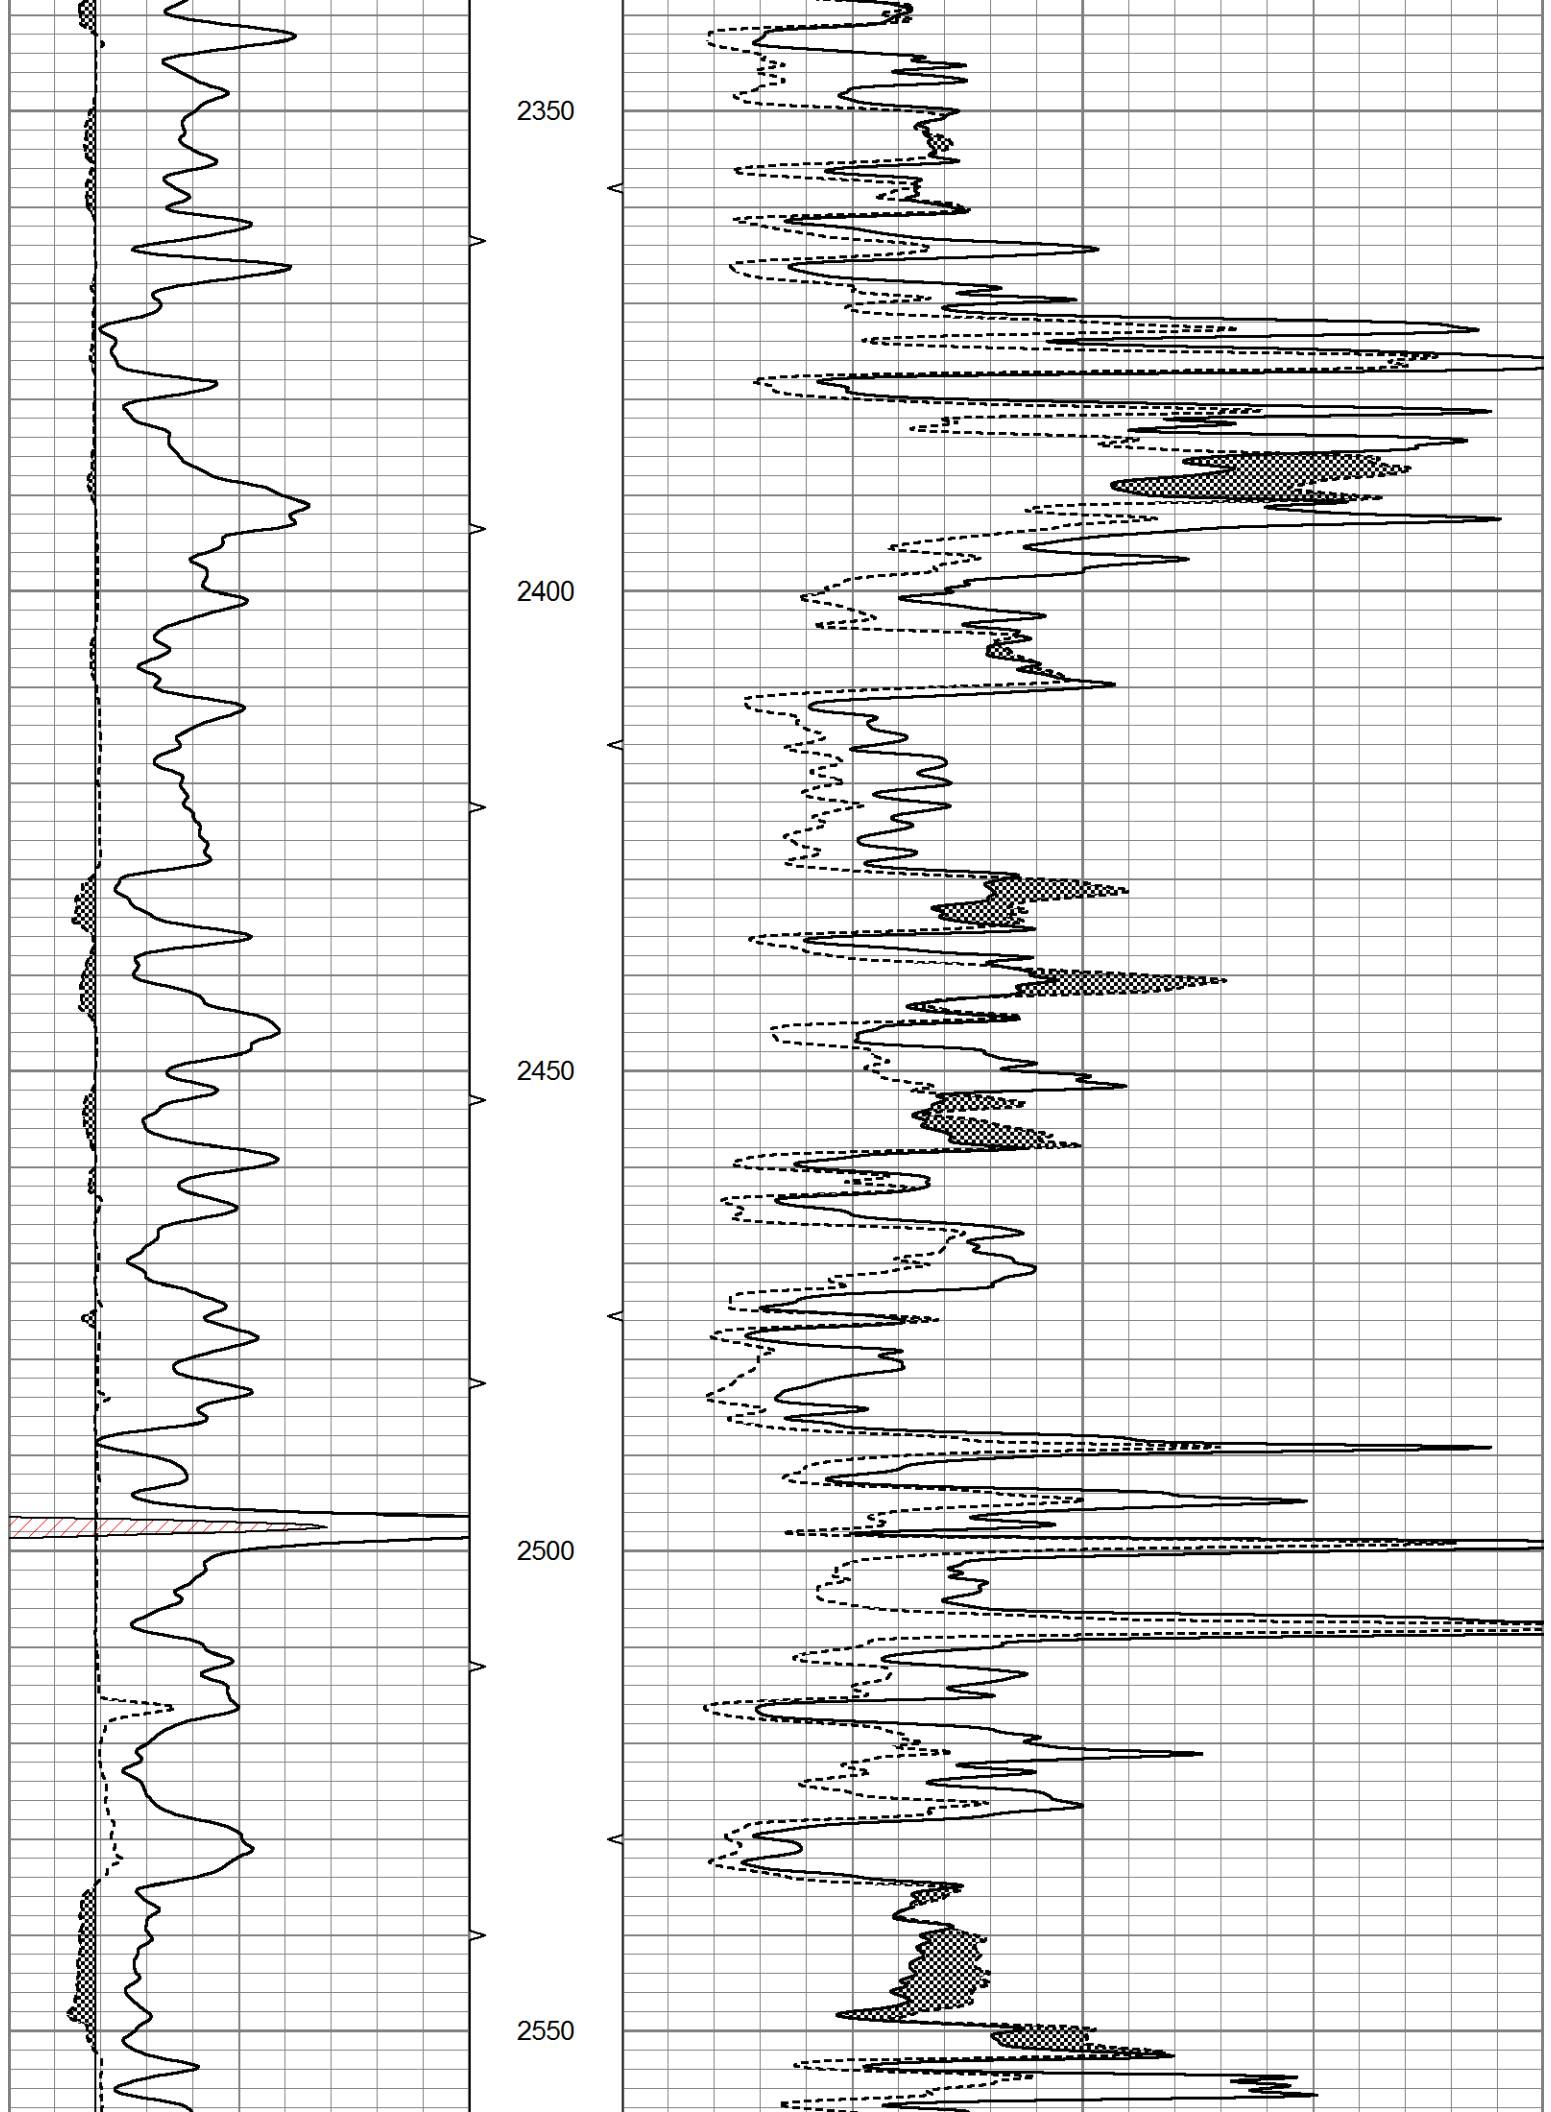

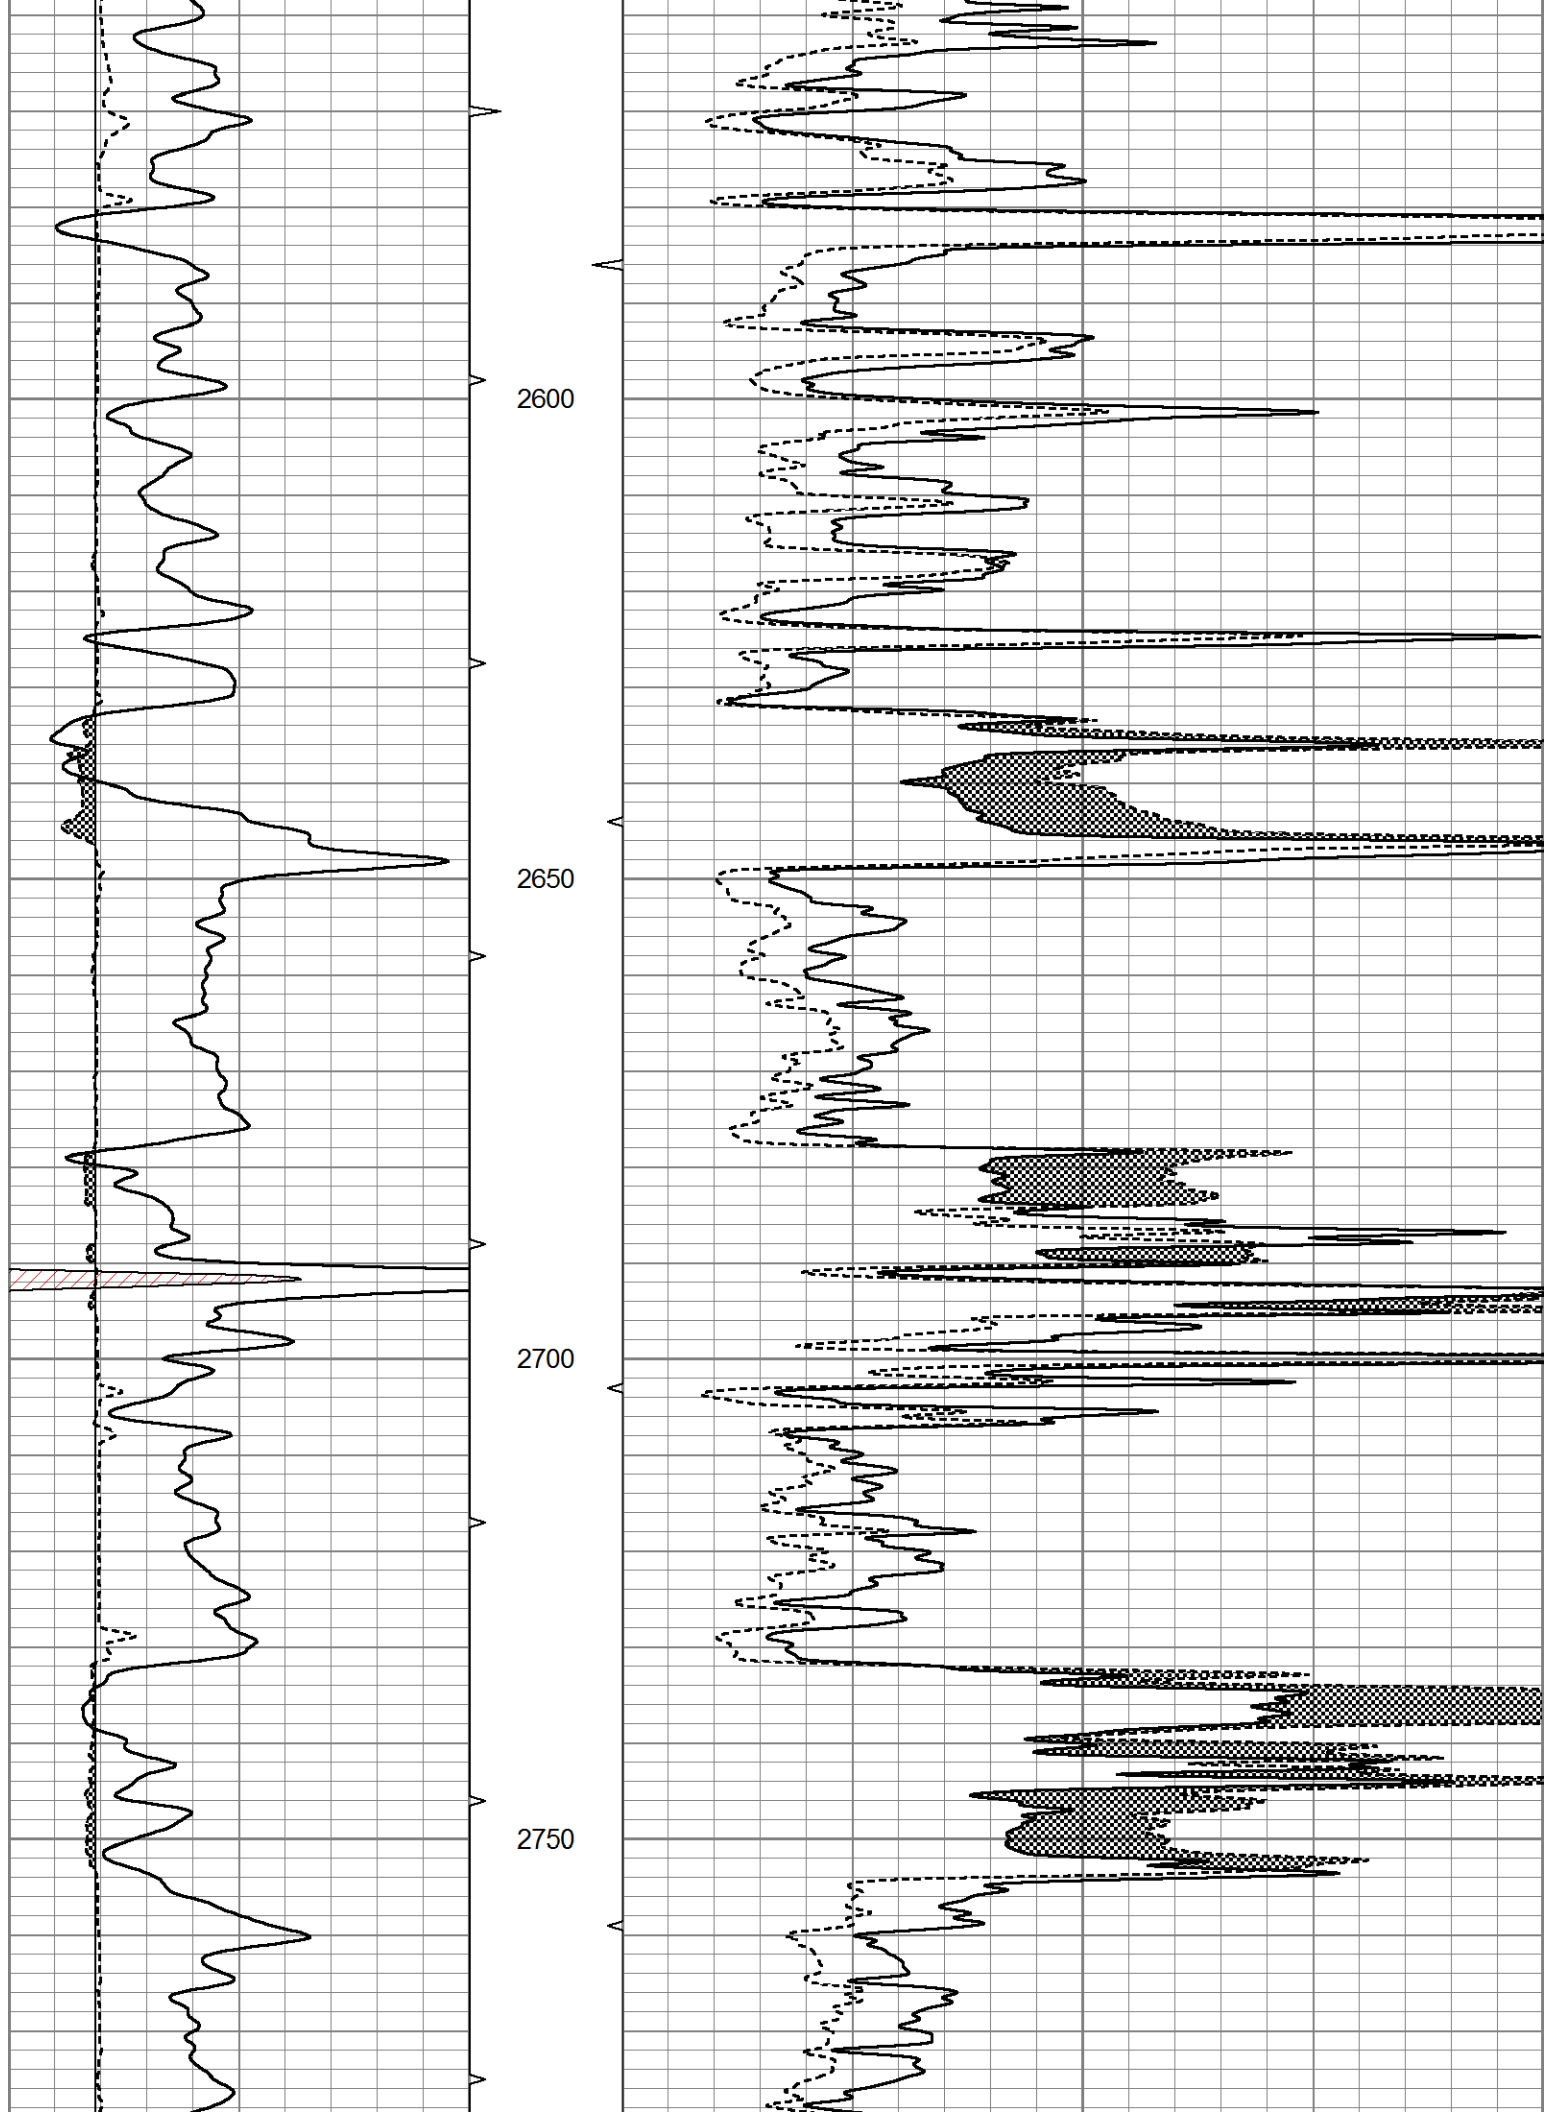

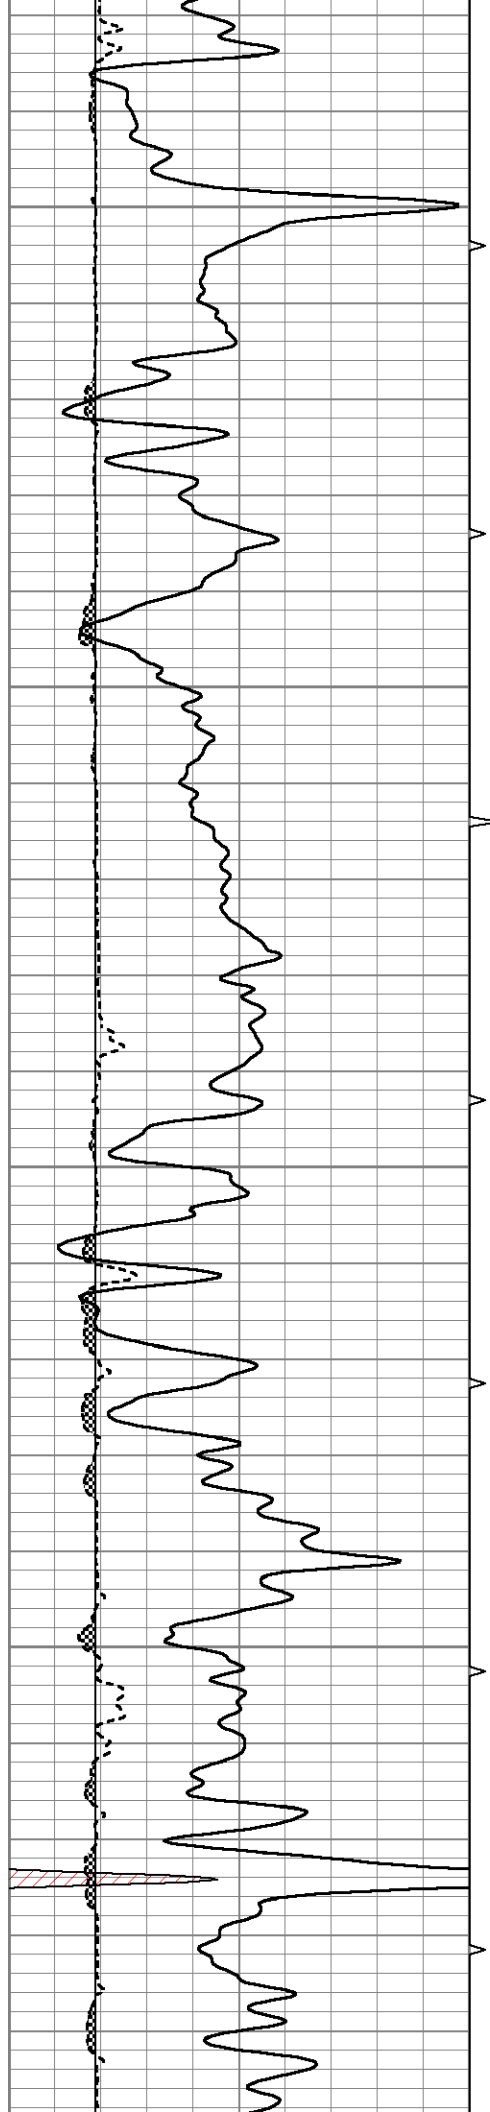



2800

2850

2900

2950

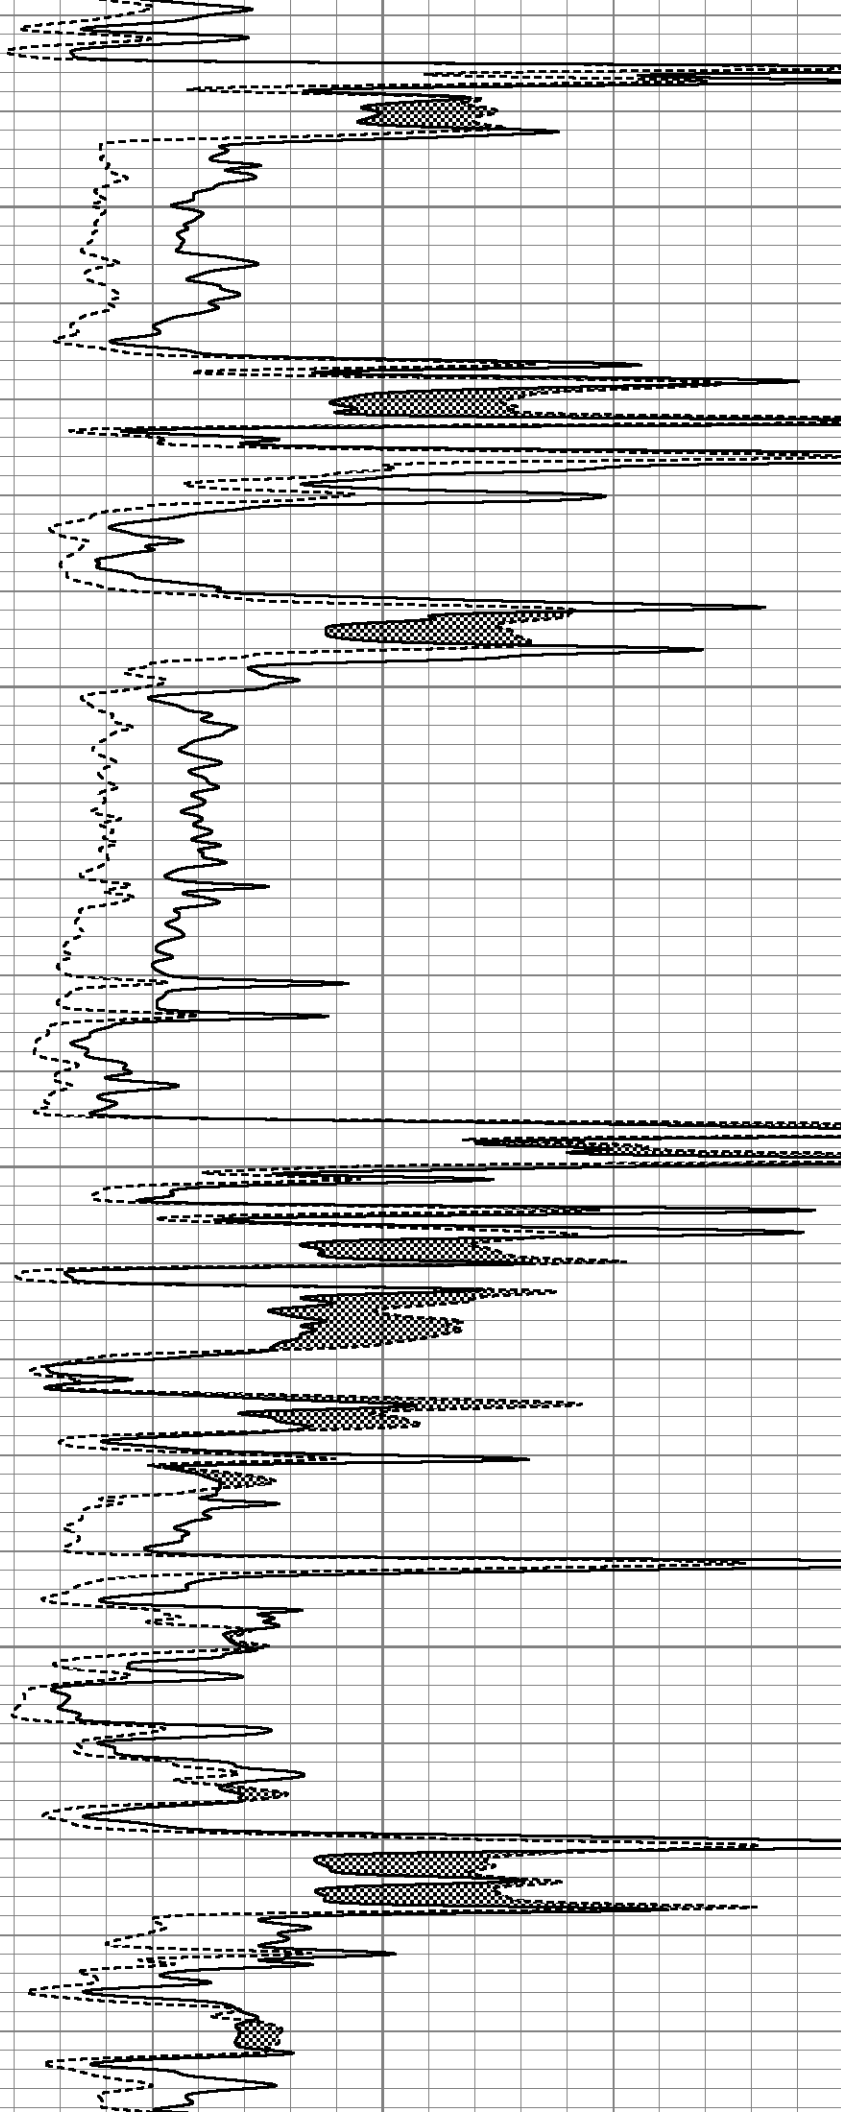

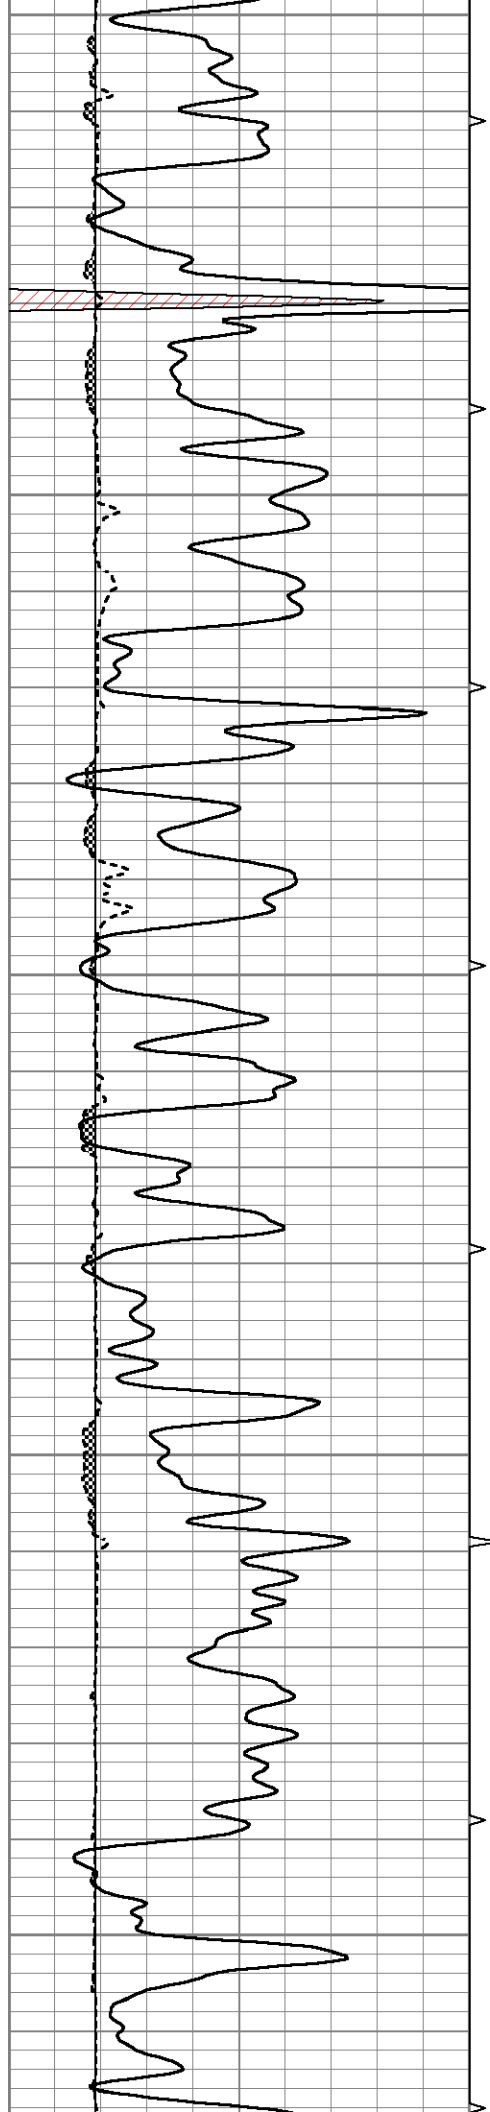


3000


3050


3100


3150


3200

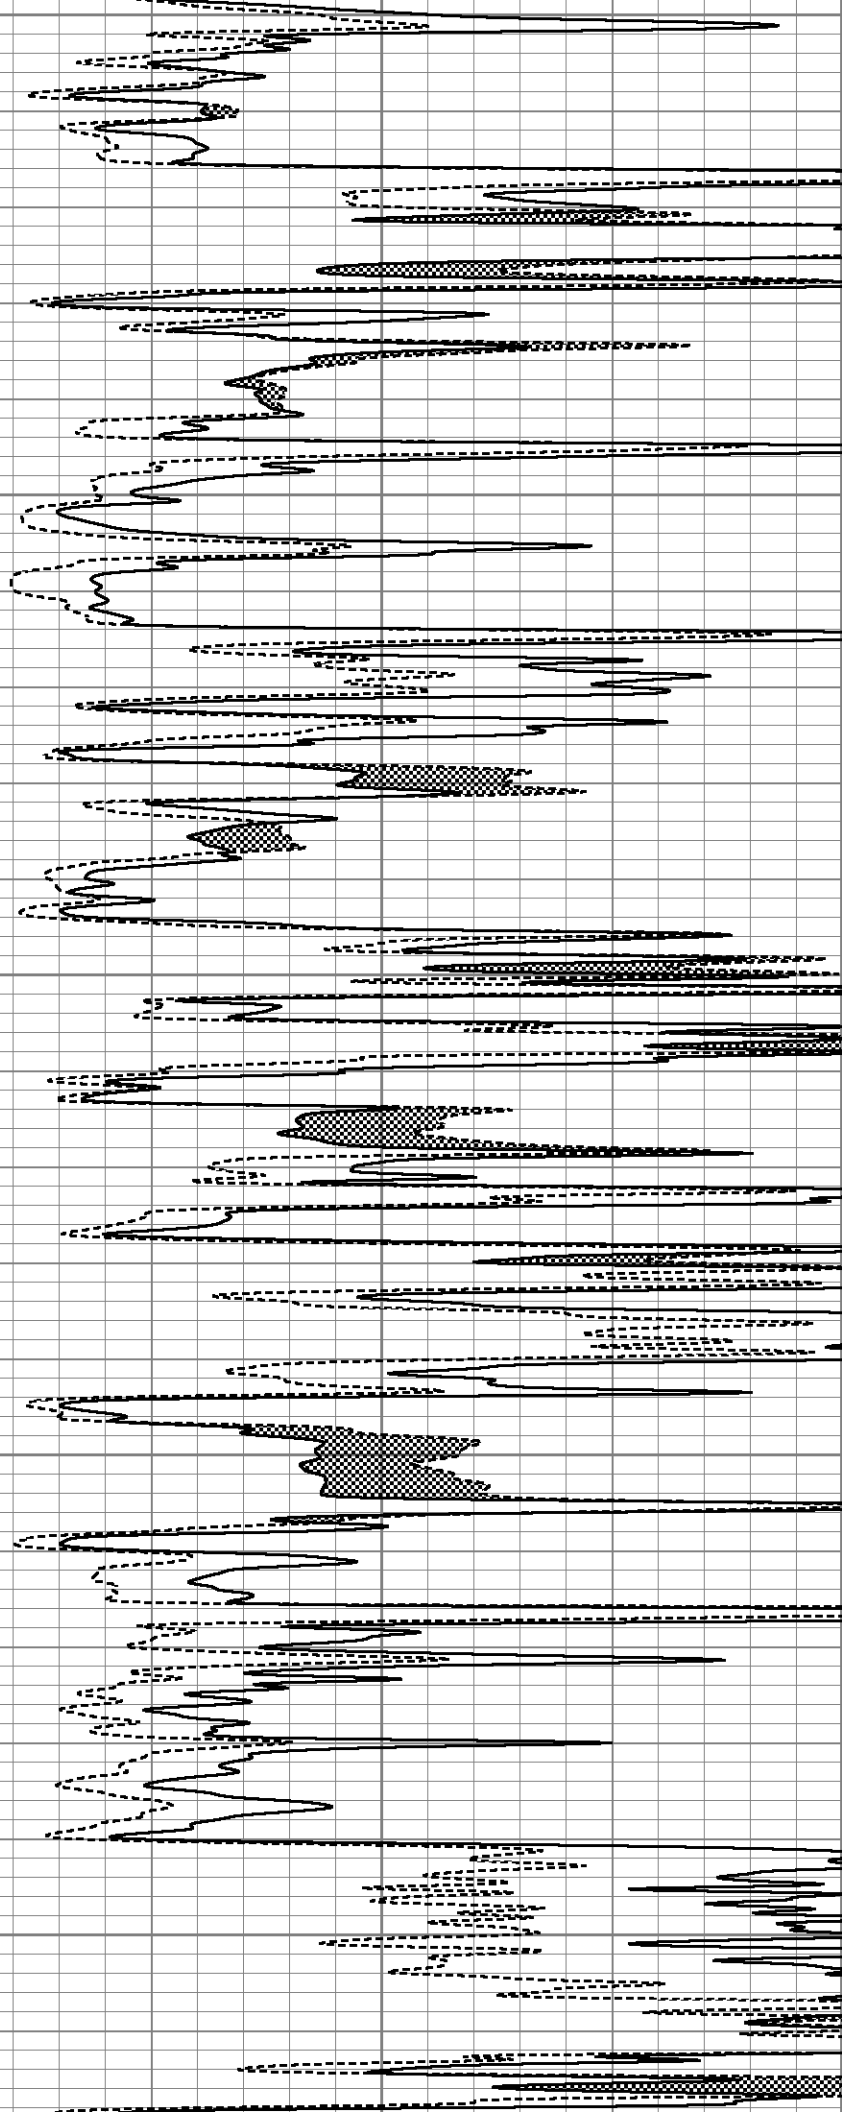


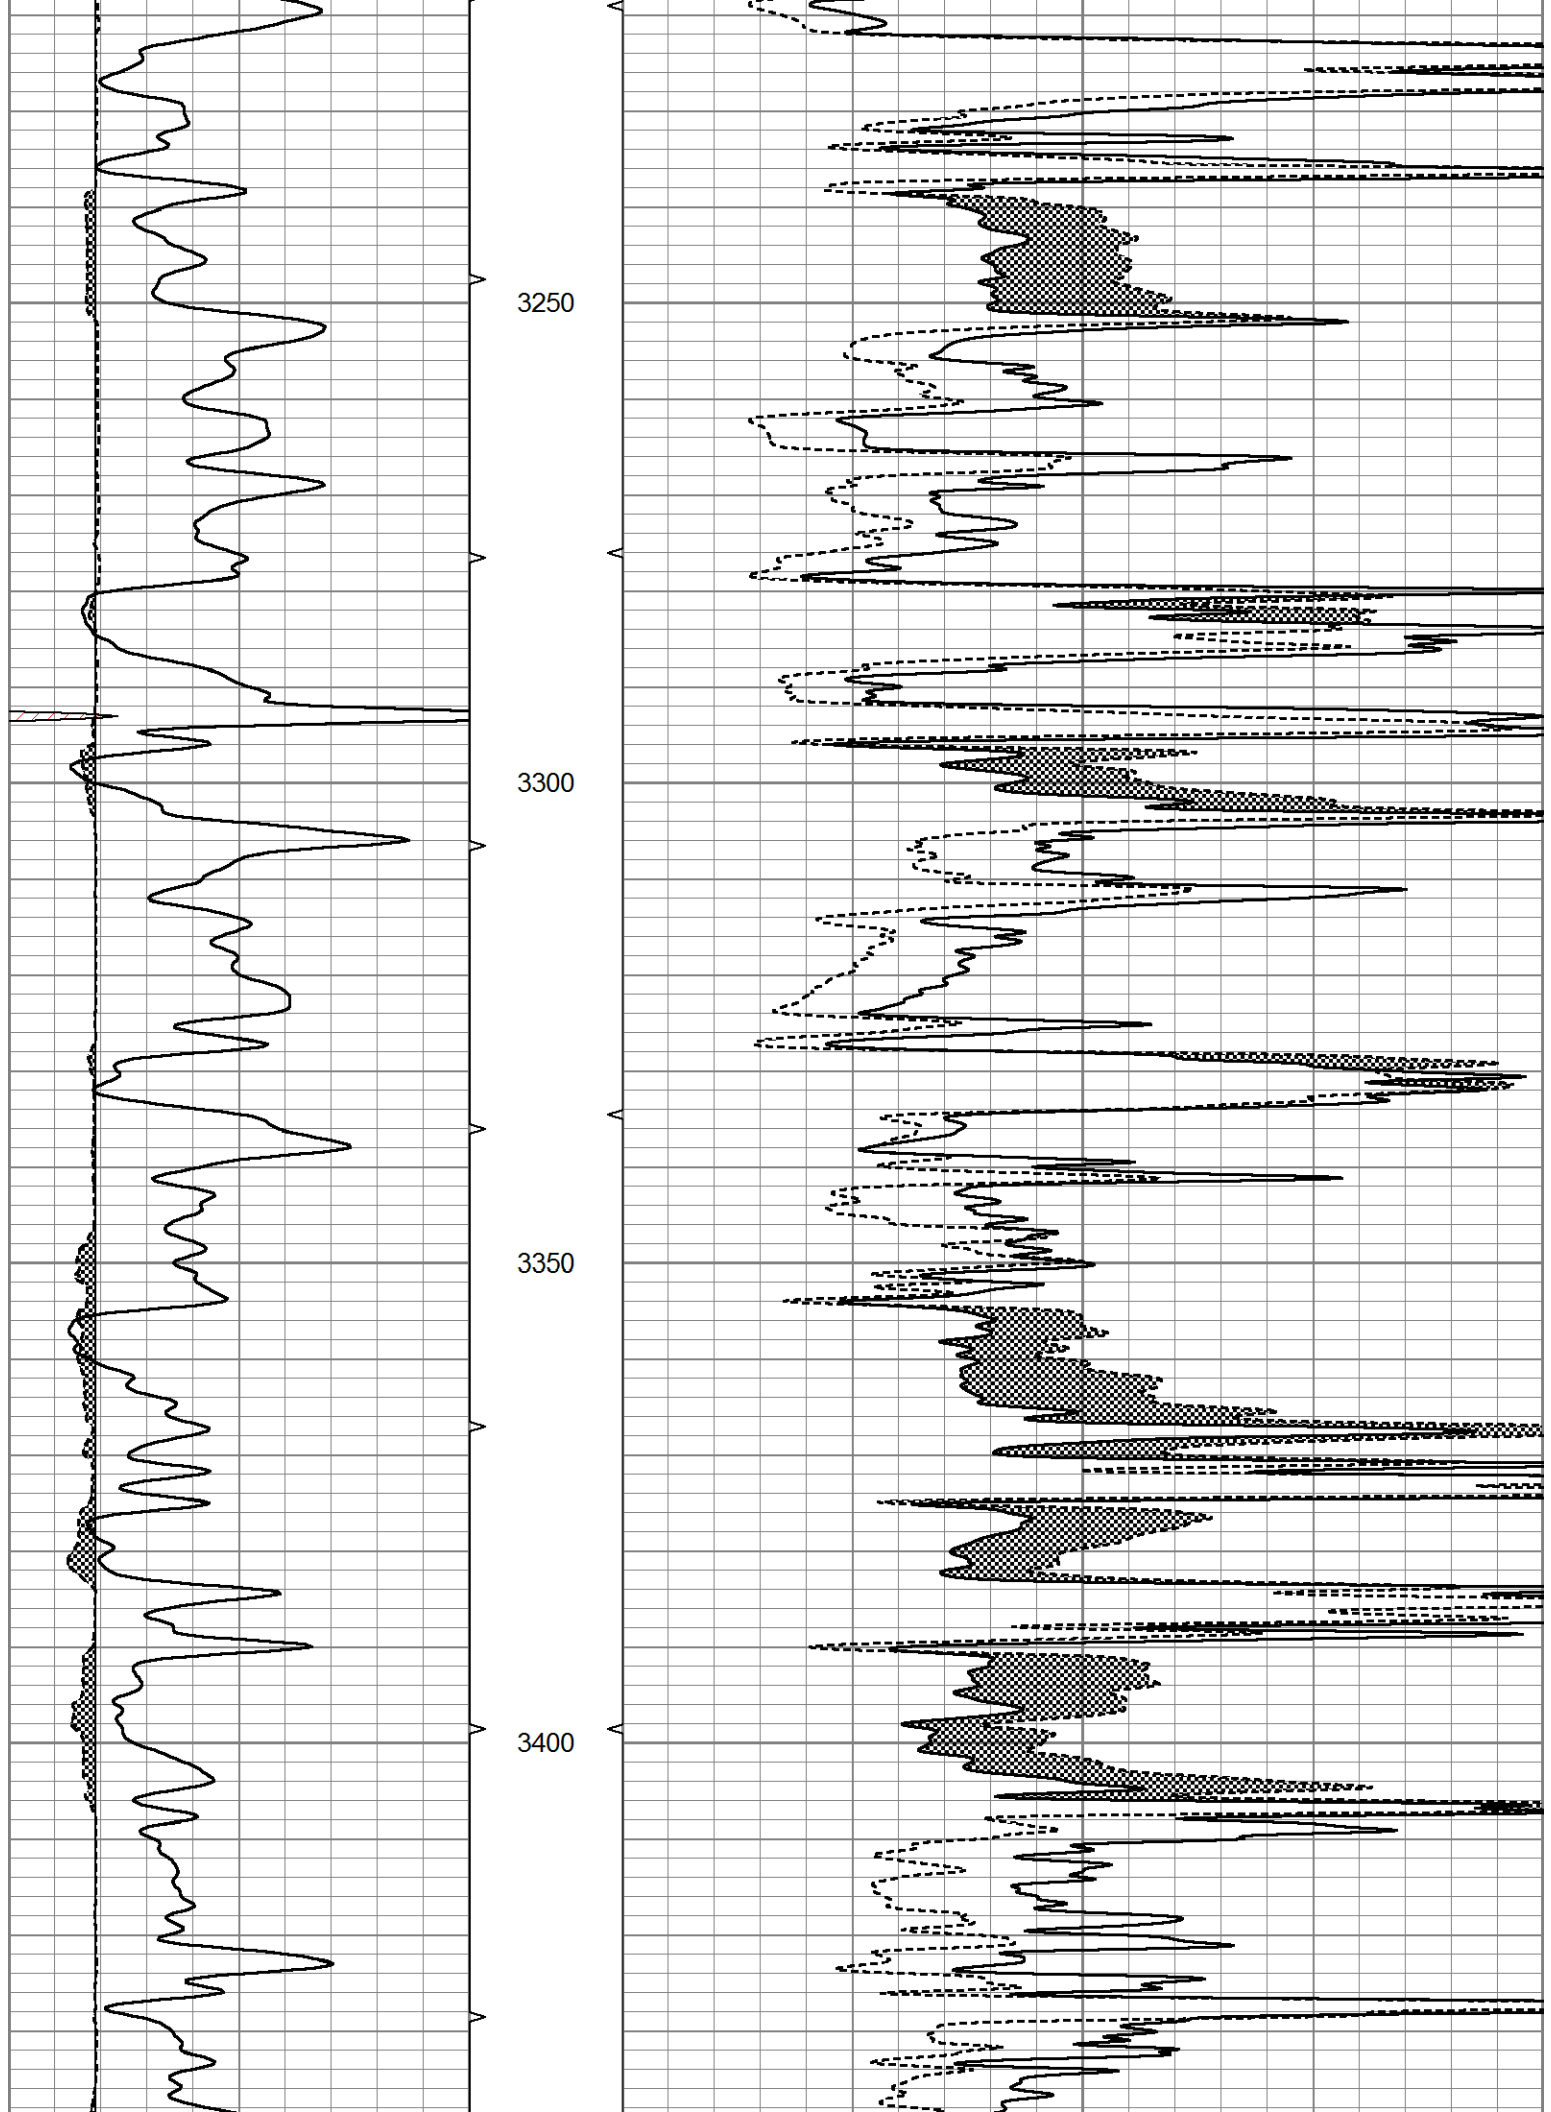

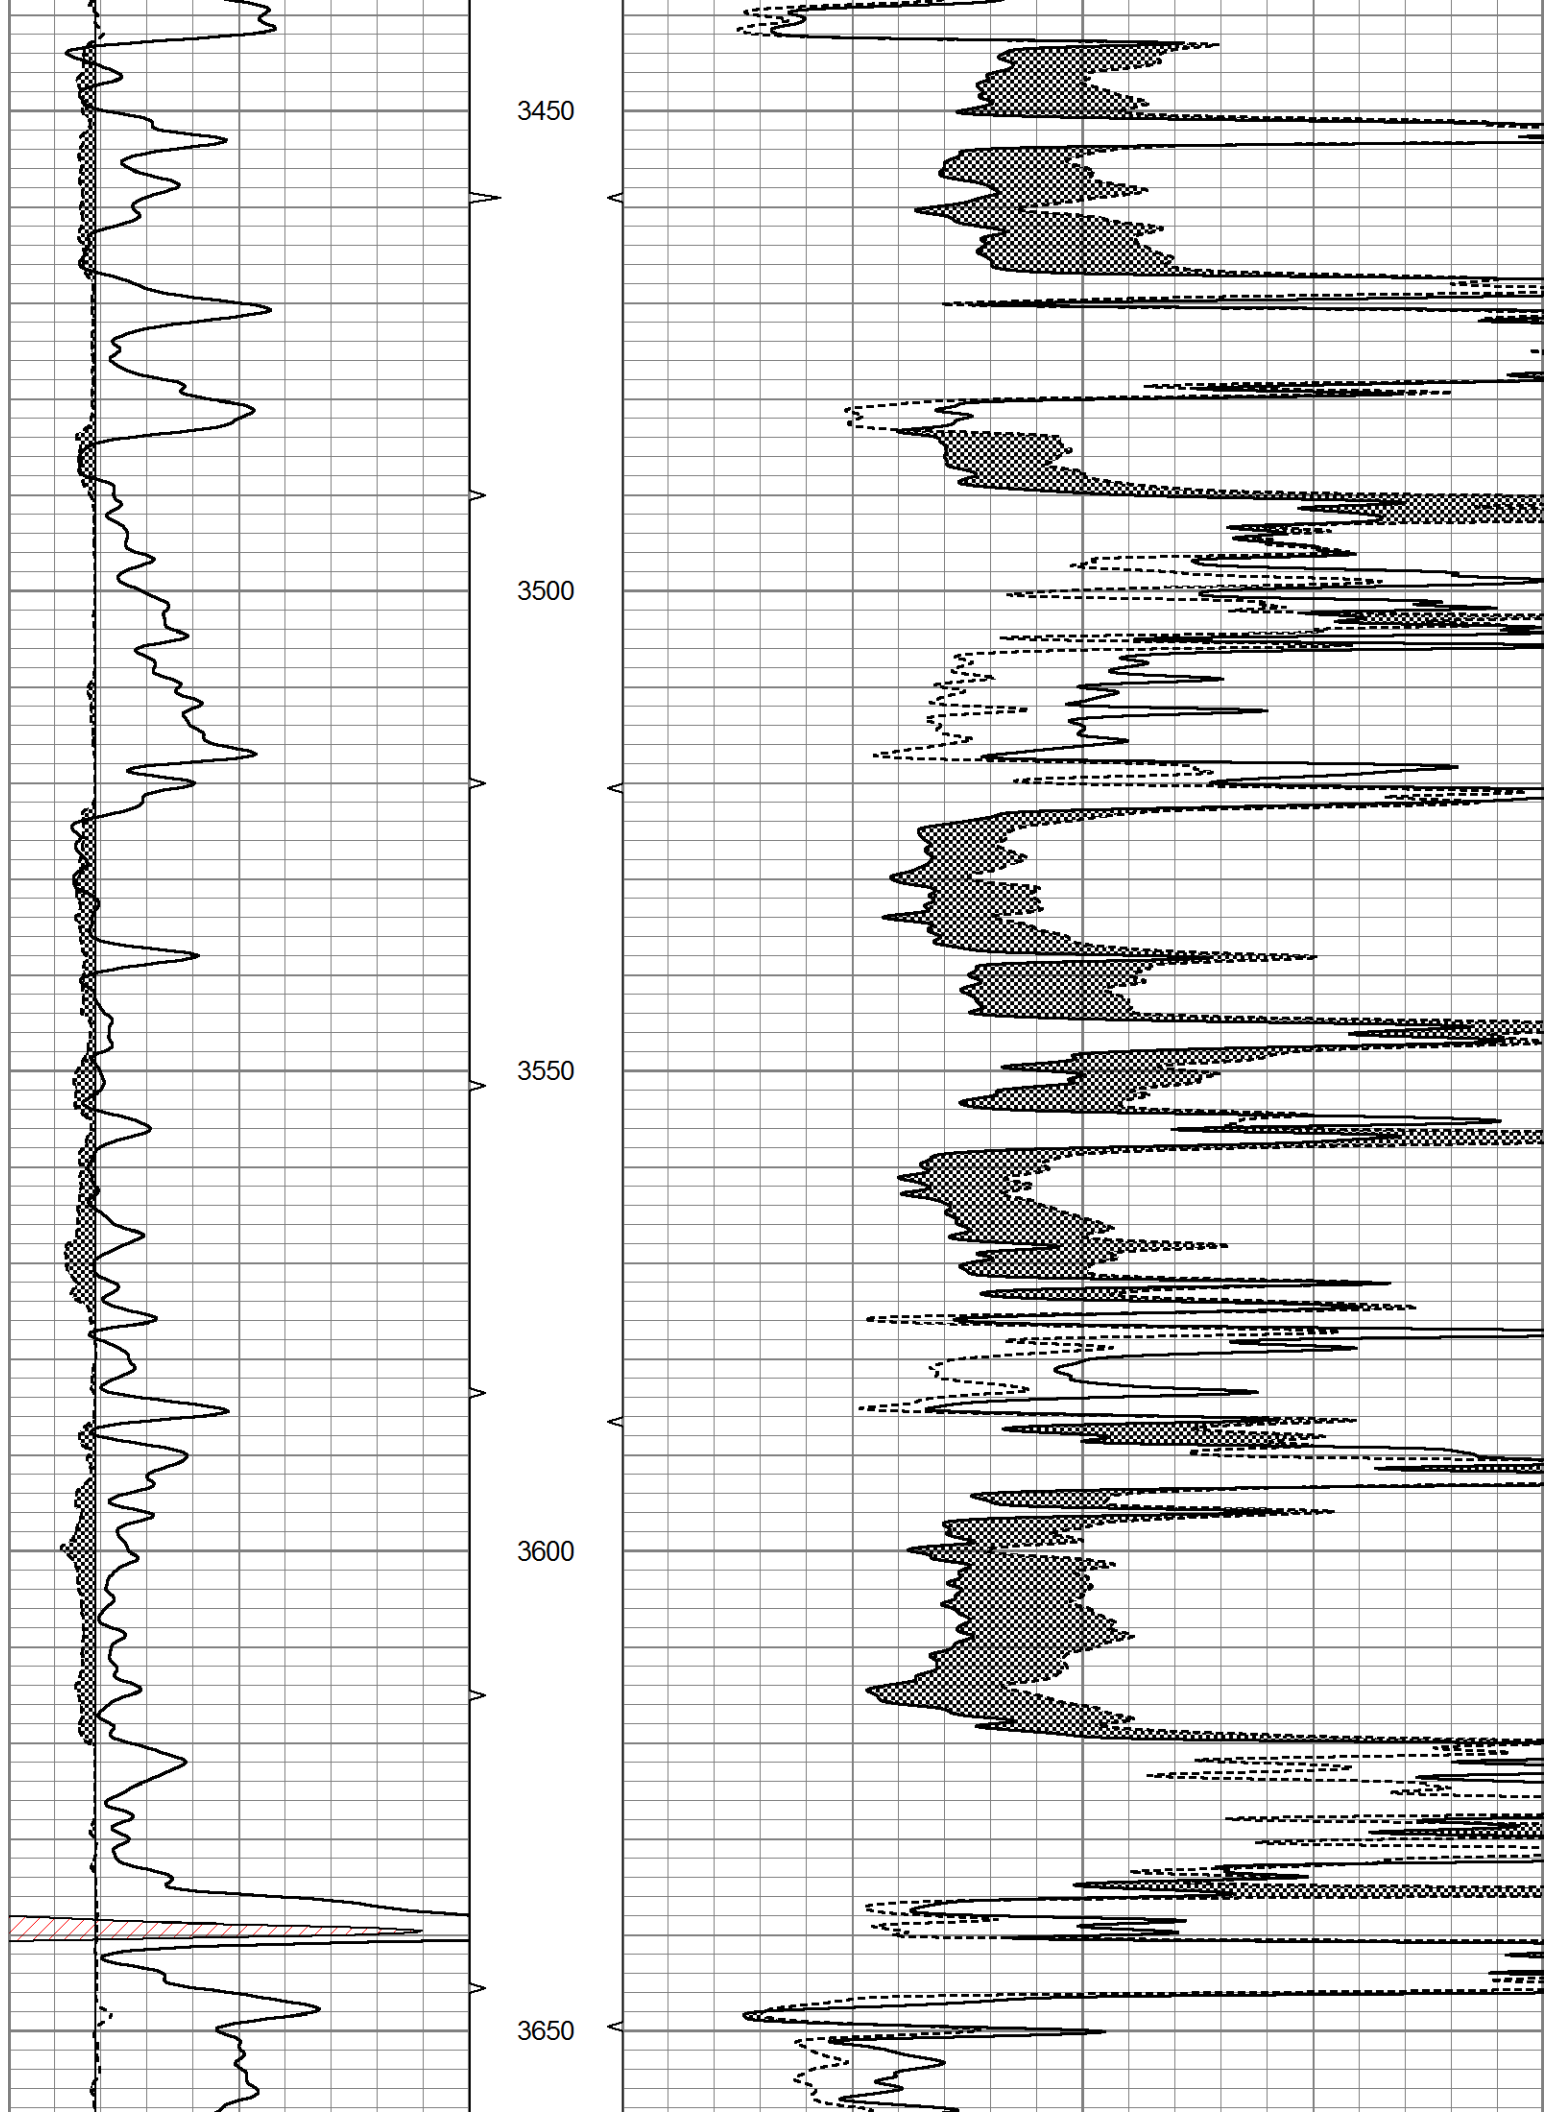

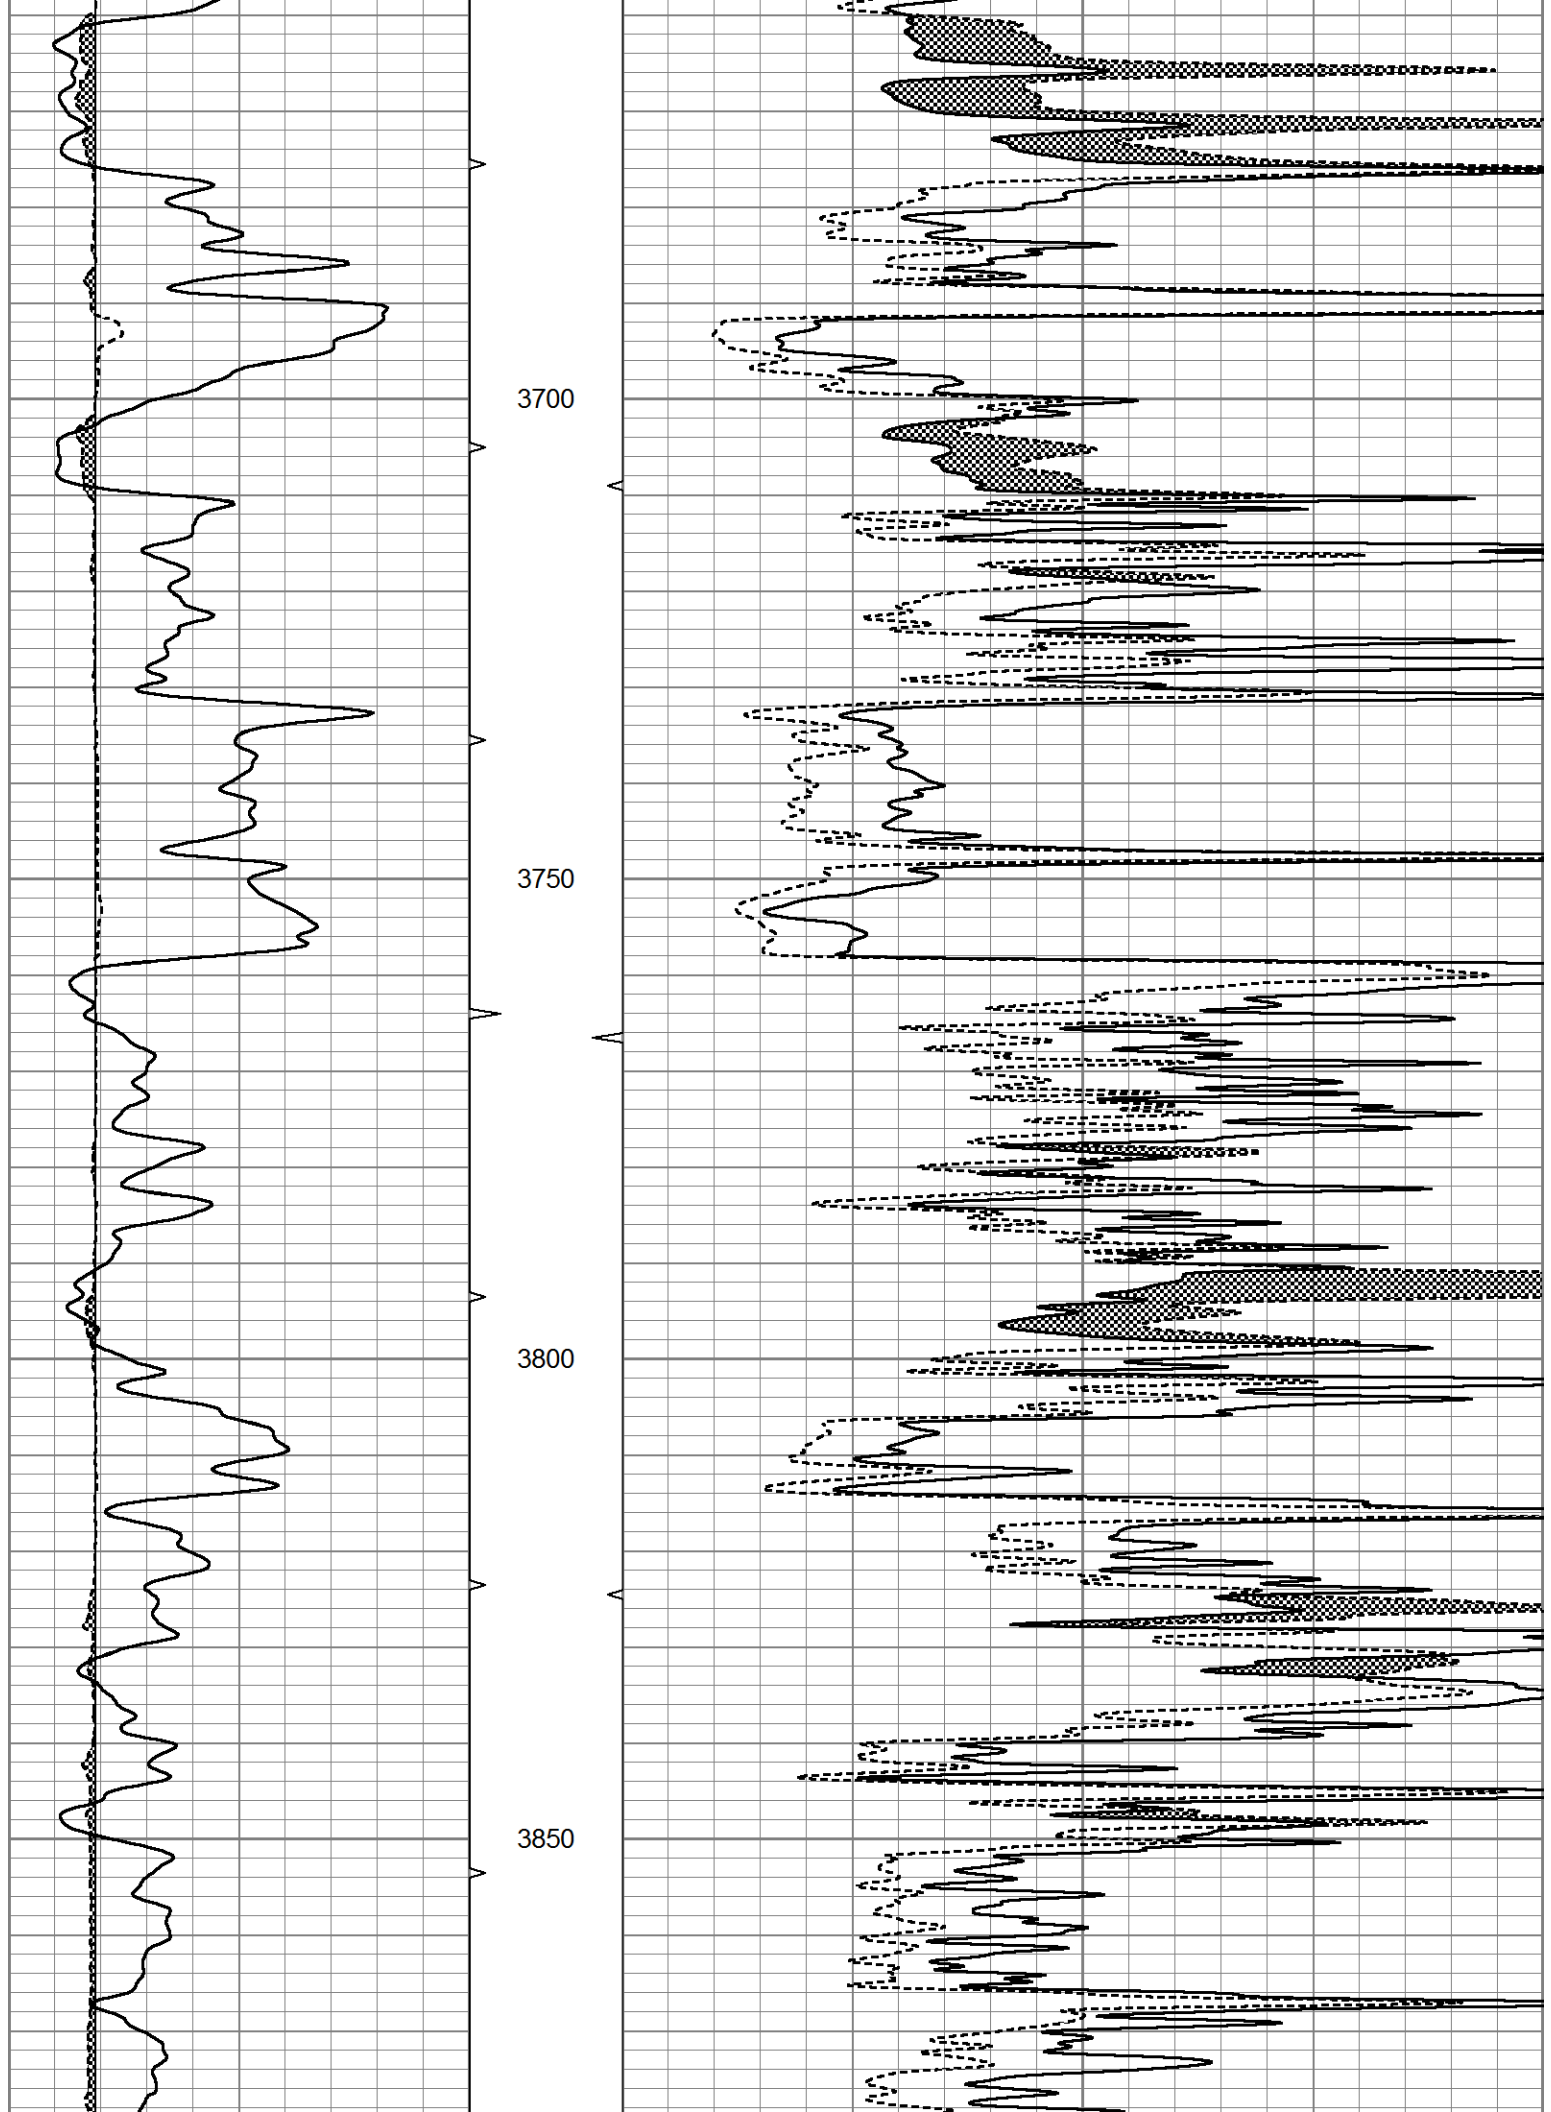

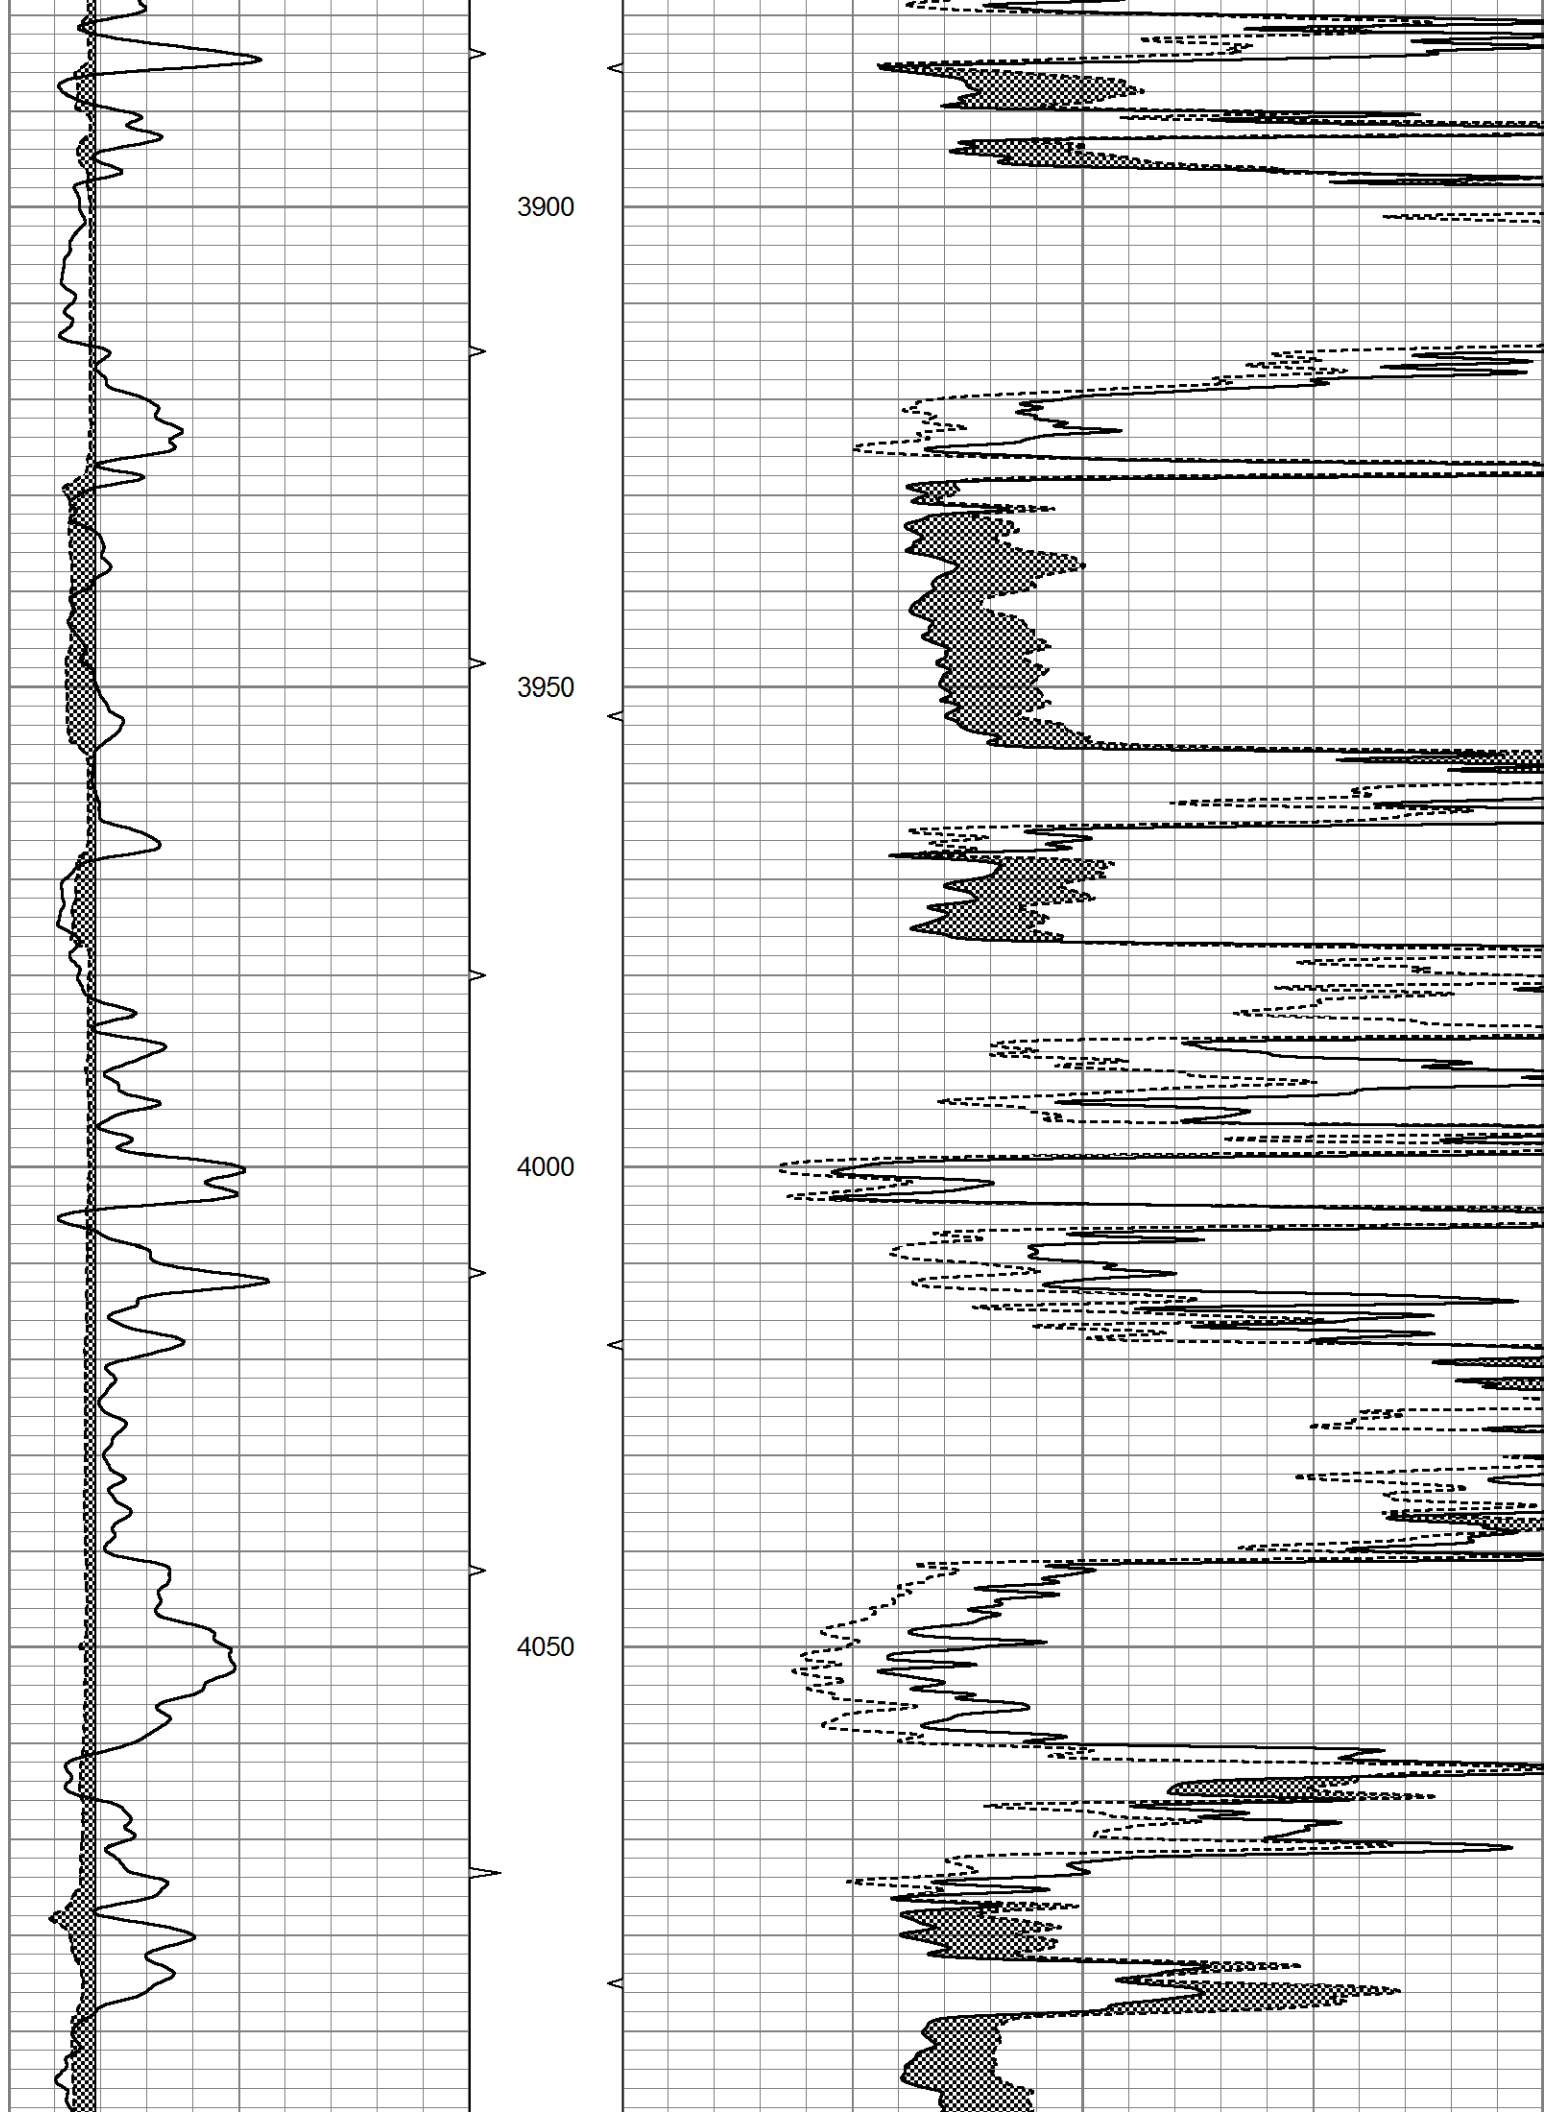

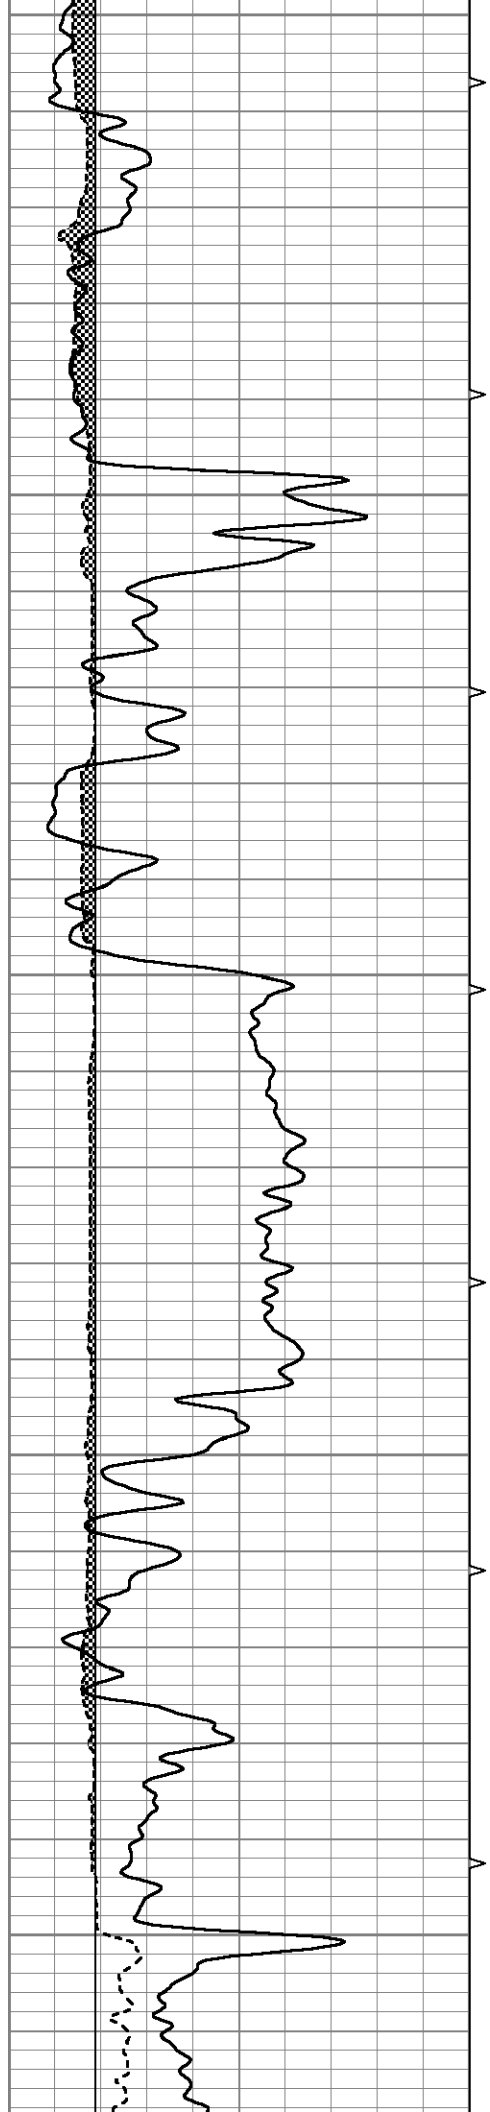


4100


4150


4200


4250

4300

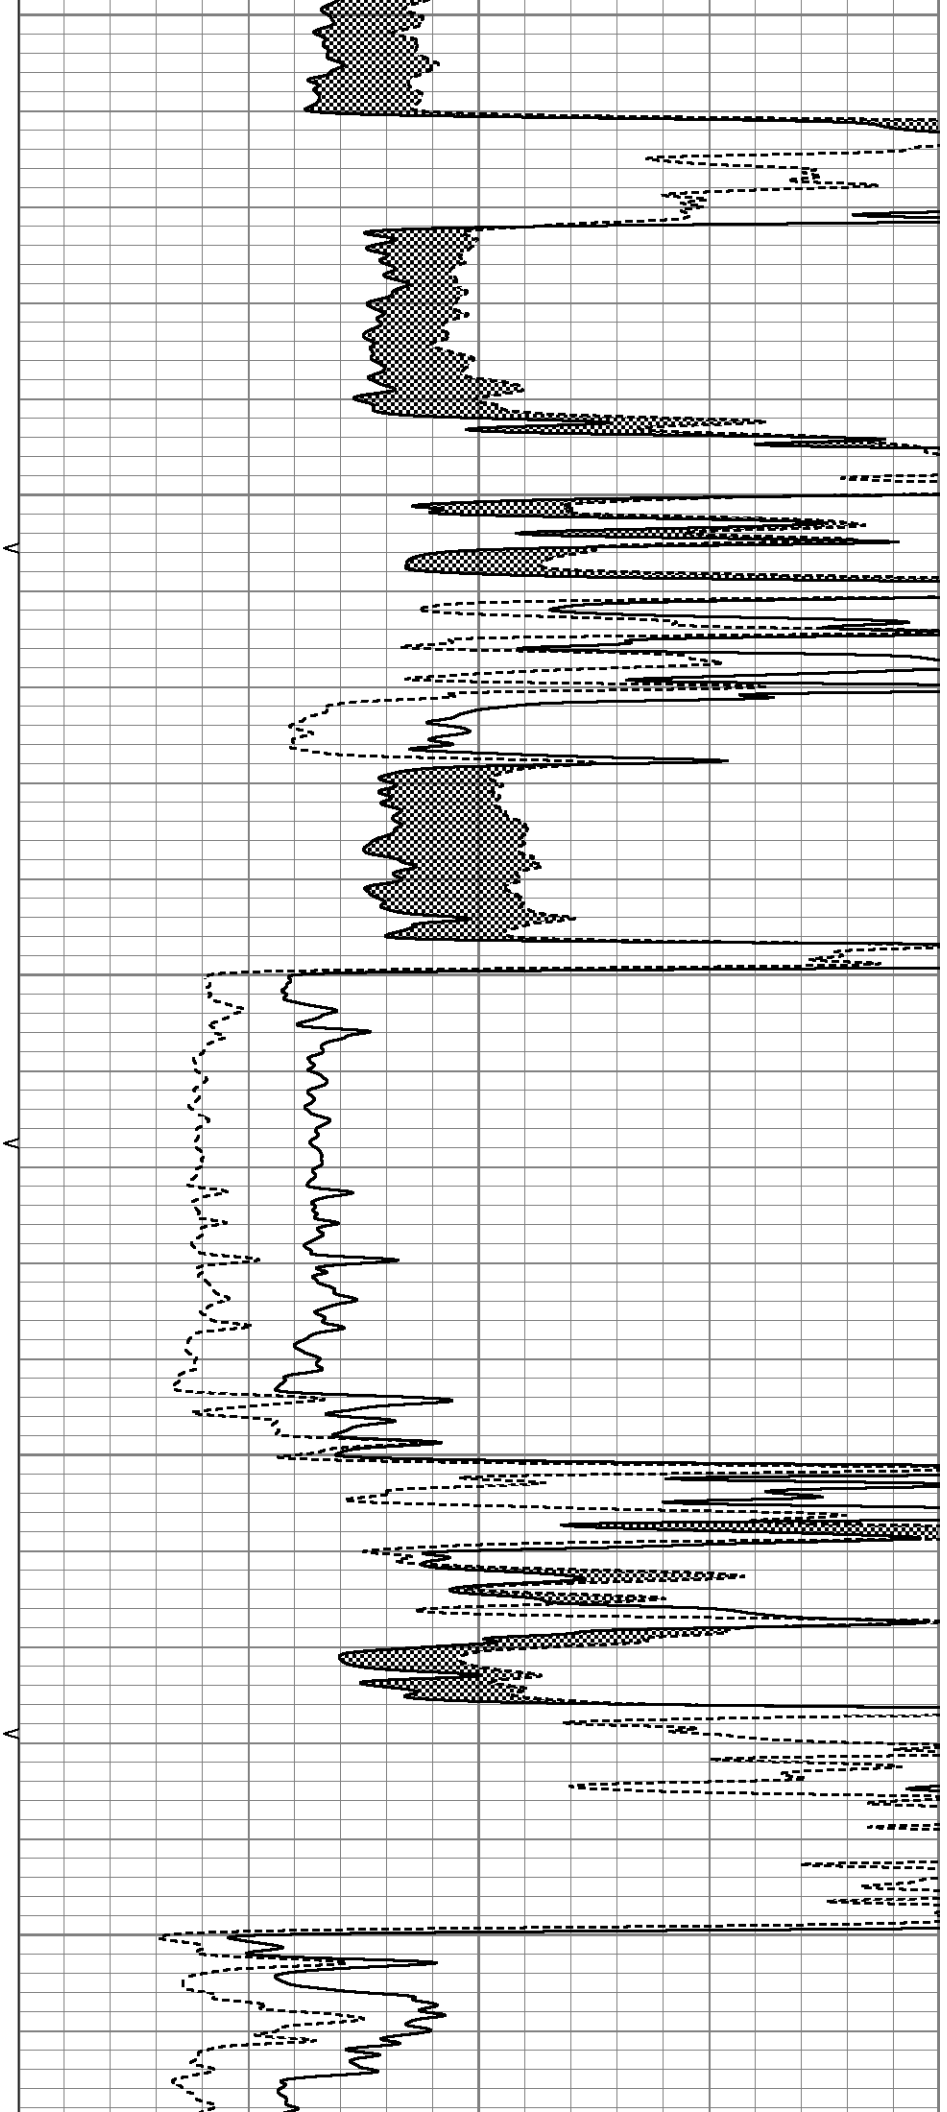

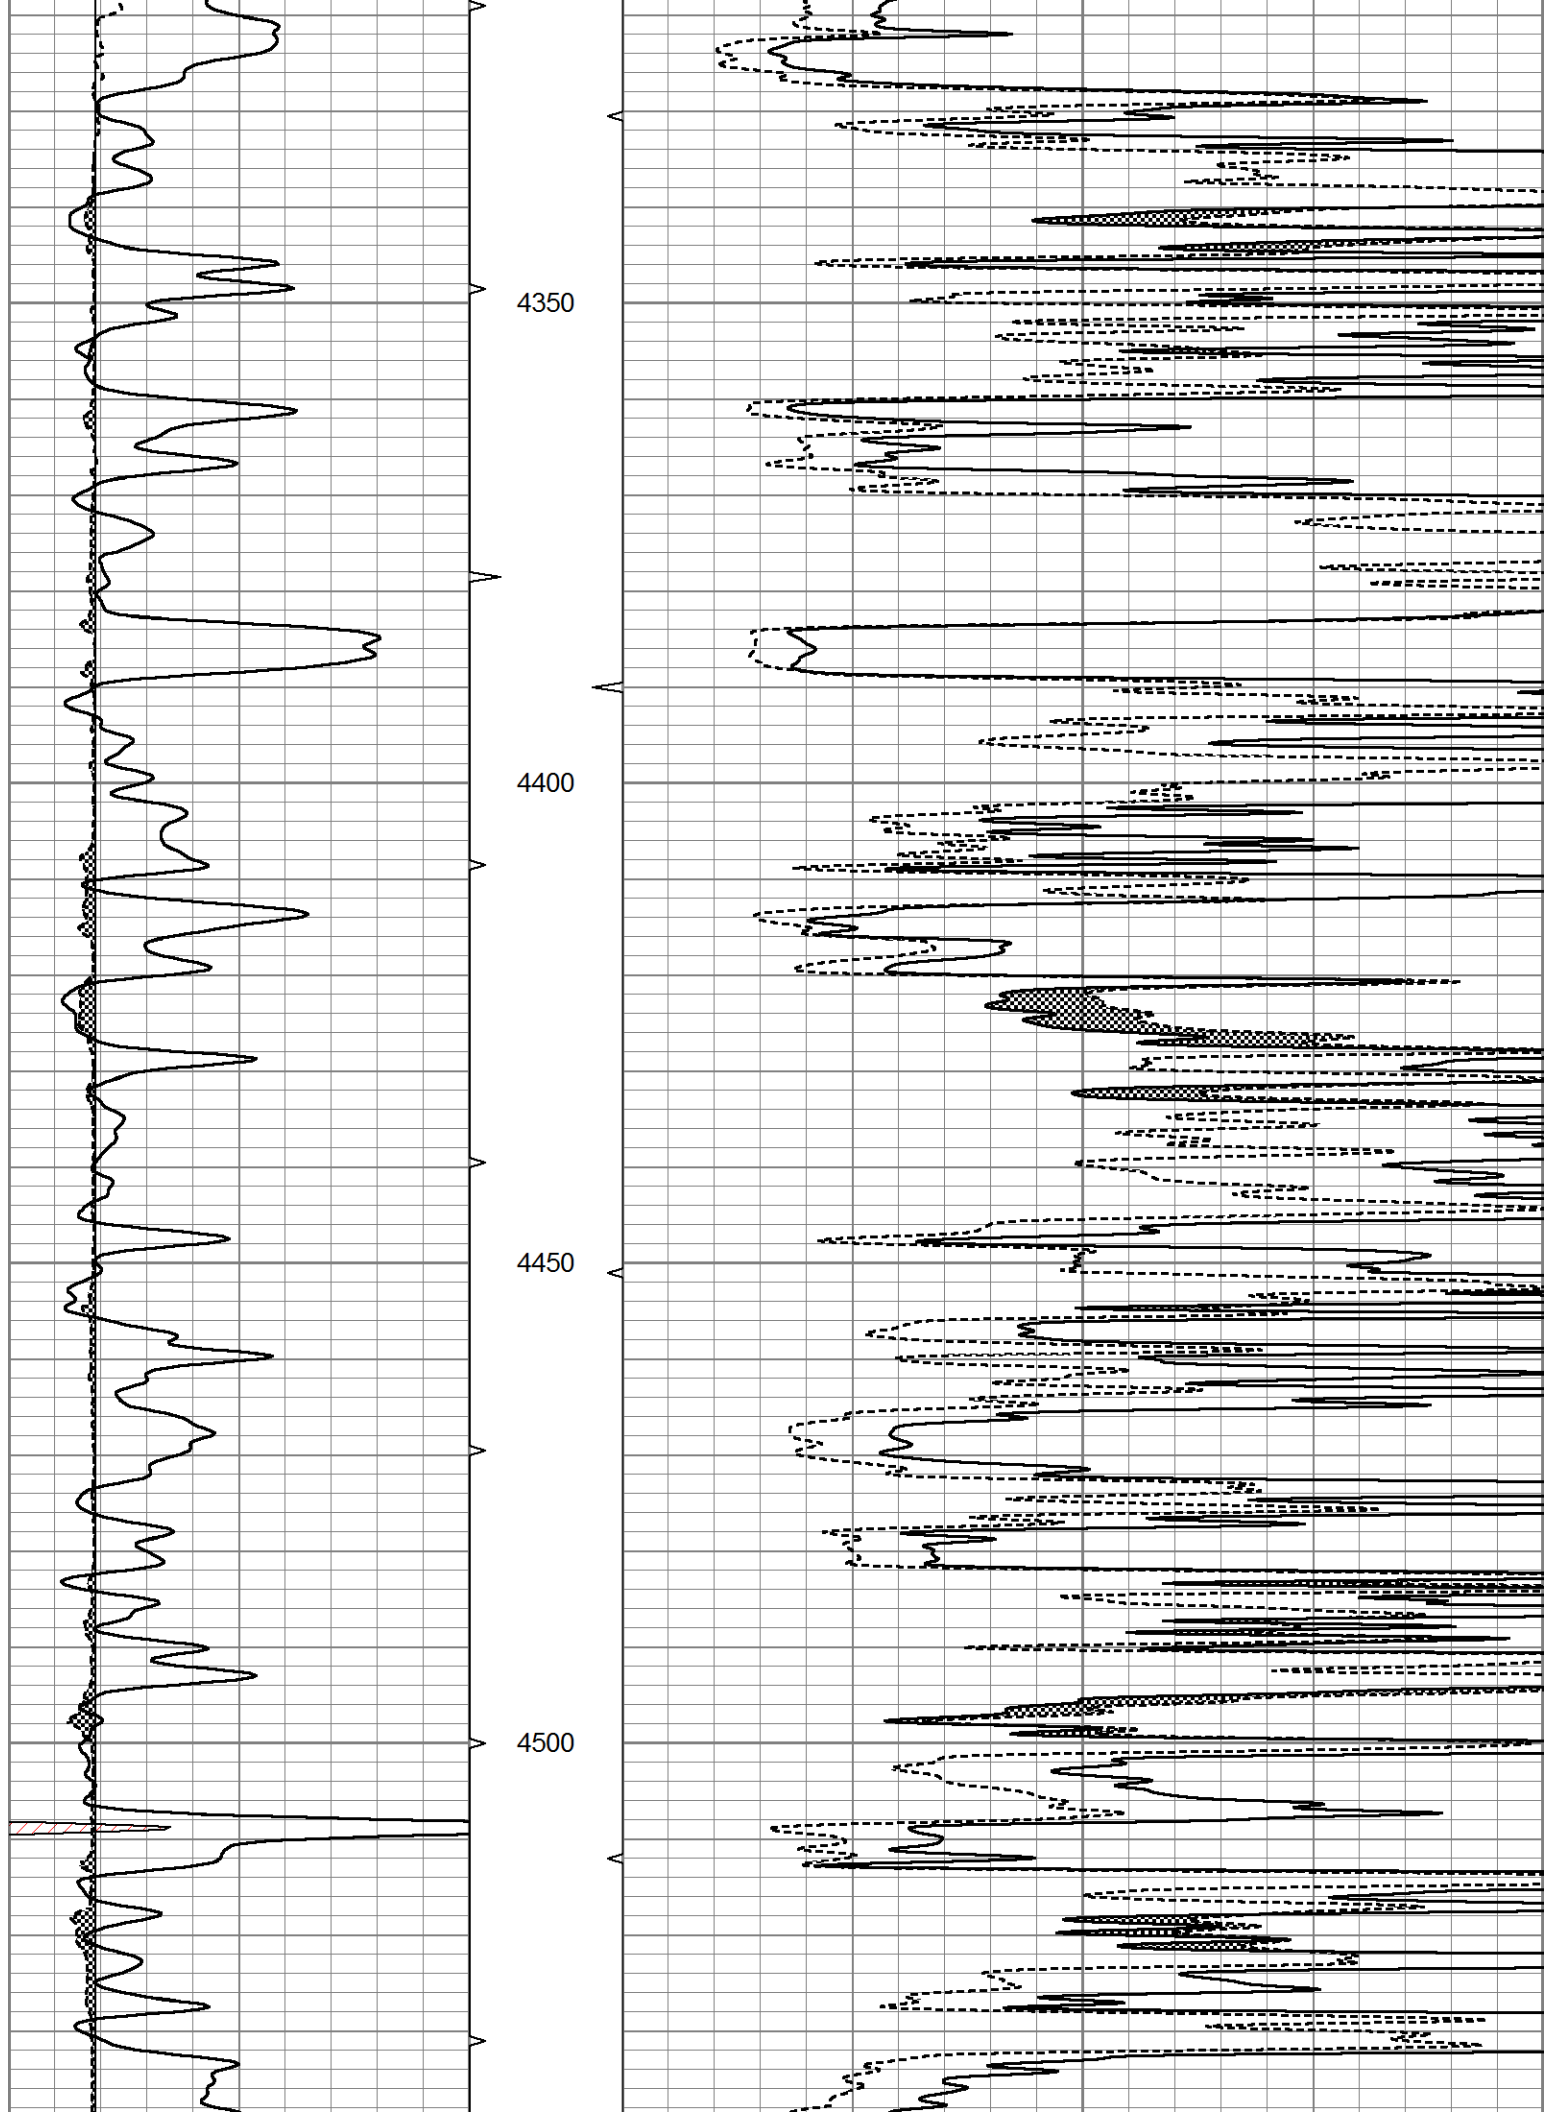

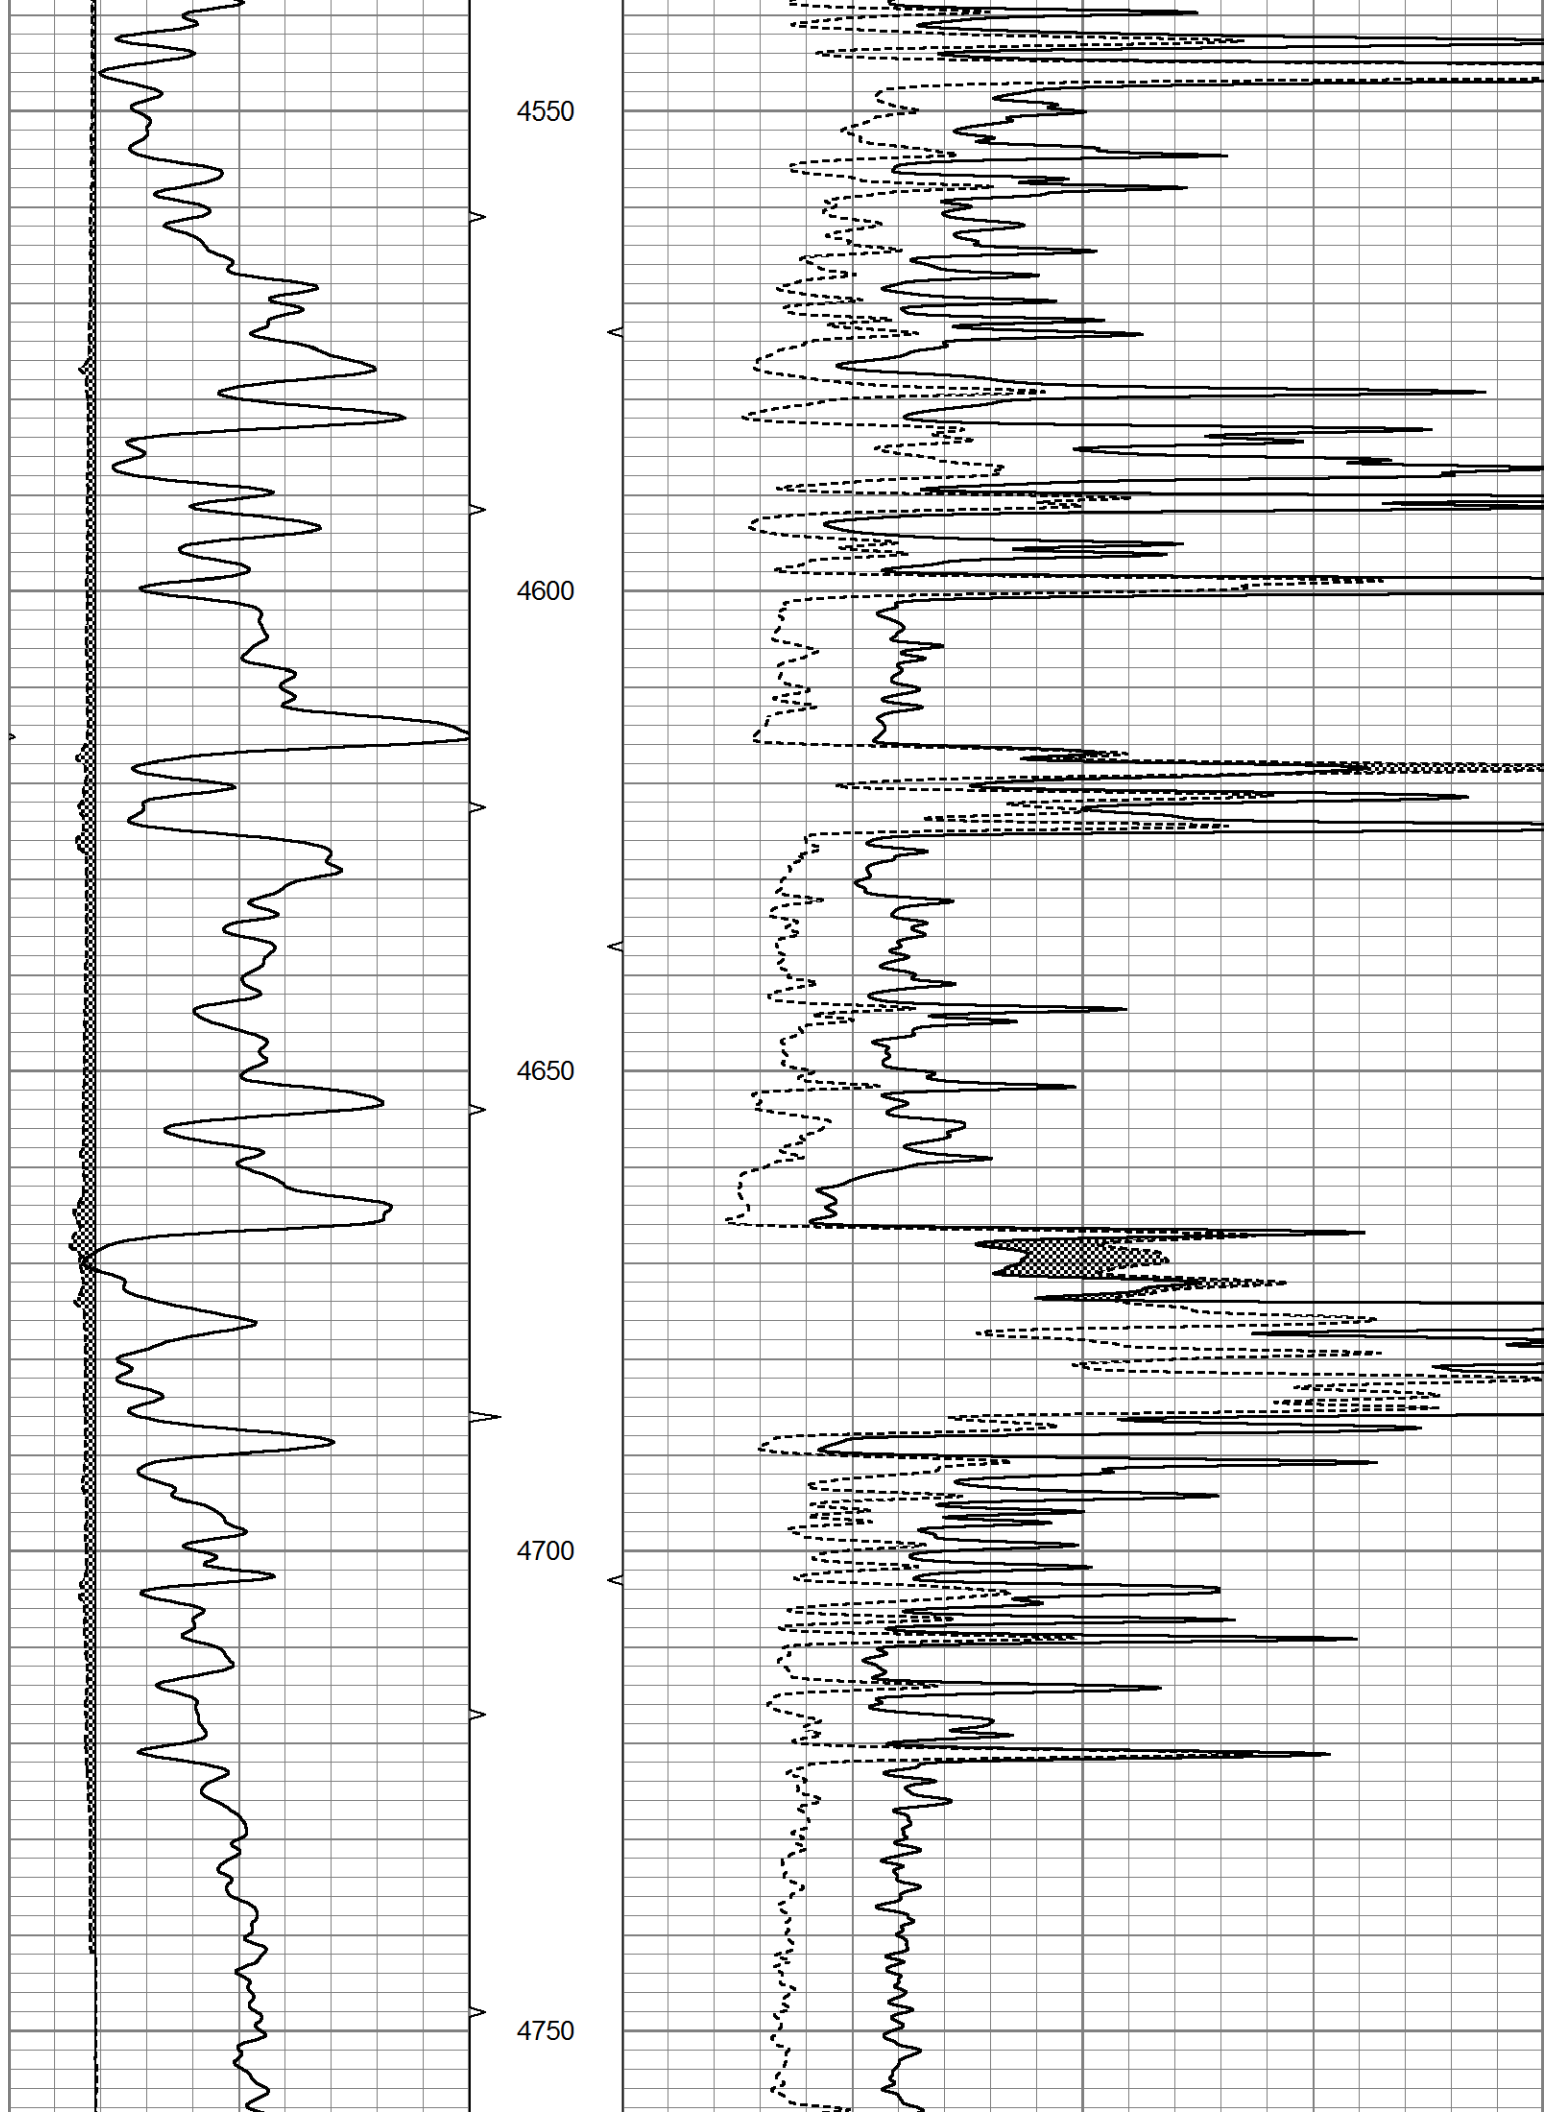

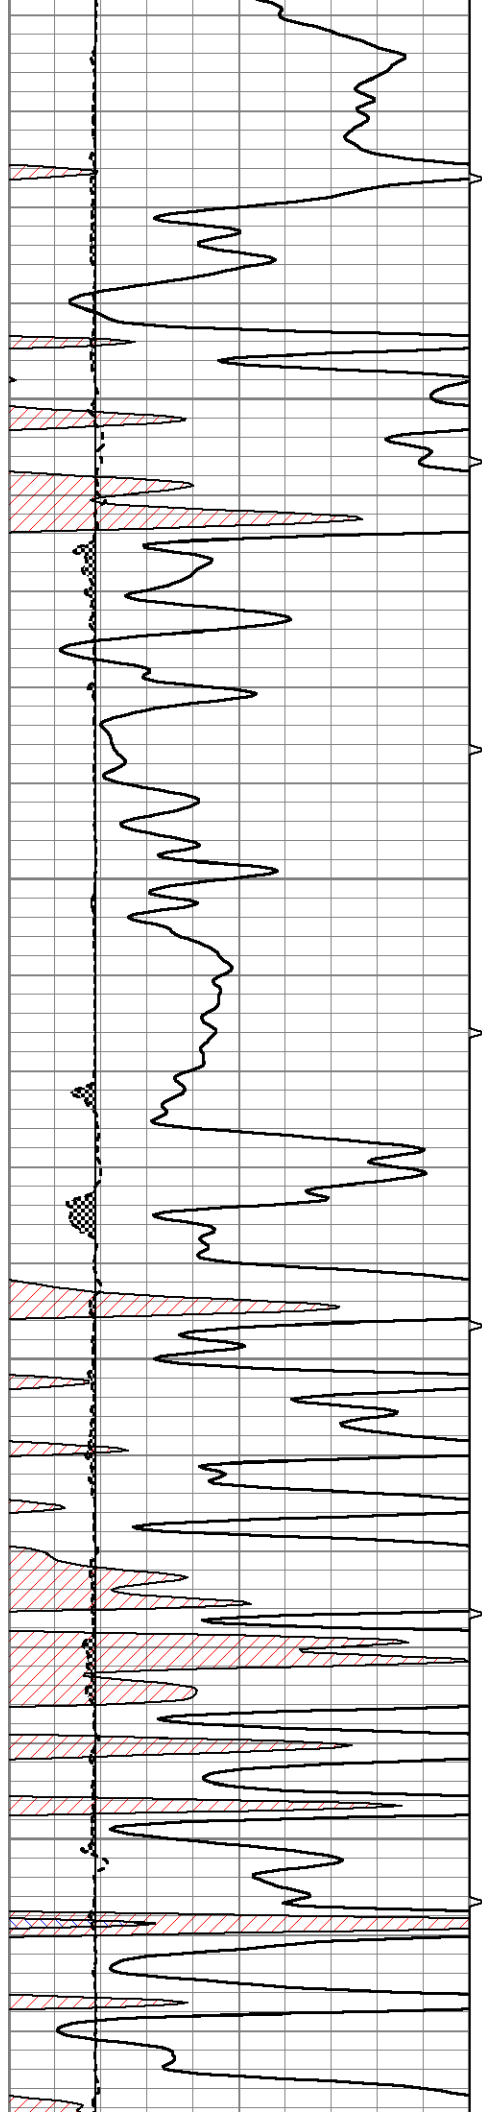



4800


4850


4900

4950

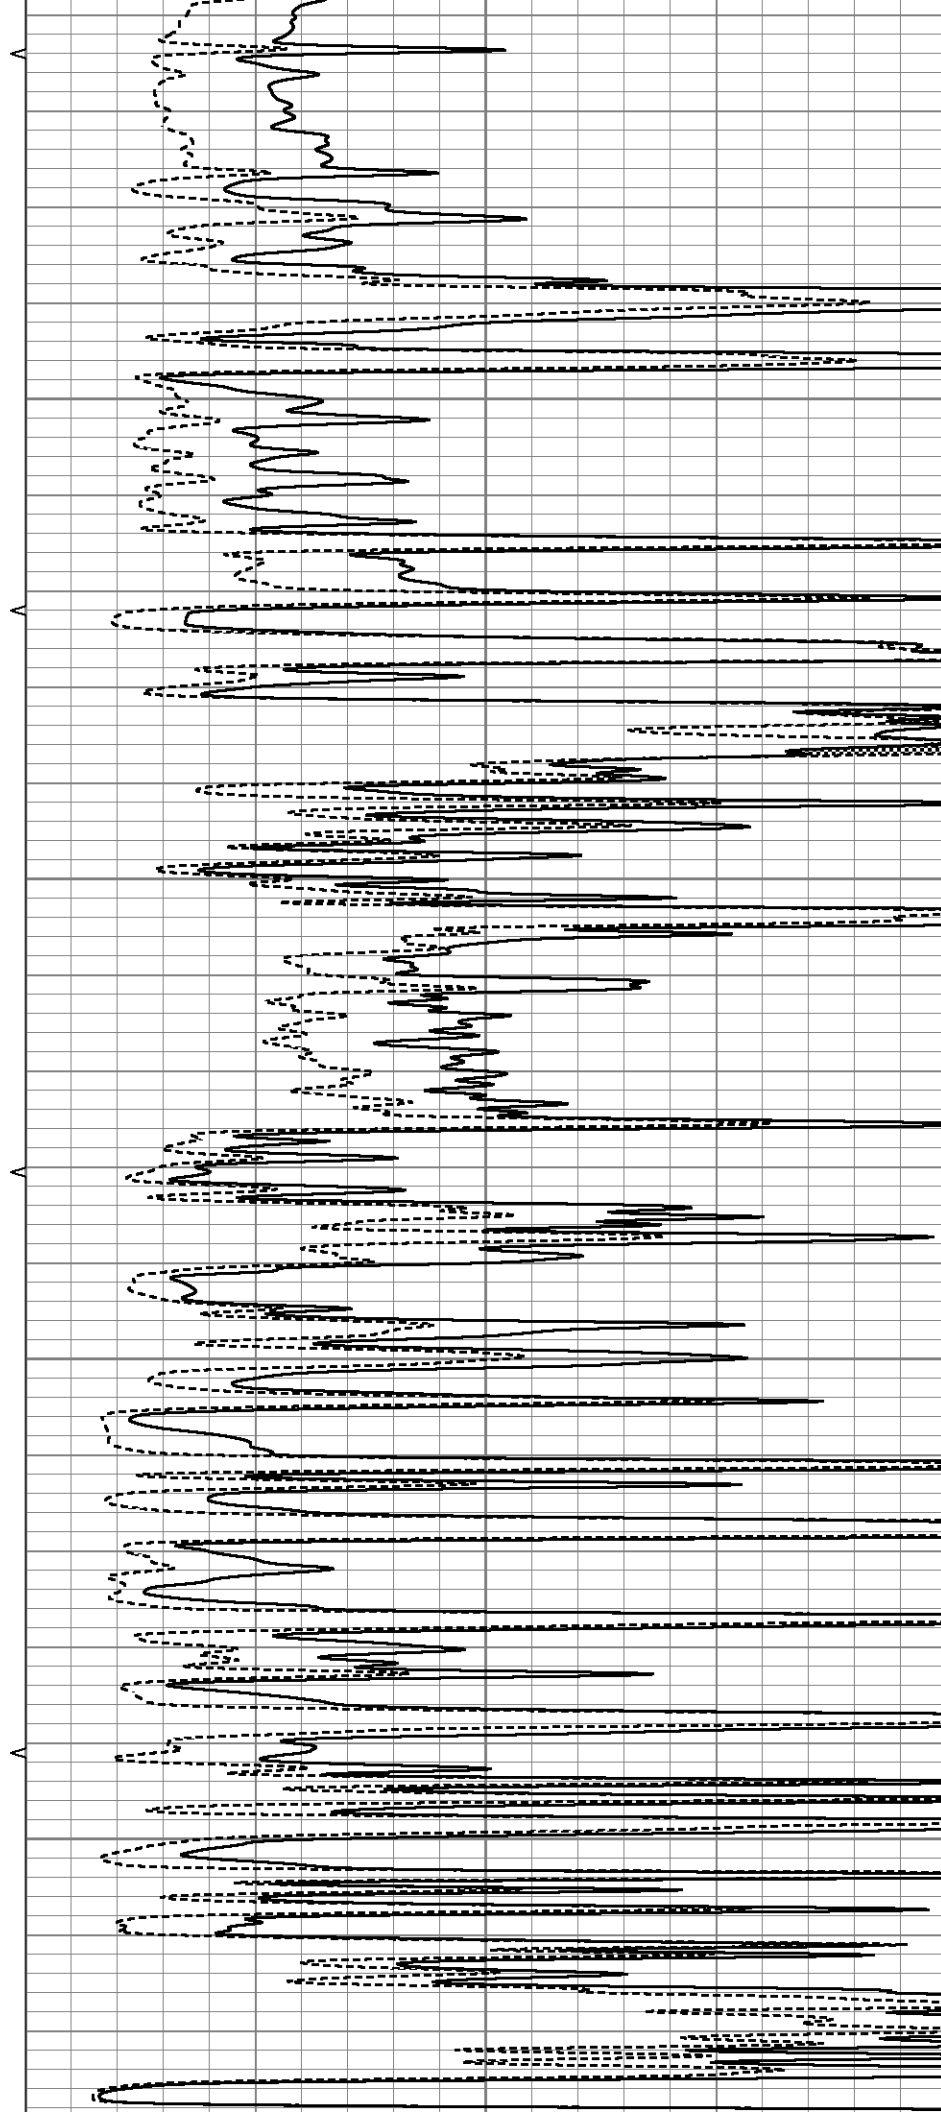

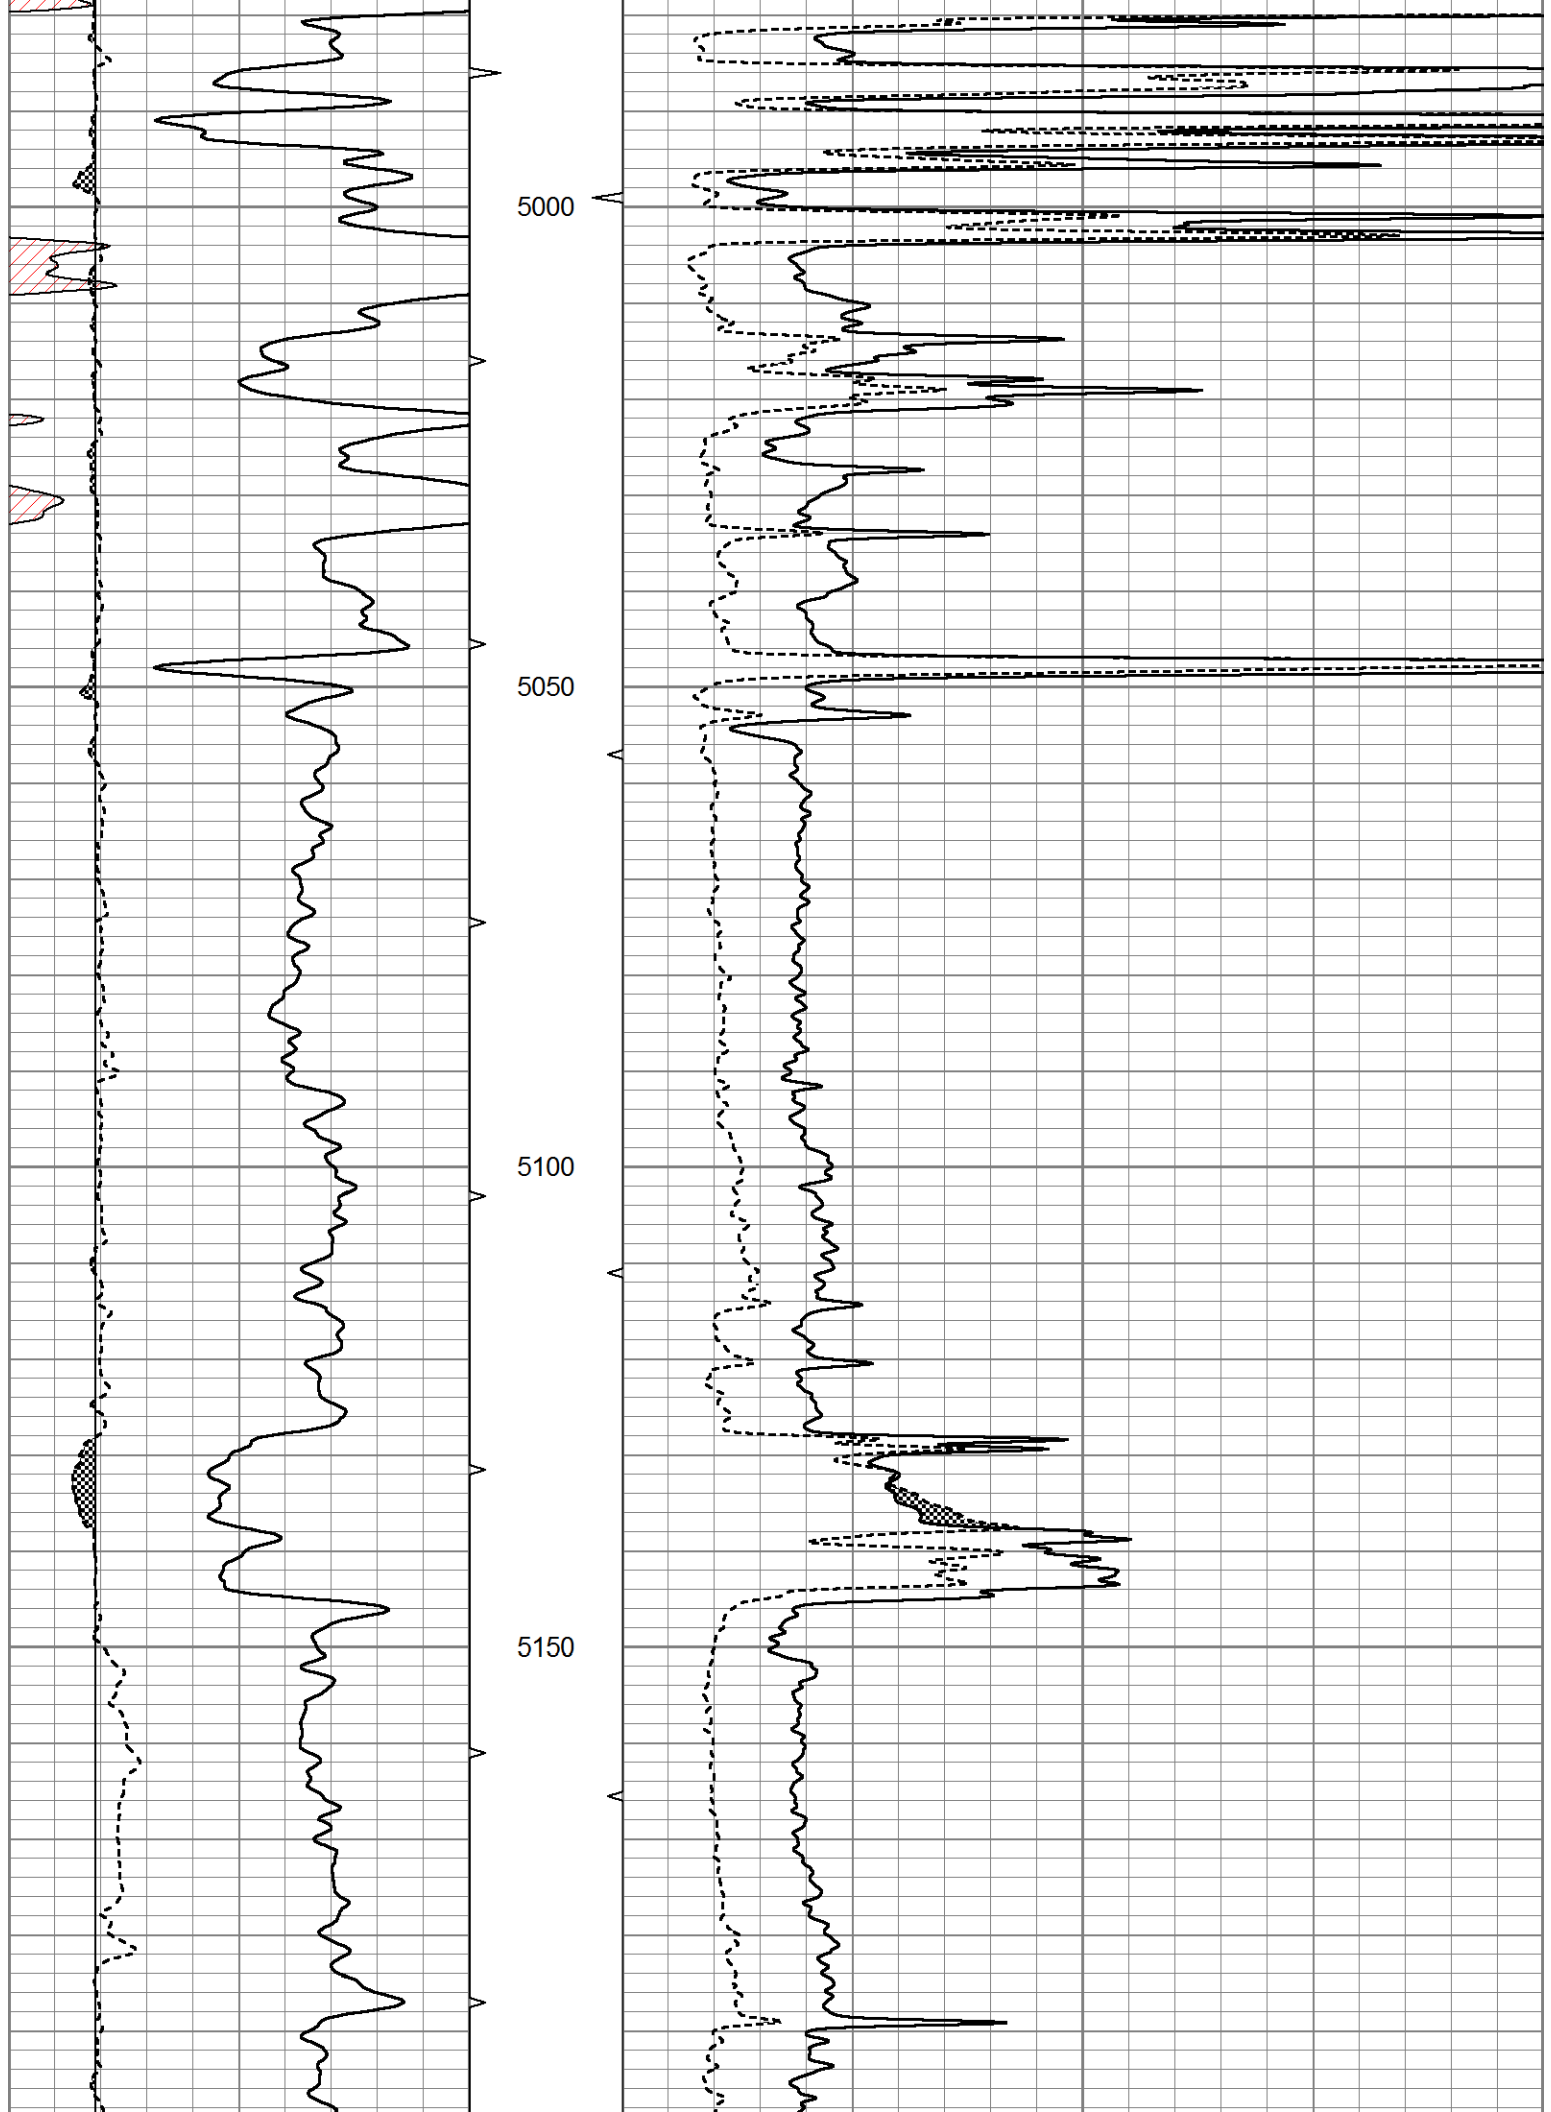


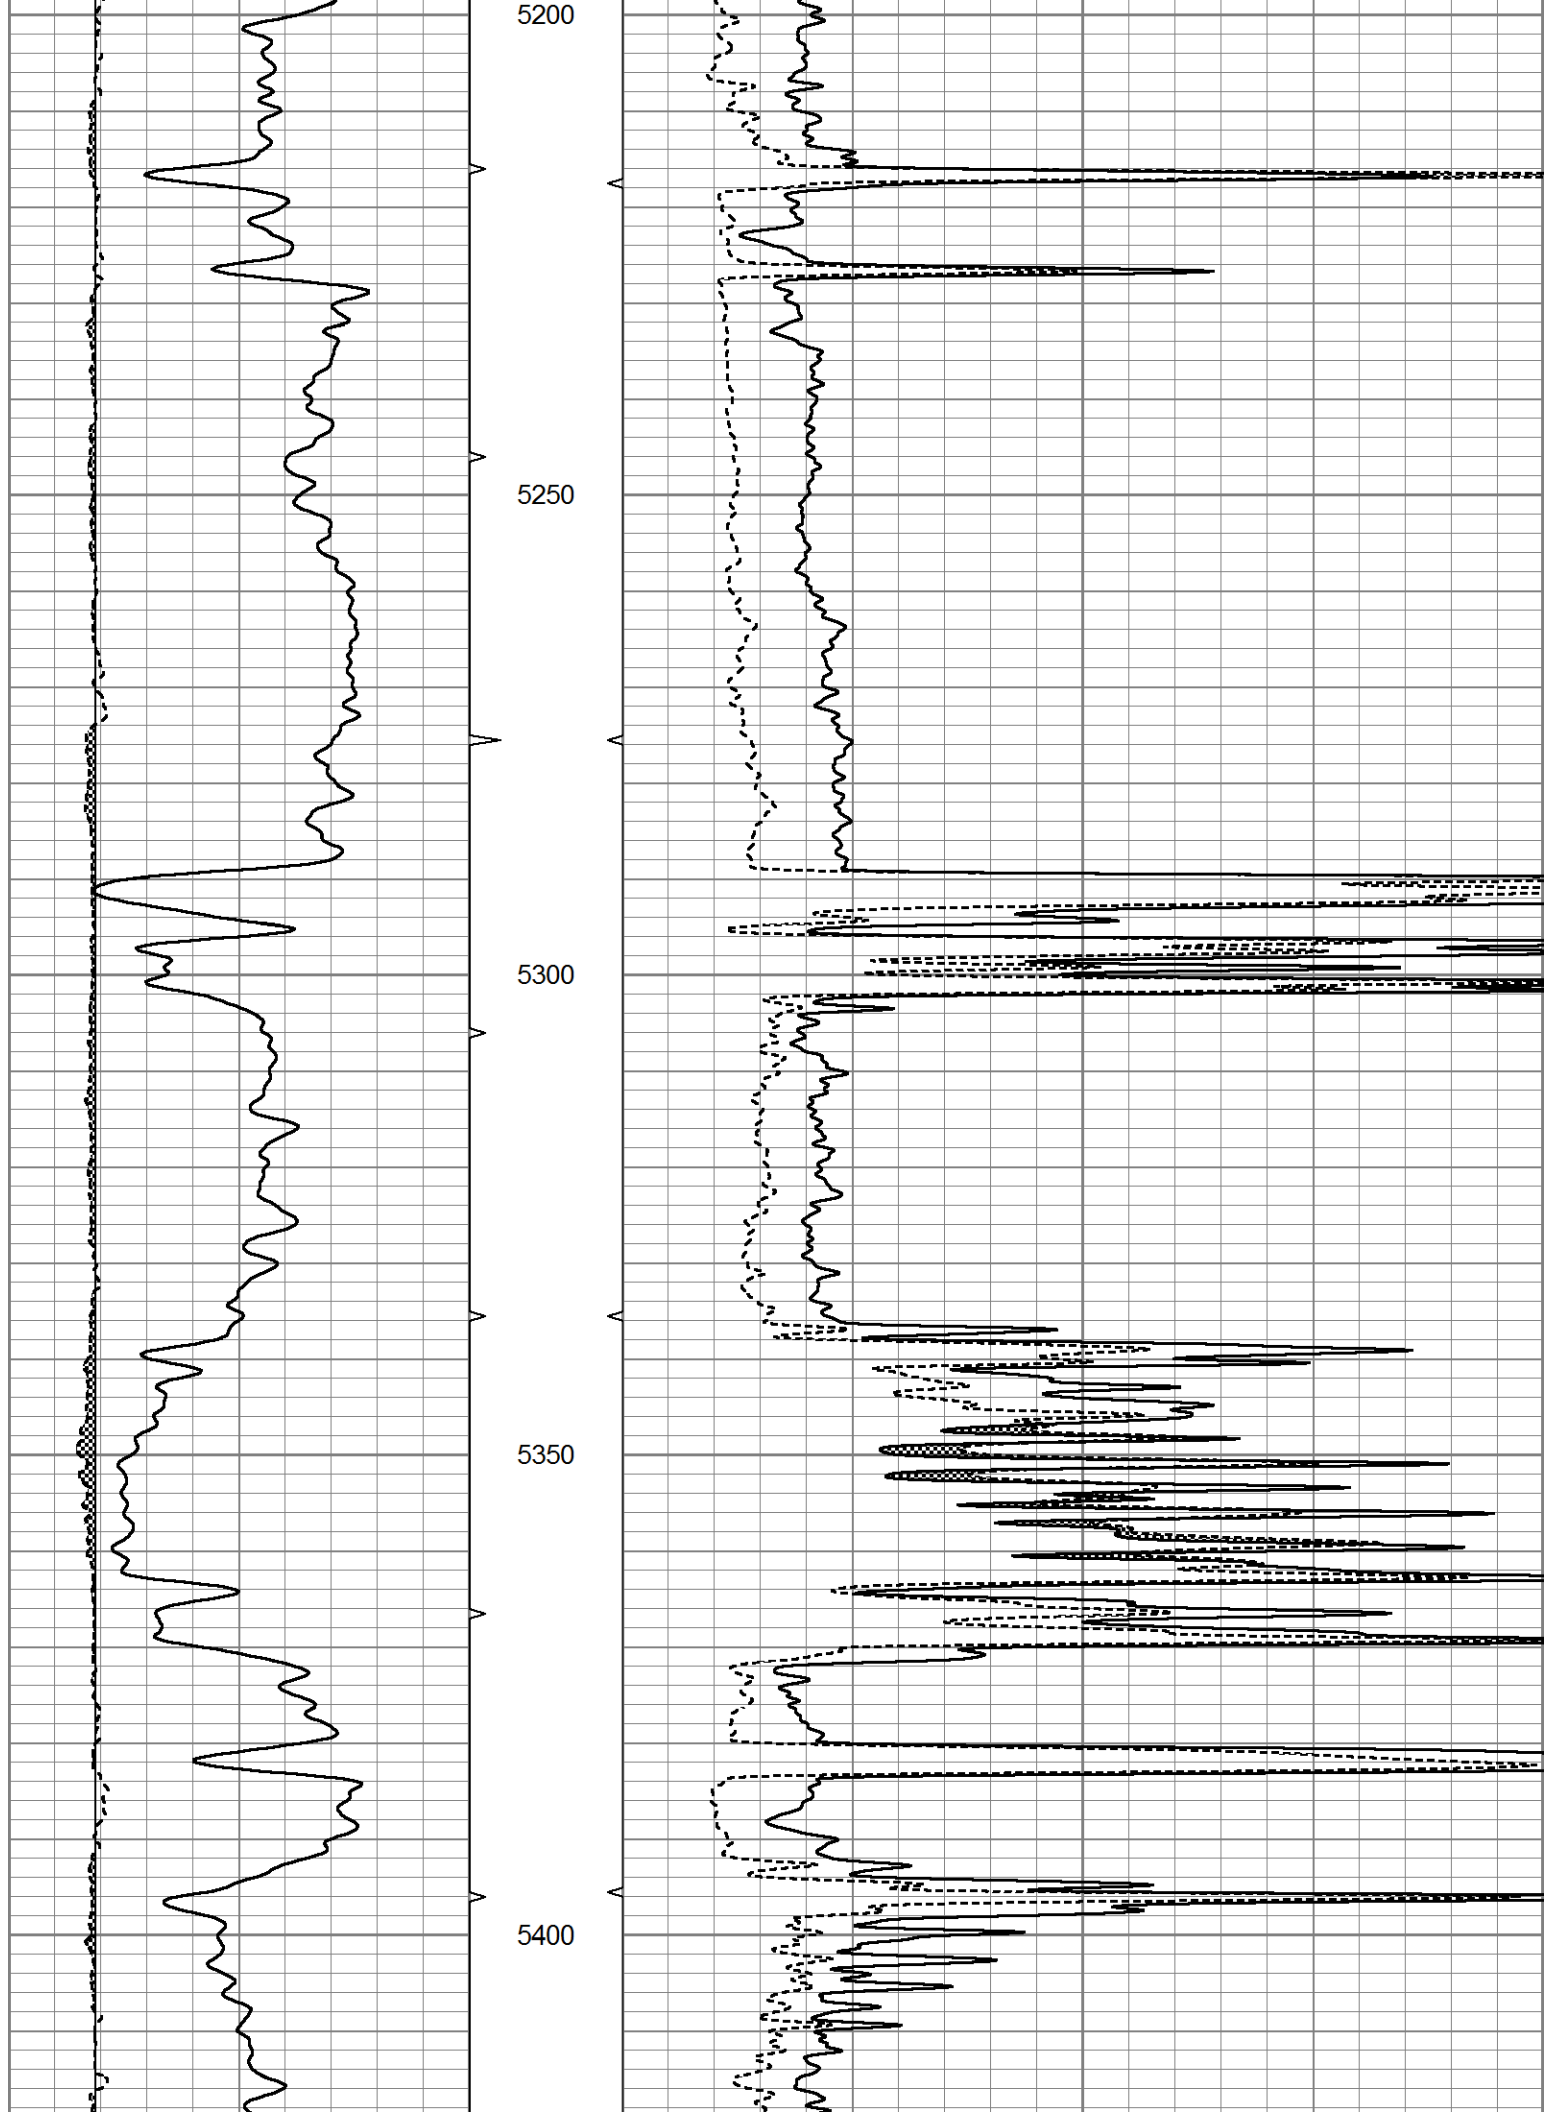


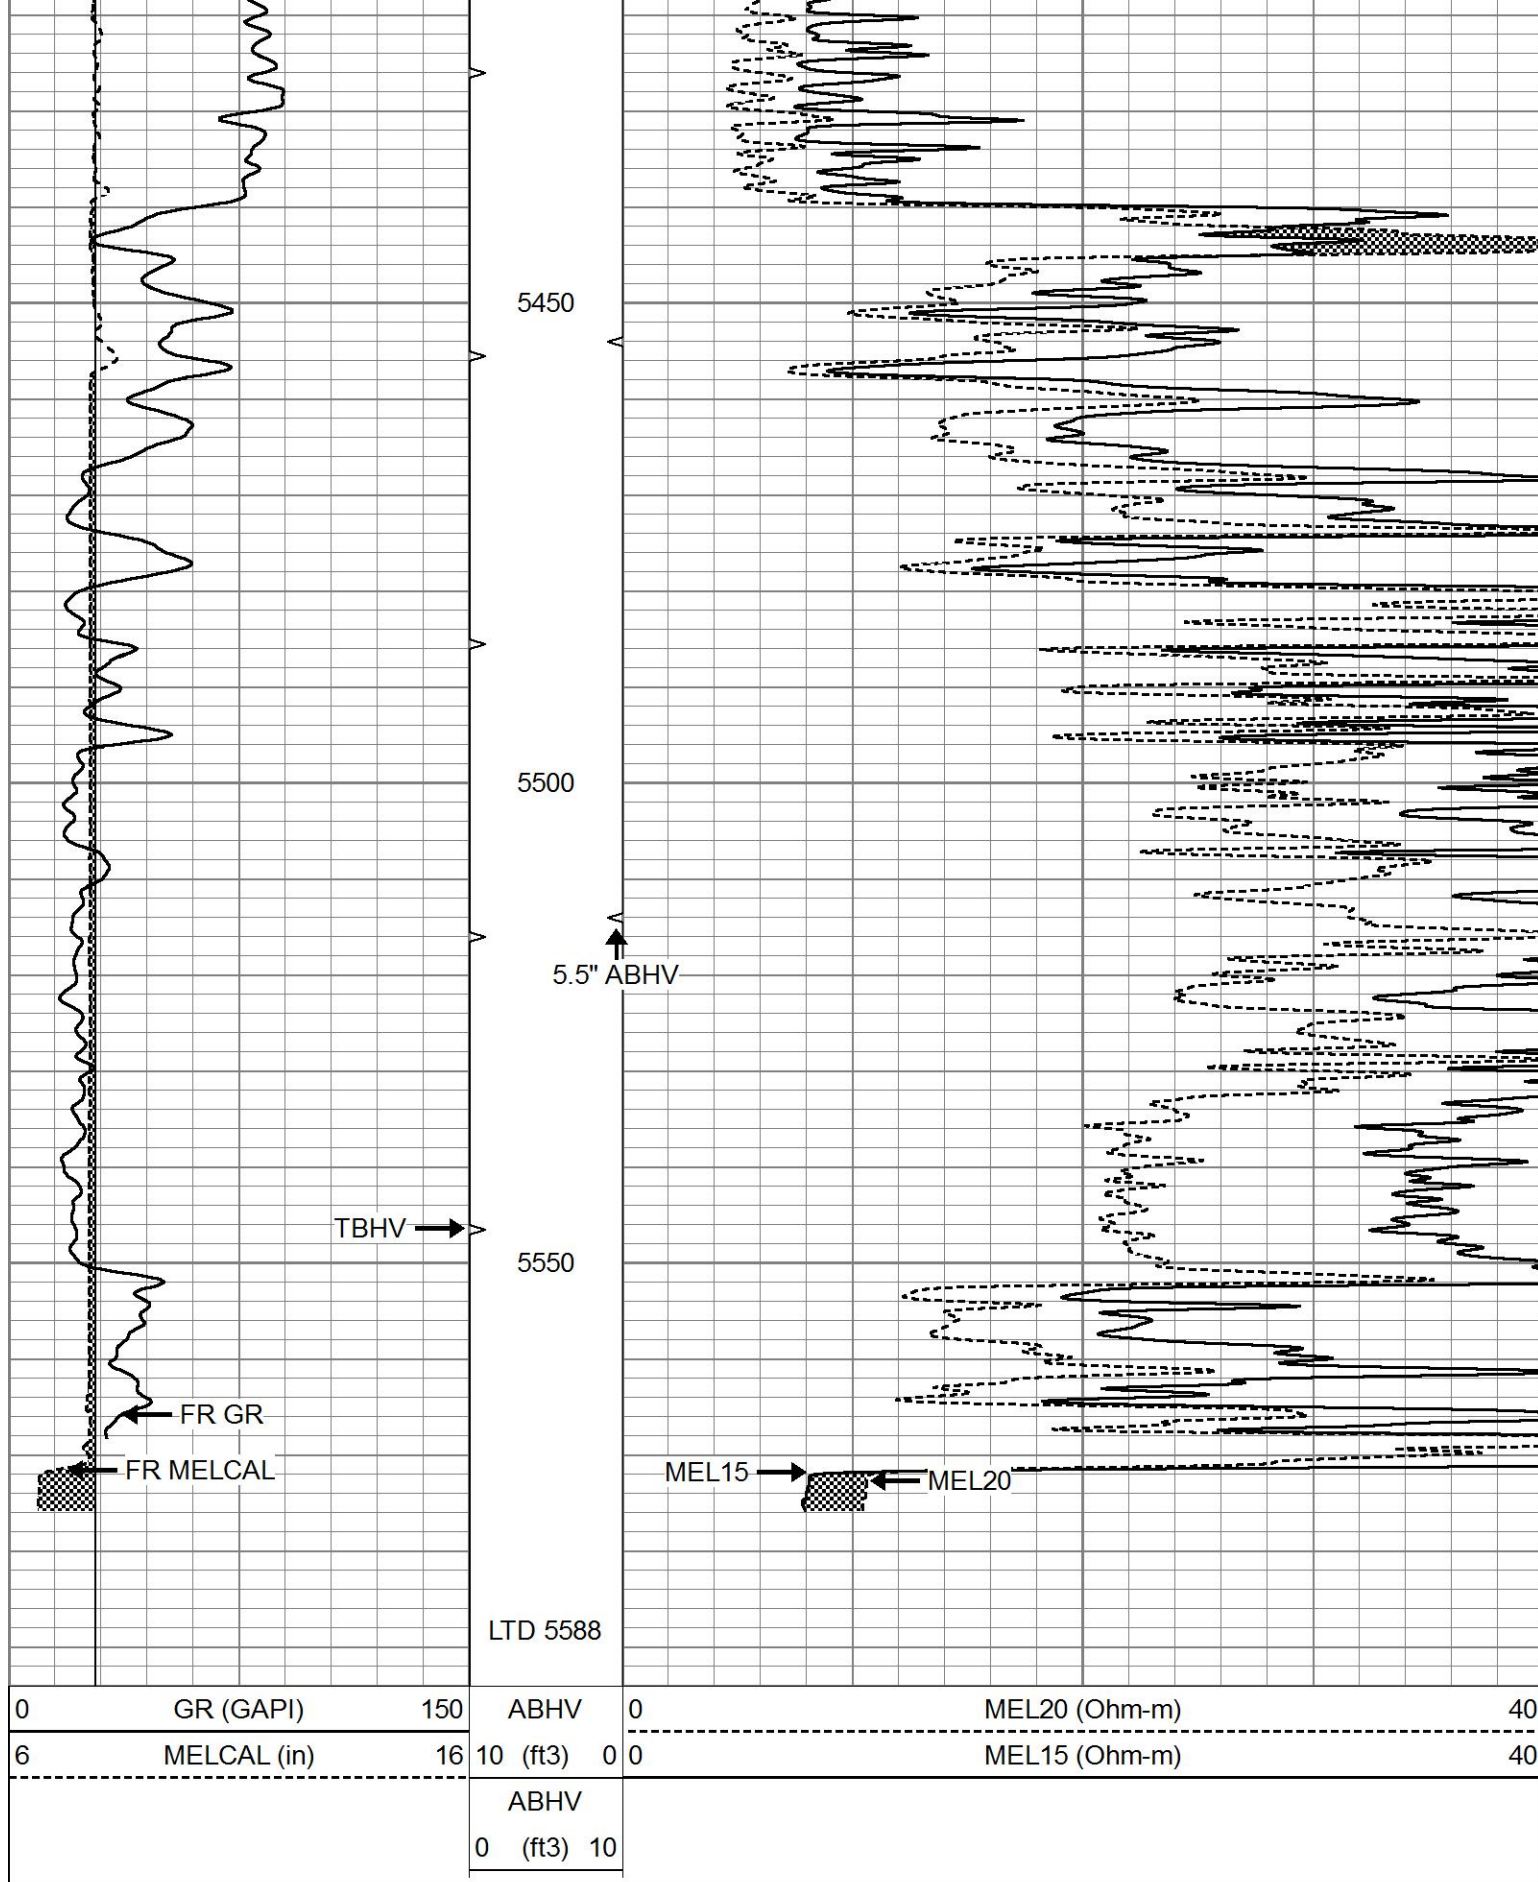

REPEAT SECTION

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

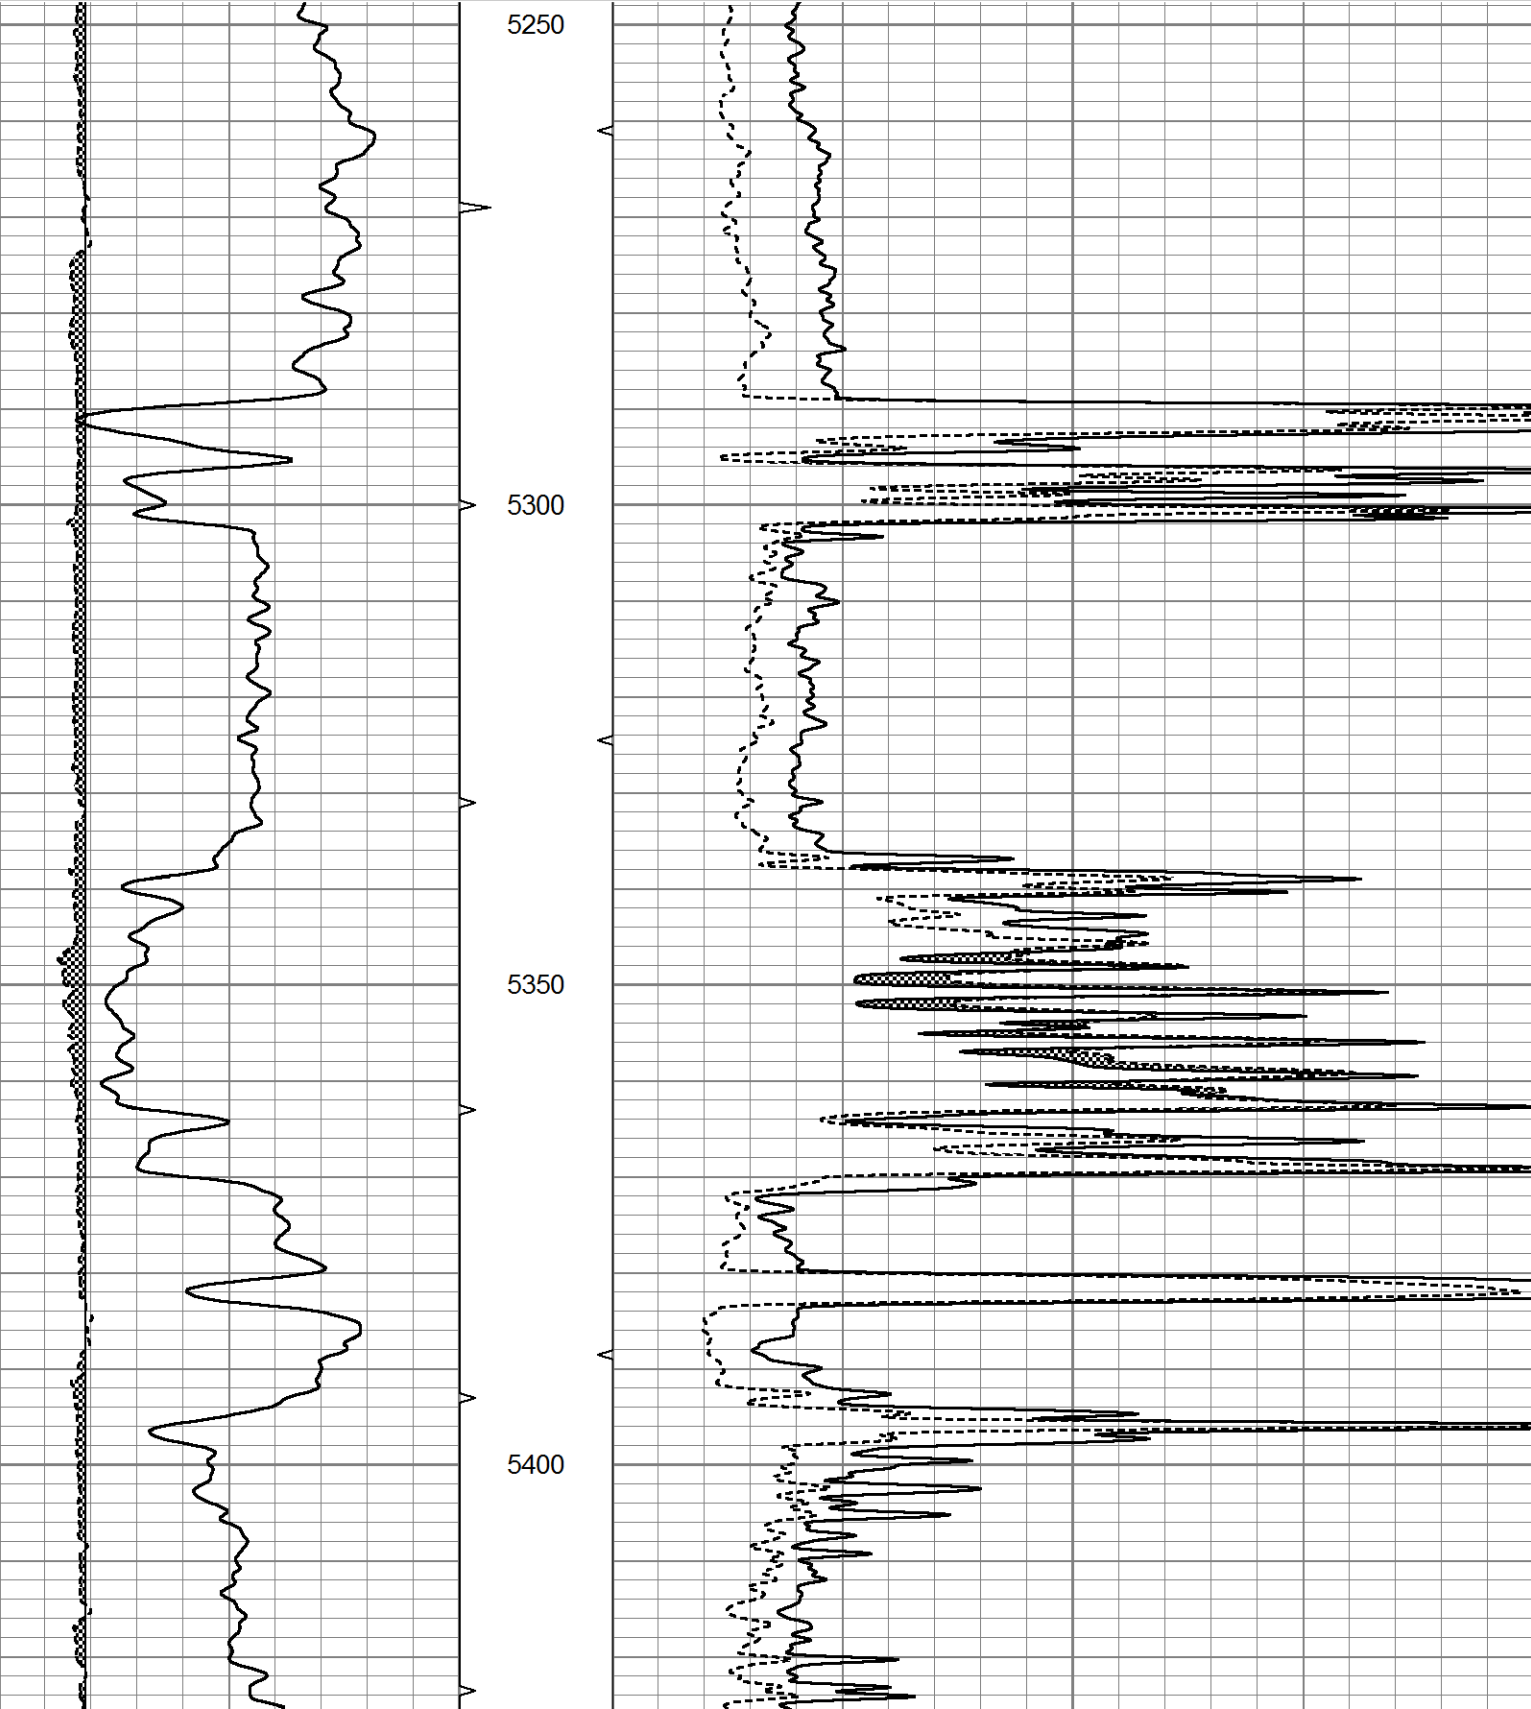

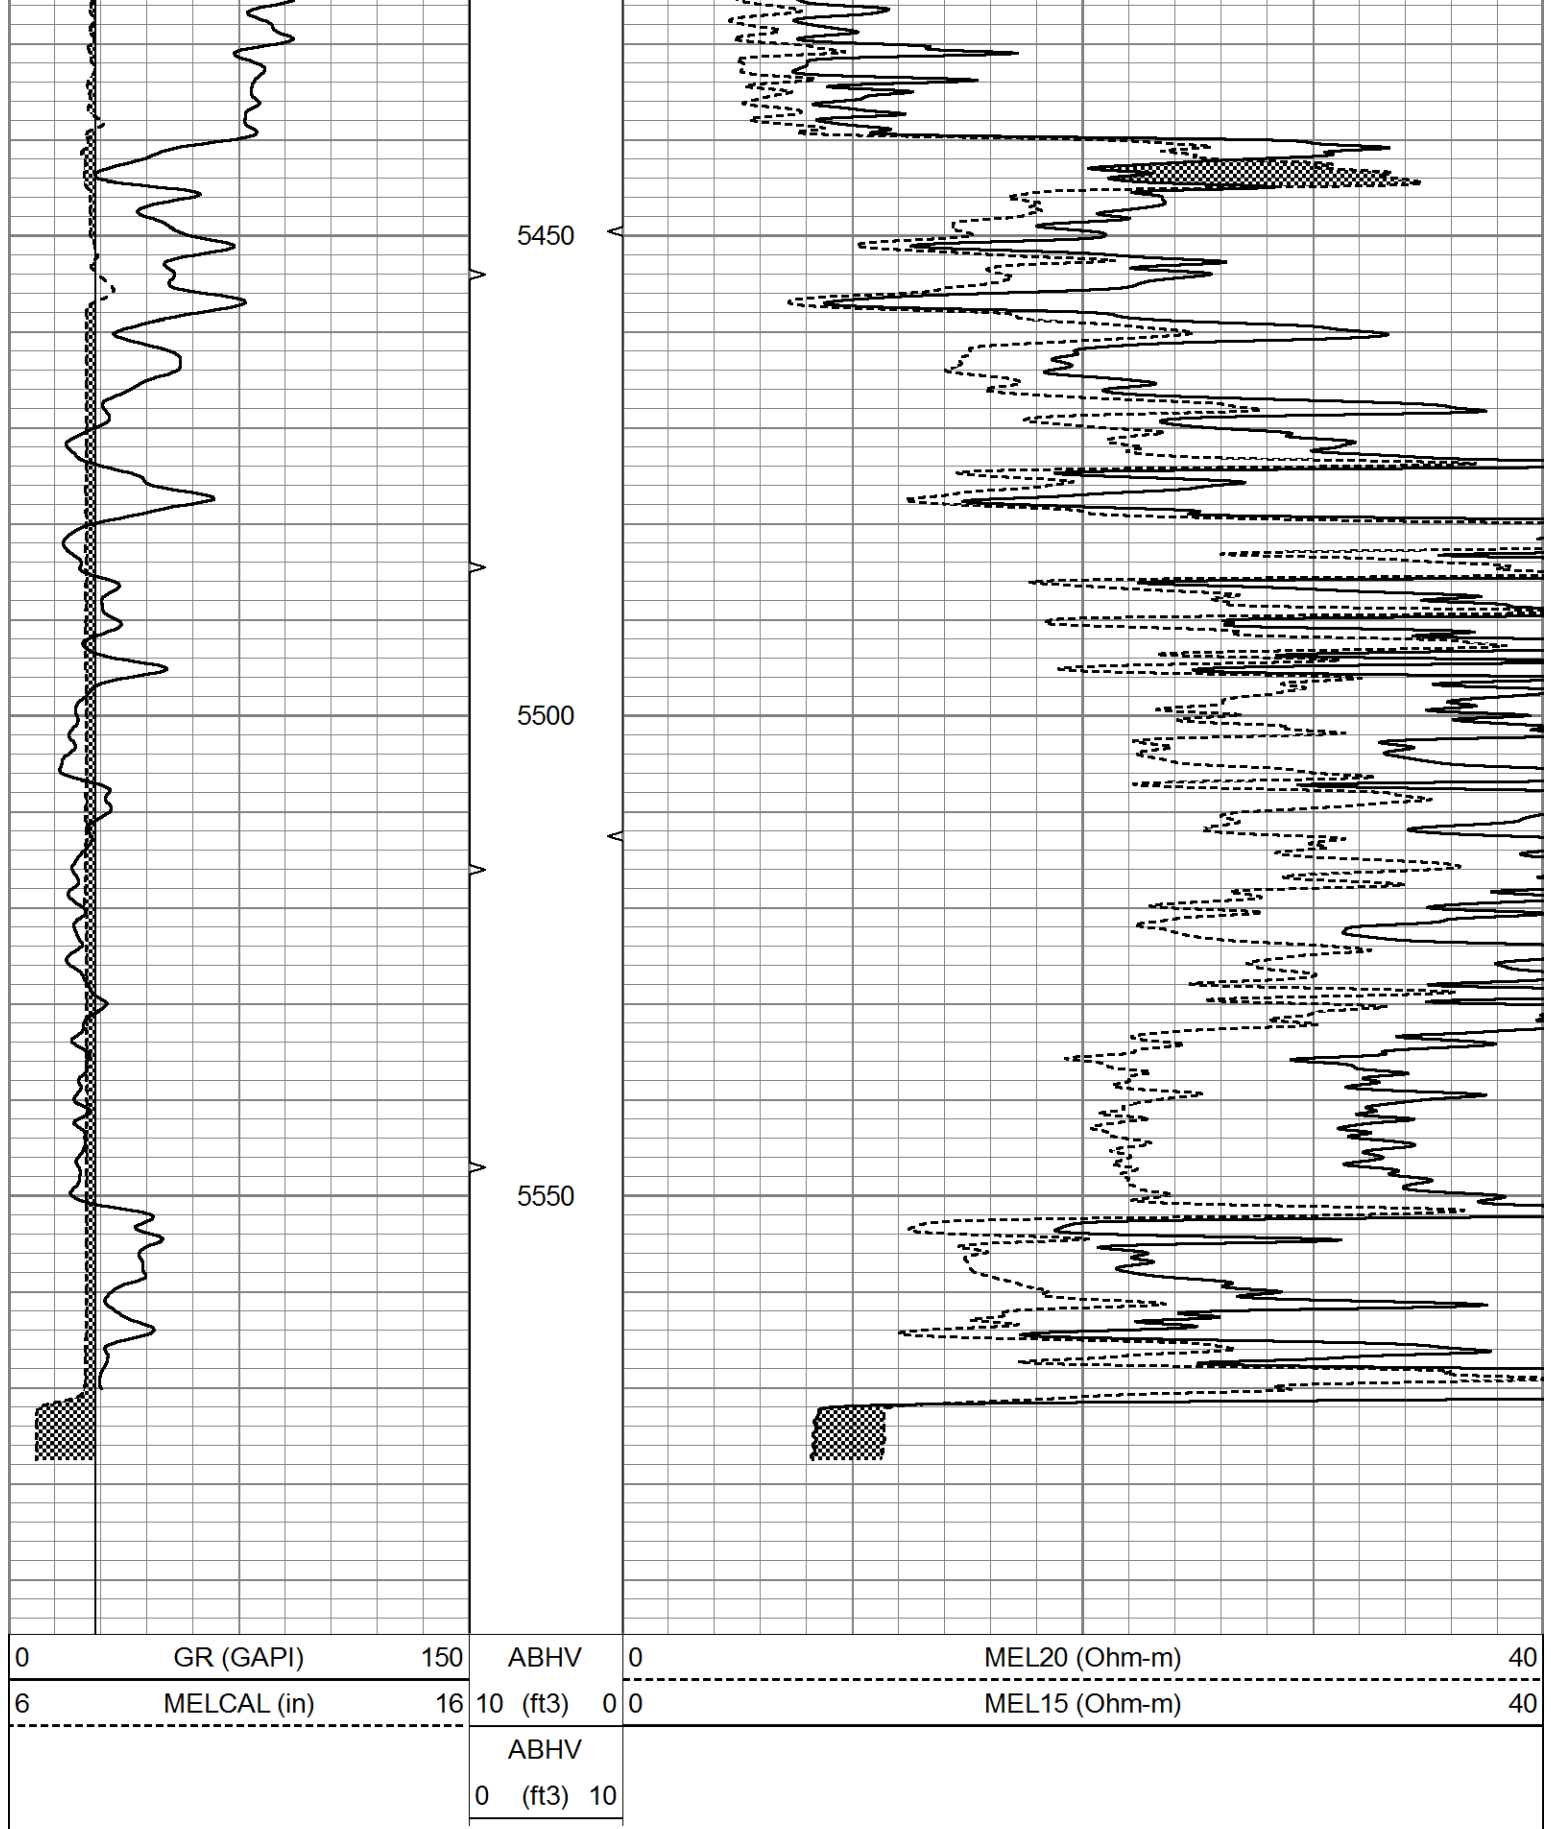

Calibration Report

Database File 6266pe.db
Dataset Pathname pass6.2
Dataset Creation Mon Mar 21 16:55:03 2022

MICRO Calibration Report

Serial Number:	070912	
Tool Model:	ProbeN	
Performed:	Mon Mar 21 15:16:59 2022	
Caliper Calibration:	Gain=3.361	Offset=0.874
References	Low Cal	High Cal
Readings	8.000	16.000
	2.120	4.500
1.5" Calibration:	Gain=32.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.002	1.239
2" Calibration:	Gain=40.000	Offset=1.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.003	1.075
Gamma Ray Calibration Report		
Serial Number:	070558	
Tool Model:	OPEN_GR	
Performed:	Wed Mar 16 17:42:55 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps