

## DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. \_\_\_\_\_

LOCATION NW NW SWSEC. 17 TWP. 9 RGE. 18Dry Hole ☒ Abandoned Oil Well ☒ Abandoned Gas Well \_\_\_\_\_


I have today completed supervision of plugging of:

Well No. 1 Lease RuzickaOperator Petroleum Inc Address Wichita, KansField \_\_\_\_\_ County RooksTotal Depth 3619 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 318' circulated with 300 Sax, 5 1/2" at 3615' with  
50 sax cement behind.

Run 5 sax cement on bottom with dump bailer, pulled 3250' 5 1/2",  
mudded hole to 300', set rock bridge and 15 sax cement,  
filled with mud to 35', set 10 sax cement to bottom cellar.

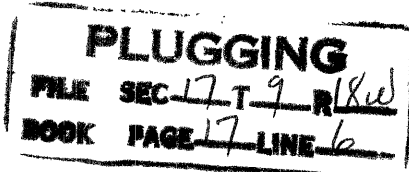

*Edmond Lee*  
District Conservation Agent  
7-18-50  
950  
CORPORATION  
COMMISSION

Date 7-17-50