


15-163-02285-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
312 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD



Locate well correctly on above
Section Plat

Rooks County. Sec. 7 Twp. 9 Rge. -- (E) 18 (W)
Location as "NE/CNW/SW" or footage from lines. NE SW SW
Lease Owner Rocket Schusterman Oil Account
Lease Name Cabbage Well No. 2
Office Address 2700 First National Tower, Tulsa, OK 74103
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 3-5 1947
Application for plugging filed 5-4 1982
Application for plugging approved 5-21 1982
Plugging commenced 6-30 1982
Plugging completed 6-30 1982
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production July 1976
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Dennis Hamel
Producing formation Arbuckle Depth to top 3496 Bottom 3501 Total Depth of Well 3501 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	Oil	3496	3501	5 1/2	3498'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hooked up Allied Cementers Pump Truck and pumped 450 sacks of 50/50 Pozmix with 6% Gel, 3% CaCl and 8 sacks of Hulls at 450 psi down 5 1/2" casing. Cement circulated out Braden Head at completion of mixing & pumping.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Allied Cementers and Operator
Address _____

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
R. J. Davis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Davis
2700 First National Tower
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of July, 1982

My commission expires Sept. 24, 1985
Rhonda Kaye Halloway
STATE CORPORATION COMMISSION Notary Public.

7/21/82
JUL 21 1982

CONSERVATION DIVISION
Wichita, Kansas

CABBAGE WELL NO. 2

Location: Approx.Center NE $\frac{1}{4}$ SW $\frac{1}{4}$ SW $\frac{1}{4}$ Sec.7-9S-18W Rooks County, Kansas
 Operator: H H & B Drilling Co., Inc.
 Contractor: H H & B Drilling Co., Inc.
 Casing Records: Surface Casing - 10 Jts. 10-3/4" 32# 8 Thd. @ 216' Cemented with 135 sacks of Lone Star Cement and 1 CC
 Oil String - 69 Jts. 14# H-40 8 Rd.Thd. 2203.68' and 42 Jts. 17# H-40 8 Rd.Thd. 1319.80' Cemented at 3498' with 150 sacks.

Commenced: 2-5-47
 Oil String Cemented: 2-21-47
 Total Depth: 3501'

LOG
 (Figures indicate bottom of formation)

Sand, shale and shells	0 to	180	Lime and shale	3000
Shale and lime shells		258	Shale and lime	3075
Shale and shells		500	Lime and shale	3115
Shale and shells		630	Lime	3145
Sand		860	Lime	3165
Sand and shale		1150	Lime and shale	3185
Shale		1190	Lime and shale	3225
Shale, shells and red bed		1438	Shale and lime	3260
Anhydrite		1440	Lime	3280
Anhydrite		1470	Lime	3315
Shale and shells		1600	Lime	3345
Shale and red bed		1870	Lime and shale	3375
Lime and shale		1973	Lime and shale	3410
Shale and lime shells		2070	Lime	3430
Lime and shale		2220	Lime	3450
Lime and shale		2280	Lime and shale	3490
Lime and shale		2330		
Shale and lime		2450		
Shale and lime		2525		
Lime and shale		2575		
Lime and shale		2645		
Lime and shale		2710		
Lime and shale		2770		
Shale and shells		2860		
Shale and lime		2912	Total Depth:	3501'

The undersigned, H H & B Drilling Co., Inc., hereby certifies that the above log is a true and correct log of the formations encountered in drilling the above noted well as reflected by the Daily Drilling Reports.

H H & B DRILLING CO., INC.
 BY: R. W. Bailey
 Asst. Secretary

STATE OF KANSAS)
 COUNTY OF SEDGWICK) SS:


Be it remembered that on this 27th day of February 1947, before me the undersigned, a Notary Public, duly commissioned, in and for the County and State aforesaid, came R. W. Bailey, Asst. Secretary of H H & B Drilling Co., Inc., a corporation of the State of Kansas, personally known to me to be such officer, and to be the same person who executed as such officer the foregoing instrument of writing in behalf of said corporation, and he duly acknowledged the execution of the same for himself and for said corporation.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.

Richard Hindery
 Notary Public

My commission expires: July 2, 1949.

RECEIVED
 STATE OF KANSAS
 CONSERVATION DIVISION
 WICHITA, KANSAS
 FEB 27 1947

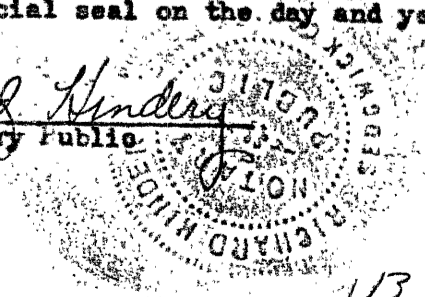

Tops
 Potential