



MICRO LOG

Company REILLY OIL COMPANY, INC.	
Well	GWEN #1-4
Field	SPRUCE
County	TREGO
State	KANSAS
Location: API #: 15-195-23138-0000	
2303' FSL & 820' FEL SE - NW - NE - SE	
Permanent Datum	GROUND LEVEL Elevation 2341
Log Measured From	KELLY BUSHING 7' A.G.L
Drilling Measured From	KELLY BUSHING
SEC 4 TWP 14S RGE 22W	
Other Services CDL/CNL DIL	
Elevation K.B. 2348 D.F. 2346 G.L. 2341	
Date	6/22/22
Run Number	TWO
Depth Driller	4290
Depth Logger	4289
Bottom Logged Interval	4287
Top Log Interval	3400
Casing Driller	8 5/8"@218'
Casing Logger	218
Bit Size	7 7/8
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.0/52
PH / Fluid Loss	10.0/5.2
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.850@84F
Rmt @ Meas. Temp	.638@84F
Rmc @ Meas. Temp	1.02@84F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	.600@119F
Time Circulation Stopped	4 HOURS
Time Logger on Bottom	3:00 P.M.
Maximum Recorded Temperature	119F
Equipment Number	3802
Location	HAYS, KANSAS
Recorded By	COLE ROBEN
Witnessed By	DUSTY RHOADES
	RICHARD BELL

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS:


OGALLAH, KS I70 EXIT SOUTH 8 MILES ON RD 147 TO CURVE, 1 MILE
WEST FROM YIELD SIGN TO 320 RD,SOUTH 1/2 MILE, WEST INTO




MAIN SECTION

Database File	6545ddn.db
Dataset Pathname	pass6.4
Presentation Format	_micro
Dataset Creation	Wed Jun 22 15:31:28 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

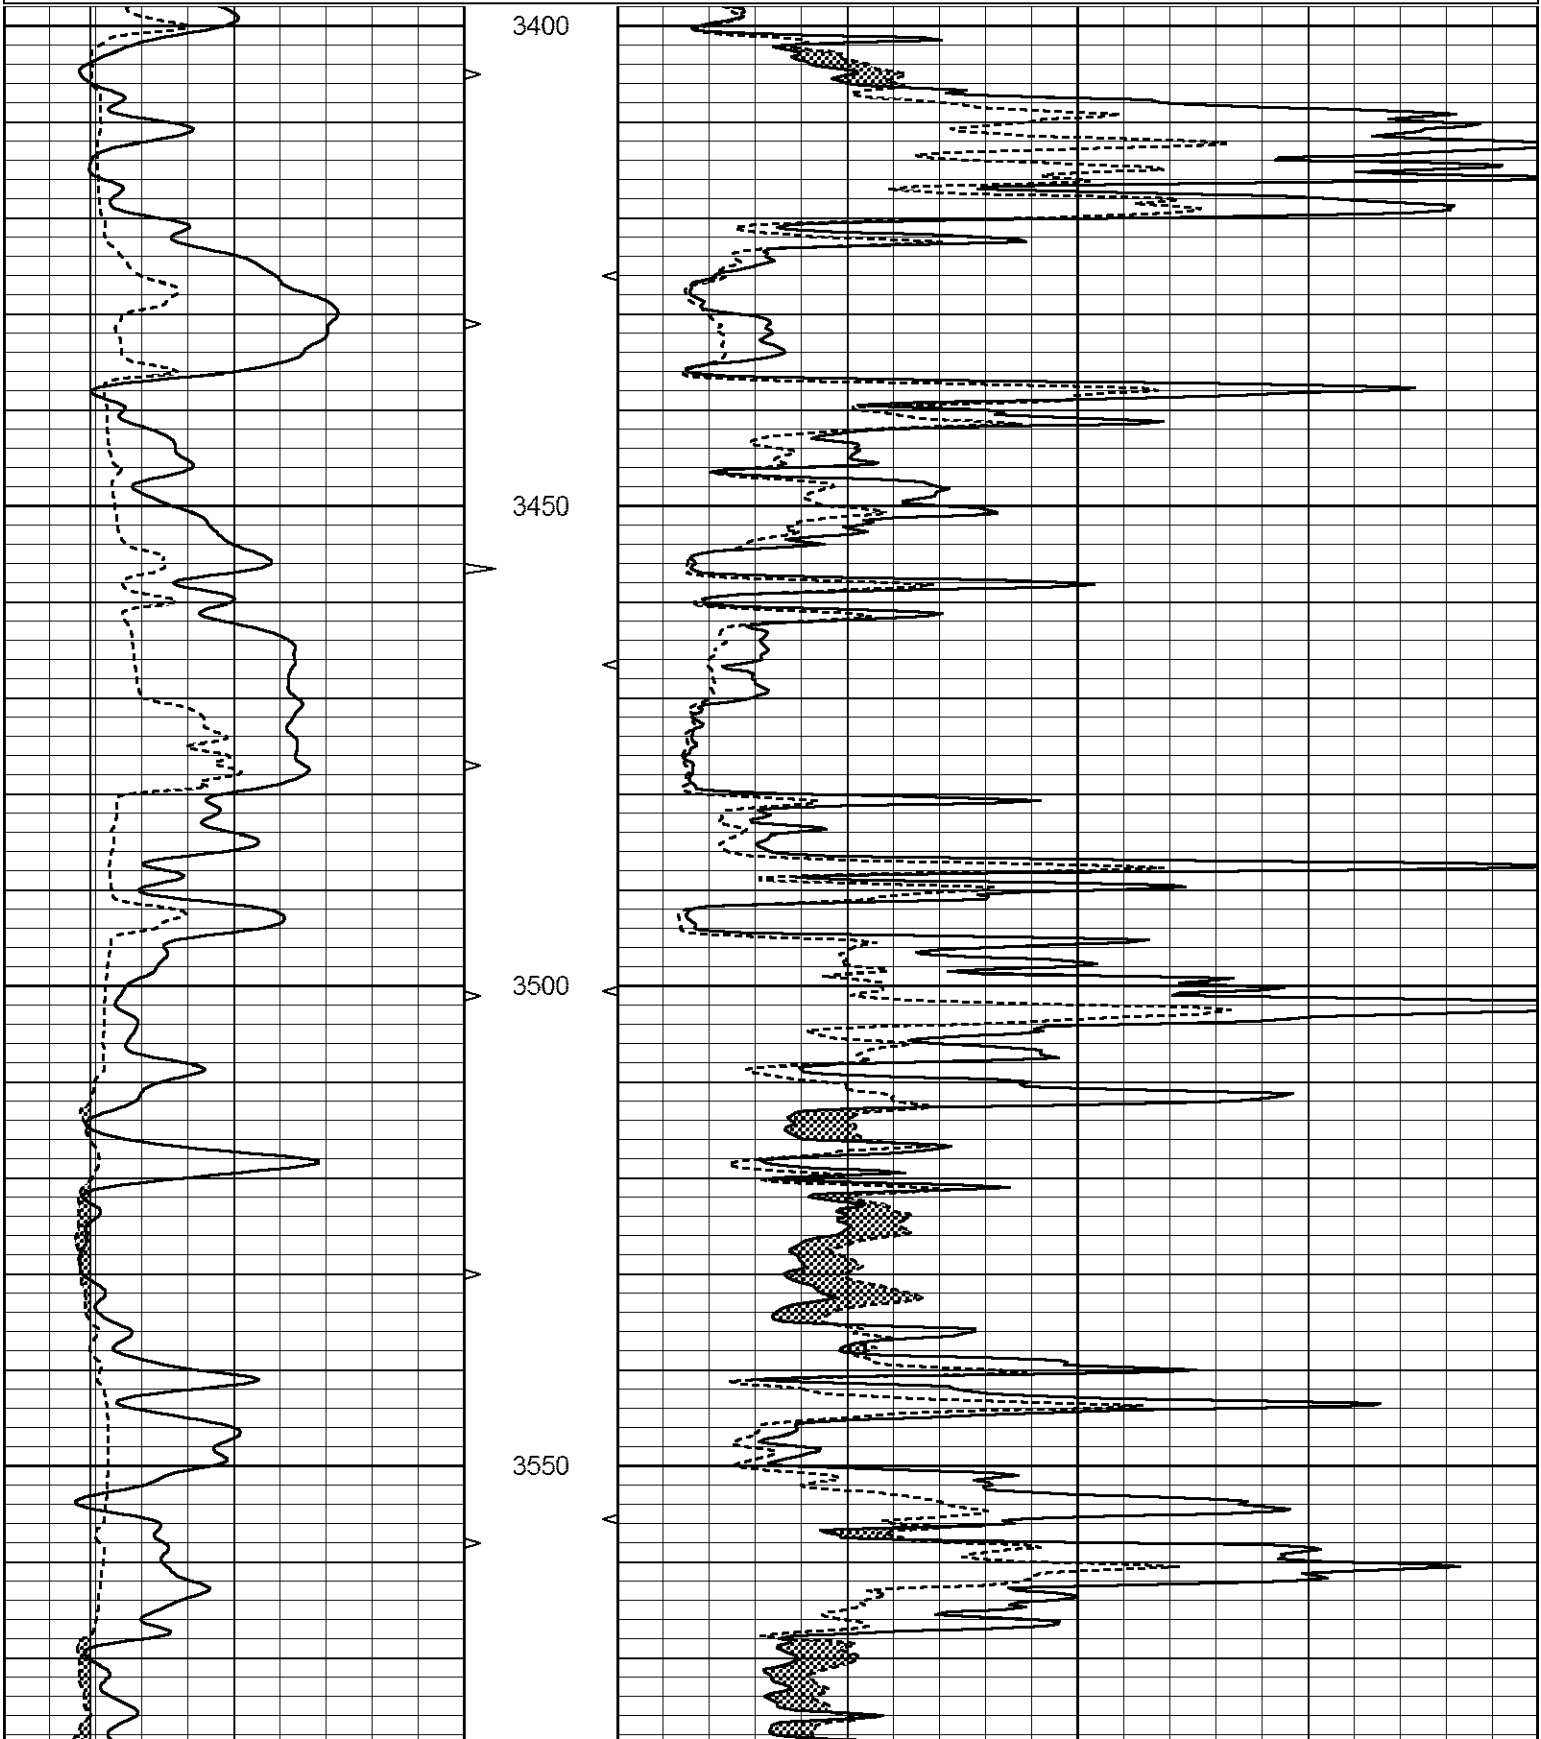

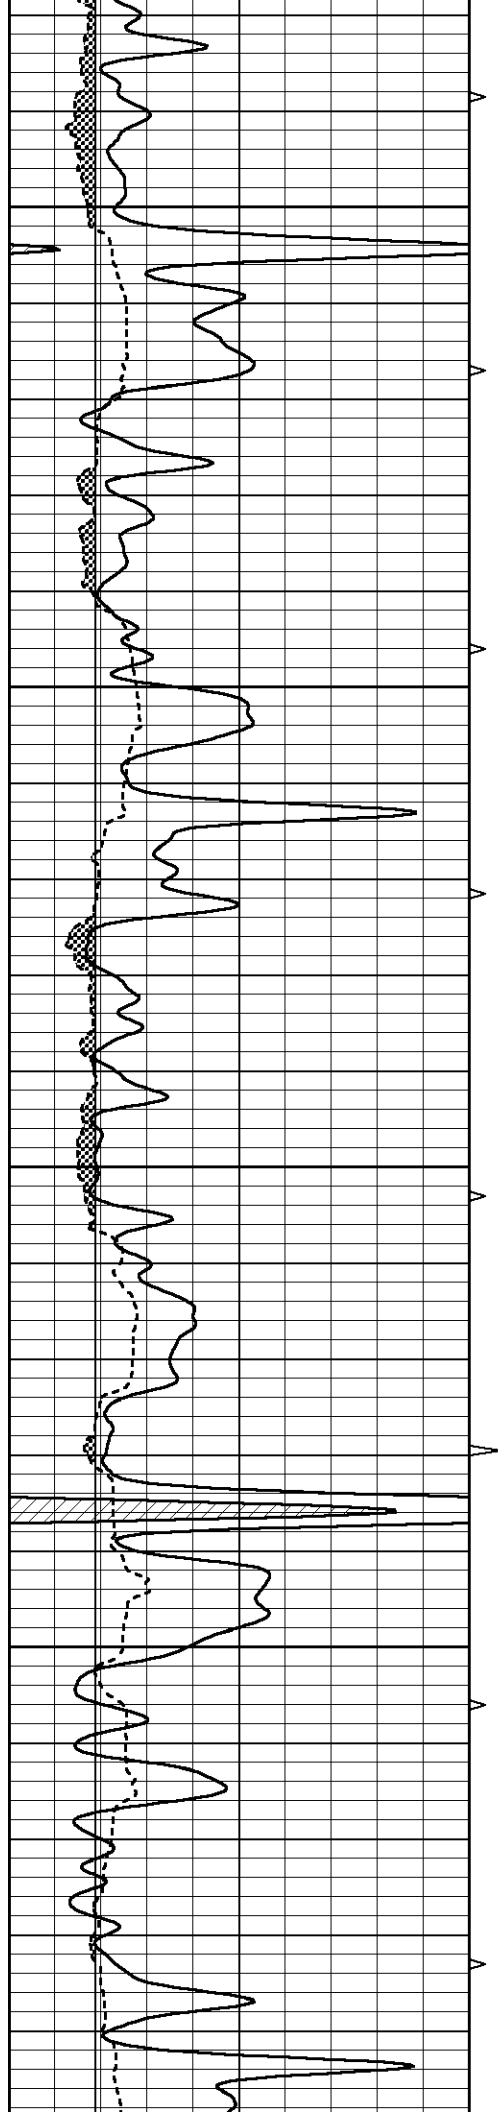



3600

3650

3700

3750

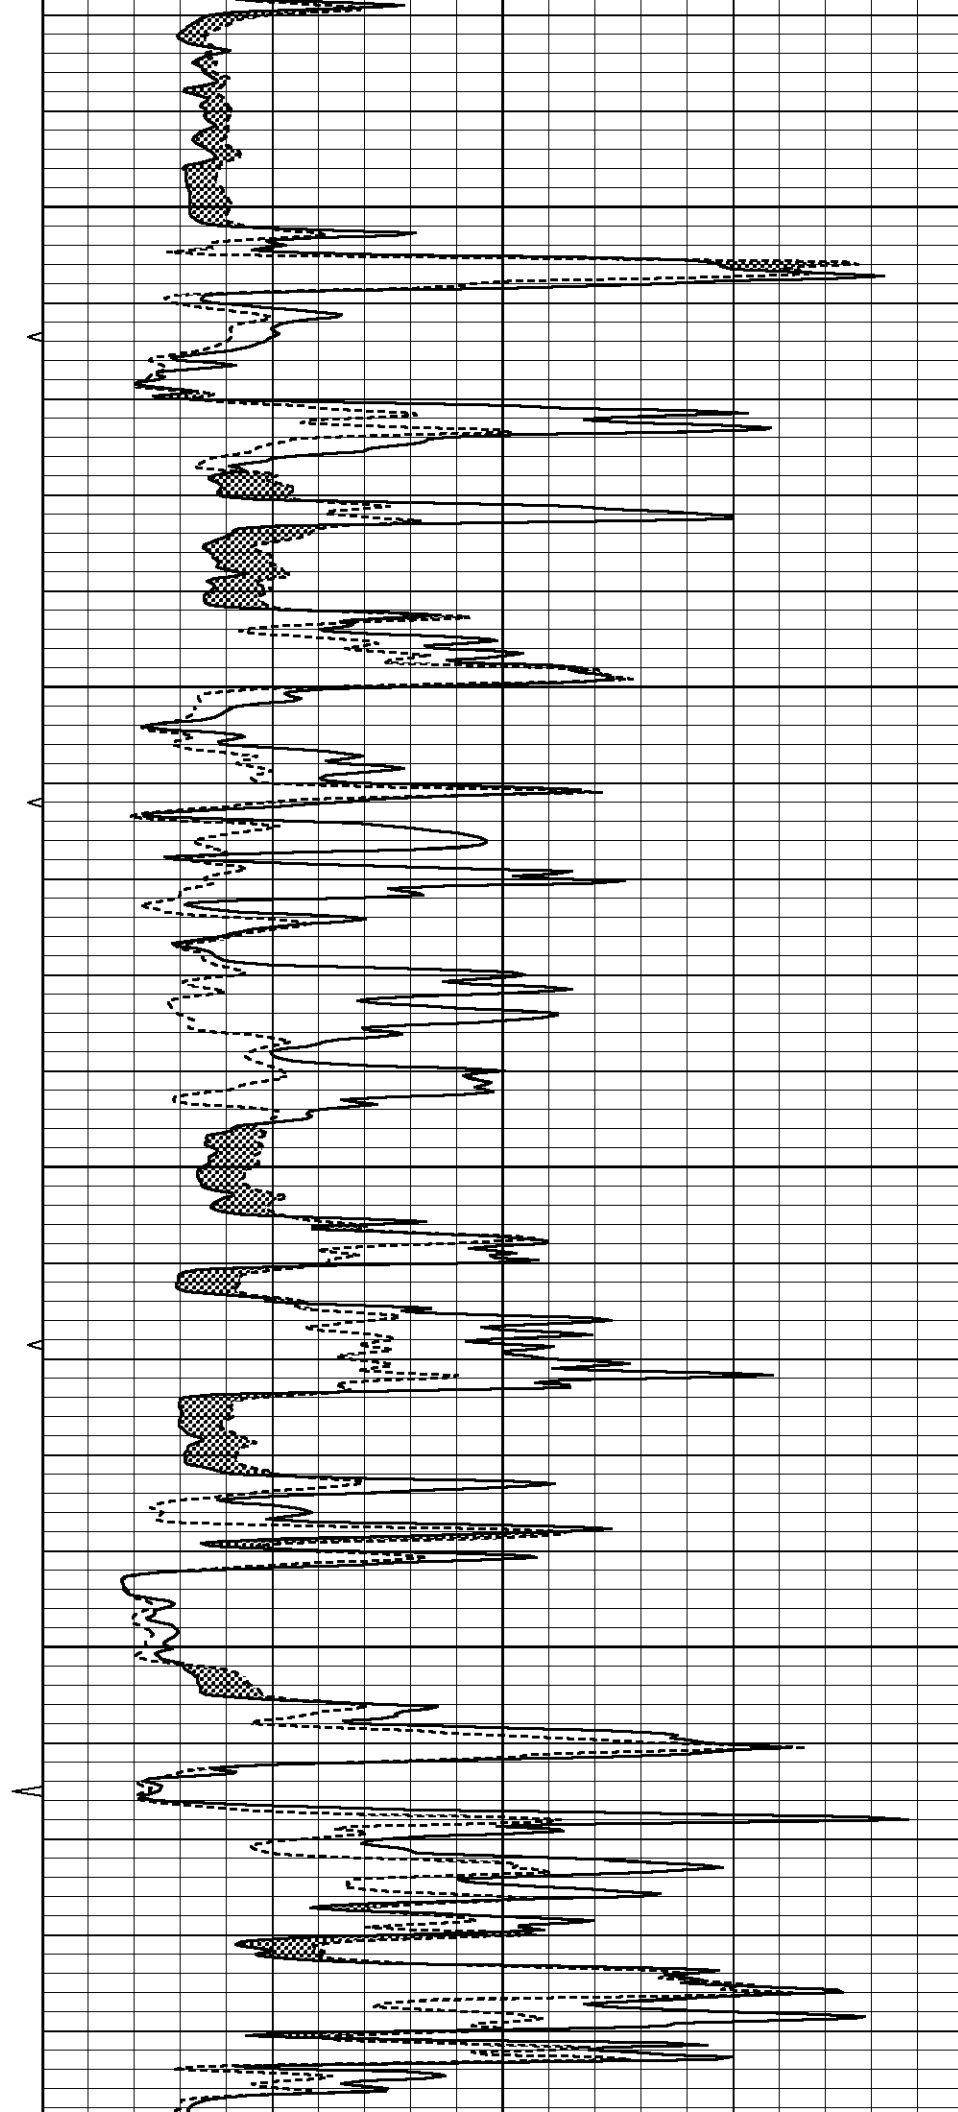

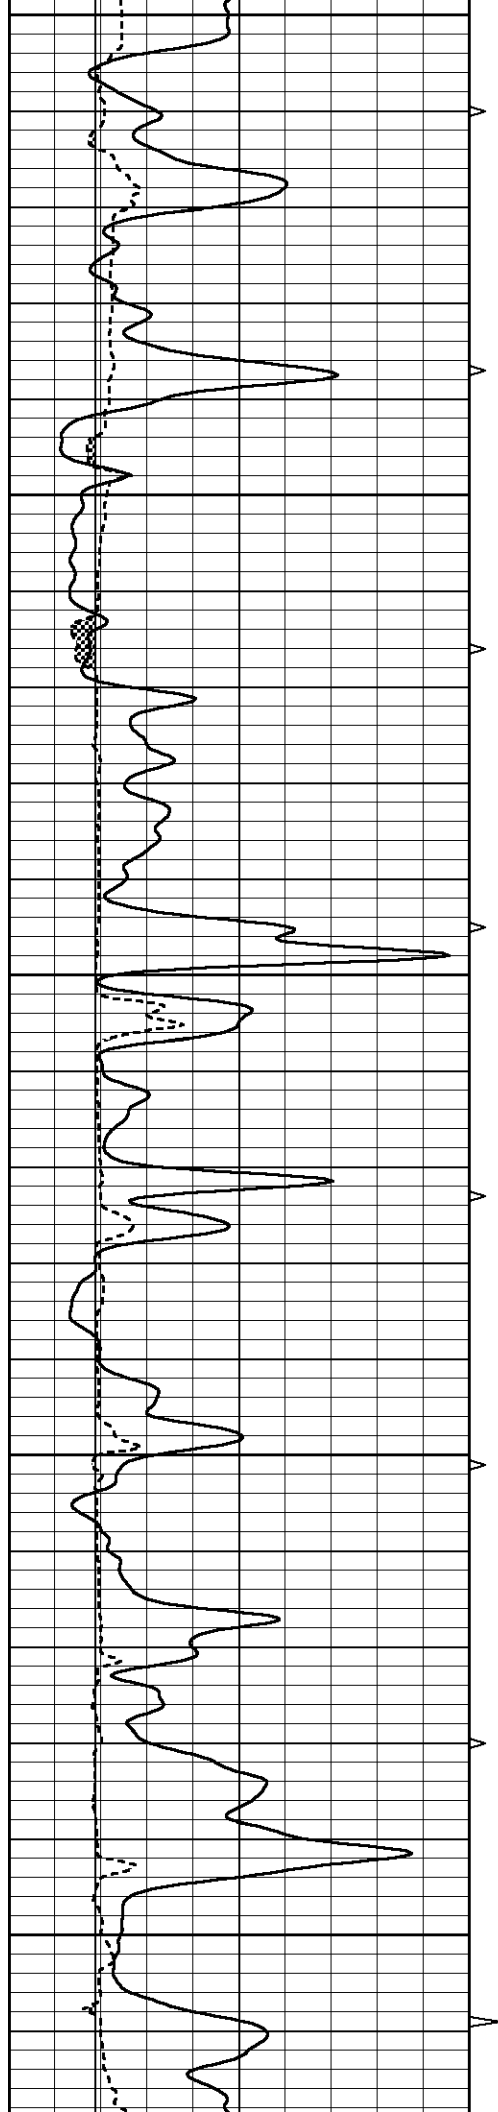


3800



3850


3900

3950

4000

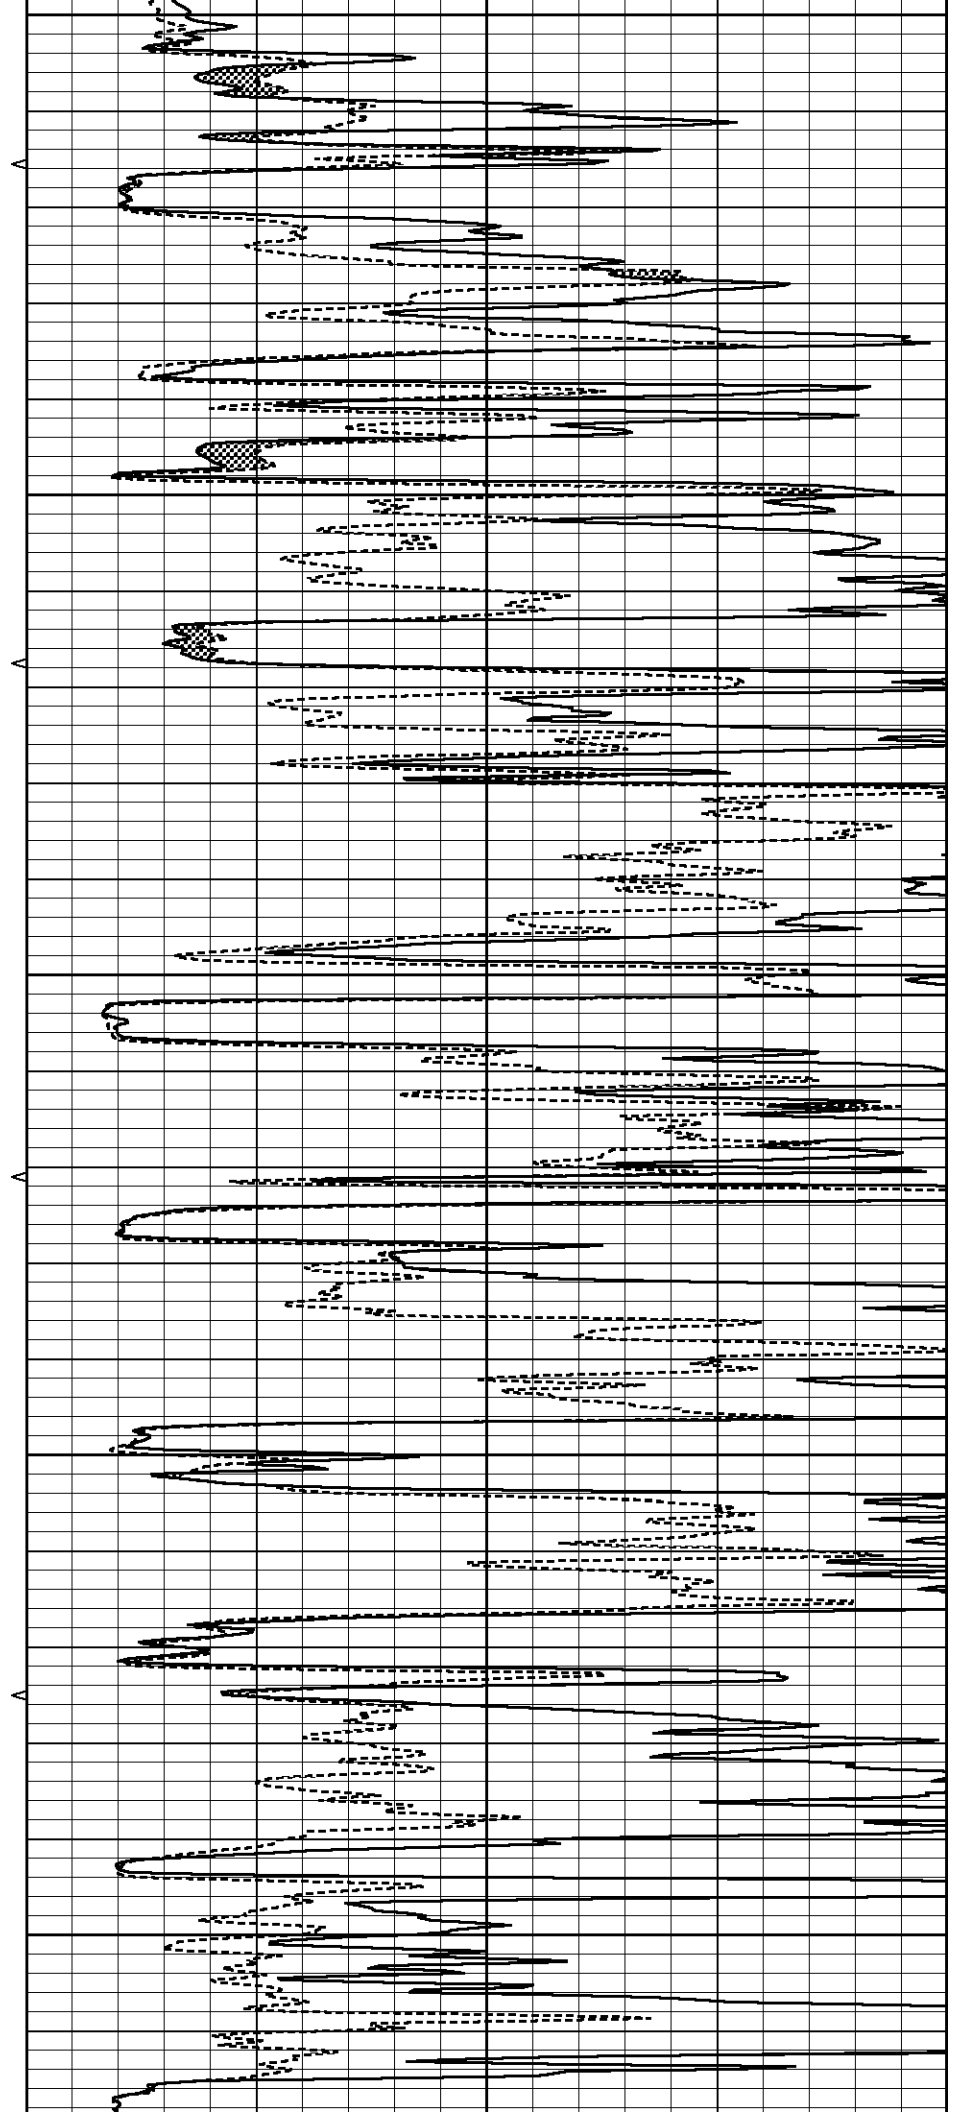

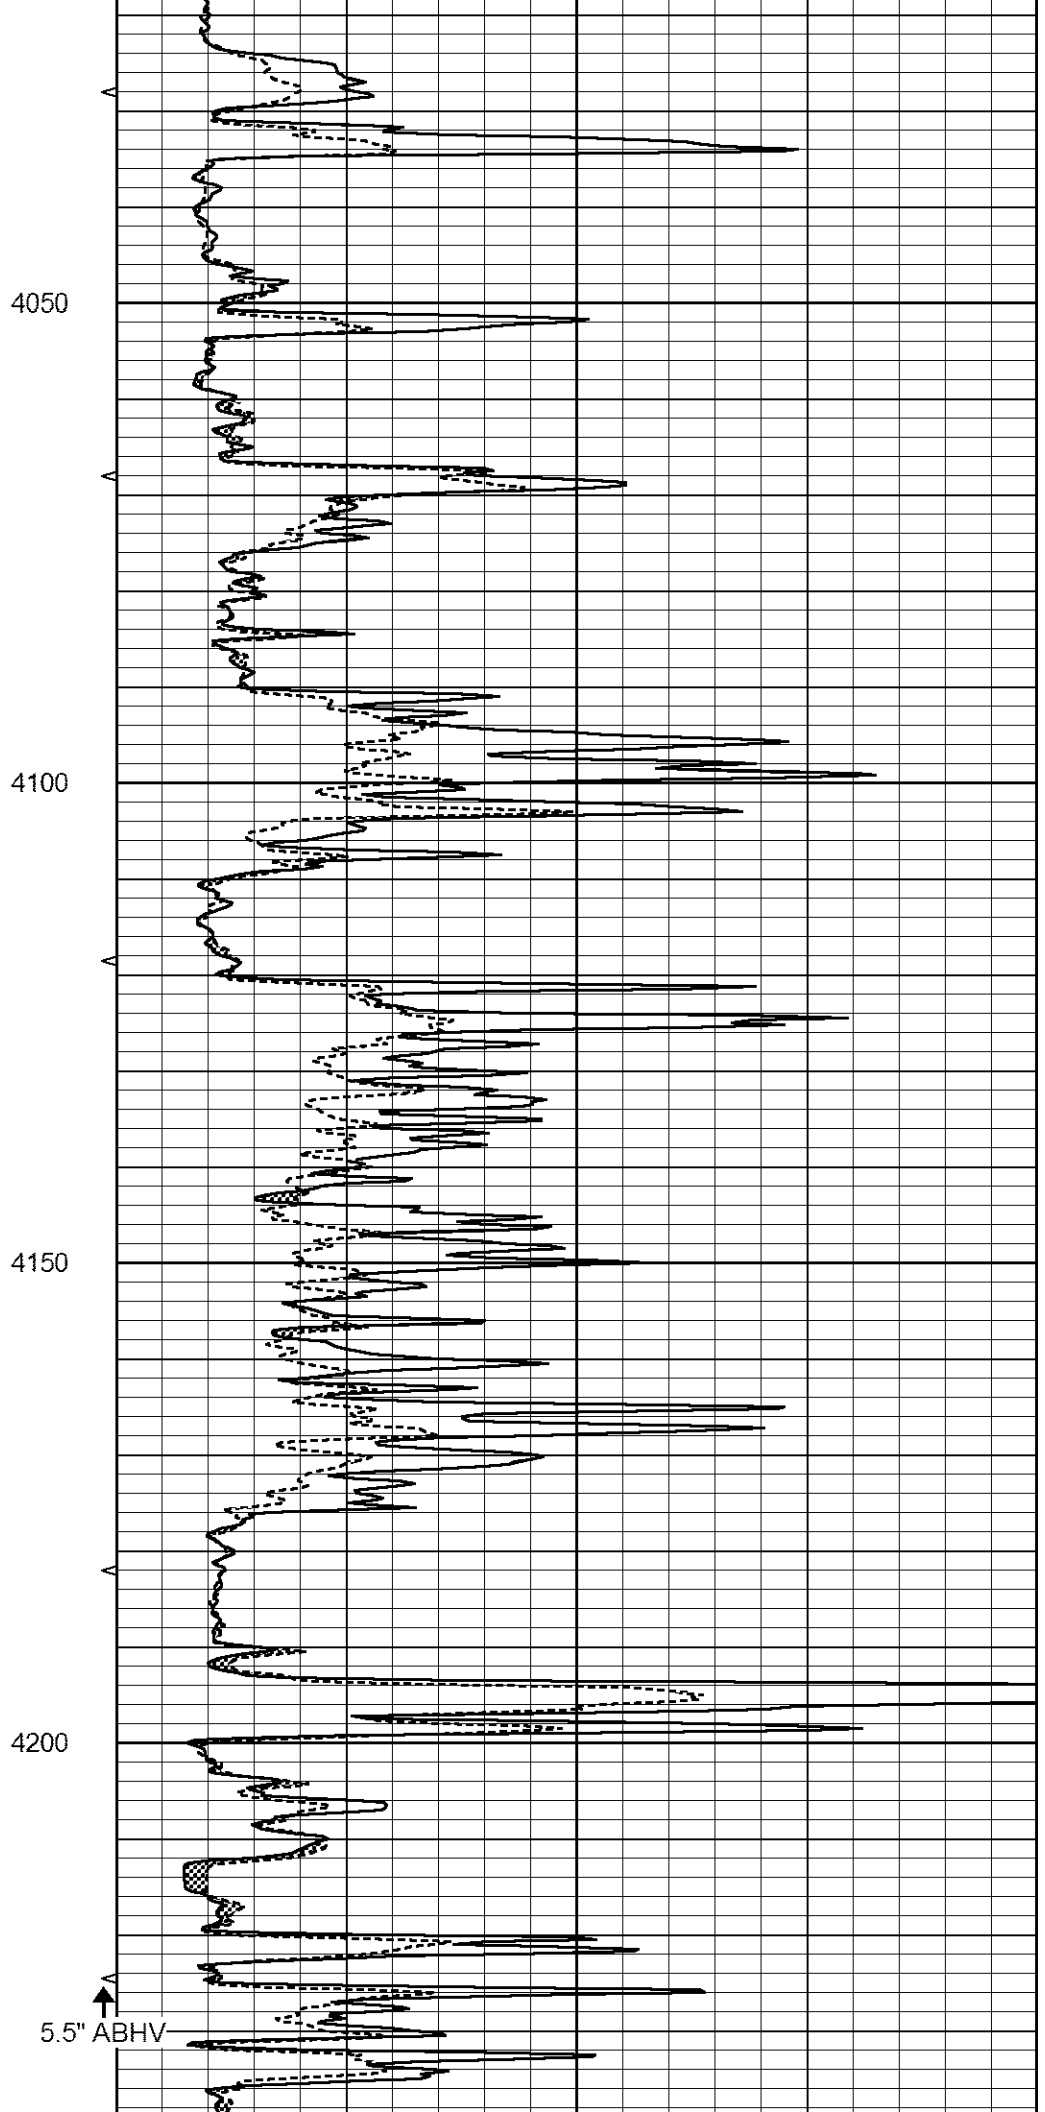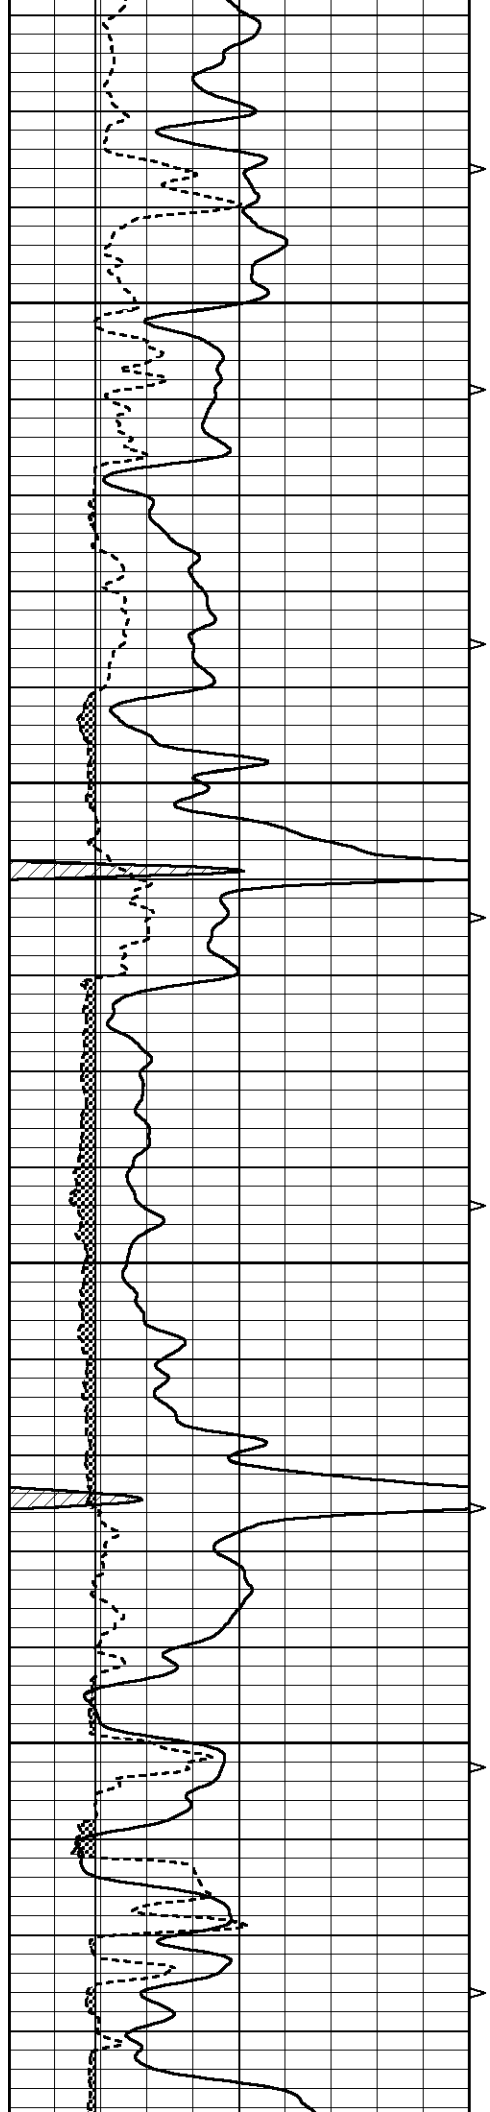


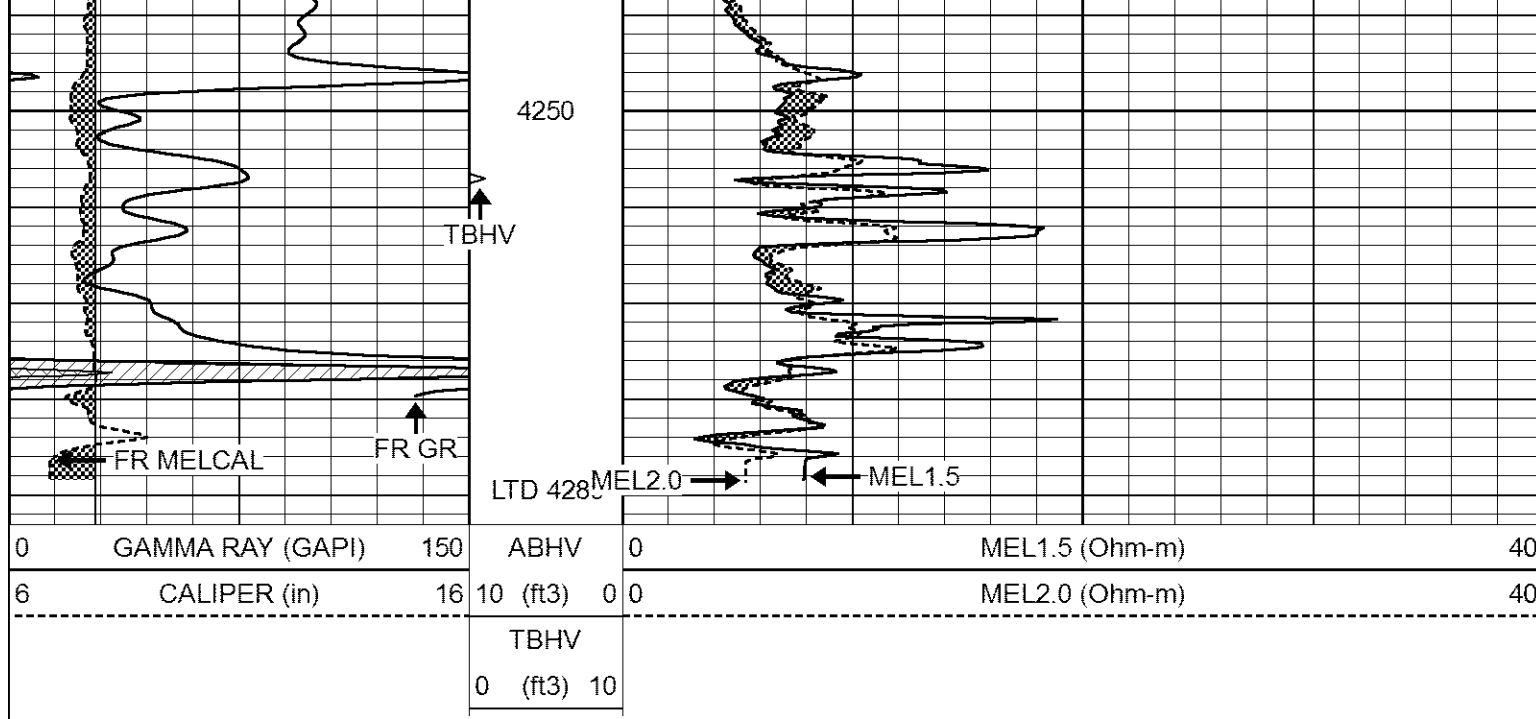


REPEAT SECTION

Database File 6545ddn.db
 Dataset Pathname pass5.3
 Presentation Format _micro
 Dataset Creation Wed Jun 22 15:33:10 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

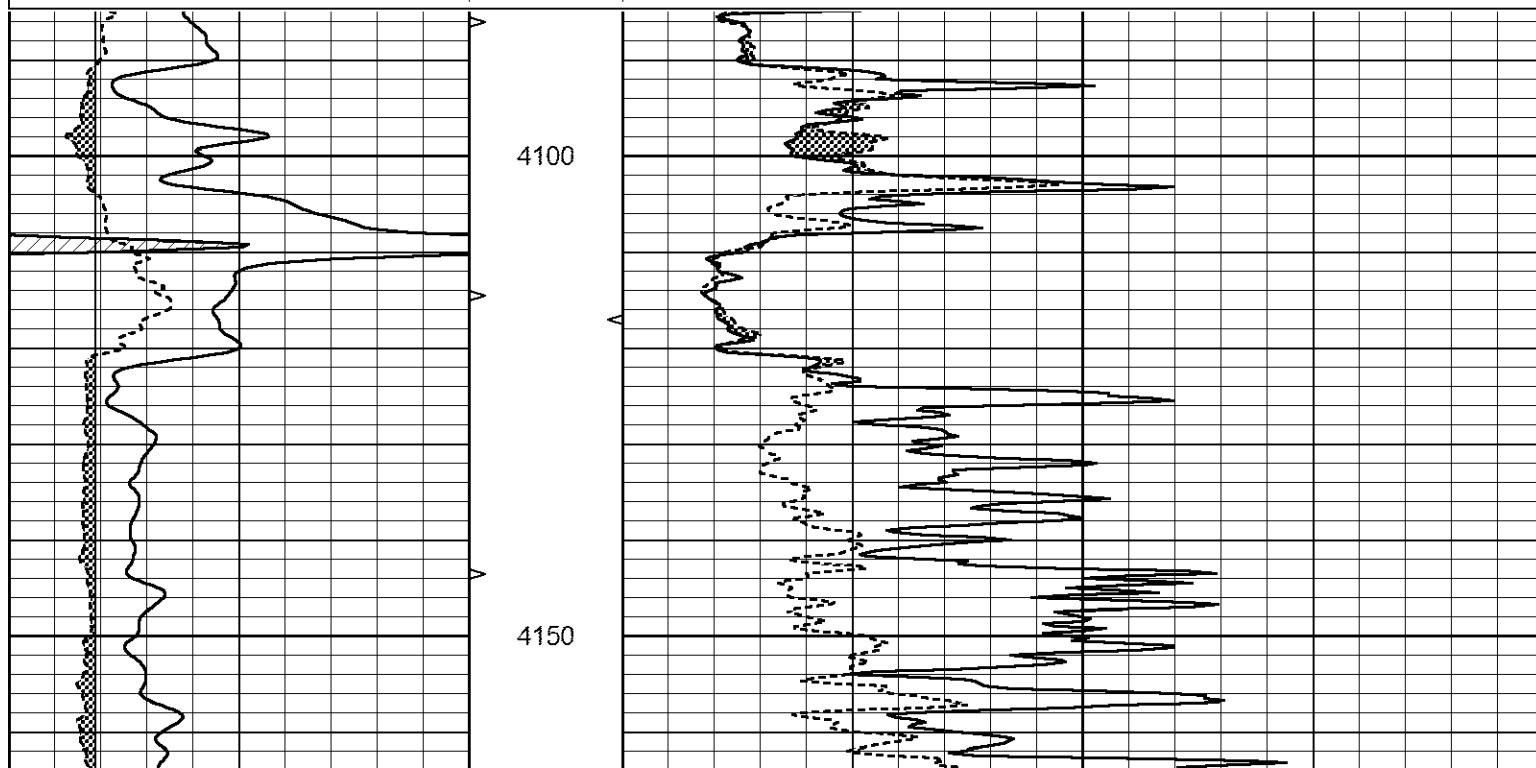

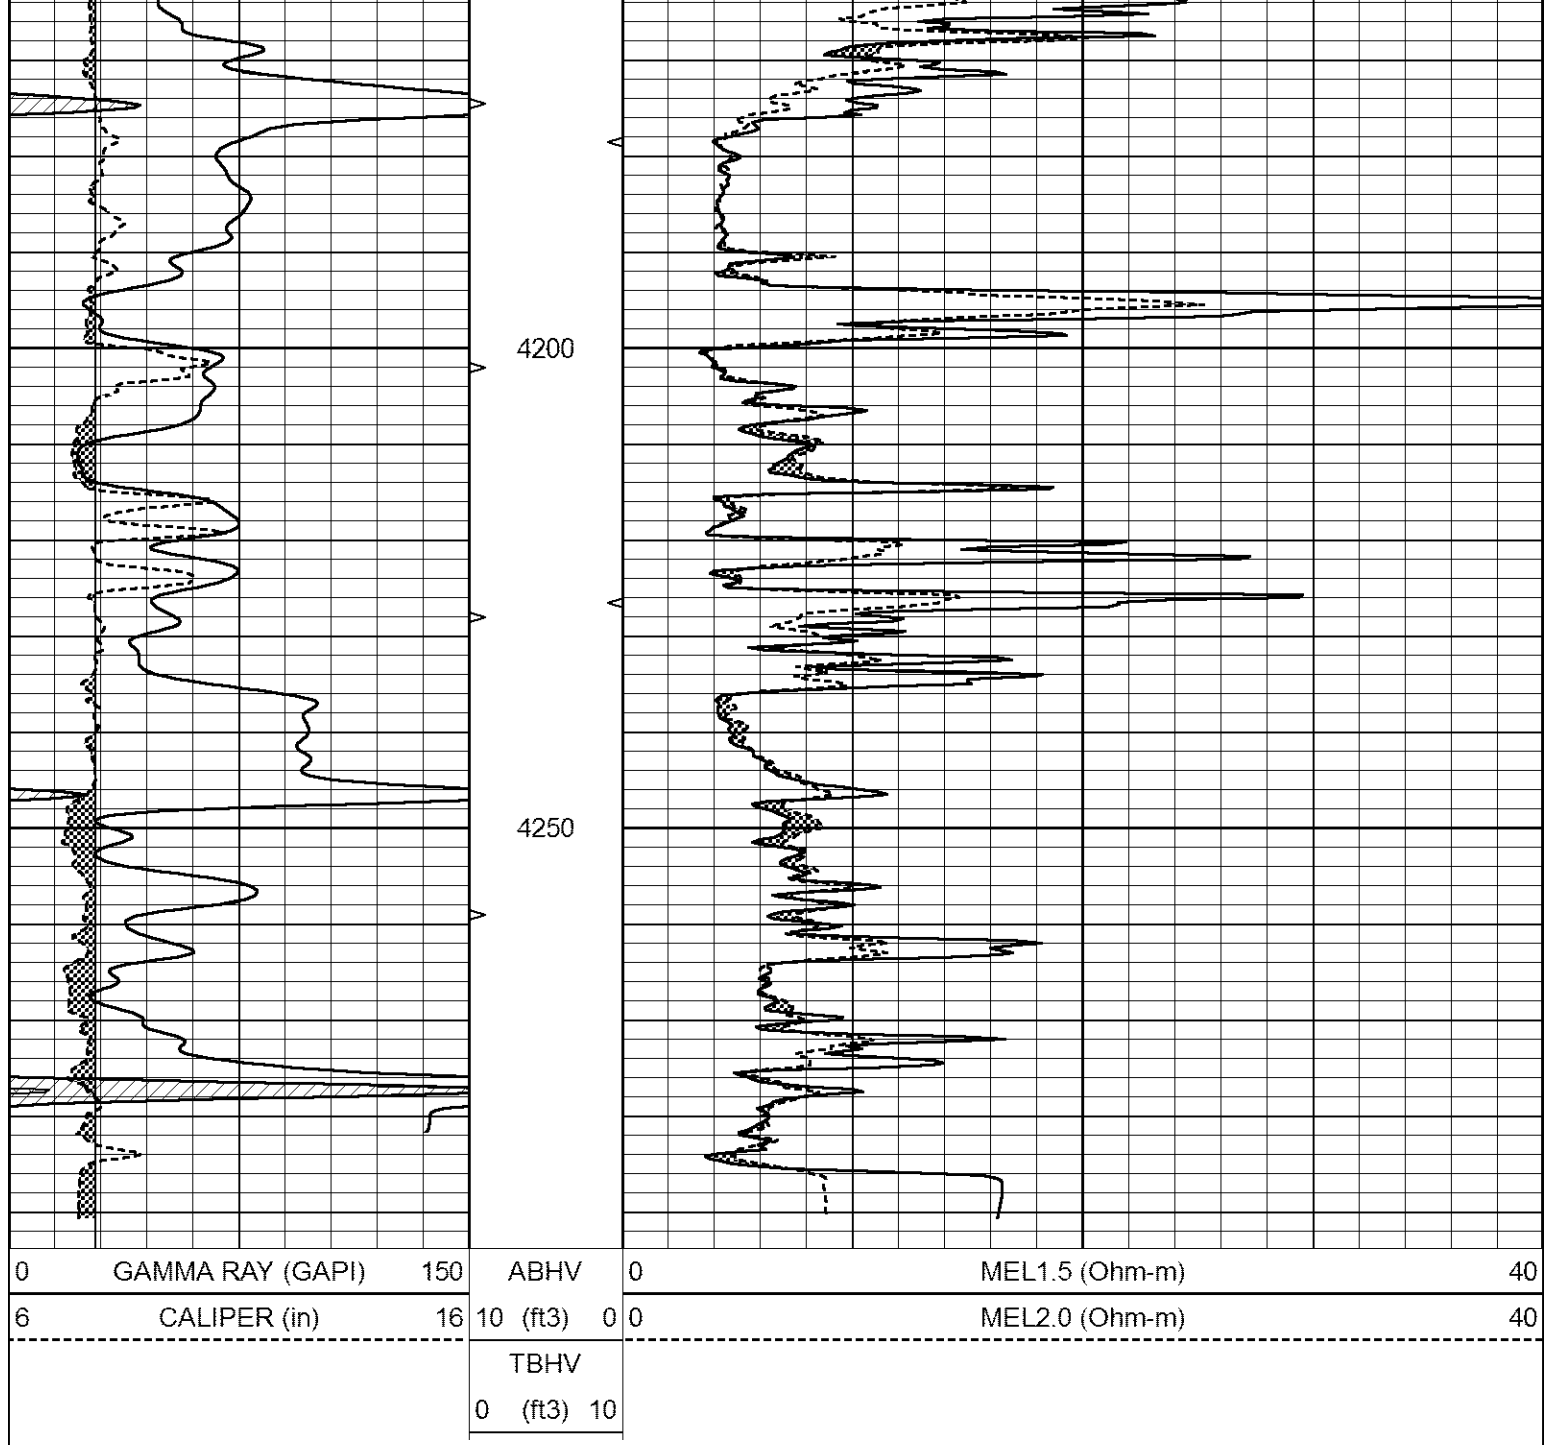

Calibration Report			
Database File	6545ddn.db		
Dataset Pathname	pass6.4		
Dataset Creation	Wed Jun 22 15:31:28 2022		
MICRO_USR Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeL		
Performed:	Tue Jun 07 09:12:25 2022		
Caliper Calibration:	Gain=7.212	Offset=2.700	
	Low Cal	High Cal	
References	8.000	14.000	
Readings	0.725	1.557	
1.5" Calibration:	Gain=30.000	Offset=1.800	
	Low Cal	High Cal	

References	0.000	20.000
Readings	0.004	1.335
2" Calibration:		
	Gain=49.000	Offset=1.200
References	Low Cal	High Cal
Readings	0.000	20.000
	0.004	1.029
Microlog Calibration Report		
Serial-Model: Performed:	070910-ProbeL (Not Performed)	
Readings		
	Zero	Cal
Normal	0.0000	1.0000
Inverse	0.0000	1.0000
Caliper	0.0000	1.0000
References		
	Zero	Cal
	0.0000	1.0000
	0.0000	1.0000
	0.0000	1.0000
Results		
	m	b
	1.0000	0.0000
	1.0000	0.0000
	1.0000	0.0000
Gamma Ray Calibration Report		
Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Tue May 17 15:23:49 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2200	GAPI/cps