OSAGE WIRELINE

GAMMA RAY/CCL CEMENT BOND LOG

Company JONES OIL EXPLORATION, LLC
Well HIGH #33-5
Field PERU-SEDAN
County CHAUTAUQUA
State KANSAS

Location: API # : 15-019-27715-00-00
SW SE SW NE
2924' FSL & 1902' FEL
SEC 33 TWP 34S RGE 12E

Permanent Datum GL Elevation 875'
Log Measured From GL — K.B. ---
Drilling Measured From GL — D.F. ---
G.L. 875'

Other Services

Date	5-9-22
Run Number	ONE
Depth Driller	1108'
Depth Logger	1031'
Bottom Logged Interval	1030'
Top Log Interval	SURFACE
Open Hole Size	6.75"
Type Fluid	WATER
Density / Viscosity	---
Max. Recorded Temp.	---
Estimated Cement Top	SURFACE
Time Well Ready	ON ARRIVAL
Time Logger on Bottom	---
Equipment Number	OW1
Location	HOMINY, OK.
Recorded By	K. HENSLEY
Witnessed By	MR. JONES

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String				
Prot. String				
Production String	2 7/8"		SURFACE	T.D.
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

FILE # 6295 CBL OW1 JONES OIL HIGH #33-5
CREW: T. LUNN, T. FERGUSON
THANK YOU FOR USING OSAGE WIRELINE!!!

OSAGE WIRELINE

GR/CCL/CEMENT BOND LOG

Database File	6295 cbl ow1 jones oil high # 33-5.db
Dataset Pathname	pass4
Presentation Format	scbl_dr
Dataset Creation	Mon May 09 11:24:57 2022
Charted by	Depth in Feet scaled 1:240

Collar Locator	-2	0	Amplitude (mV)	100	200 VDL (usec) 1200
Gamma Ray (GAPI)	150				
Line Speed (ft/min)	100				

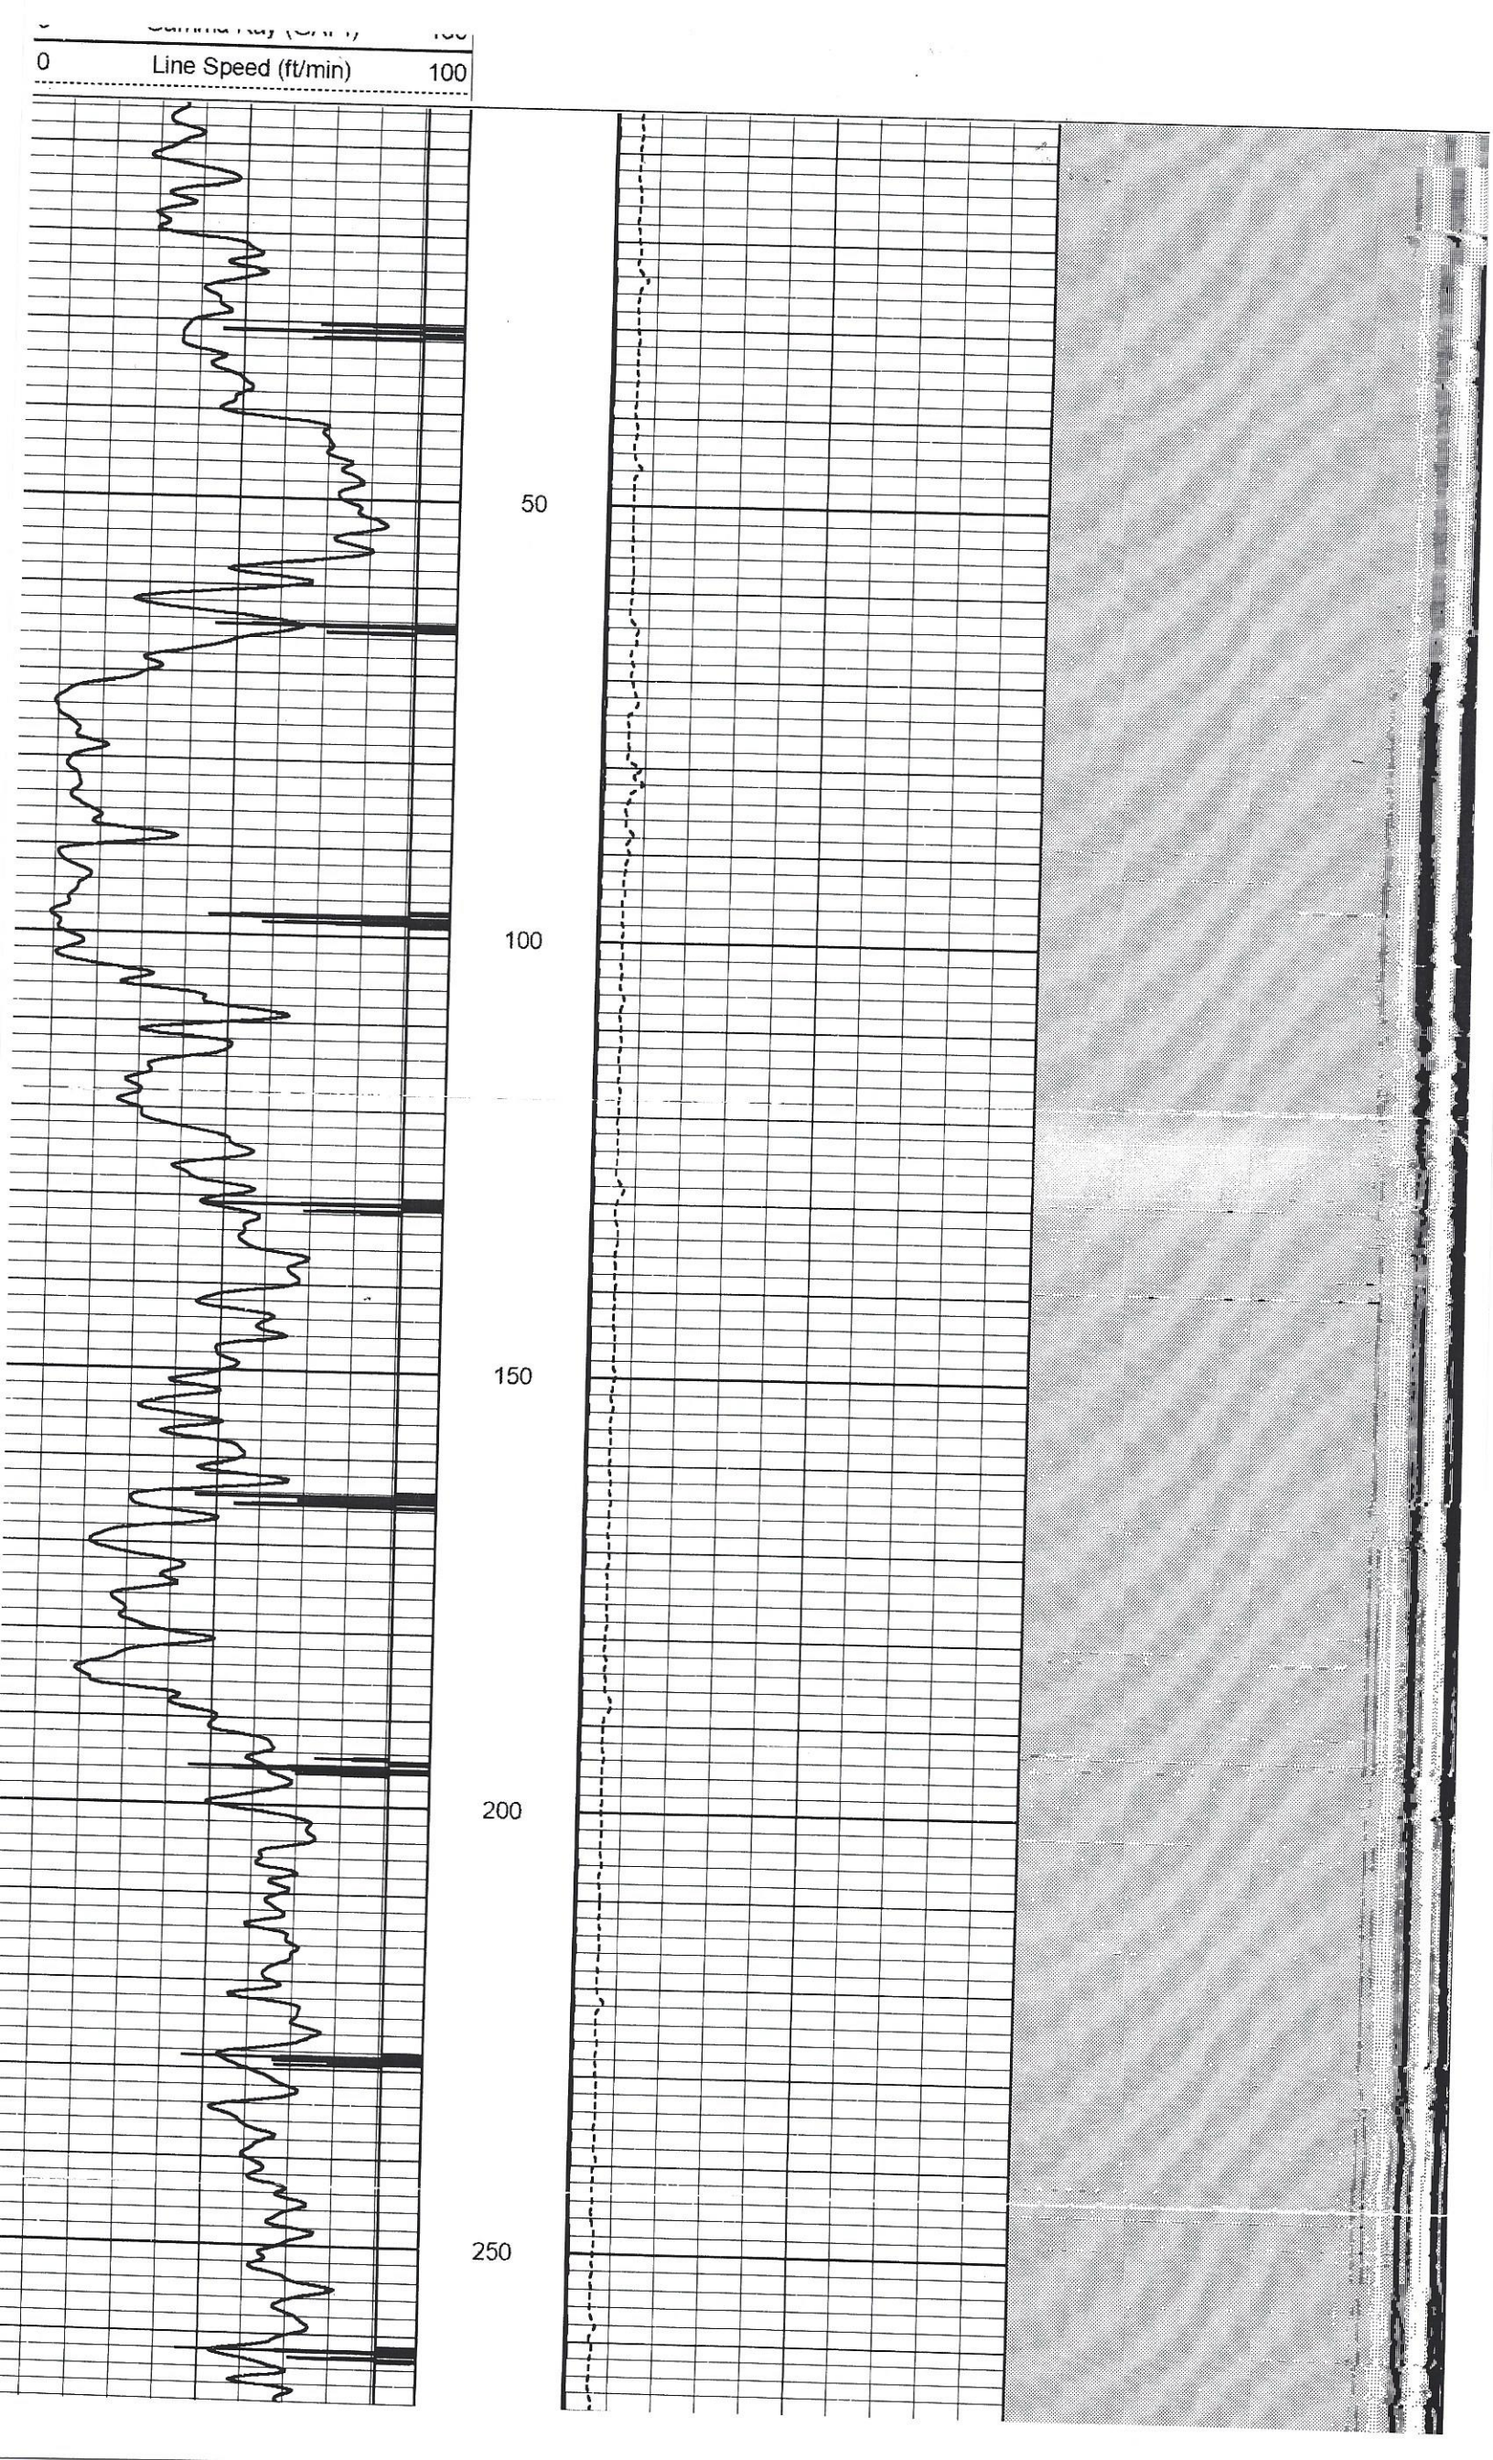
0
Line Speed (ft/min)
100
50
100
150
200
250

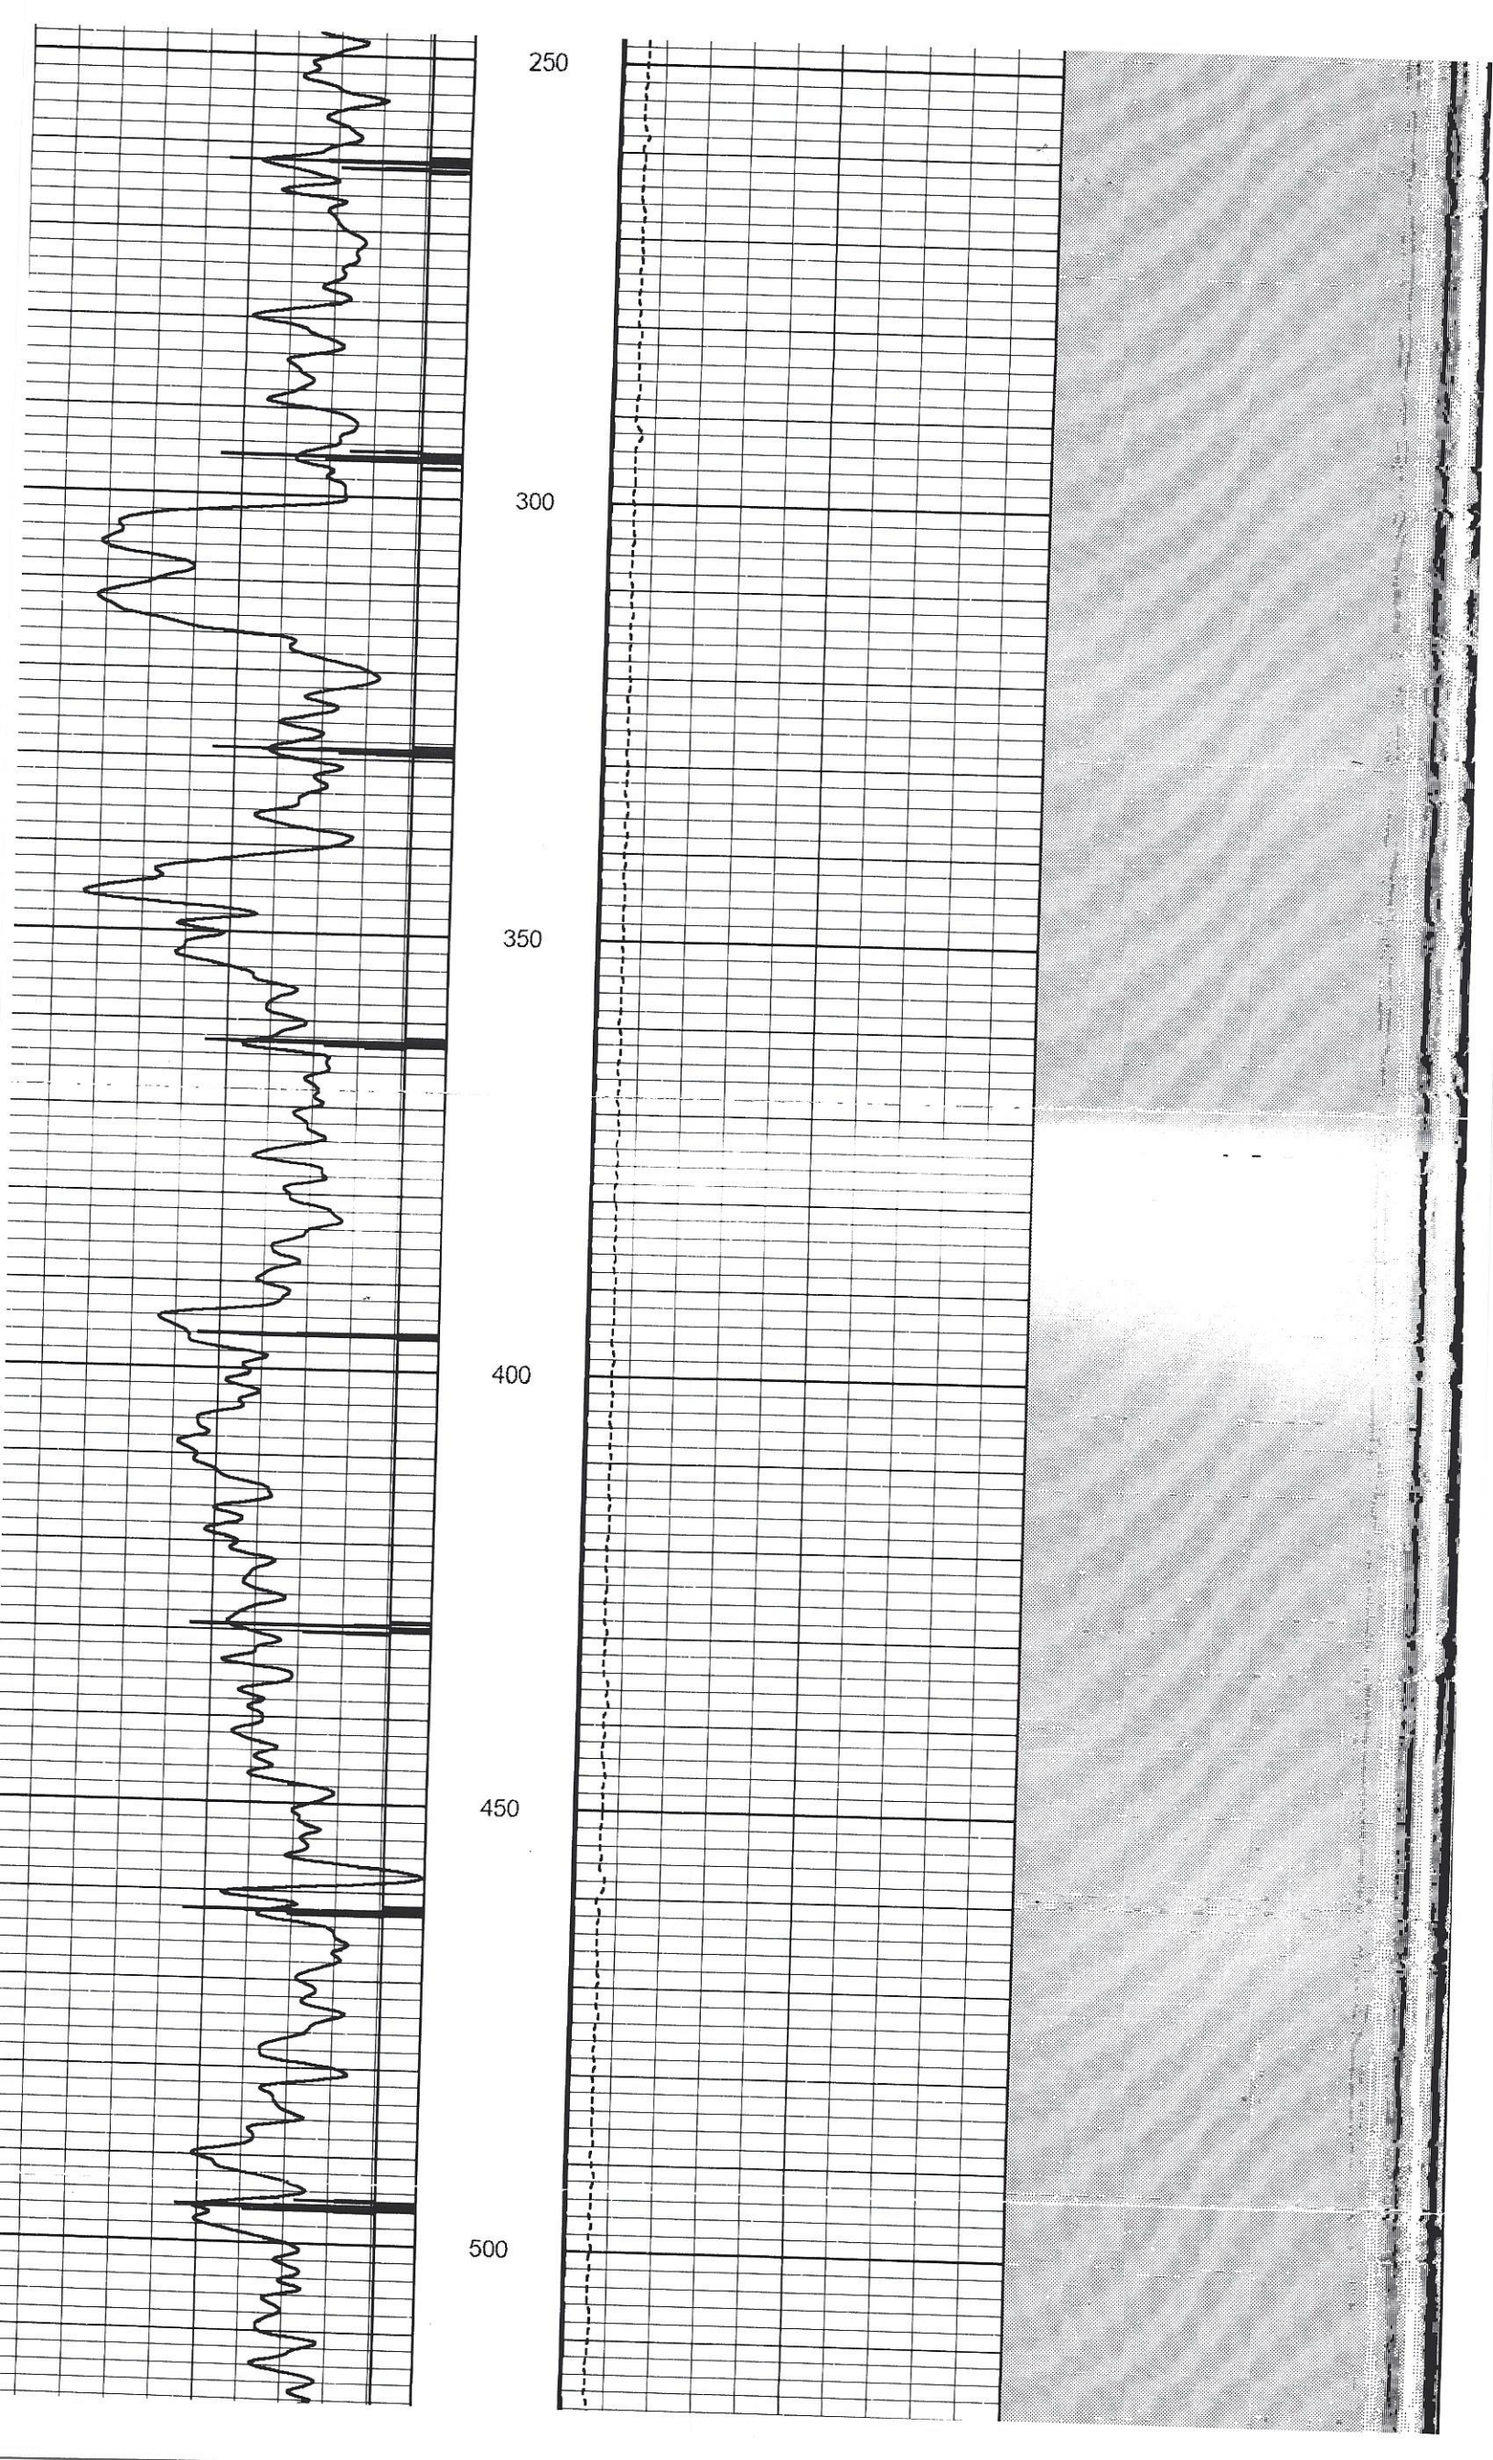
250
300
350
400
450
500

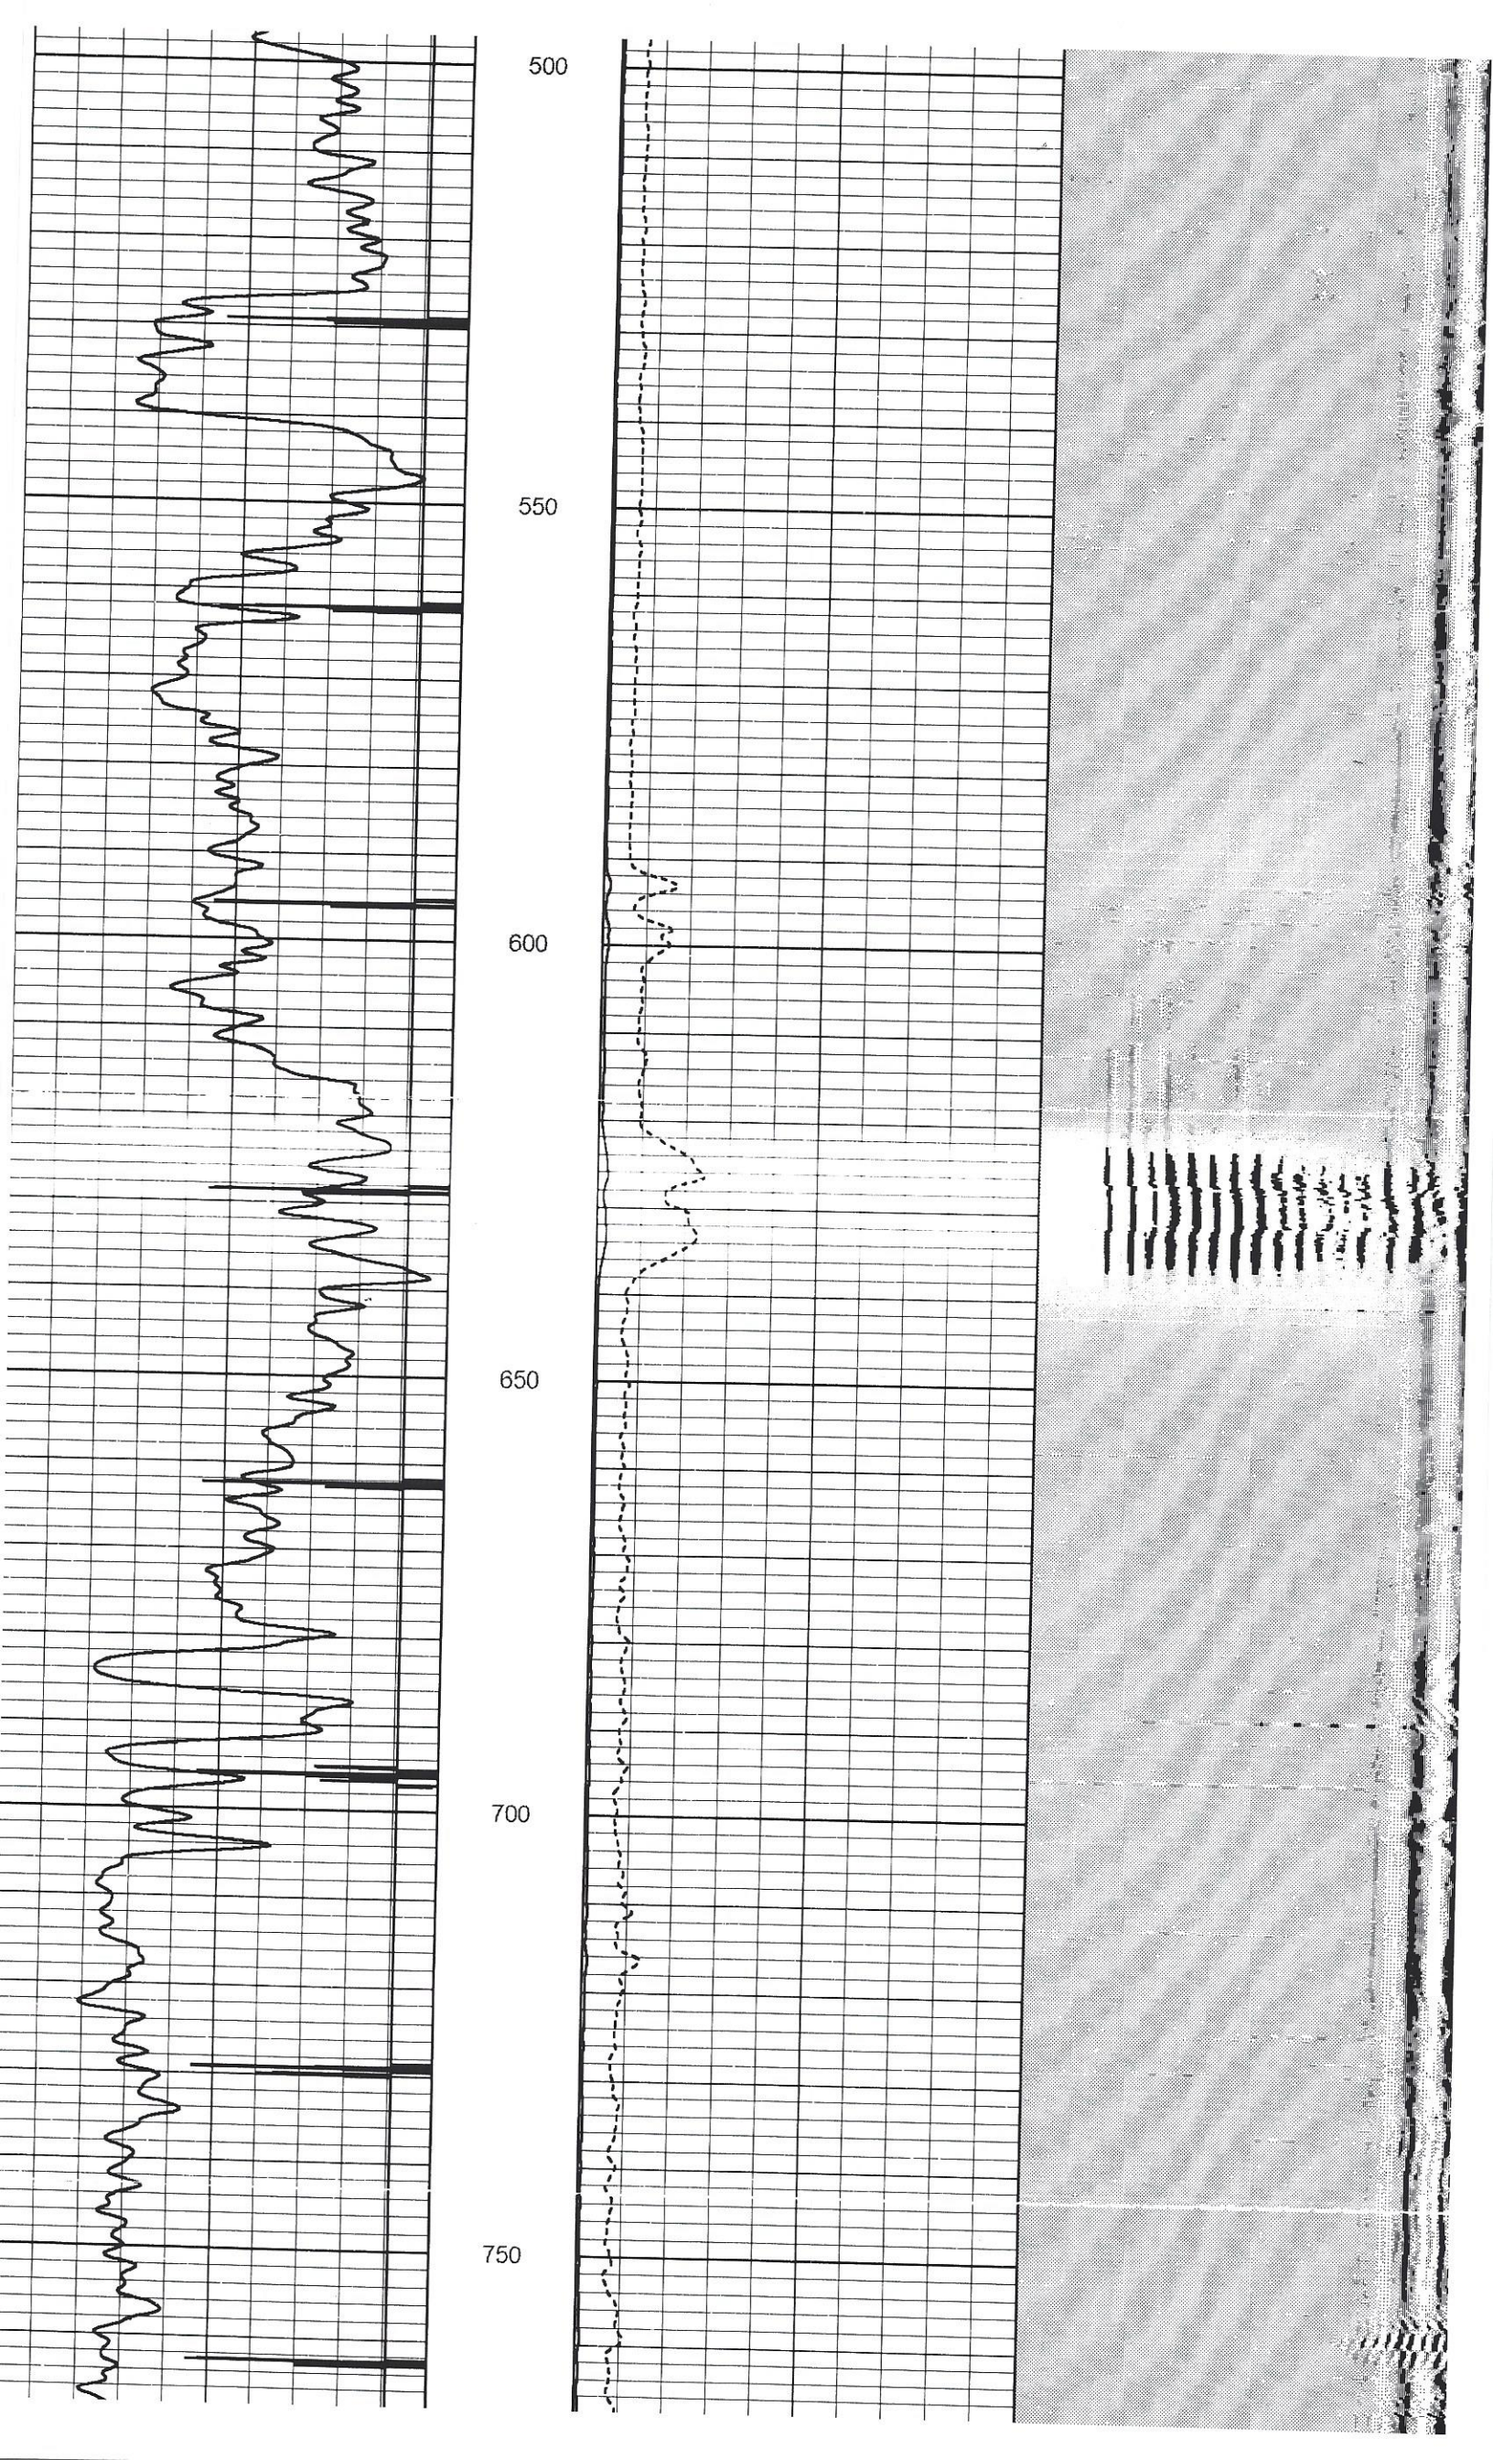
500
550
600
650
700
750


750
800
850
900
950
1000
Gamma Ray
Amplitude
VDL

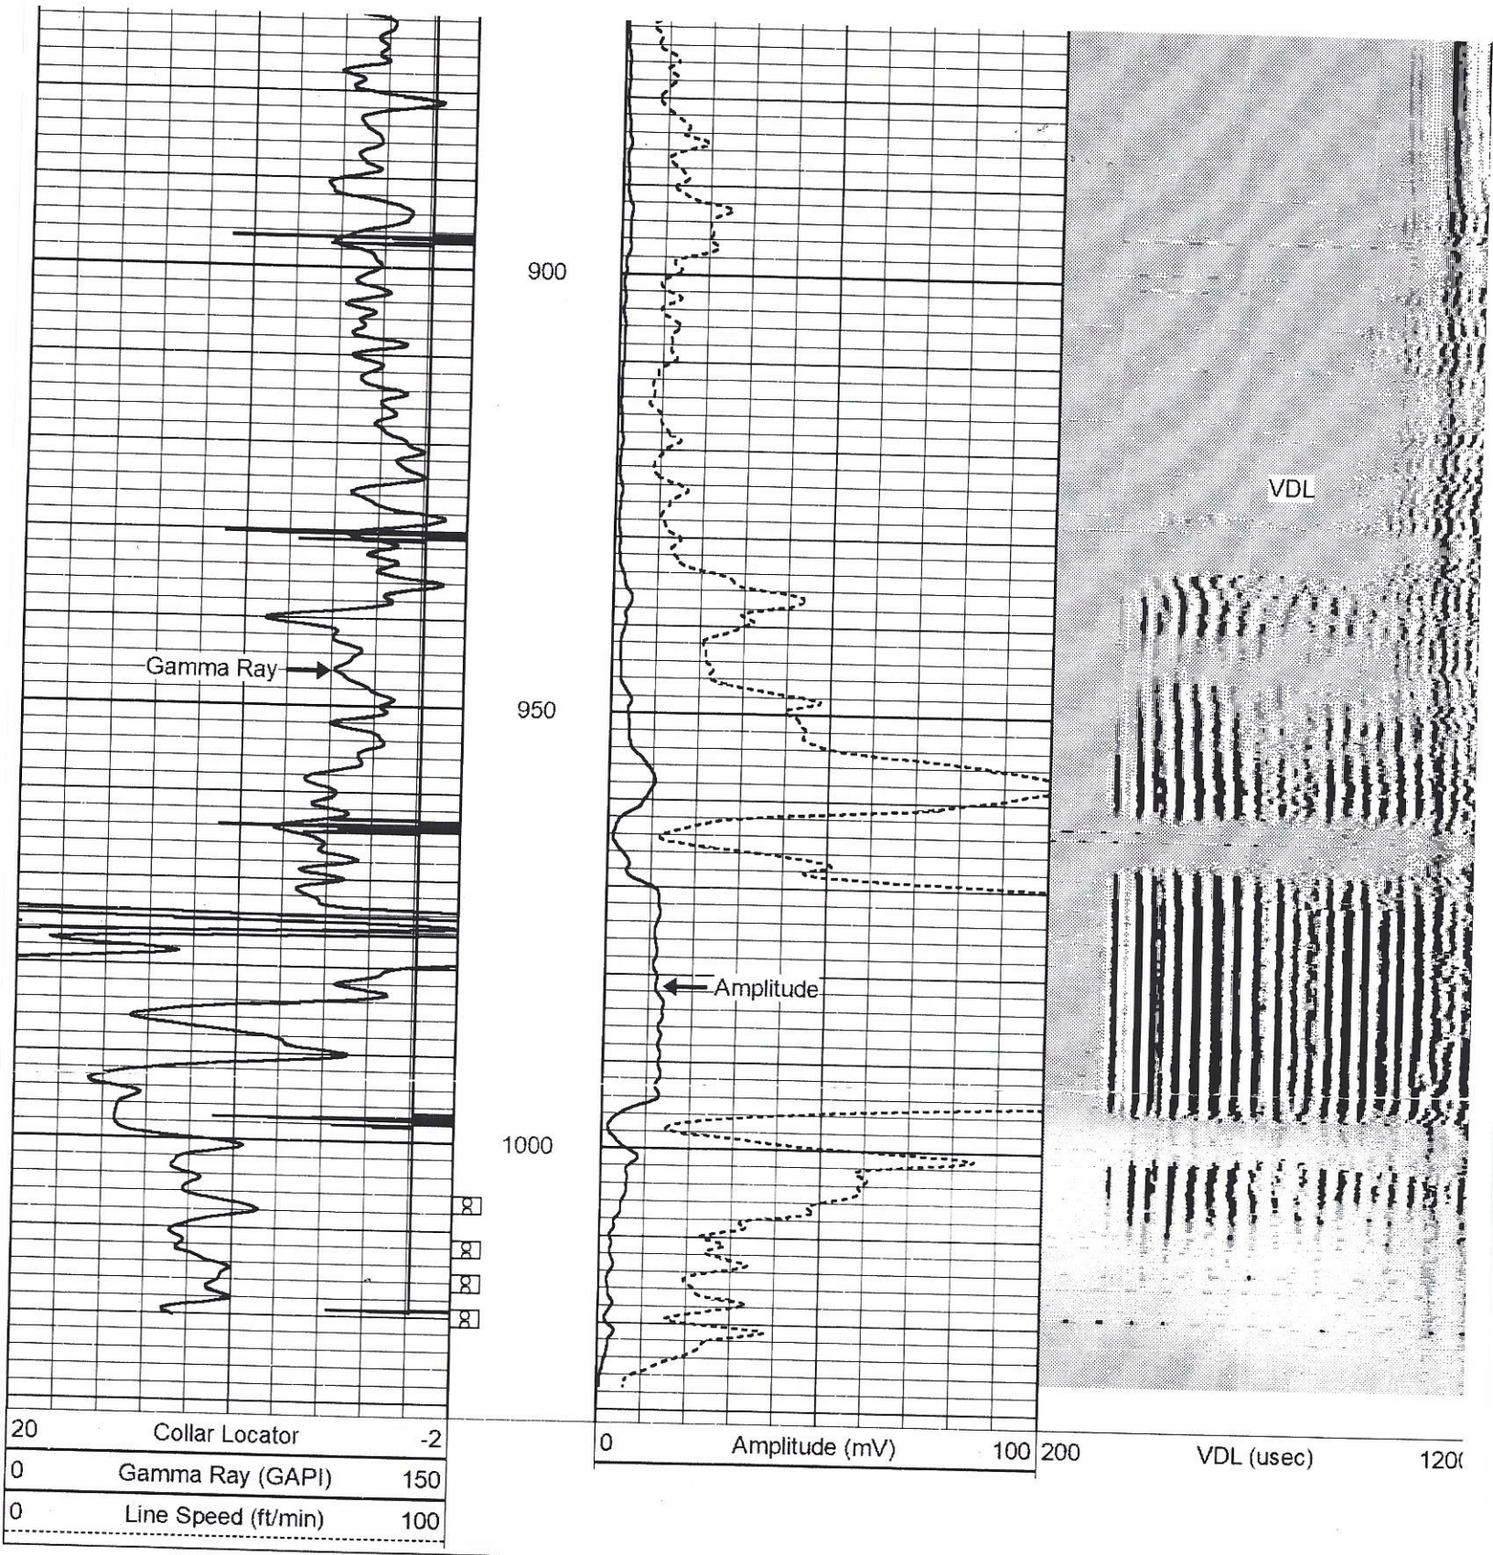

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb
CHD	12.33		CHD-STNDRD Standard Cable Head	1.00	1.69	10.00
CBLPROBE	11.33		CBLPROBE-PRB169SLIM (000908) PROBE 1 11/16 GR/CCL/CBL	11.33	1.69	20.00
CCL	10.33					
GR	7.42					
WVF3FT	4.50					
WVF5FT	3.58					
WVFSYNC	0.00					