


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

WELL PLUGGING RECORD

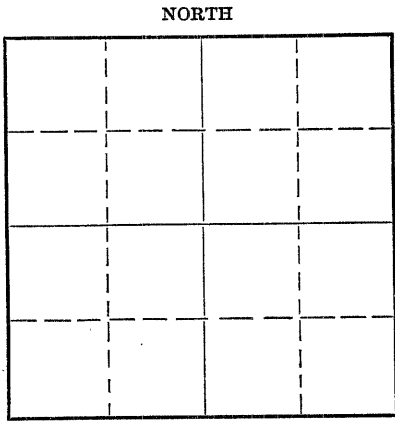

Locate well correctly on above  
Section Flat

Rooks County. Sec. 20 Twp. 9 Rge. (E) 18 (W)  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines 990' W-330' N of E/4 Corner  
Lease Owner Cities Service Oil Co.  
Lease Name Baumgartner "D"  
Office Address Bartlesville, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) dry hole  
Date well completed 4/5 19 53  
Application for plugging filed 4/5 19 53  
Application for plugging approved 4/5 19 53  
Plugging commenced 4/6 19 53  
Plugging completed 4/6 19 53  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty  
Producing formation Arbuckle Depth to top 3646 Bottom Total Depth of Well 3657 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	246'	0'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with heavy mud to 240', set bridge plug with one-half sack hulls. Run 15 sacks cement, fill with heavy mud to 40', set plug with one-half sack hulls. Run 10 sacks cement. Mud and dirt to surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Braden Drilling Co.  
Address Hutchinson, Kansas


STATE OF KANSAS, COUNTY OF BARTON, ss.  
James Porter (employee of owner) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature)

Box 553, Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of April, 1953

My commission expires 3-17-1955



# WELL RECORD

Company Cities Service Oil Company Well No. 1 Farm Baumgartner "D"  
 Location 330' North and 990' West of 1/4 Cor. Sec. 20 T. 9 R. 18W  
 Elevation 2174 (2171 Or.) County Rooks State Kansas  
 Drlg. Comm. March 27, 1953 Contractor Braden Drilling Company  
 Drlg. Comp. April 6, 1953 Acid None  
 T. D. 3657' Initial Prod. Dry Hole; P. & A. 4-6-53

CASING RECORD:

8-5/8" @ 246' cas. 175 cc cement

FORMATION RECORD:

sand & gravel	0-100
sand	170
shale	192
shale & shells	639
shale & sand	700
shale	755
shale & shells	1000
sand & shale	1250
shale	1405
anhydrite	1530
shale & shells	2030
shale & lime	2230
broken lime	2395
lime & shale	2530
broken lime	2790
lime	3050
shale	3210
lime	3414
lime & conglomerate	3630
lime	3657 T. D.

Heabner	3309'
Dodge	3330'
Lansing	3350'
Randy Conglomerate	3569'
Cherty Conglomerate	3593'
Eros. Arbuckle	3607'
Arbuckle	3646'
Penetration	11'
Total Depth	3657'

Drill Stem Test 3609-14, open  
 1 hr., recovered 28' mud;  
 B. S. P. 0 1/15 mins.

SYFO:	245'	0°
	700'	10°
	1200'	20°
	1700'	20°
	2200'	10°
	2700'	10°
	3333'	10°

7-7/8" rotary hole.

**PLUGGING**

FILE SEC 20 T 9 R 18W  
 BOOK PAGE 91 LINE 17

3072

4-15-53