


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

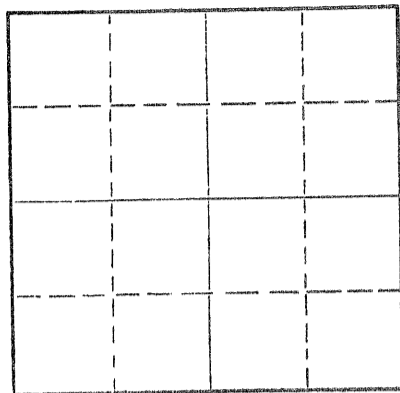

Locate well correctly on above
Section Plat

ROOKS County. Sec. 20 Twp. 9S Rge. 18 (X) (W)
Location as "NE/CNW/SW" or footage from lines SW SW SW
Lease Owner OIL PROPERTY MANAGEMENT, INC.
Lease Name JOHN "B" Well No. 1
Office Address 300 Insurance Building Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) OIL
Date well completed April, 1953 19
Application for plugging filed Yes 19
Application for plugging approved Yes 19
Plugging commenced 4-13-70 19
Plugging completed 4-13-70 19
Reason for abandonment of well or producing formation Non-Commercial
If a producing well is abandoned, date of last production December, 1969 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Kansas City Depth to top 3354 Bottom 3544 Total Depth of Well 3605 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	172	None
				5-1/2"	3606	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

ALLIED CEMENTING COMPANY Mixed 30 sax of cement, 5 sax hulls and 35 Gel then release plug and 70 sax of cement, pump down the 5 1/2" casing. Maximum pressure 800 psi. Hooked up to the Braden Head and pumped 110 sax of Pozmix down the annulus.

RECEIVED
STATE CORPORATION COMMISSION
6-1-70
JUN 1 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor ALLIED CEMENTING COMPANY
Address Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
W. H. Peachee (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. H. Peachee
W. H. Peachee

300 Insurance Building Wichita, Kansas

SUBSCRIBED AND SWORN to before me this 1st day of June, 1970

My commission expires May 25, 1971

Notary Public.

WELL LOG

COMPANY: Heathman & Compnay

SW SW SW Sec. 20

Twp 9S, Rge 18W

Rooks County, Kansas.

LEASE: John B-1

ELEVATION: 2187 R. B.

NOTE: All Meas Rotary Bushing

0 60 Soil & Sand
 60 170 Blue Shale , Shells
 170 175 Shells
 175 300 Shale Blue
 300 830 Shale & Shells
 830 1030 Sand & Shale
 1030 1275 Sand
 1275 1300 Shale & Redbed
 1300 1528 Shale & Redbed
 1528 1562 Anhydrite
 1562 1570 Anhydrite
 1570 1820 Sand & Shells
 1820 1980 Shale & Lime
 1980 2200 Shale & Lime
 2200 2325 Lime & Shale
 2325 2465 Lime & Shale
 2465 2600 Lime & Shale
 2600 2635 Lime & Shale
 2635 2655 Lime
 2655 2675 Lime & Shale
 2675 2775 Lime & Shale
 2775 2890 Shale & Lime
 2890 2920 Shale
 2920 3015 Shale & Lime
 3015 3085 Shale & Lime
 3085 3210 Shale & Lime
 3210 3275 Lime & Shale
 3275 3335 Lime & Shale
 3335 3375 Lime & Shale
 3375 3430 Lime
 3430 3440 Lime
 3440 3460 Lime
 3460 3500 Lime
 3500 3539 Lime
 3539 3562 Lime
 3562 3603 Lime
 3603 3605 Arbuckle
 3605 (Total Depth)

COMMENCED: 3-24-53

COMPLETED: 4-3-53

CASING RECORD:8 5/8 Surface Casing set @ 172' W/100
Sacks of bulk cement by Sun Cementing Co.5 1/2 Production String set @ 3606' W/100
sacks of bulk cement by Sun Cementing Co.D.S.T. By Johnston Testers3397-3433 Tool open 1 hour fair blow for
1 hour. Recovered 90' muddy salt water
slightly oil & gas cut. 15 min B.H.P. 675#3439-3460 Tool open 45 minutes. Recovered
360' muddy salt water slightly oil cut.
15 min. H.H.P. Flow pressure 200#3516-3539 Tool open 30 minutes. Recovered
5' Rotary Mud weak blow for 6 minutes.
B.H.P. 0

Schlumberger Log Run.

Geologist: Bob Armstrong.

RECEIVED
 STATE CORPORATION COMMISSION
 MAR 3 1970
 CONSERVATION DIVISION
 Wichita, Kansas

TOPS: Geologist

Anhydrite	1528 (+ 659)	- Lansing K. C.	3361 (-1174)
Topeka	3112 (- 925)	Base K. C.	3567 (-1380)
Heebner	3321 (-1134)	Arbuckle	3603 (-1416)
Toronto	3341 (-1154)	T. Depth	3605 (-1418)

STATE OF KANSAS) SS
 COUNTY OF ELLIS)

I hereby affirm that the above and foregoing is a true and correct copy of the
 log of the John B-1 located, SW SW SW Sec 20, Twp 9S, Rge 18W, Rooks County, Kansas.

CONTRACTOR: Strain Drilling CompanyBY: T. C. Strain
T. C. Strain

Subscribed and sworn to before me this 6th day of April 1953
 My Commission Expires March 26, 1956

Mildred Schneider
 Notary Public.