



MICRO LOG

Company		McGINNESS ENERGY CO., INC.	
Well		JW PLATT #1-8	
Field		HARDTNER	
County		BARBER	
State		KANSAS	
Location:		API # : 15-007-24420-0000	
Permanent Datum		GROUND LEVEL Elevation 1445	
Log Measured From		KELLY BUSHING 13' A.G.L	
Drilling Measured From		KELLY BUSHING	
SEC 8 TWP 35S RGE 12W		Elevation	
		K.B. 1458	
		D.F. 1456	
		G.L. 1445	
Date		5/14/22	
Run Number		THREE	
Depth Driller		5450	
Depth Logger		5452	
Bottom Logged Interval		5450	
Top Log Interval		3600	
Casing Driller		397	
Casing Logger		397	
Bit Size		7 7/8	
Type Fluid in Hole		CHEMICAL MUD	
Density / Viscosity		9.0/50	
pH / Fluid Loss		9.5/9.6	
Source of Sample		FLOWLINE	
Rm @ Meas. Temp		.800@78F	
Rmf @ Meas. Temp		.600@78F	
Rmc @ Meas. Temp		.960@78F	
Source of Rmf / Rmc		MEASUREMENT	
Rm @ BHT		.483@129F	
Time Circulation Stopped		5 HOURS	
Time Logger on Bottom		1:00 A.M.	
Maximum Recorded Temperature		129F	
Equipment Number		3802	
Location		HAYS, KANSAS	
Recorded By		JEFF LUEBBERS	
Witnessed By		LEAH KASTEN	
		COLE ROBBEN	


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS


HARDTNER, KS. 1/4 MILE EAST, NORTH INTO

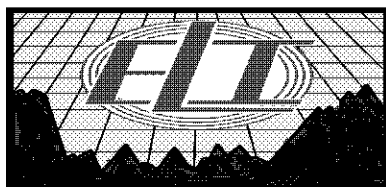


MAIN SECTION

Database File	6397pe.db
Dataset Pathname	pass22.1M
Presentation Format	_micro
Dataset Creation	Sat May 14 08:49:23 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

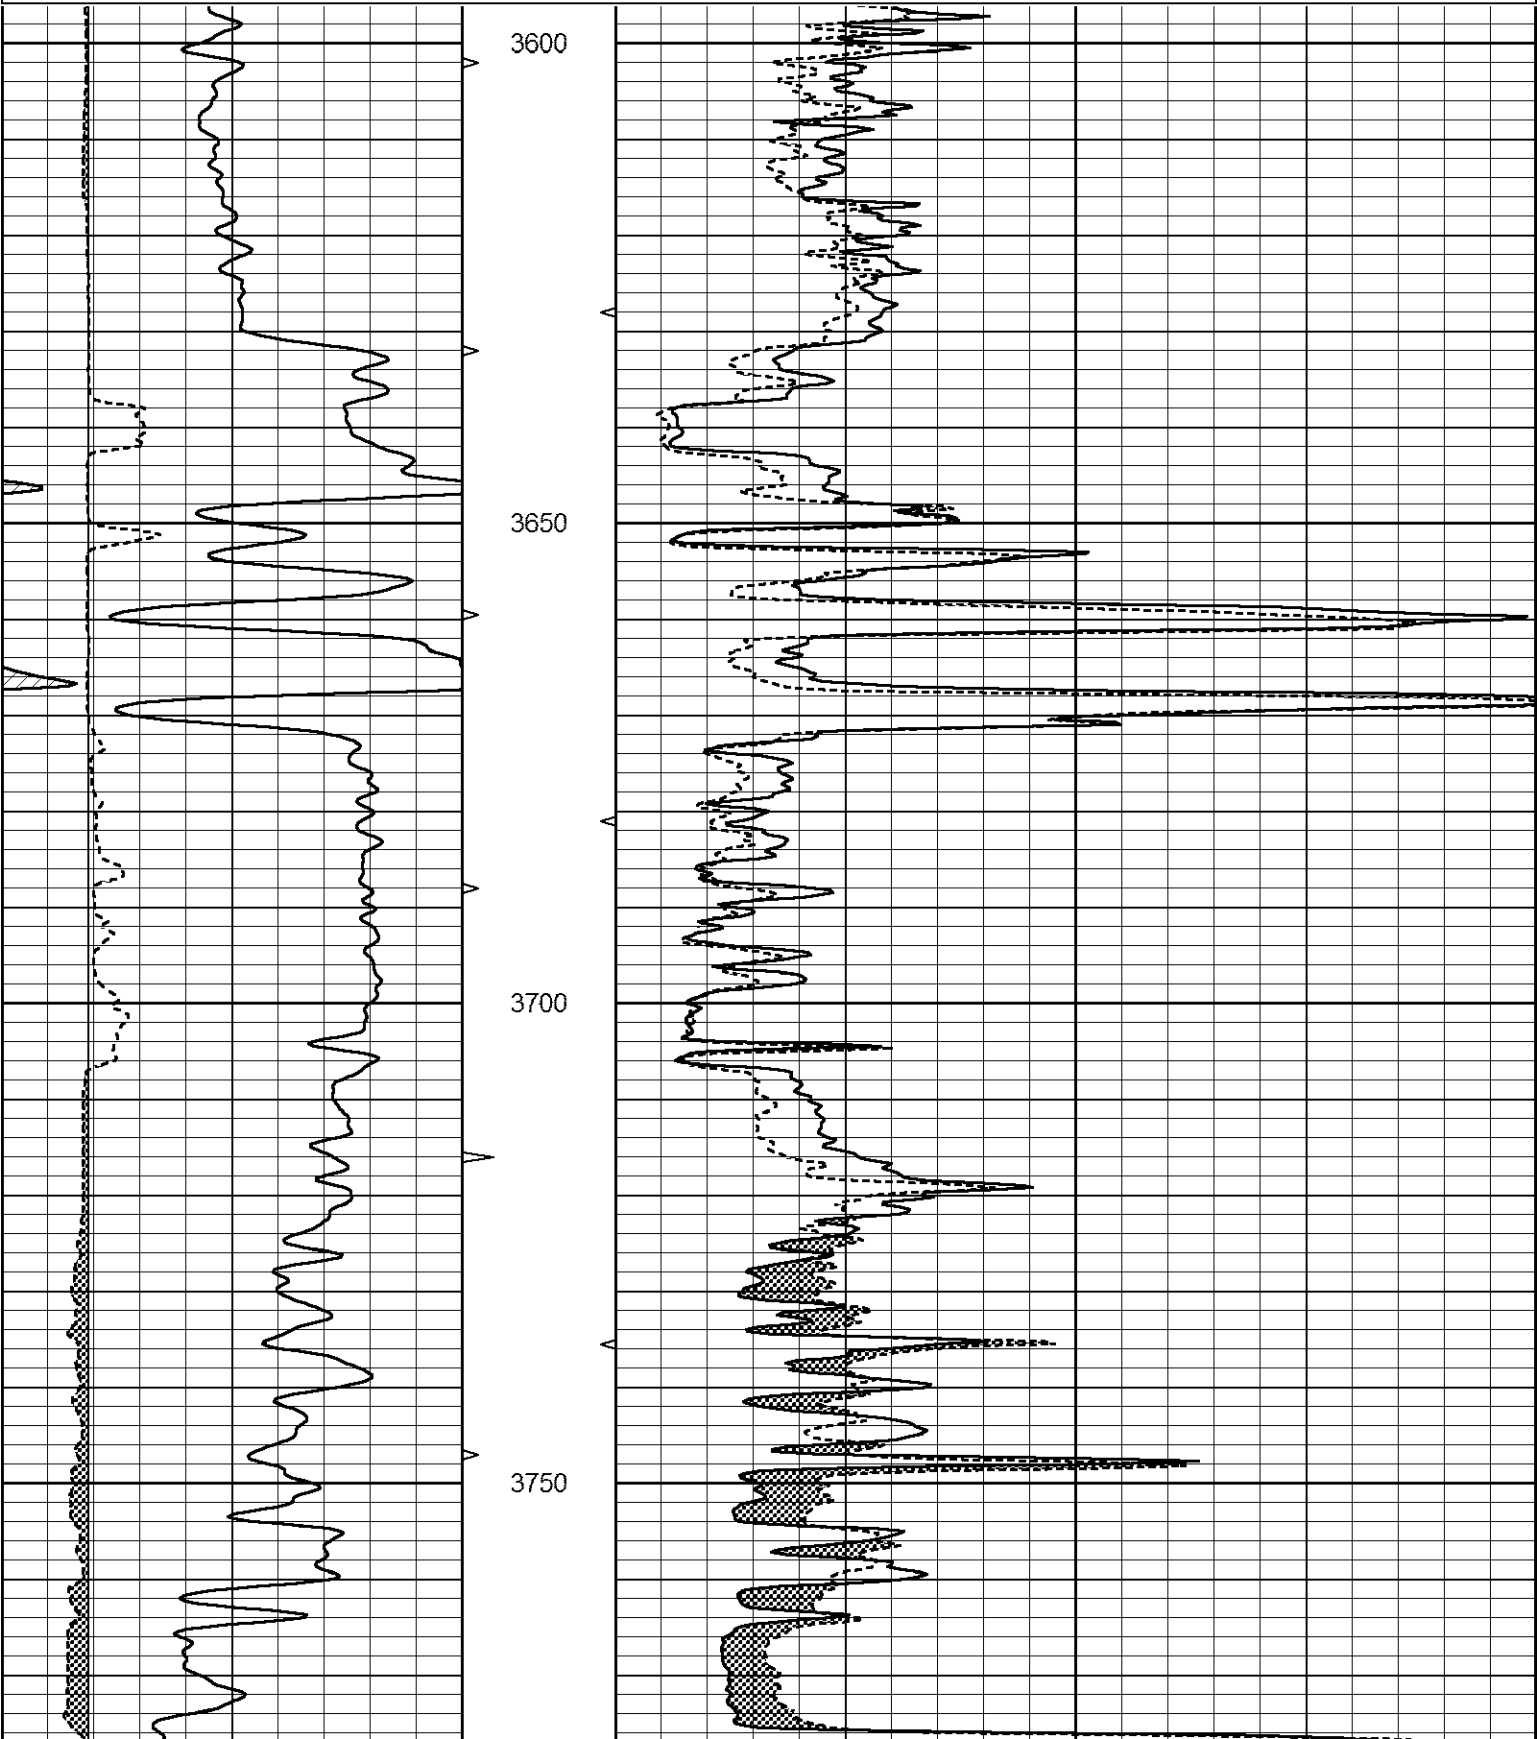

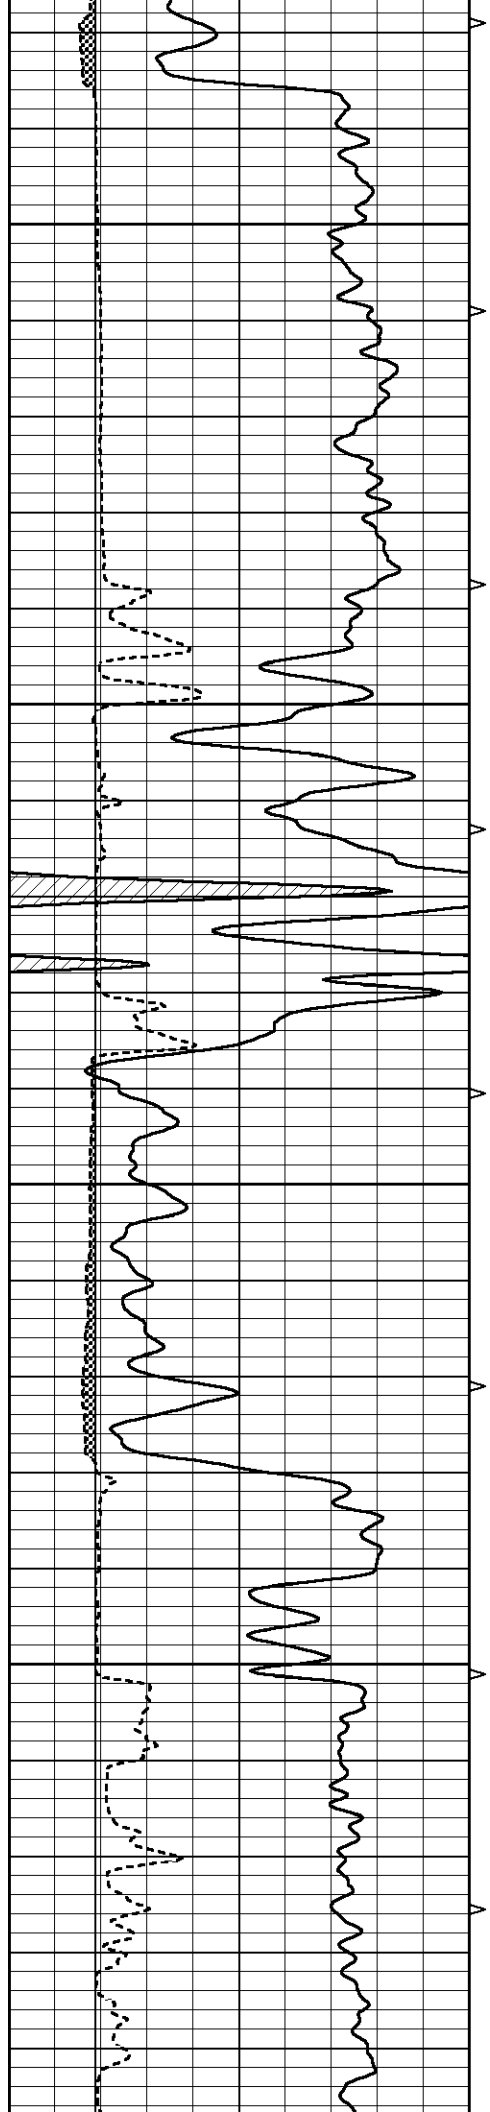



3800

3850

3900

3950

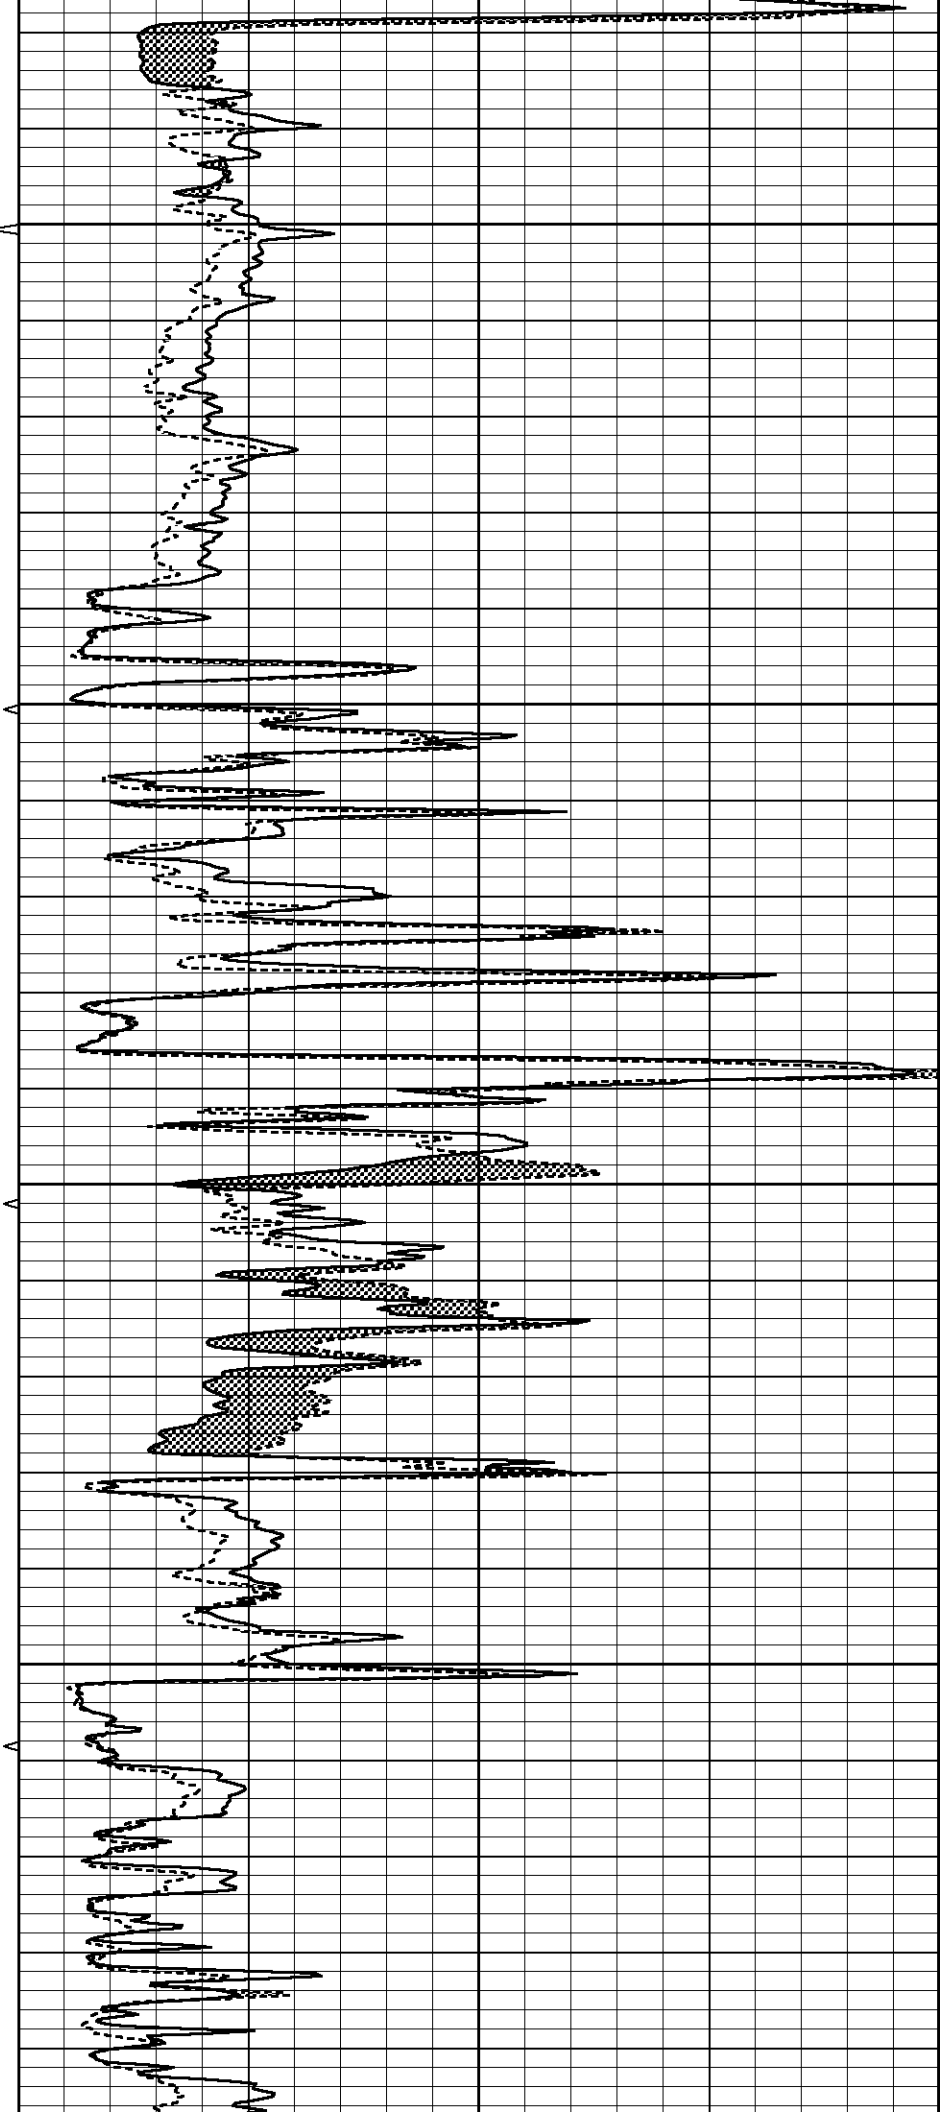

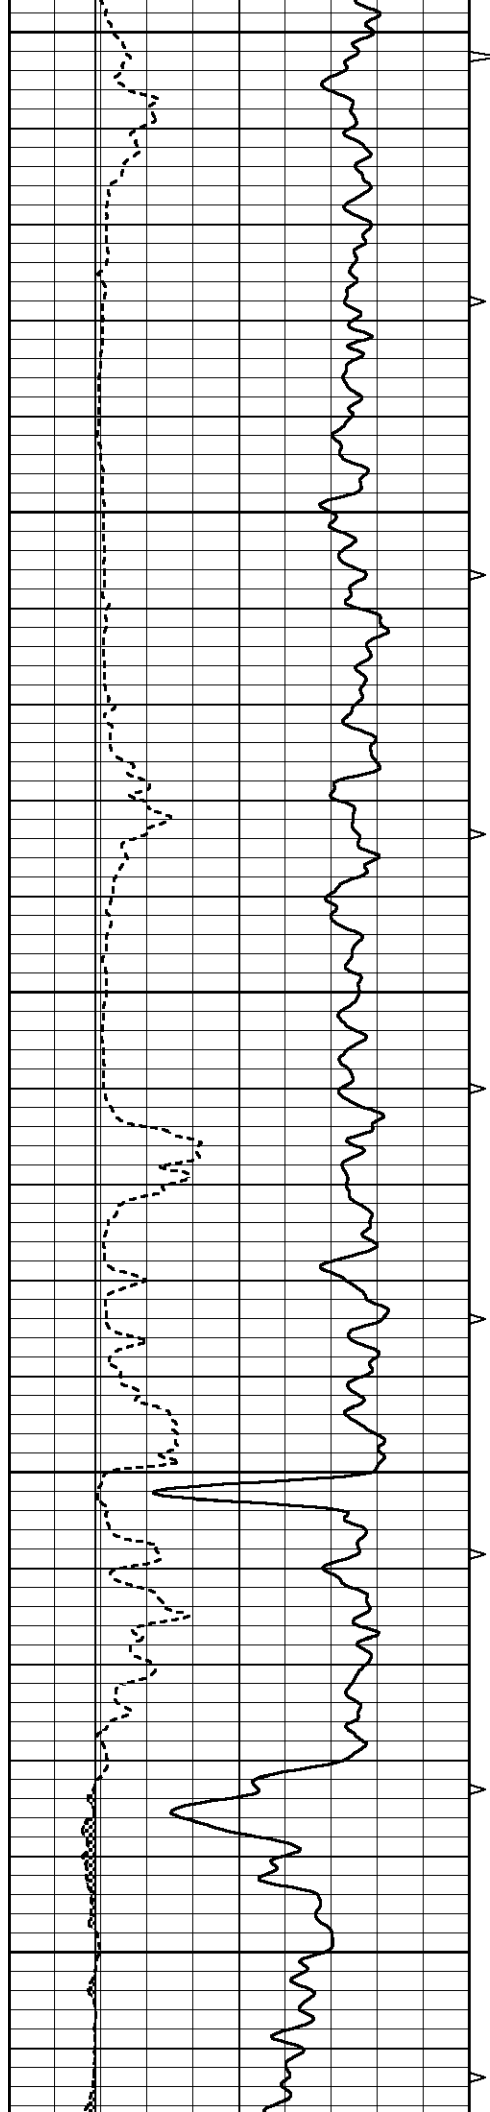


4000


4050


4100


4150

4200

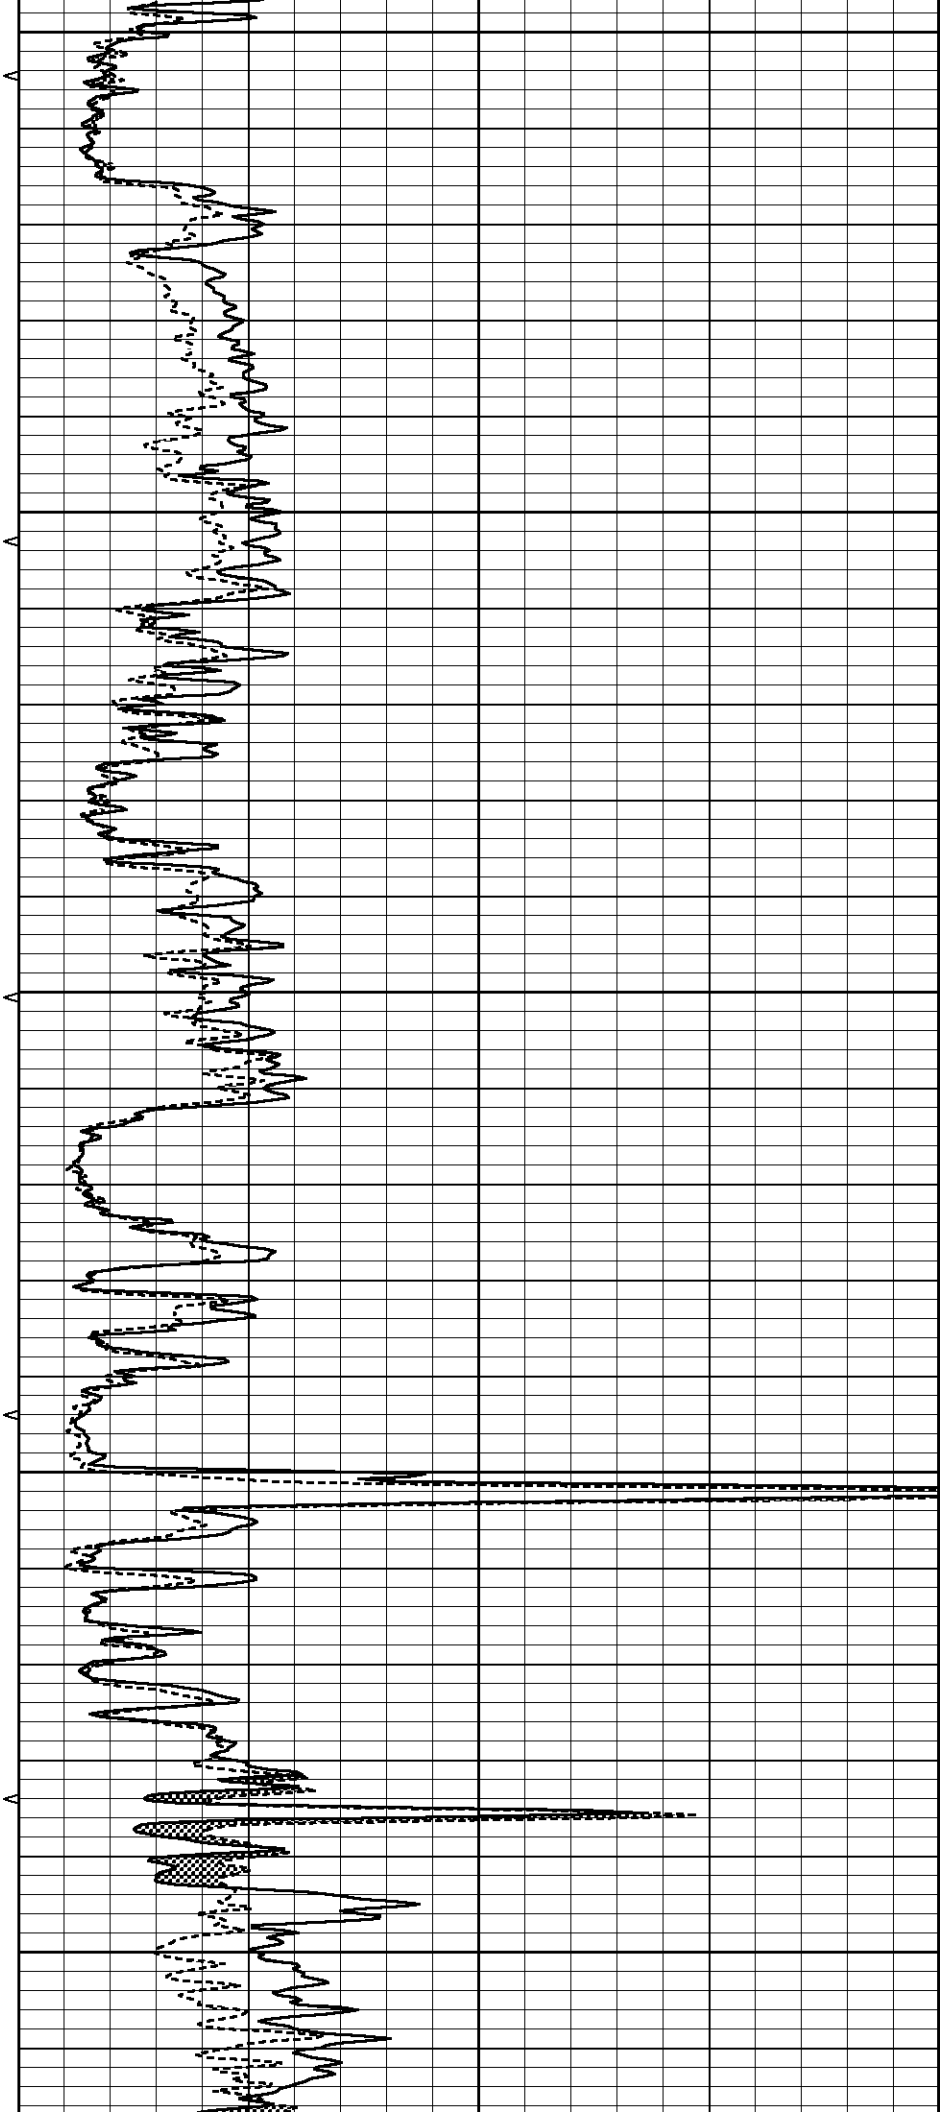

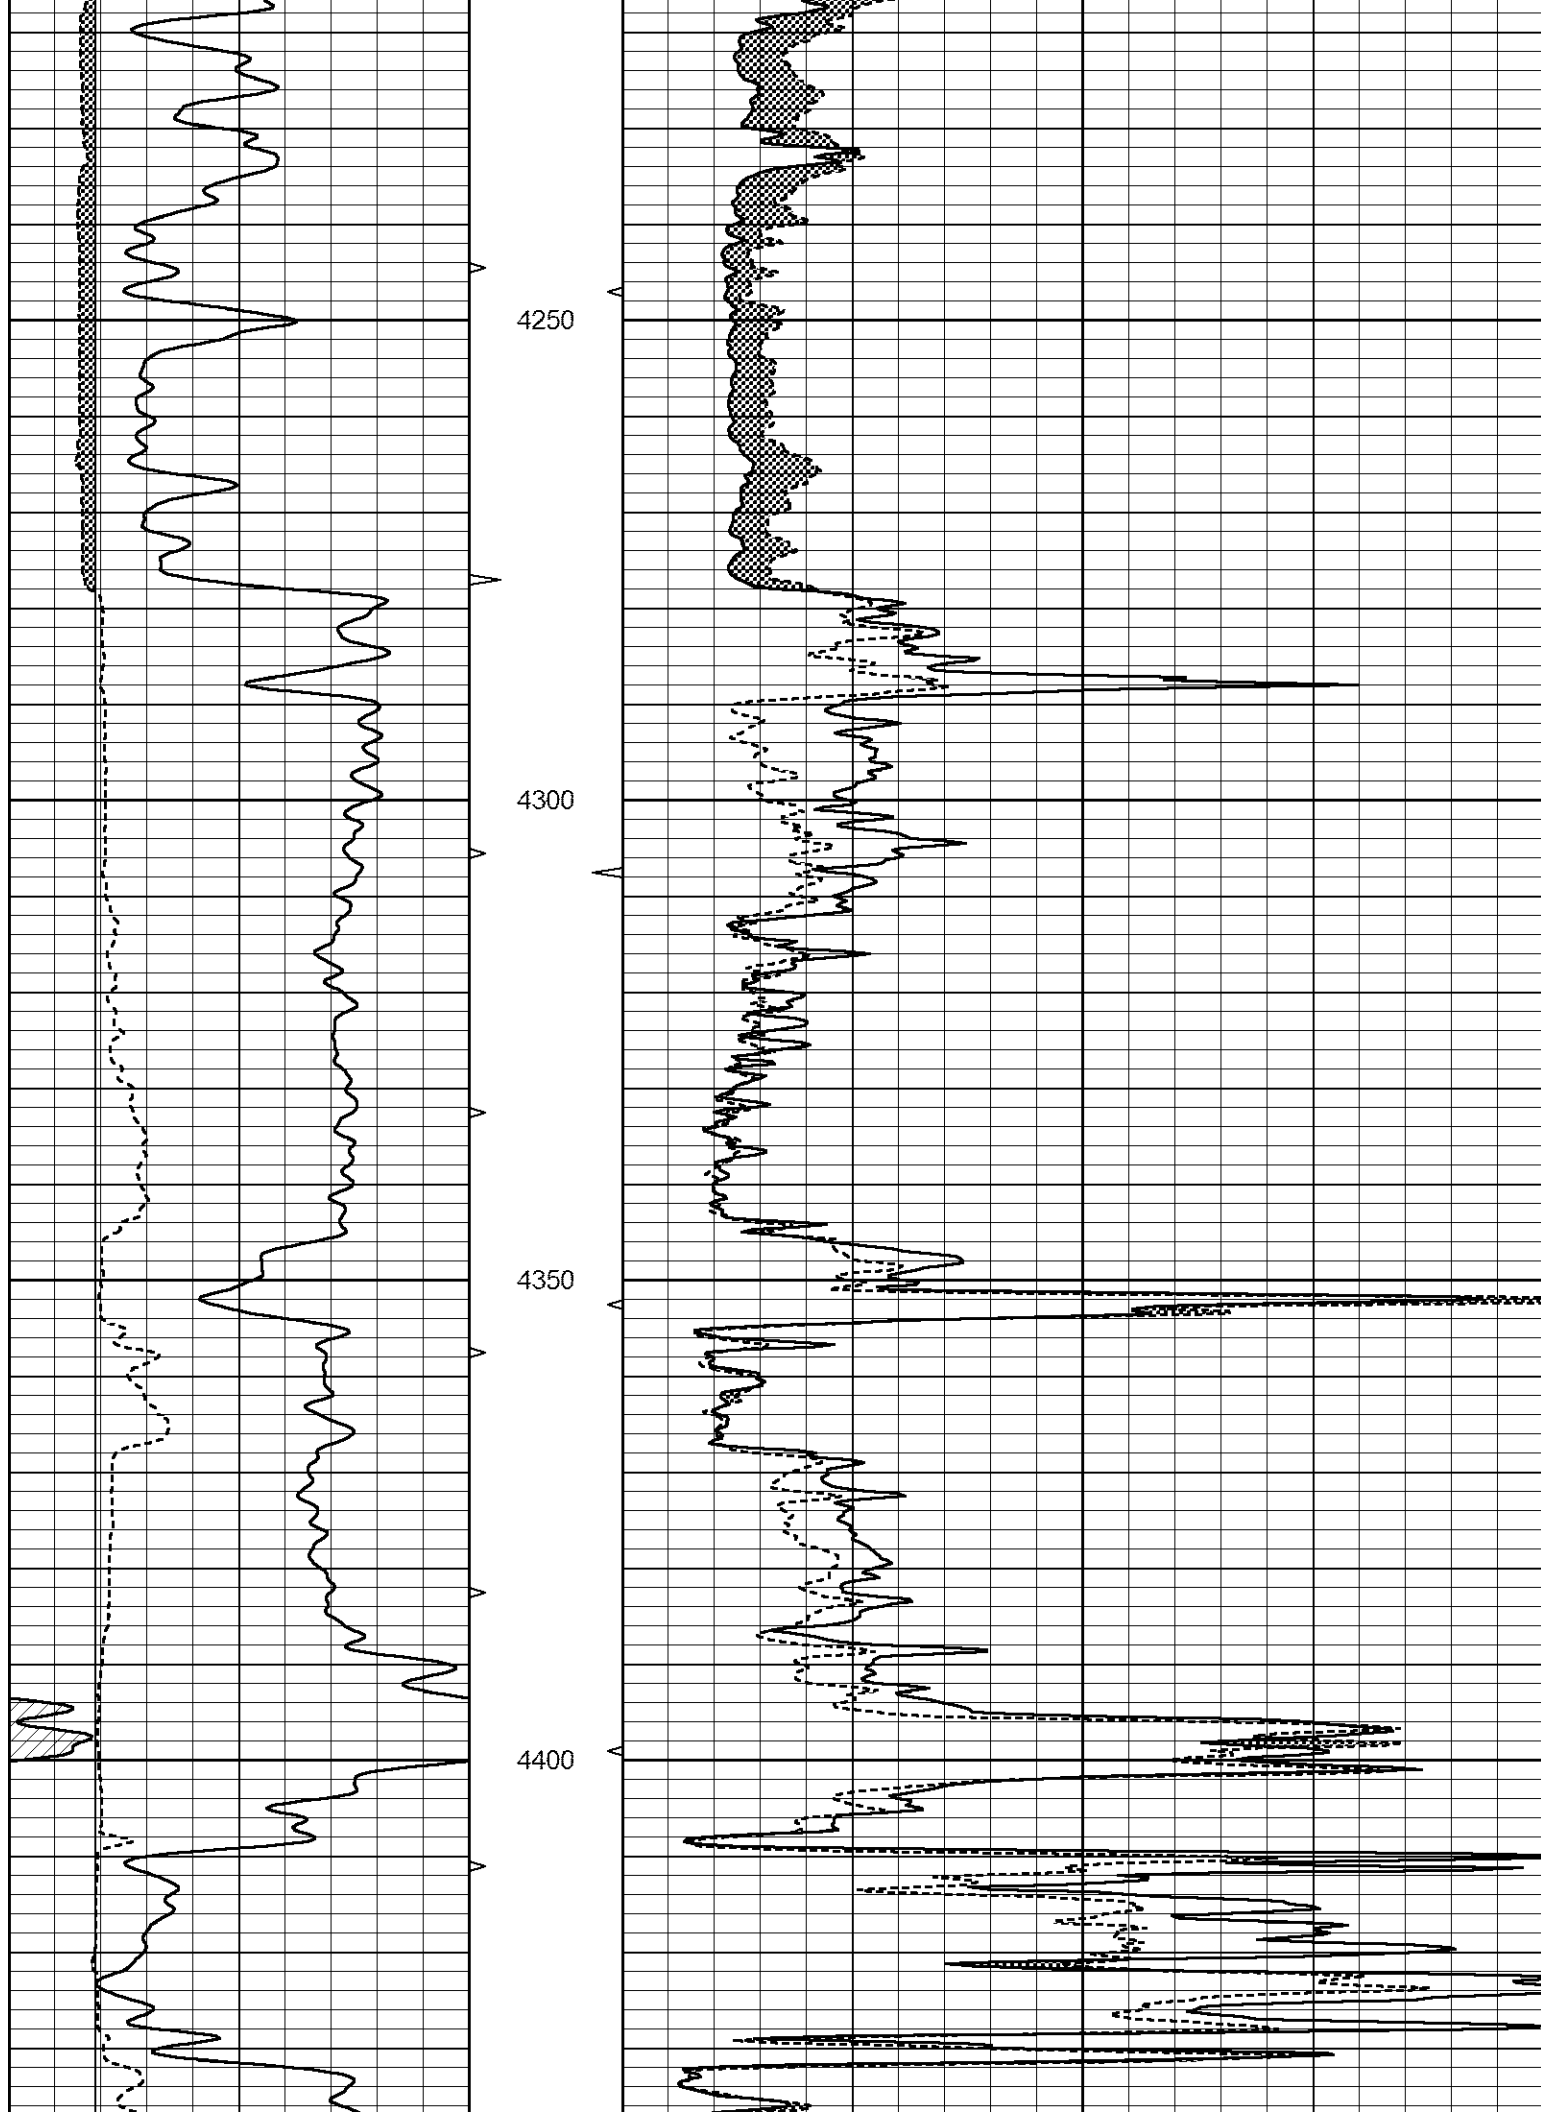

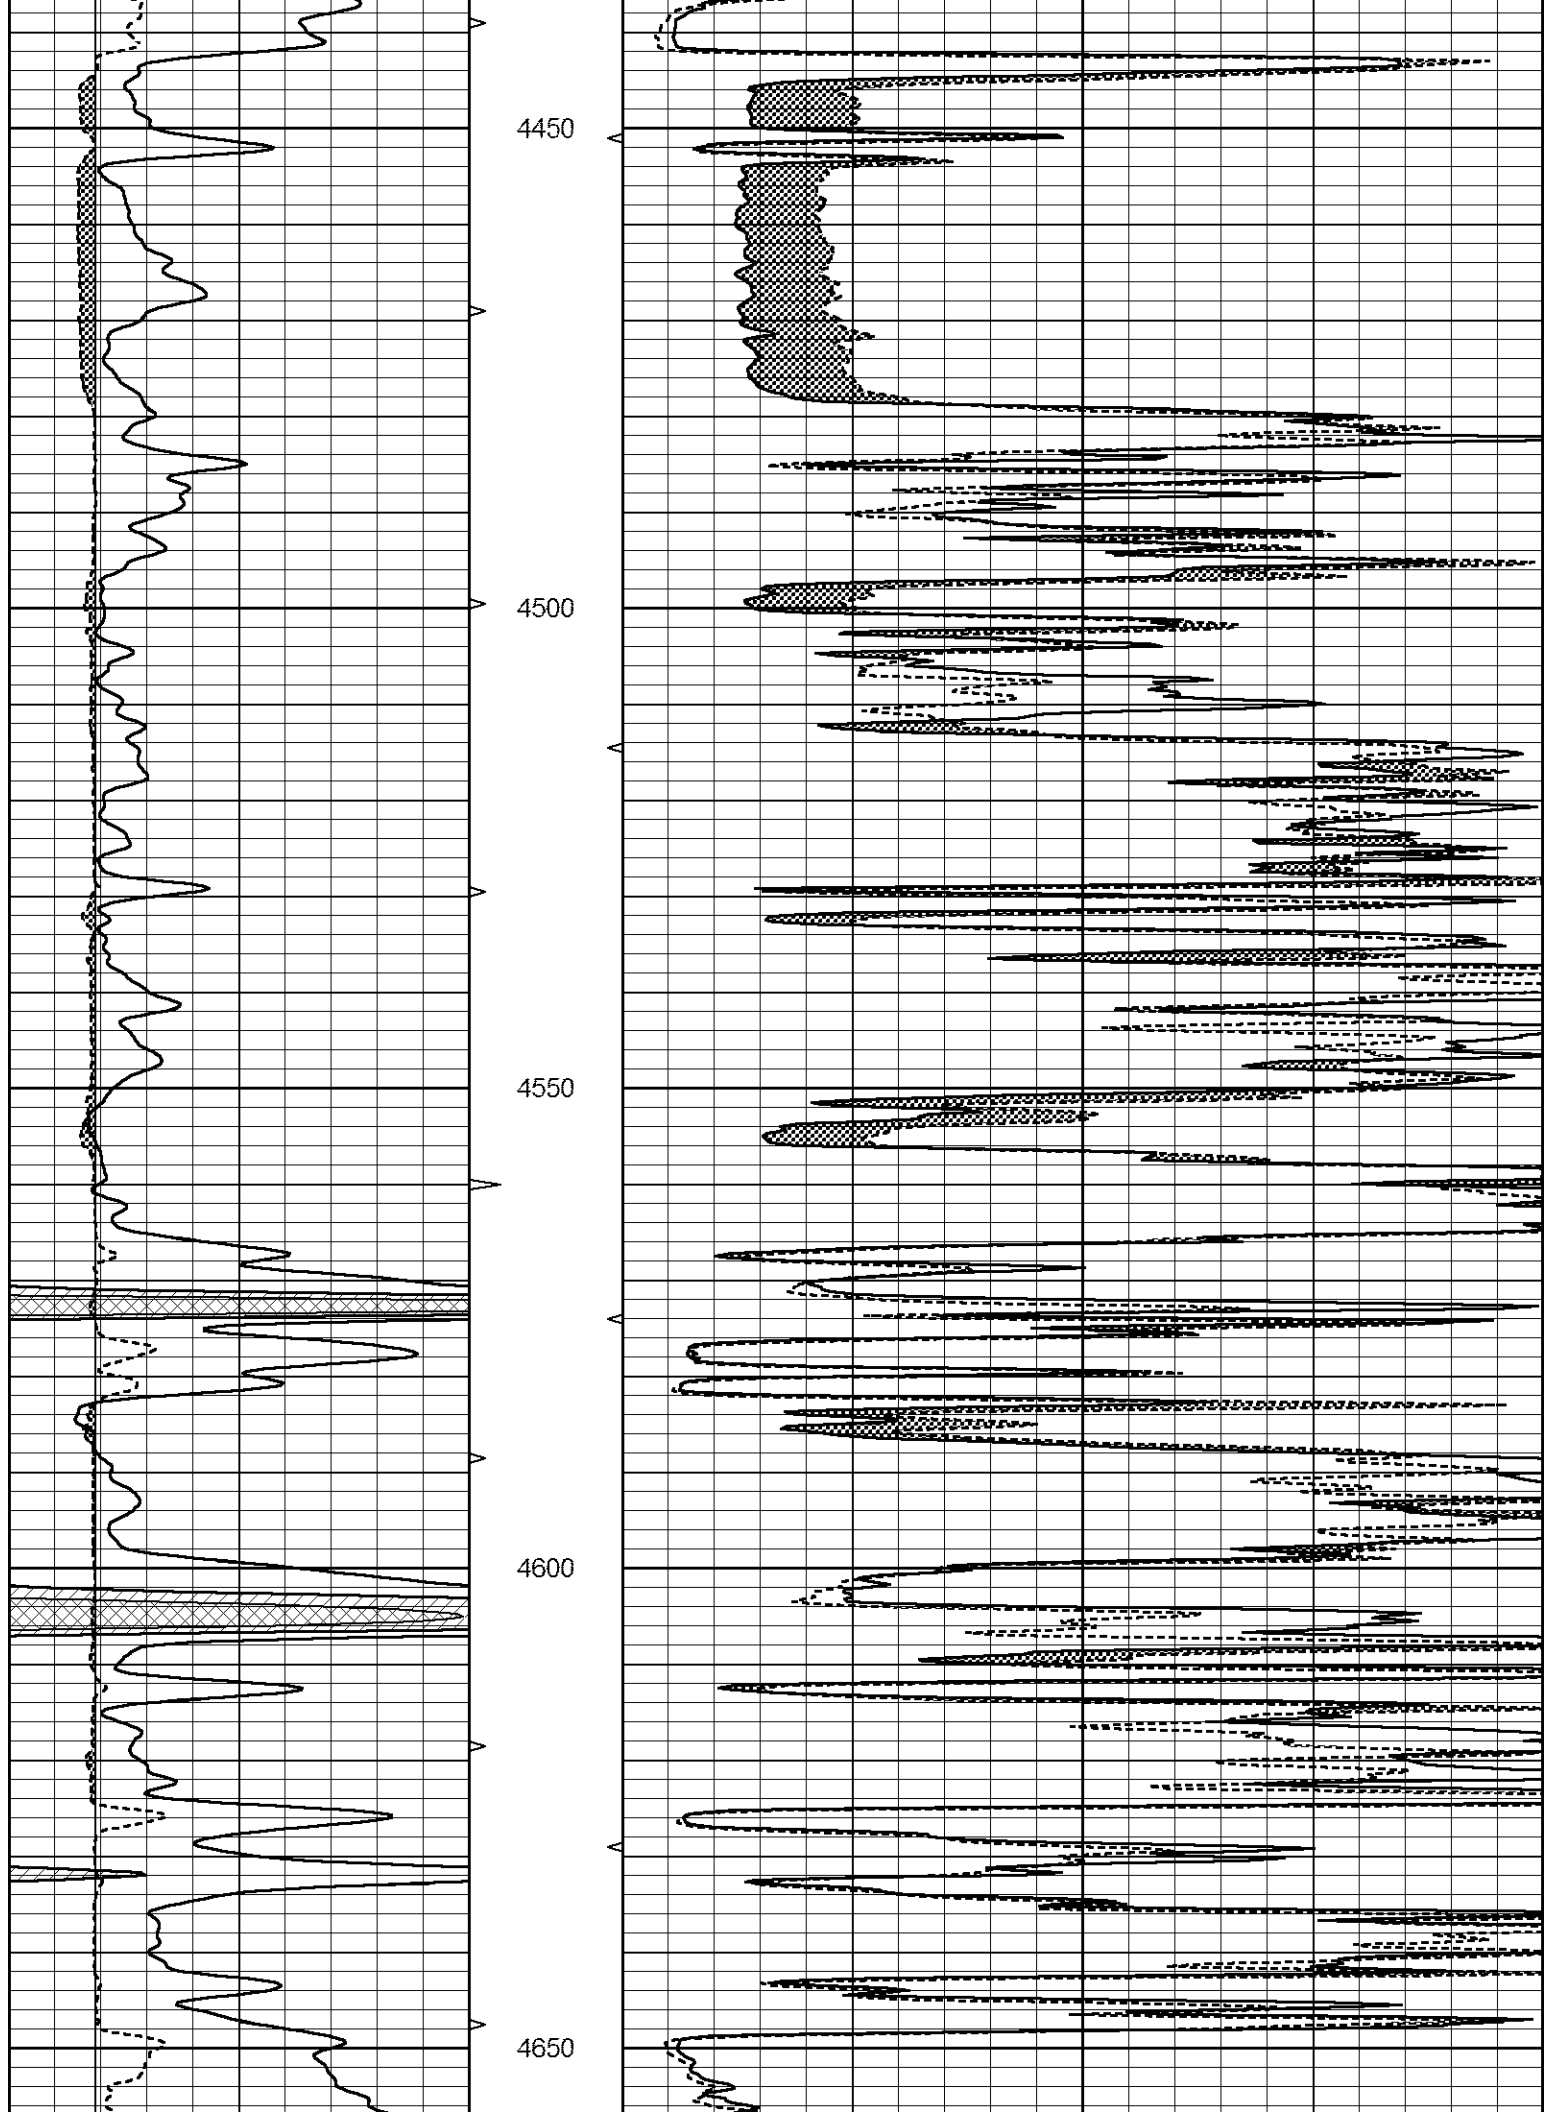

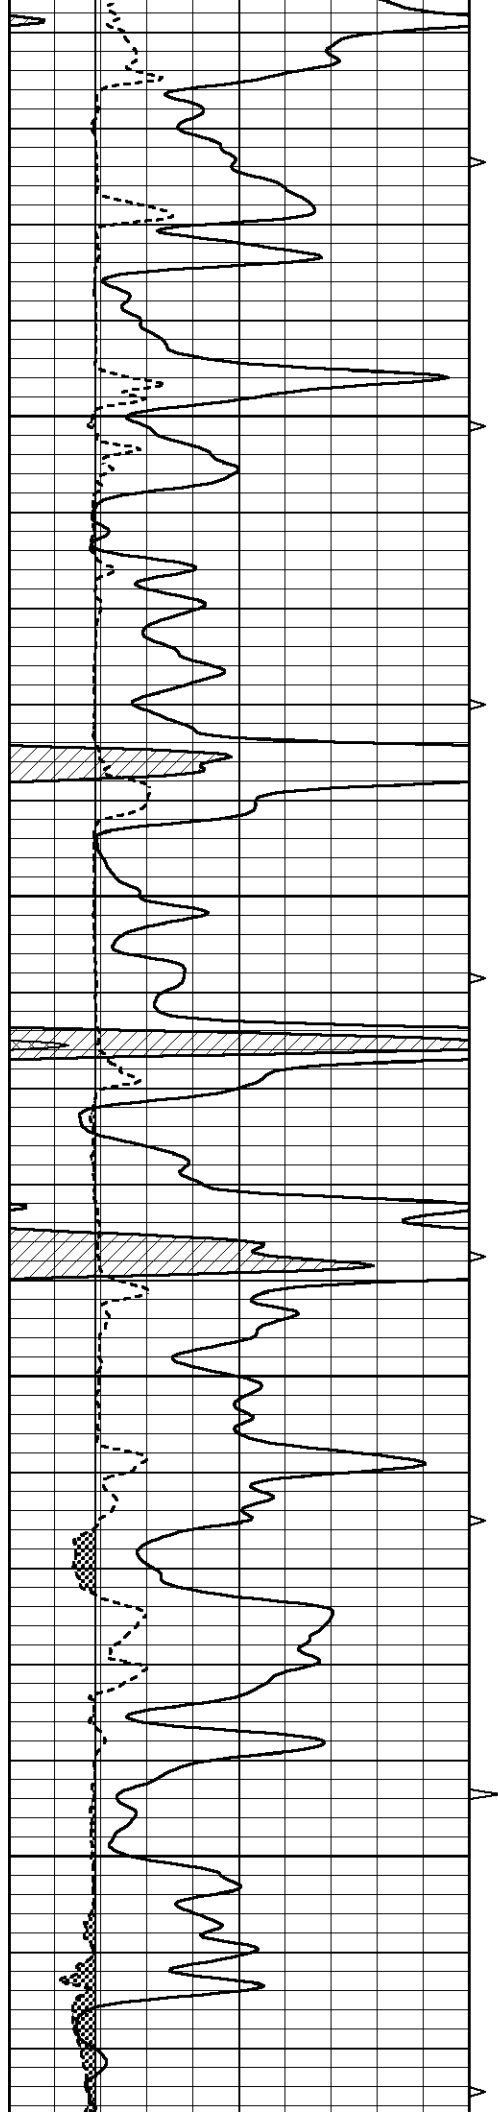




4700



4750


4800

4850

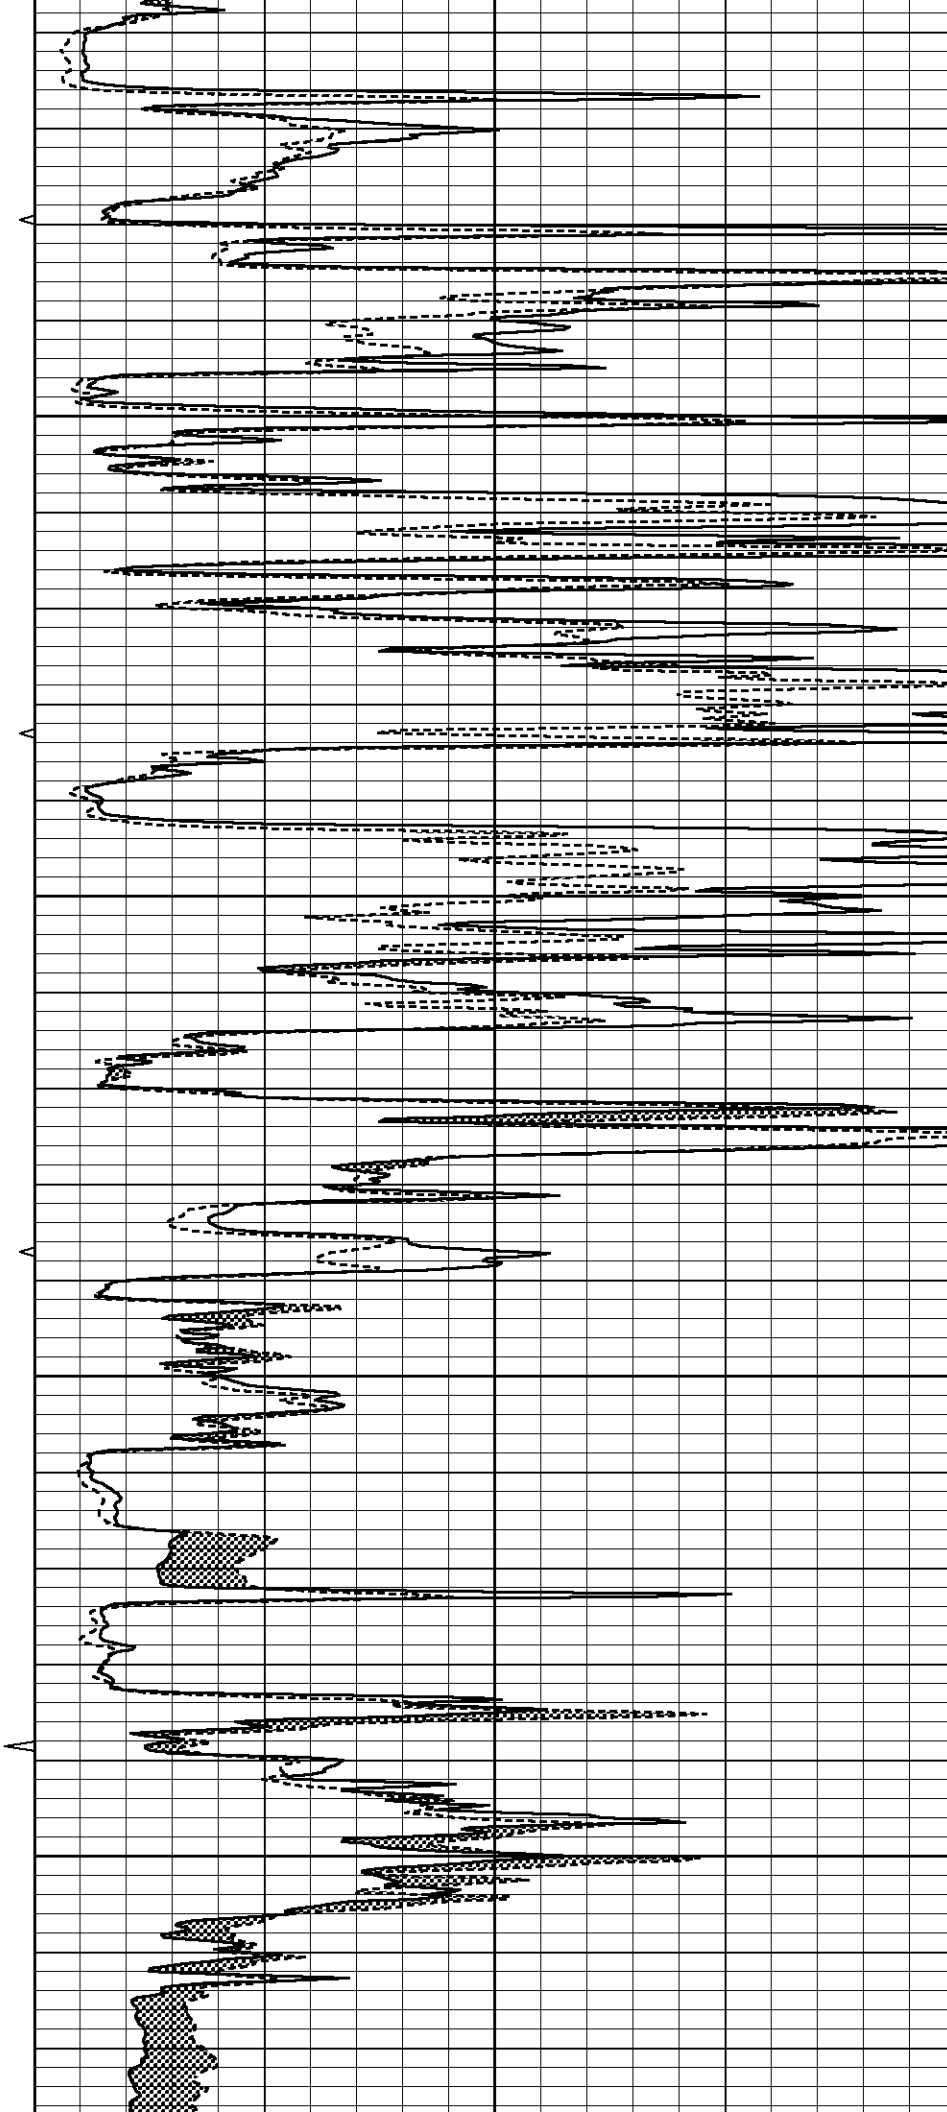

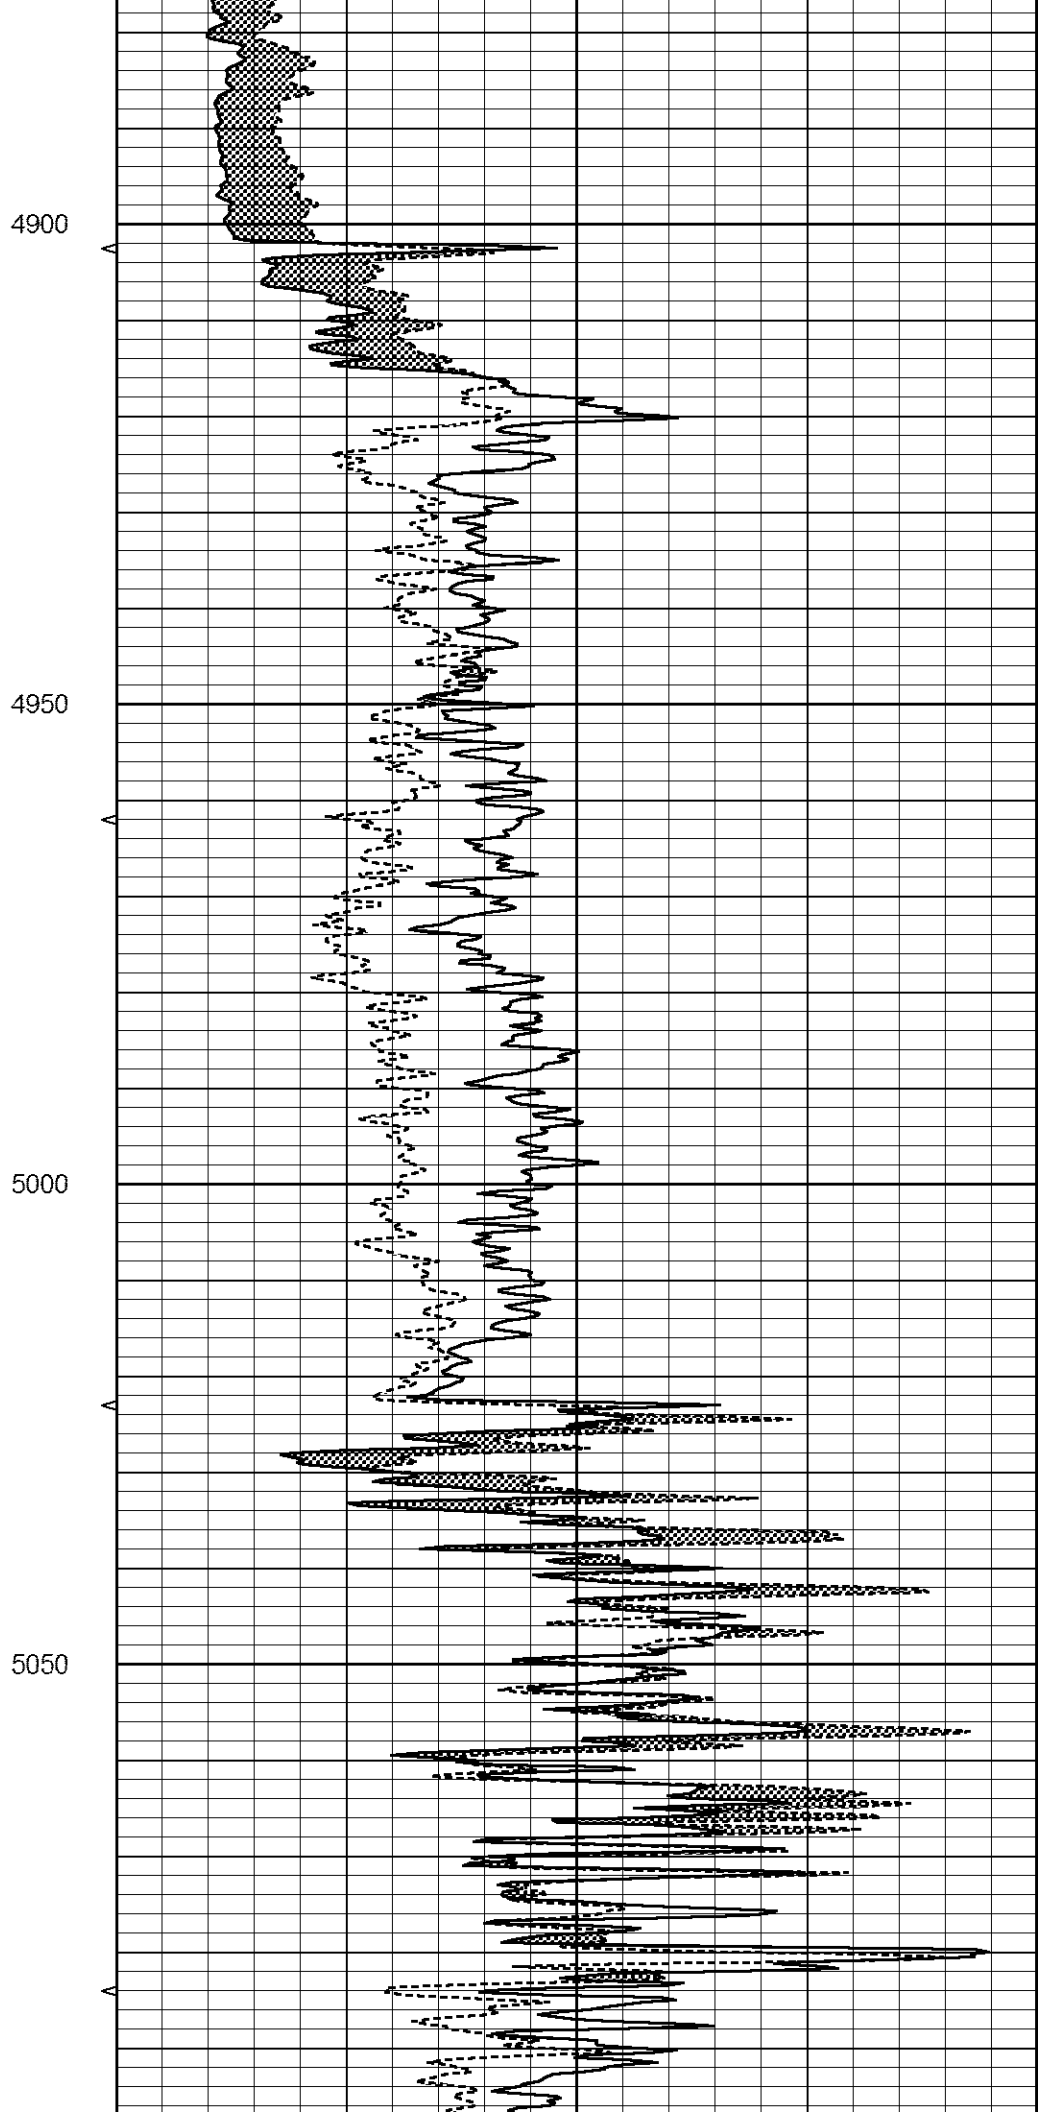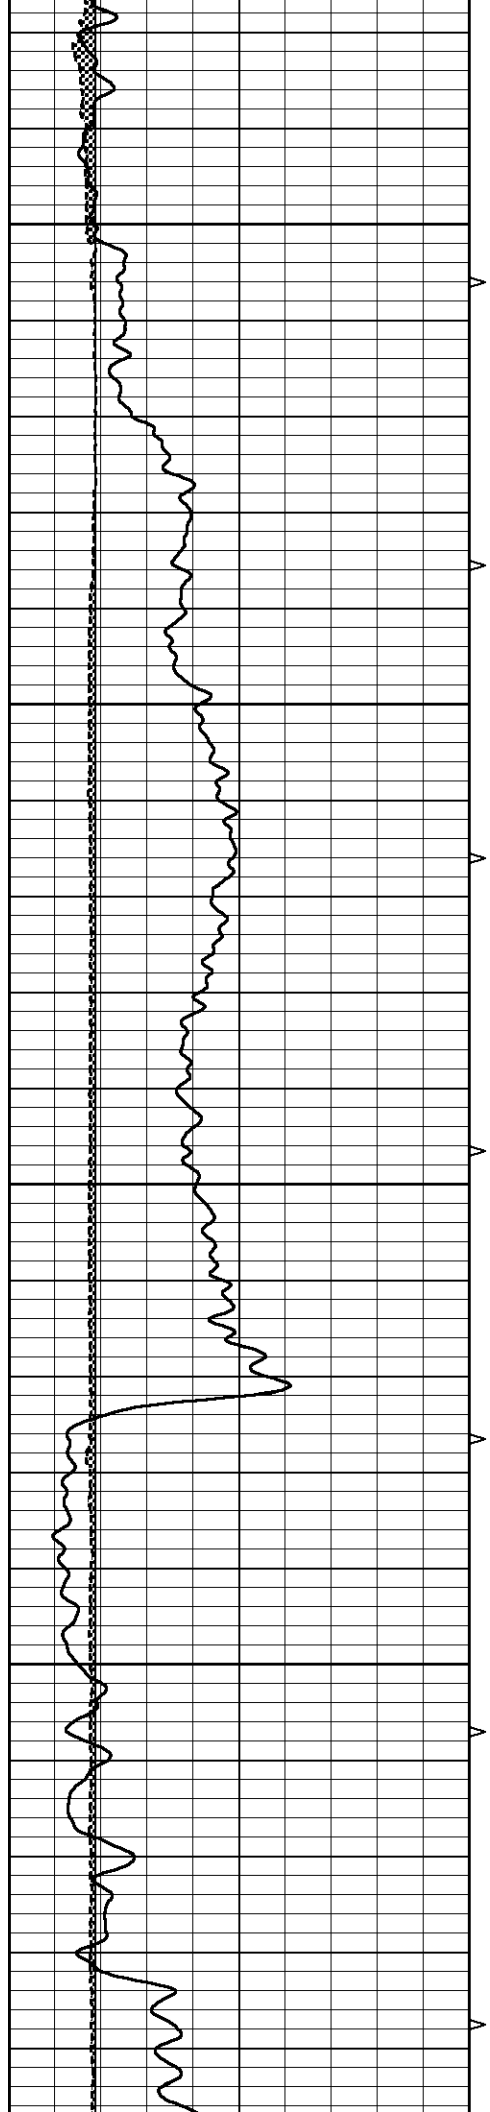

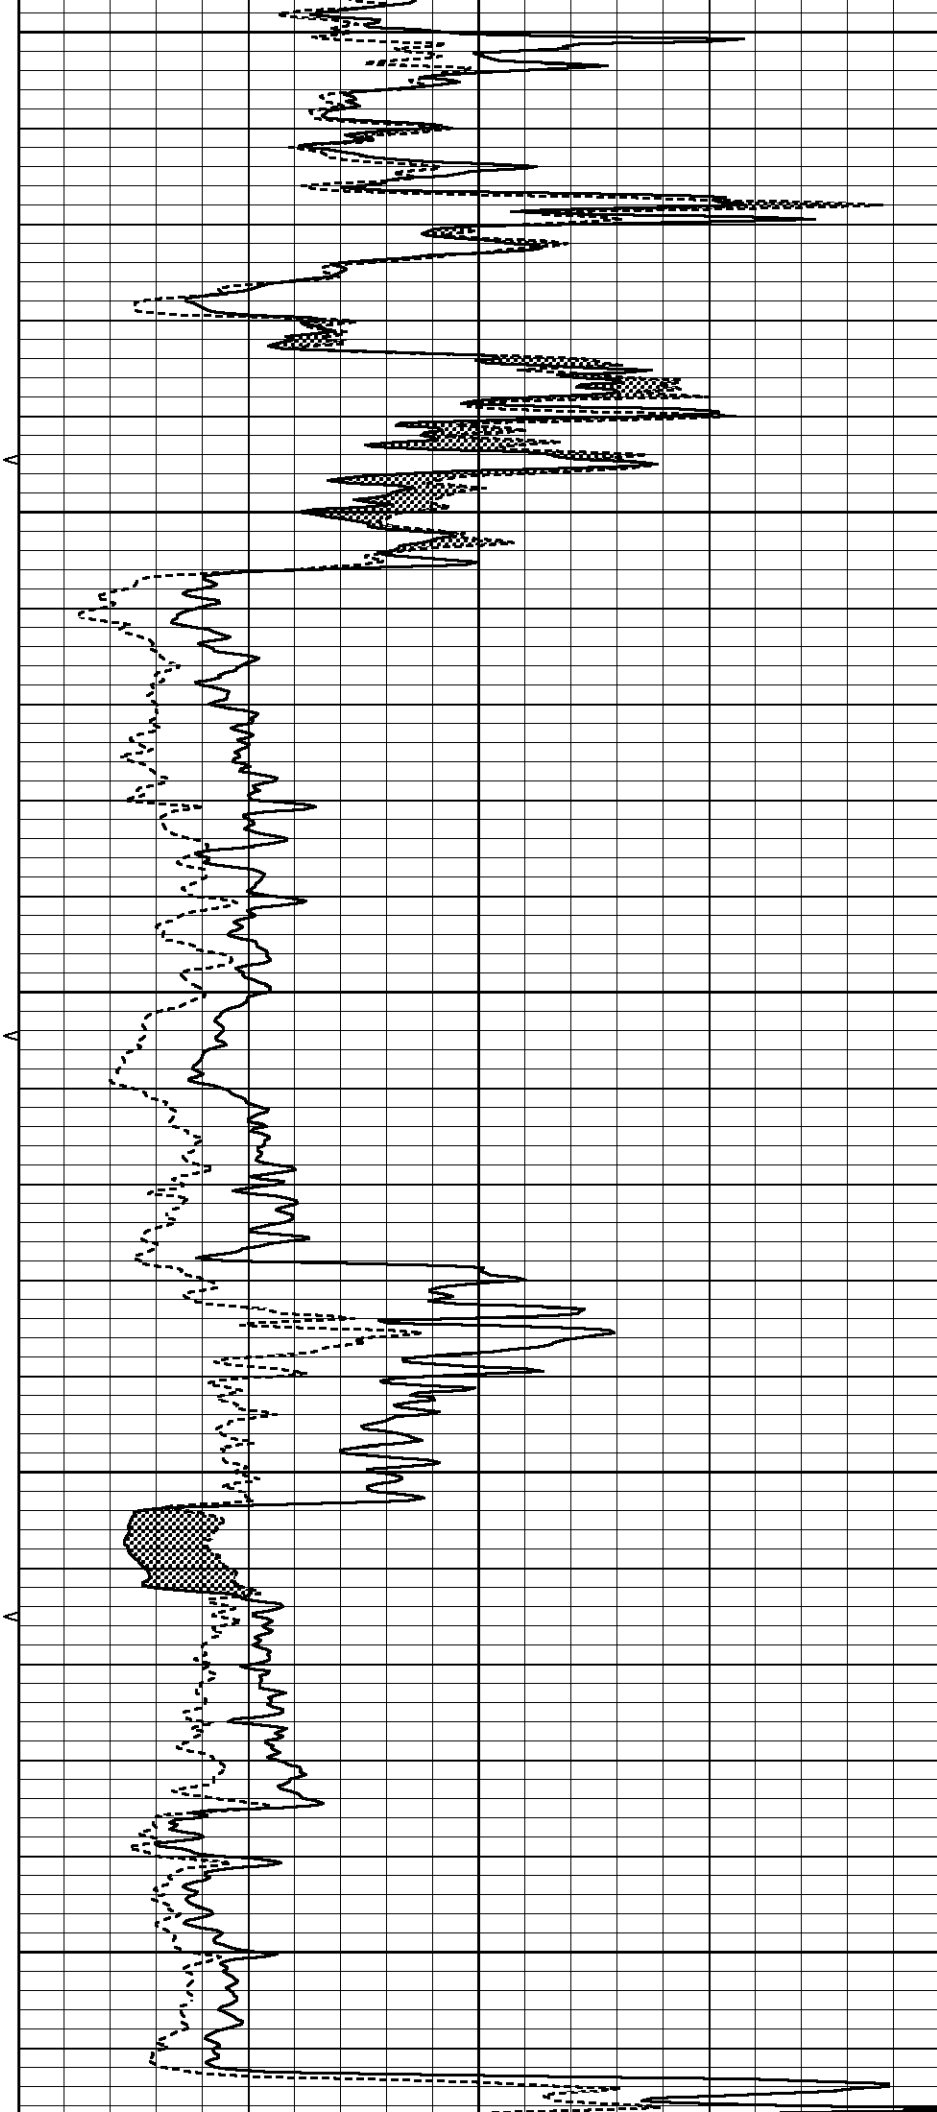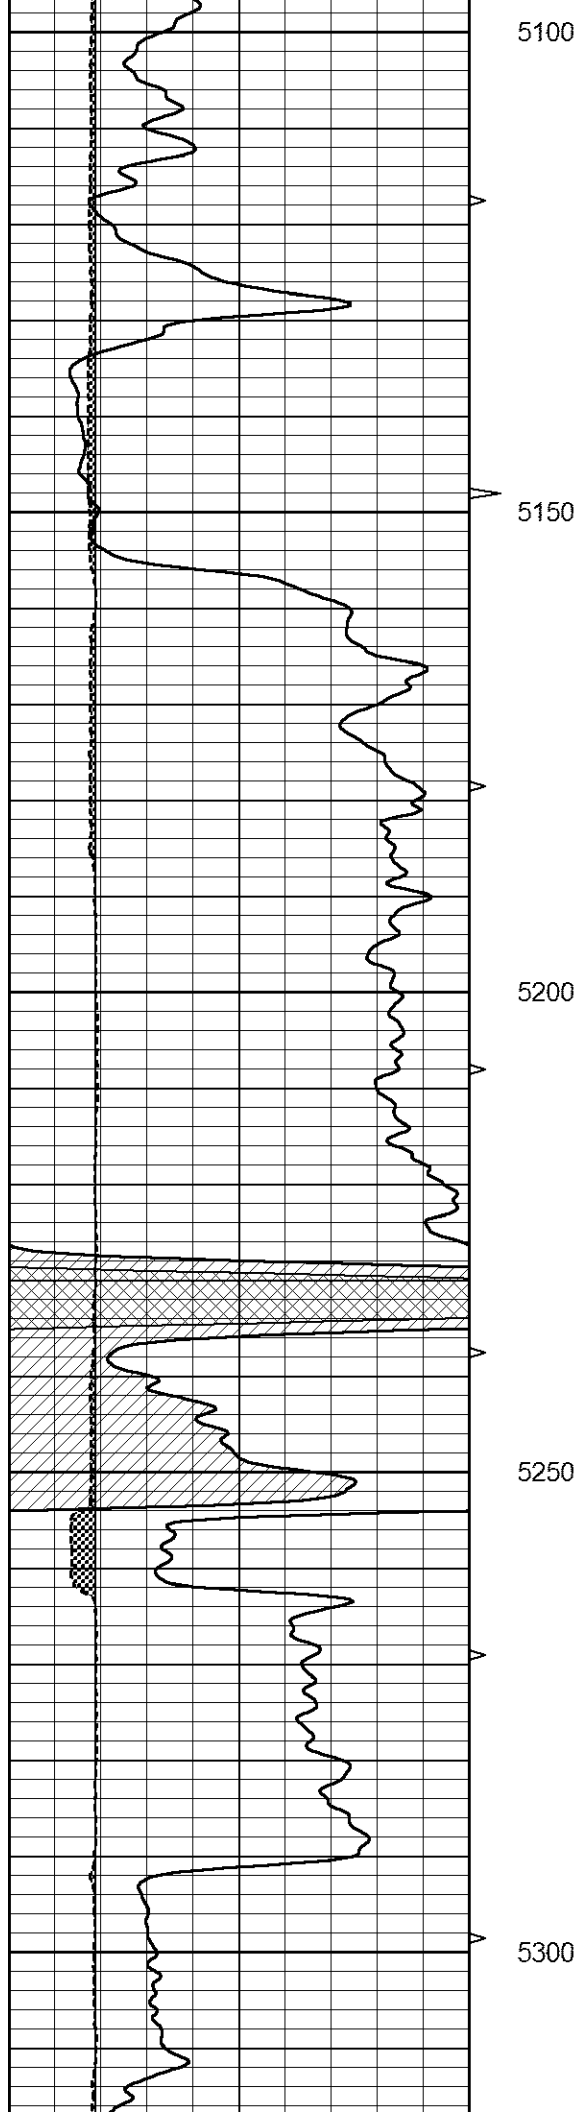

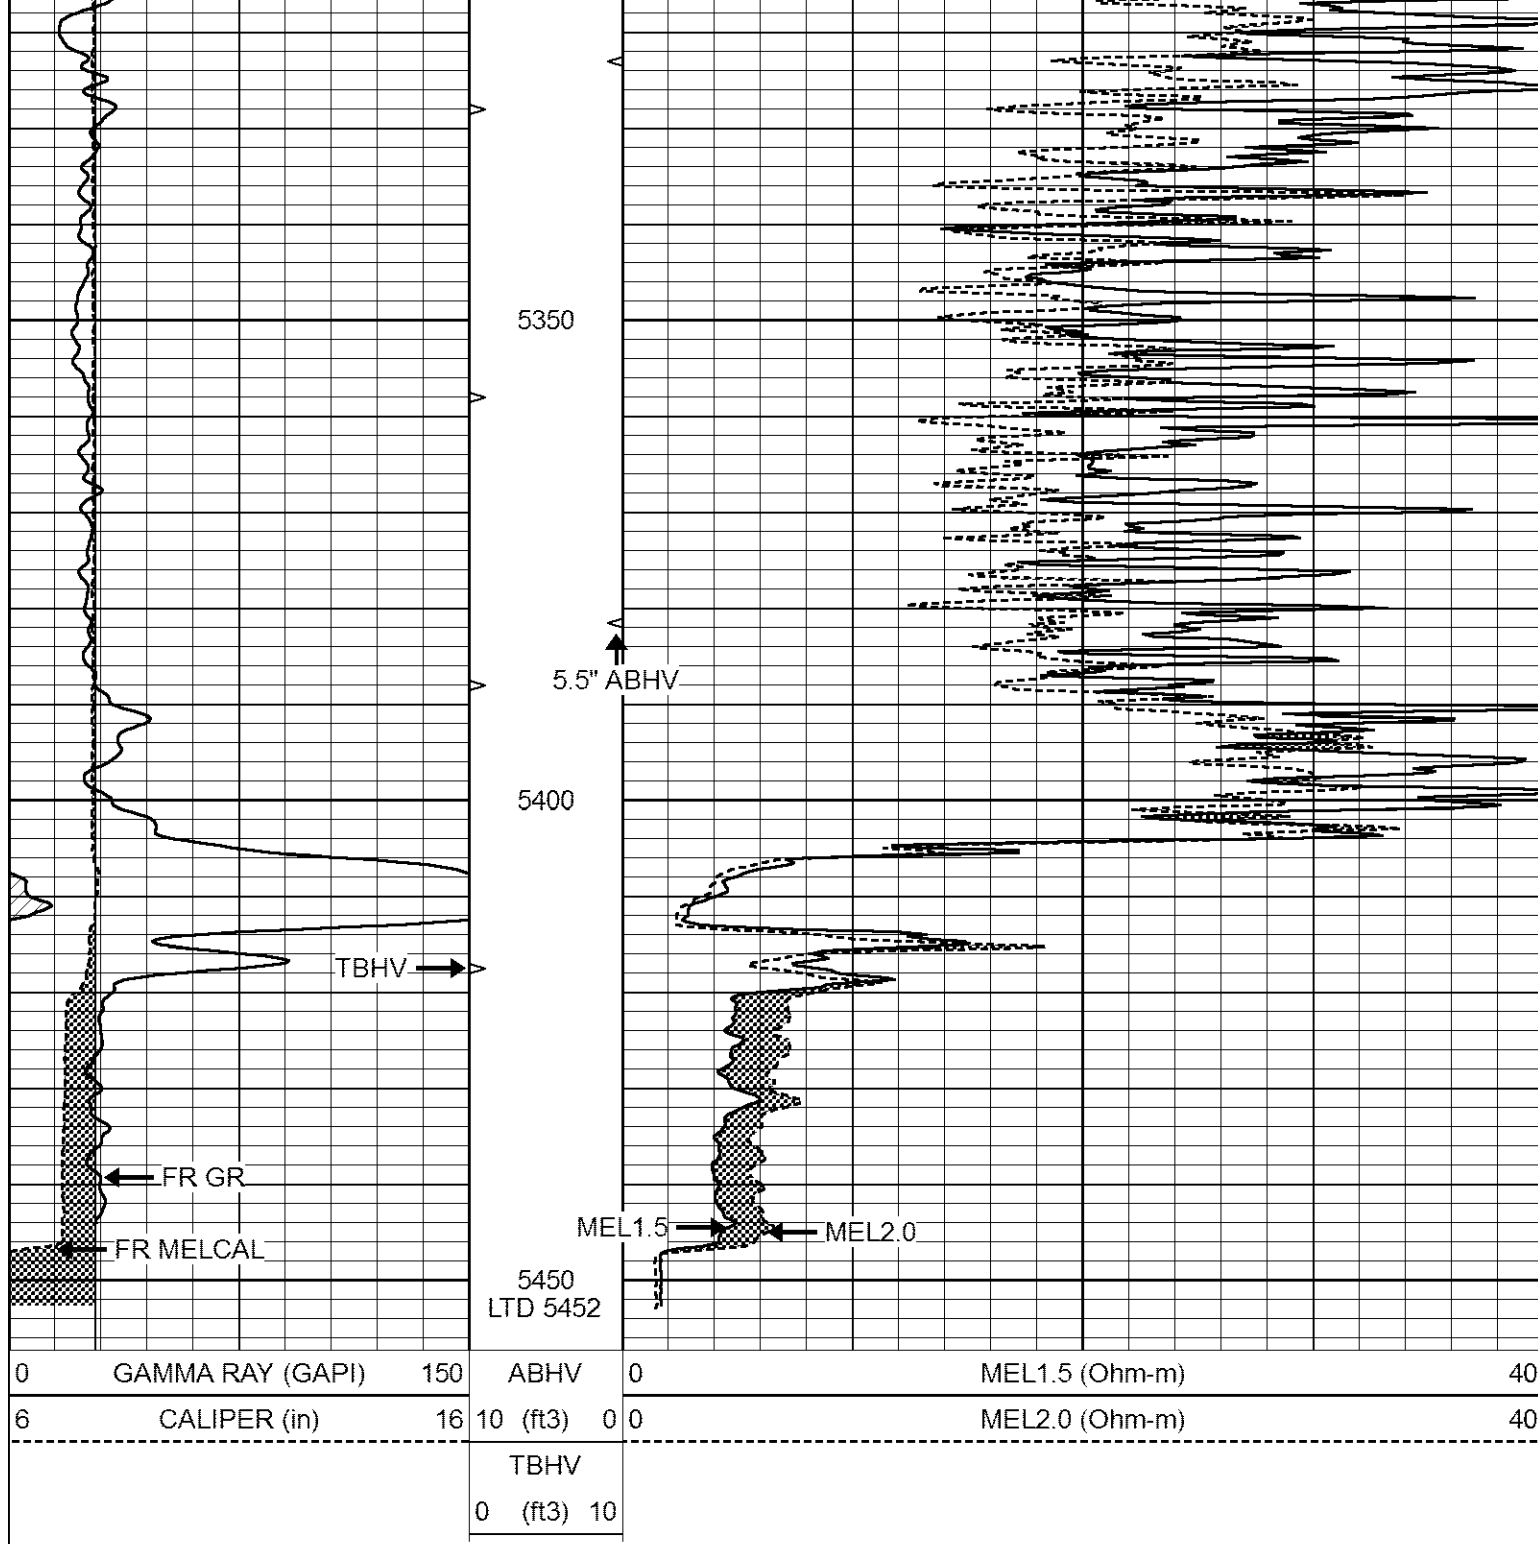


REPEAT SECTION

Database File 6397pe.db
 Dataset Pathname pass21.4
 Presentation Format _micro
 Dataset Creation Sat May 14 07:50:56 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			

0 (ft3) 10

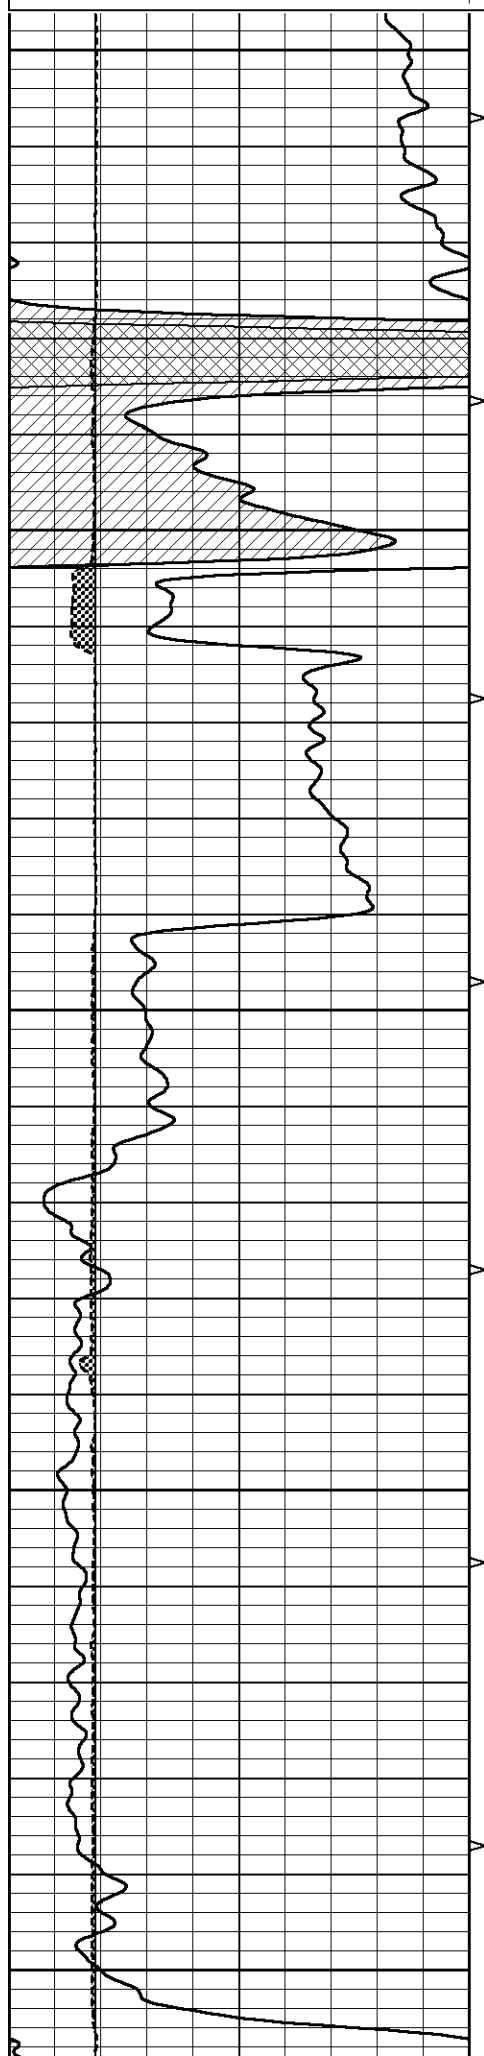


5200


5250

5300

5350

5400

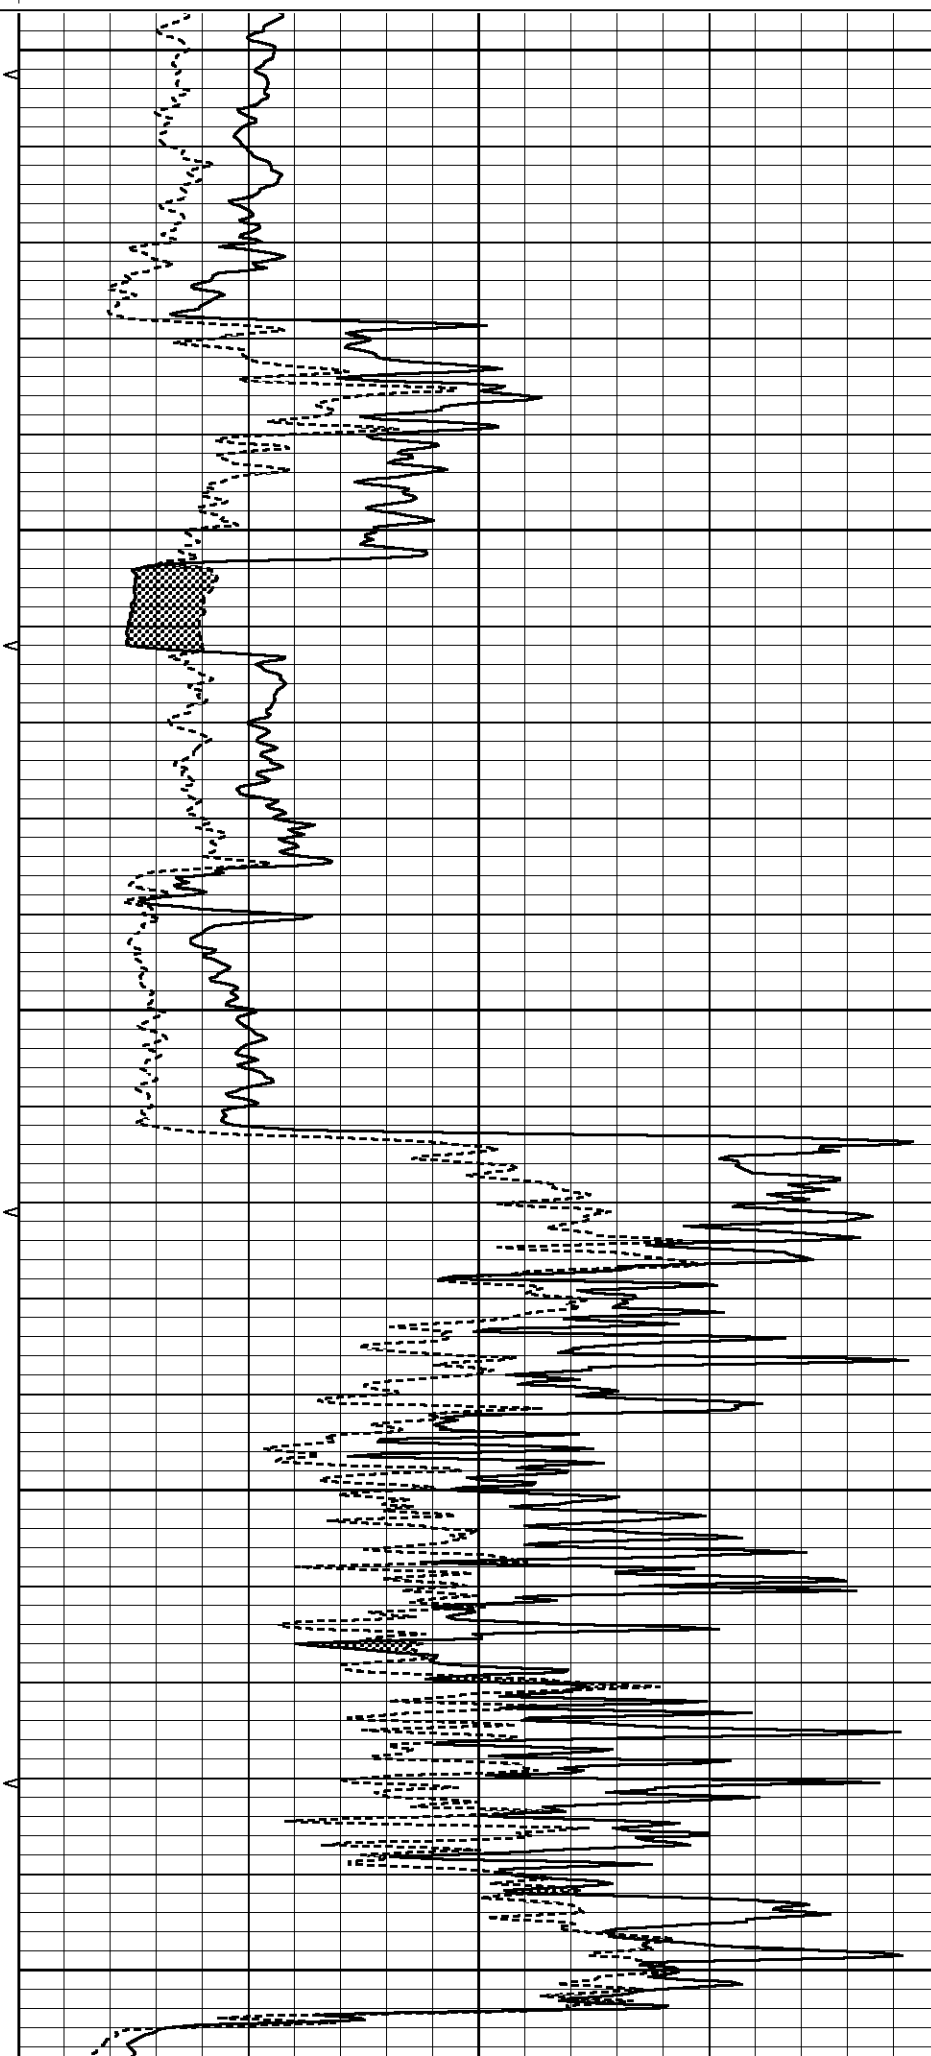

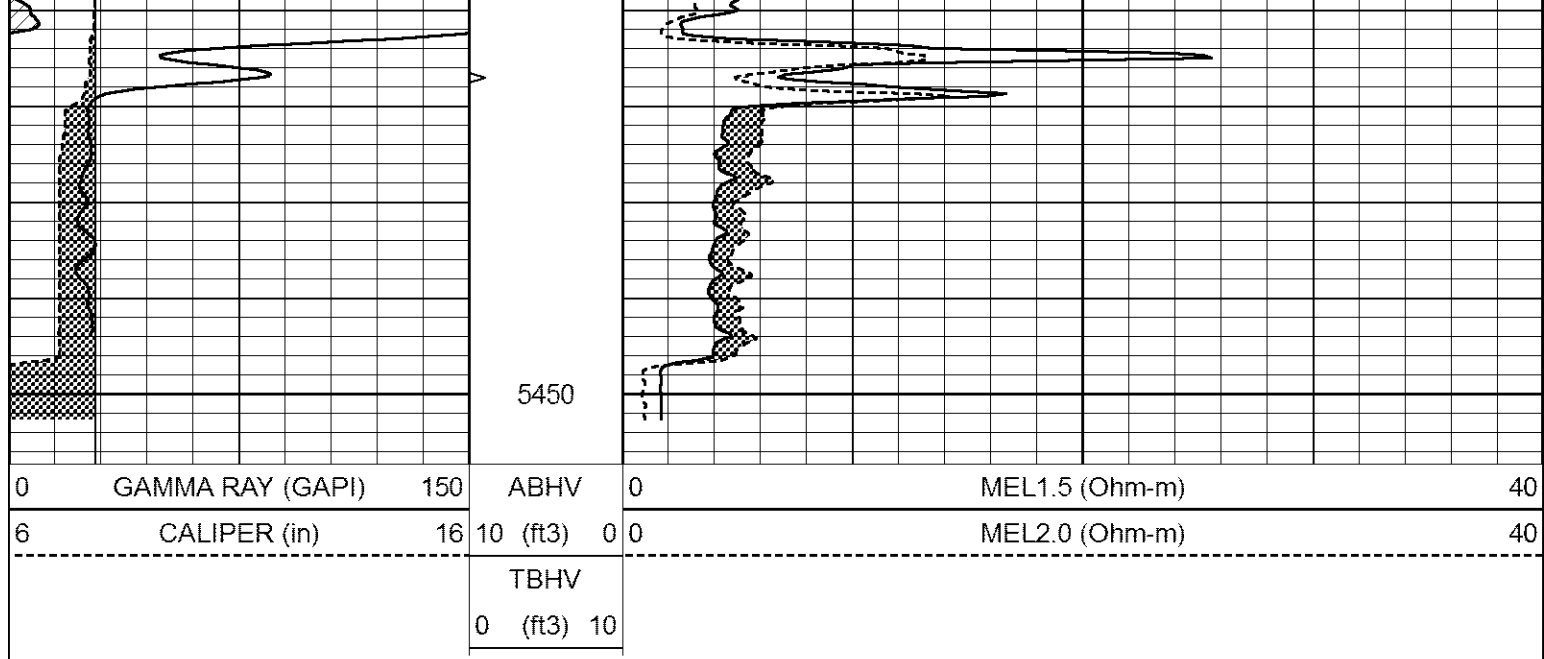

Calibration Report

Database File 6397pe.db
 Dataset Pathname pass22.4
 Dataset Creation Sat May 14 08:42:40 2022

MICRO_USR Calibration Report

Serial Number: 070910
 Tool Model: ProbeL
 Performed: Sat May 14 08:28:26 2022

Caliper Calibration: Gain=7.255 Offset=2.704

	Low Cal	High Cal
References	8.000	14.000
Readings	0.730	1.557

1.5" Calibration: Gain=30.000 Offset=1.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.335

2" Calibration: Gain=70.000 Offset=-0.500

	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.029

Microlog Calibration Report

Serial-Model: 070910-ProbeL
 Performed: (Not Performed)

Readings

References

Results

	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number: 070558

Serial Number: 010000
Tool Model: Probe1
Performed: Sat May 14 08:15:06 2022

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps

Calibrator Reading: 1.0 cps

Sensitivity: 0.2500 GAPI/cps