

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-163-00504-00-00  
Spot: N2NENE Sec/Twnshp/Rge: 20-9S-18W  
4950 feet from S Section Line, 660 feet from E Section Line  
Lease/Unit Name: BAUMGARTNER B Well Number: 1  
County: ROOKS Total Vertical Depth: 3640 feet

Operator License No.: 101

Production Casing Size: 5.5 feet: 0

Op Name: KCC FEE FUND

Surface Casing Size: 8.625 feet: 163

Address: 130 S. MARKET, ROOM 2078  
WICHITA, KS 67202

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 06/19/2003 4:30 PM

Plug Co. License No.: 6901

Plug Co. Name: D S & W WELL SERVICING, INC.

Proposal Rcvd. from: JOE STRUBE

Company: D S & W WELL SERVICING, INC.

Phone: (620) 587-3361

Proposed Plugging Method: Ordered out 425 sxs 60/40 pozmix - 10% gel - 400# hulls.  
Junk left in the hole.

Plugging Proposal Received By: JAY PFEIFER

WitnessType: Plugging Operations 100% Witnessed (Complete)

Date/Time Plugging Completed: 06/19/2003 6:00 PM

KCC Agent: JAY PFEIFER

**Actual Plugging Report:**

Washed well down to 1247'. Tubing stuck in the hole.  
Backed off at 1200'.  
Tied onto tubing and circulated cement with 110 sxs cement.  
POOH. Topped with 15 sxs cement. S.I.P. 500#.  
Hooked up to annulus - mixed and pumped 300 sxs cement with 400# hulls.

Remarks: COPELAND ACID AND CEMENTING.

Plugged through: TBG

District: 04

Signed \_\_\_\_\_

(TECHNICIAN)

RECEIVED

JUL 01 2003

KCC WICHITA

6-25-03

JUN 25 2003


Contr. WALTERS DRILLING COMPANY INC ROOKS CountyE 2170RB Comm. 9-5-53 Comp. 11-20-53 IP 2779 BOPD

DRAW DOWN

Tops	Depth	Datum
ANH	1502	668
TOP	3080	-910
HEEB	3291	-1121
TOR	3311	-1141
LANS	3330	-1160
B/KC	3539	-1369
ARB	3576	-1406
.TD	3640	-1470

Casing 8" 163 DST 3414-24, 1 HR, 25' OCM, 360'  
 SL OG SW: BHP 1110#  
 DST 3587-96, 1 HR, 1740' OIL:  
 BHP 1010#  
 DST 3598-3604, 1 HR, 1800' OIL  
 BHP 1010#  
 DST 3614-30, 1 HR, 1000' O &  
 1000' WTR:  
 PERF 12/3624-27:24/3627-33:  
 40/3614-24:20/3615-20:31:SWB  
 160 BF: PB 3584: SQZ: PERF 30/  
 3600-05:2000' OIL:SWB 32 80:  
 PARADISE CREEK POOL PERF 36/3594-  
 3600:2600' OIL:SWB 13.5 BOPH/3  
 HRS: AGIO 250: RMP 12 BOPH/3  
 HRS


INDEPENDENT OIL & GAS SERVICE  
 WICHITA, KANSAS

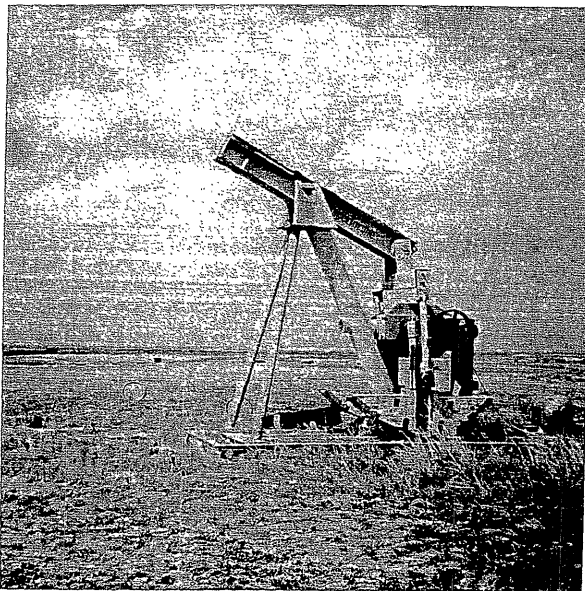

Flow @ 8 sec.  
 Photo 5/22/02