



MICRO
LOG

Company PALOMINO PETROLEUM
Well GIMME SHELTER #1
Field UNNAMED
County TREGO
State KS

Company PALOMINO PETROLEUM
Well GIMME SHELTER #1
Field UNNAMED
County TREGO State KS

Location: 1361' FNL & 1629' FEL
API #: 15-195-23137
SEC 25 TWP 15S RGE 25W
Permanent Datum Ground Level Elevation 2497
Log Measured From KB 8' AGL
Drilling Measured From KB
Other Services
CDNL
ML
Elevation
K.B. 2505
D.F. 2503
G.L. 2497

Date	06/05/22
Run Number	One
Depth Driller	4620
Depth Logger	4620
Bottom Logged Interval	4618
Top Log Interval	3600
Casing Driller	8 5/8" @ 309'
Casing Logger	309
Bit Size	7 7/8"
Type Fluid in Hole	Chemical
Density / Viscosity	9.2/54
pH / Fluid Loss	11.0/5.4
Source of Sample	Pit
Rm @ Meas. Temp	1.2@70degf
Rmf @ Meas. Temp	.90@70degf
Rmc @ Meas. Temp	1.44@70degf
Source of Rmf / Rmc	Calculated
Rm @ BHT	.73@115degf
Time Circulation Stopped	2:00 A.M.
Time Logger on Bottom	4:00 AM
Maximum Recorded Temperature	115degf
Equipment Number	T605
Location	Hays, KS
Recorded By	GUS PFANENSTIEL
Witnessed By	RYAN SEIB

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

WEST OF ARNOLD TO J RD NORTH TO T EAST 1/4 MILE NORTH TO CC RD.
3/4 MILE, SOUTH INTO.

Thank You for using Gemini Wireline LLC
785-625-1182





MAIN PASS

Database File ppgimmeshelter#1oh.db
 Dataset Pathname pass5
 Presentation Format kml
 Dataset Creation Sun Jun 05 06:25:50 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

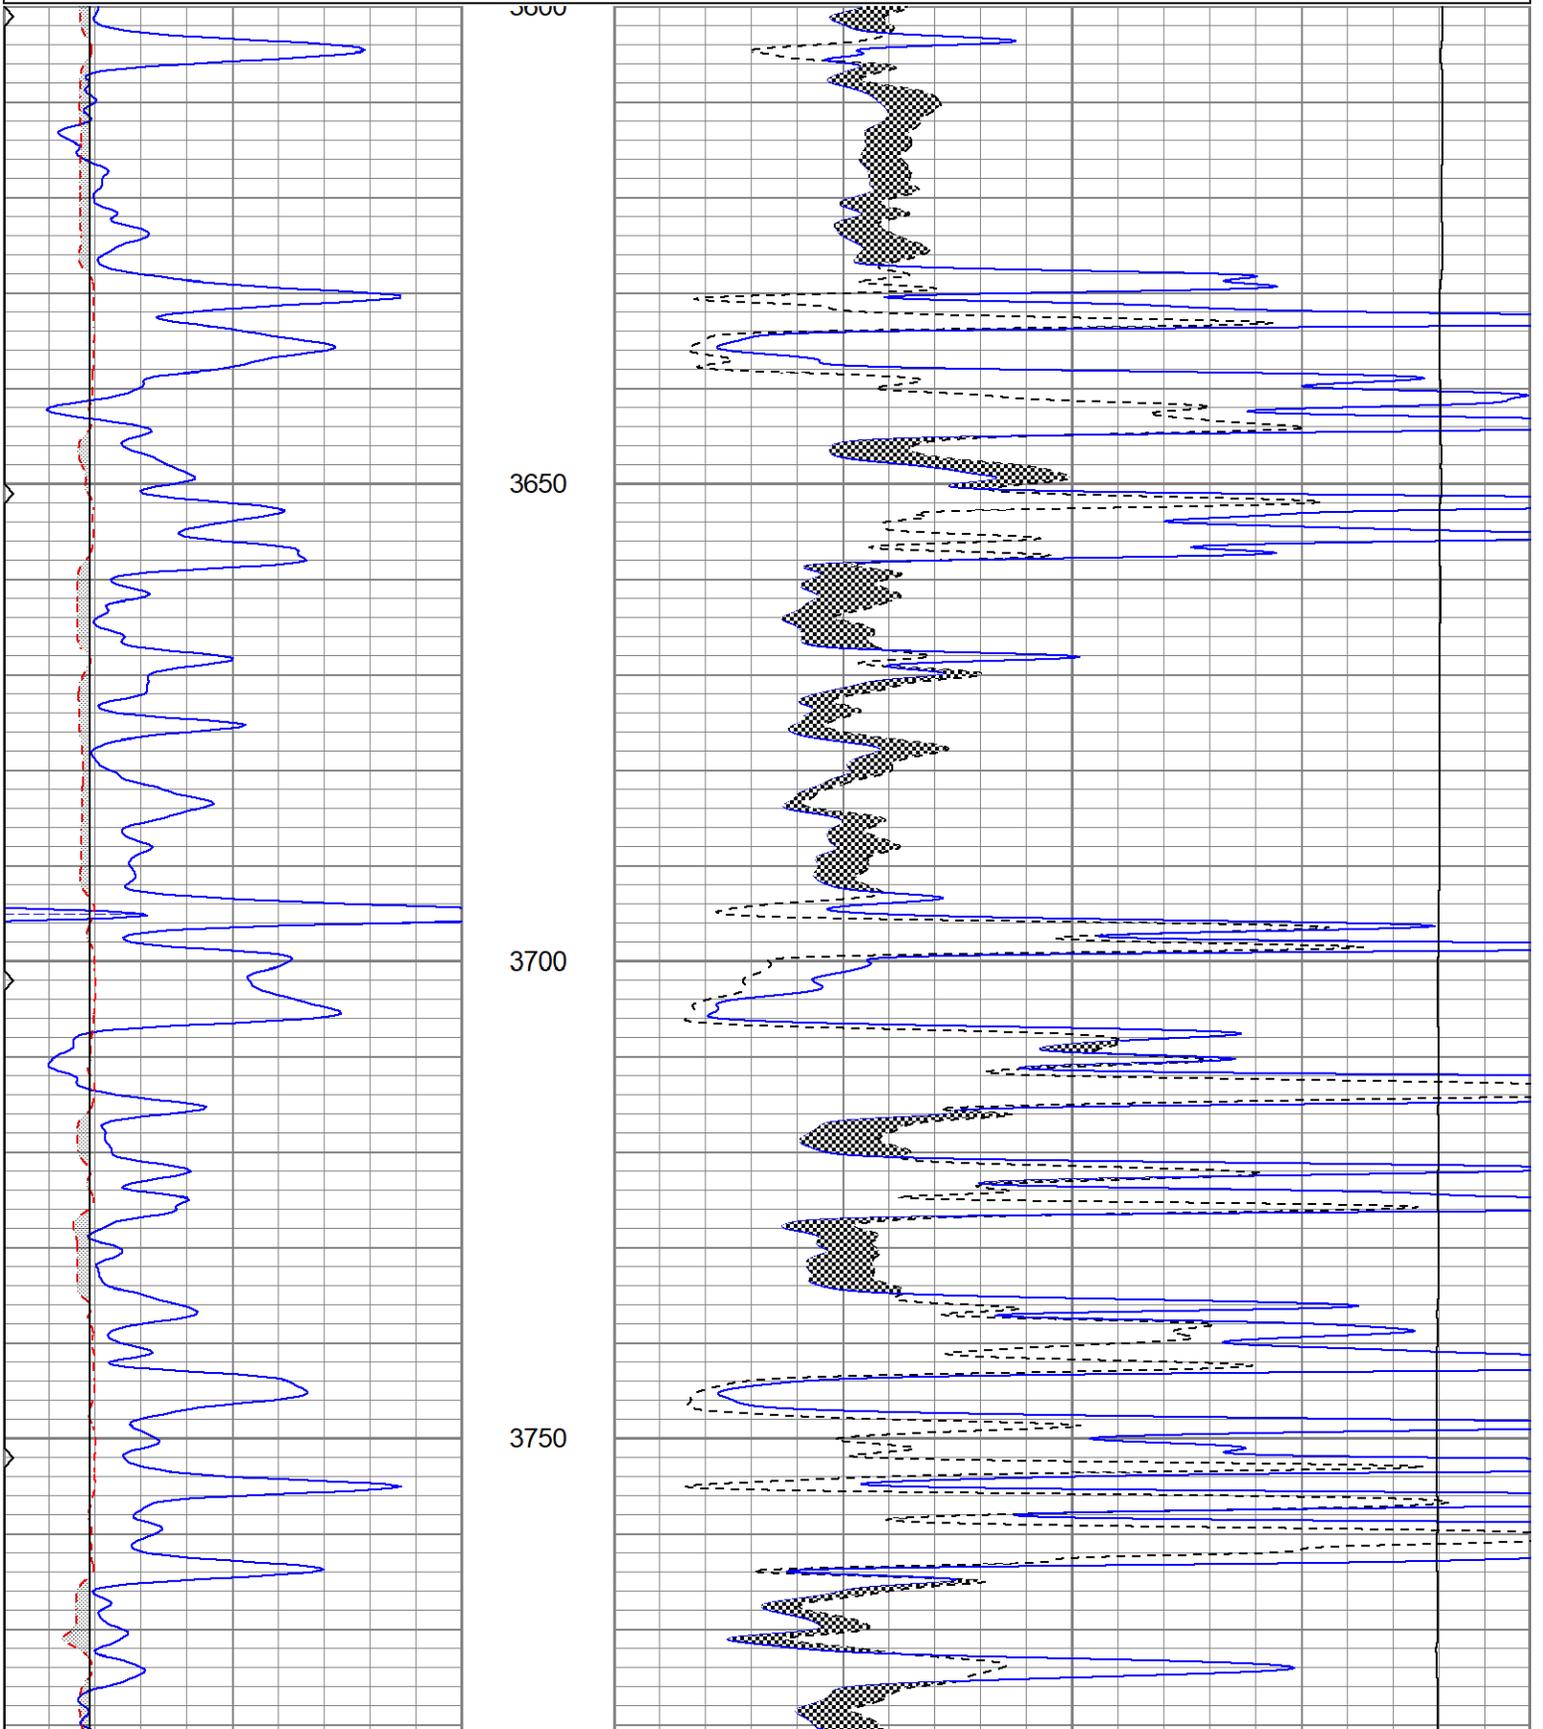

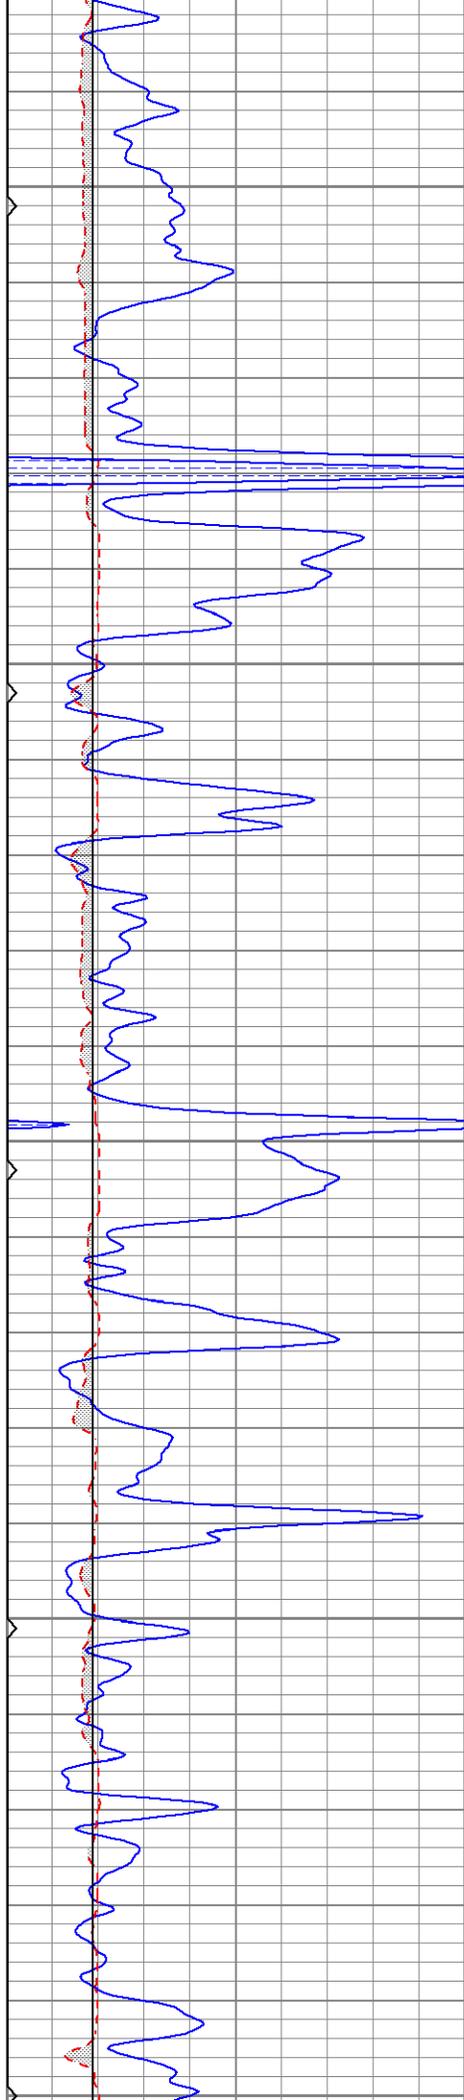


3800


3850

3900

3950

4000

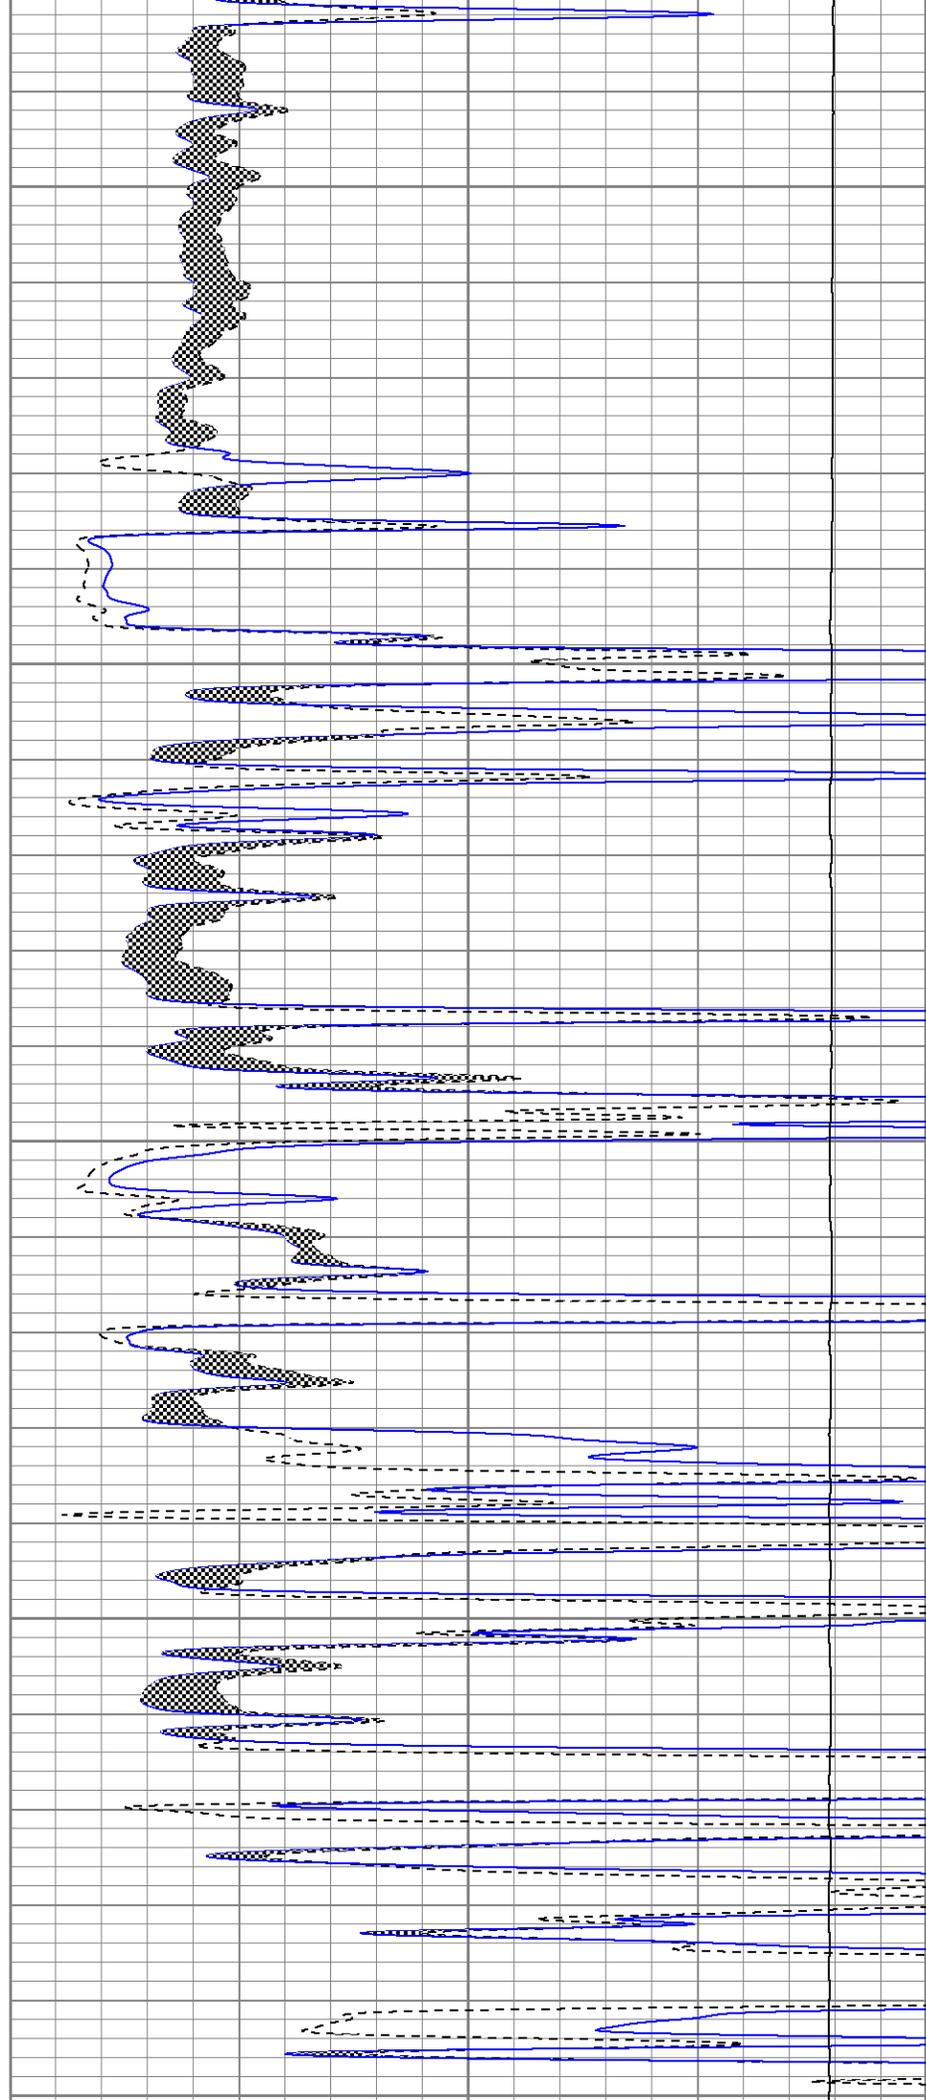

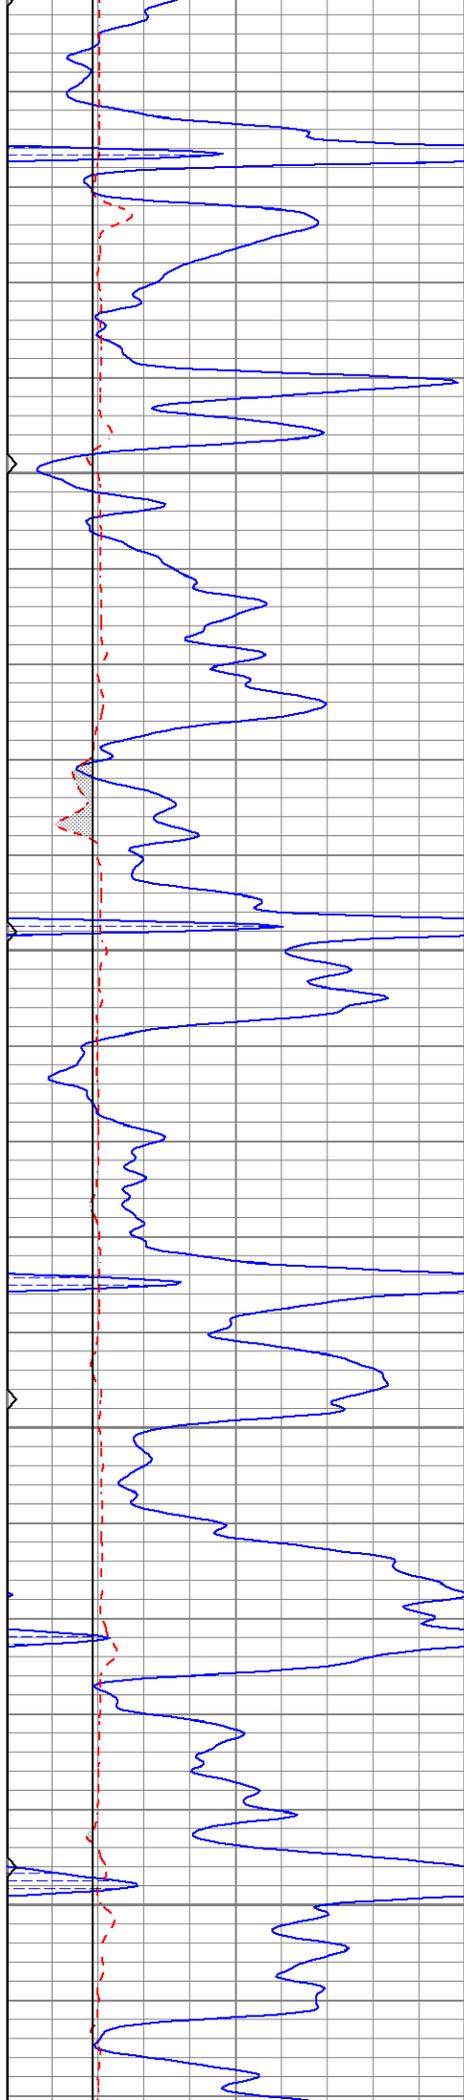


4000


4050

4100

4150

4200

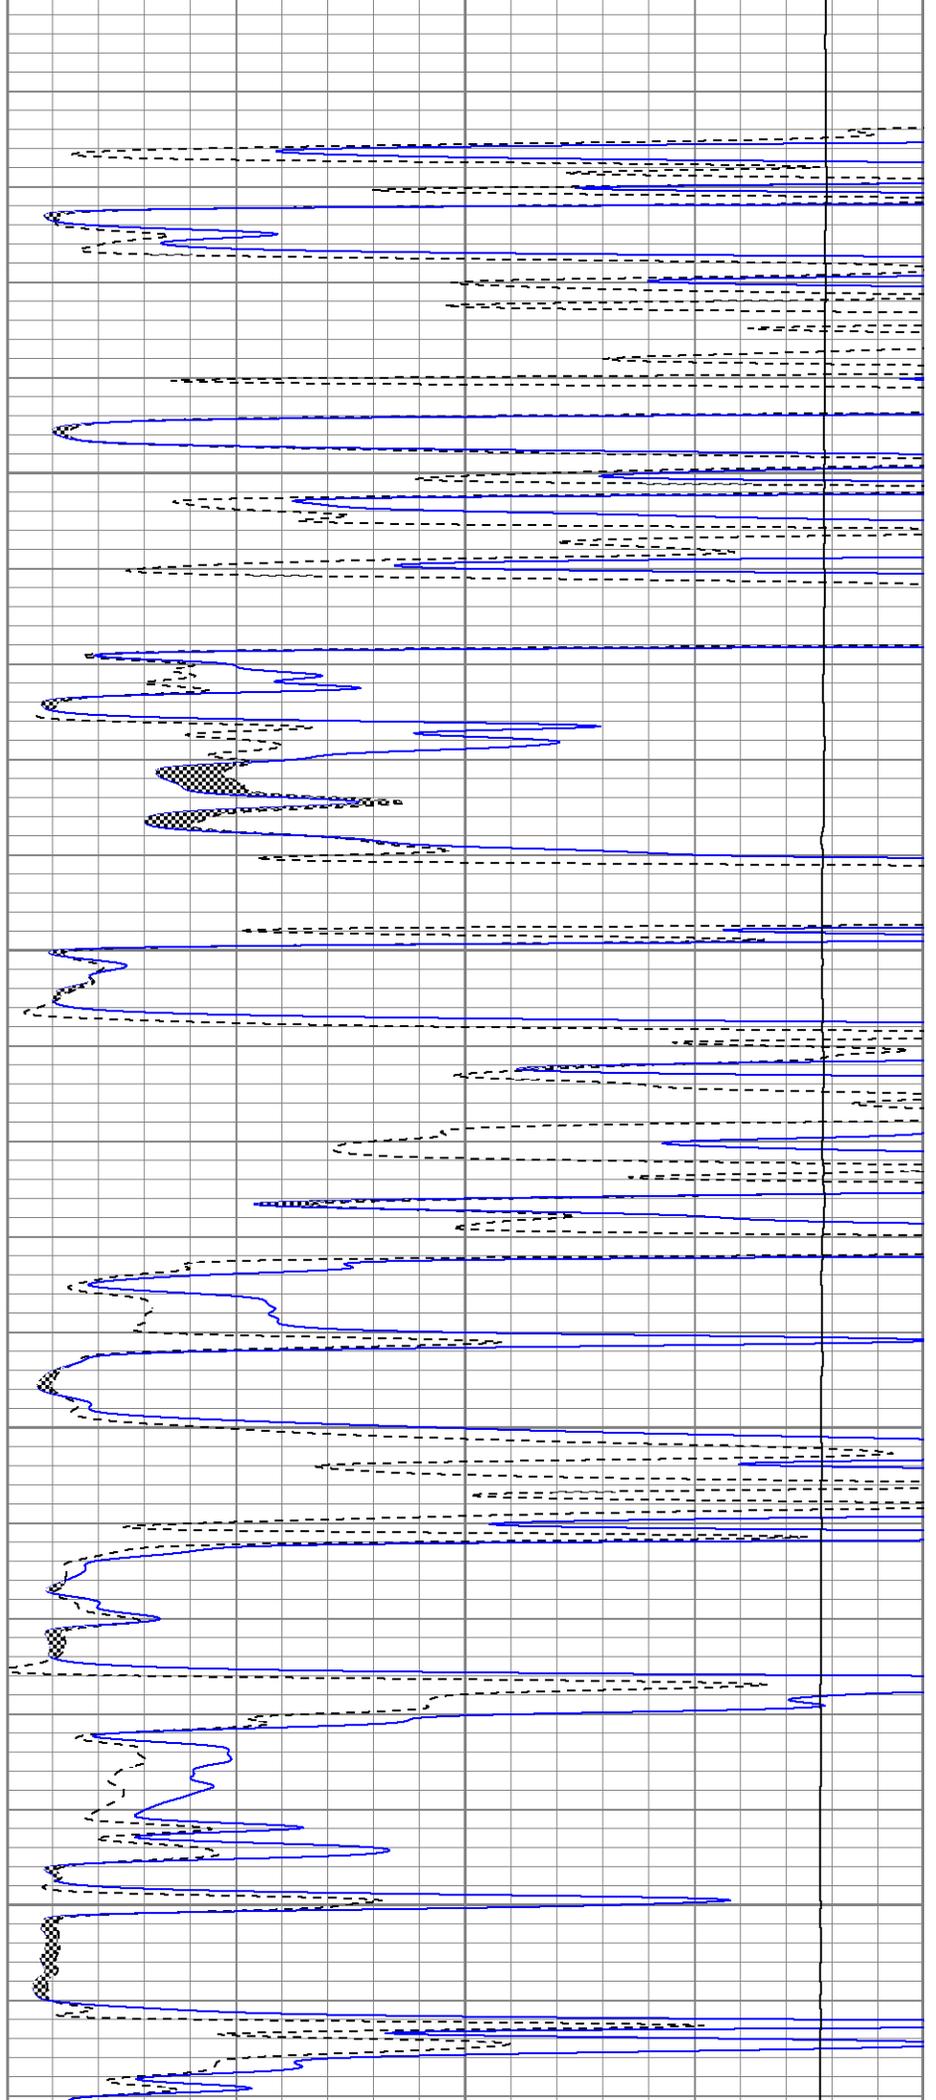

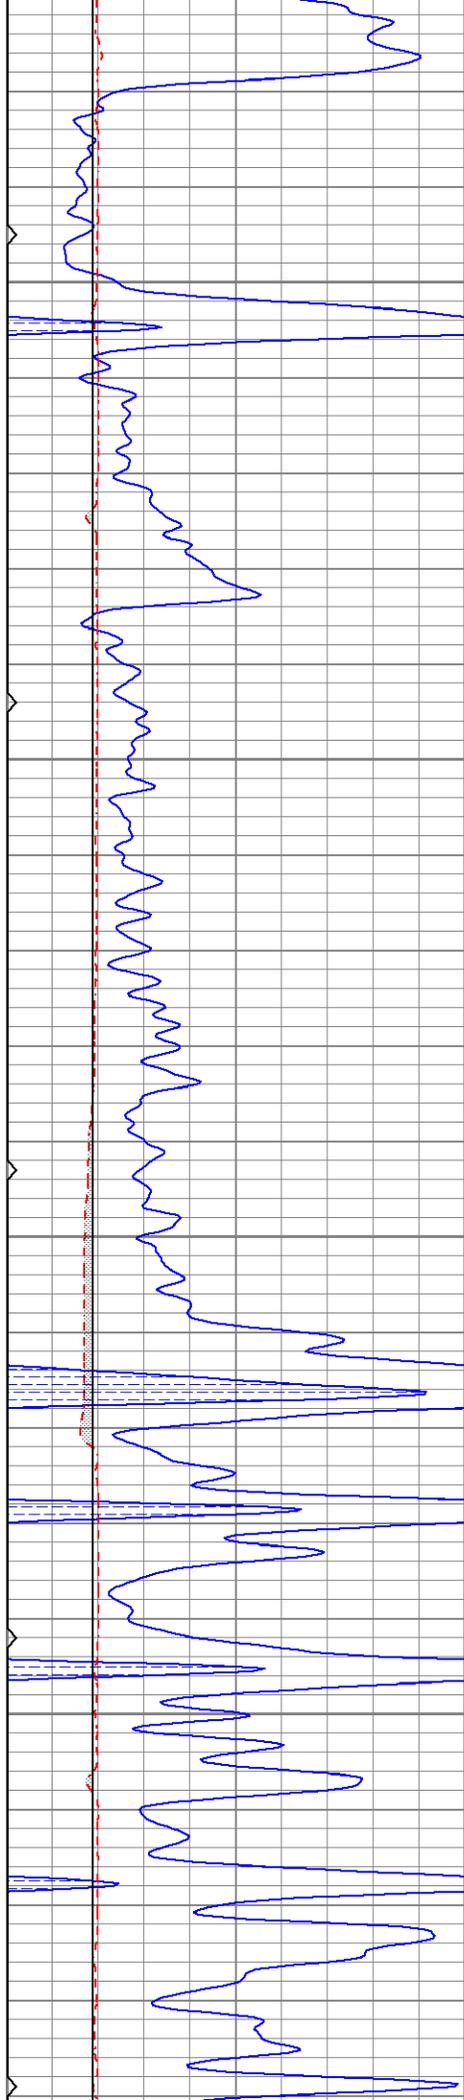



4250

4300

4350

4400

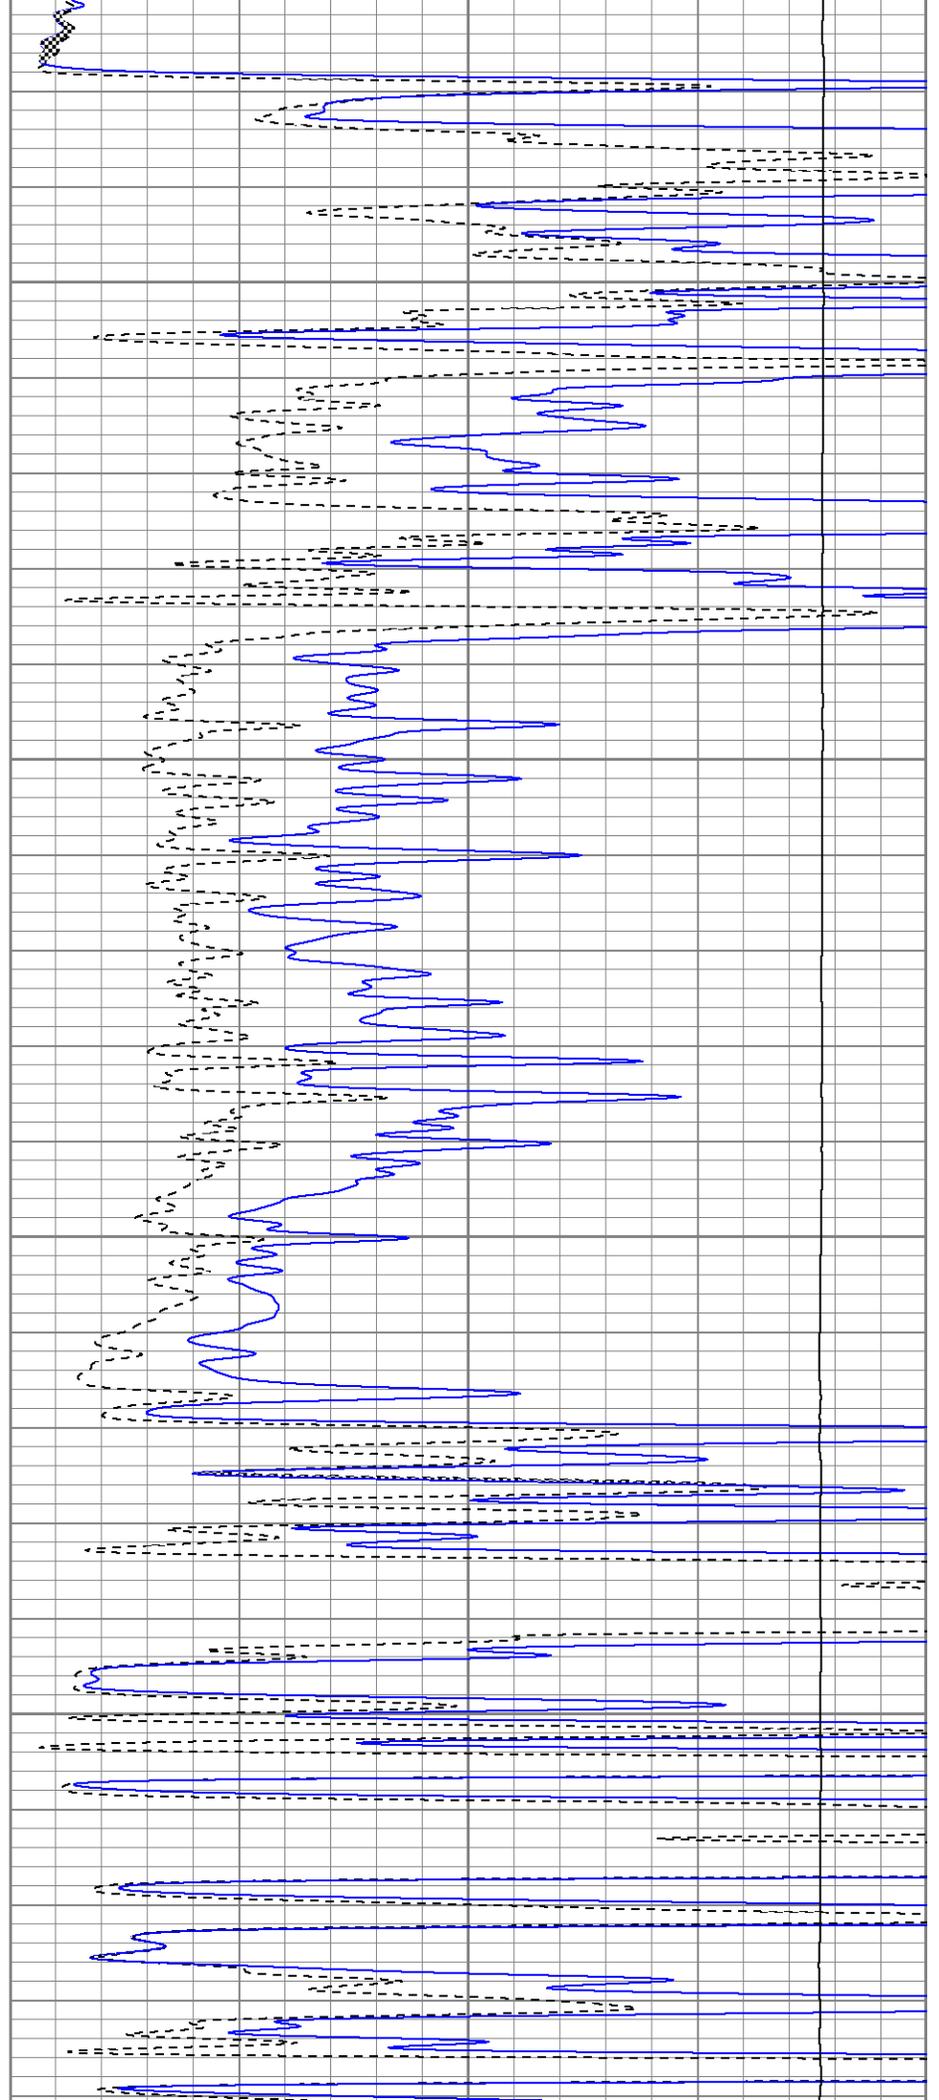

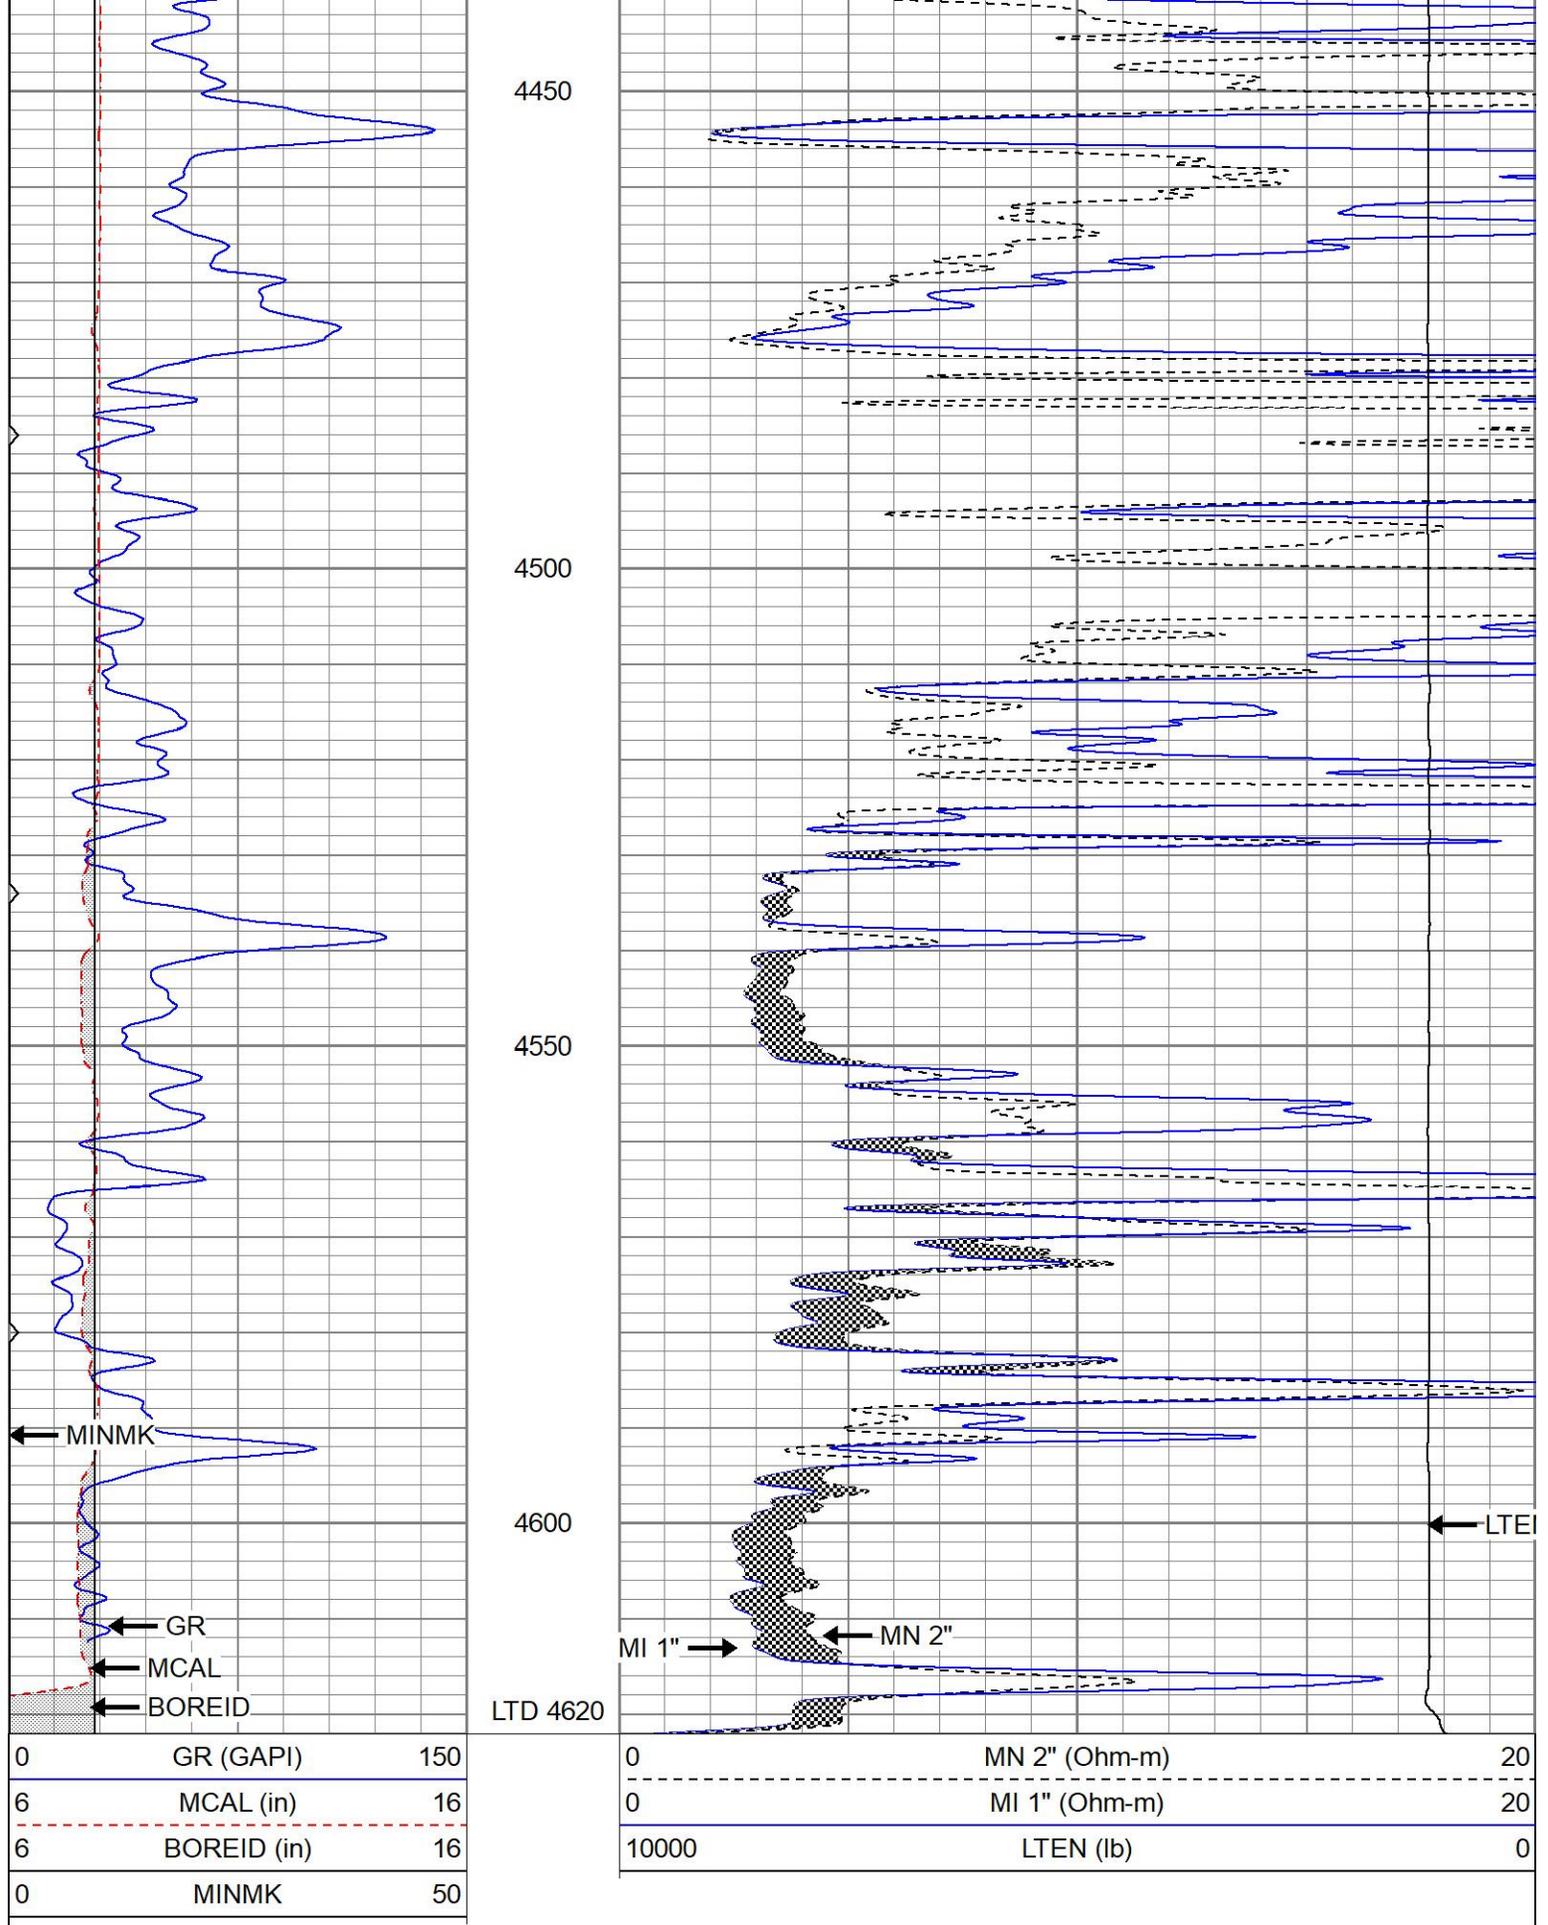



REPEAT SECTION

Database File ppgimmeshelter#1oh.db
 Dataset Pathname pass4.1
 Presentation Format kml
 Dataset Creation Sun Jun 05 06:33:03 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

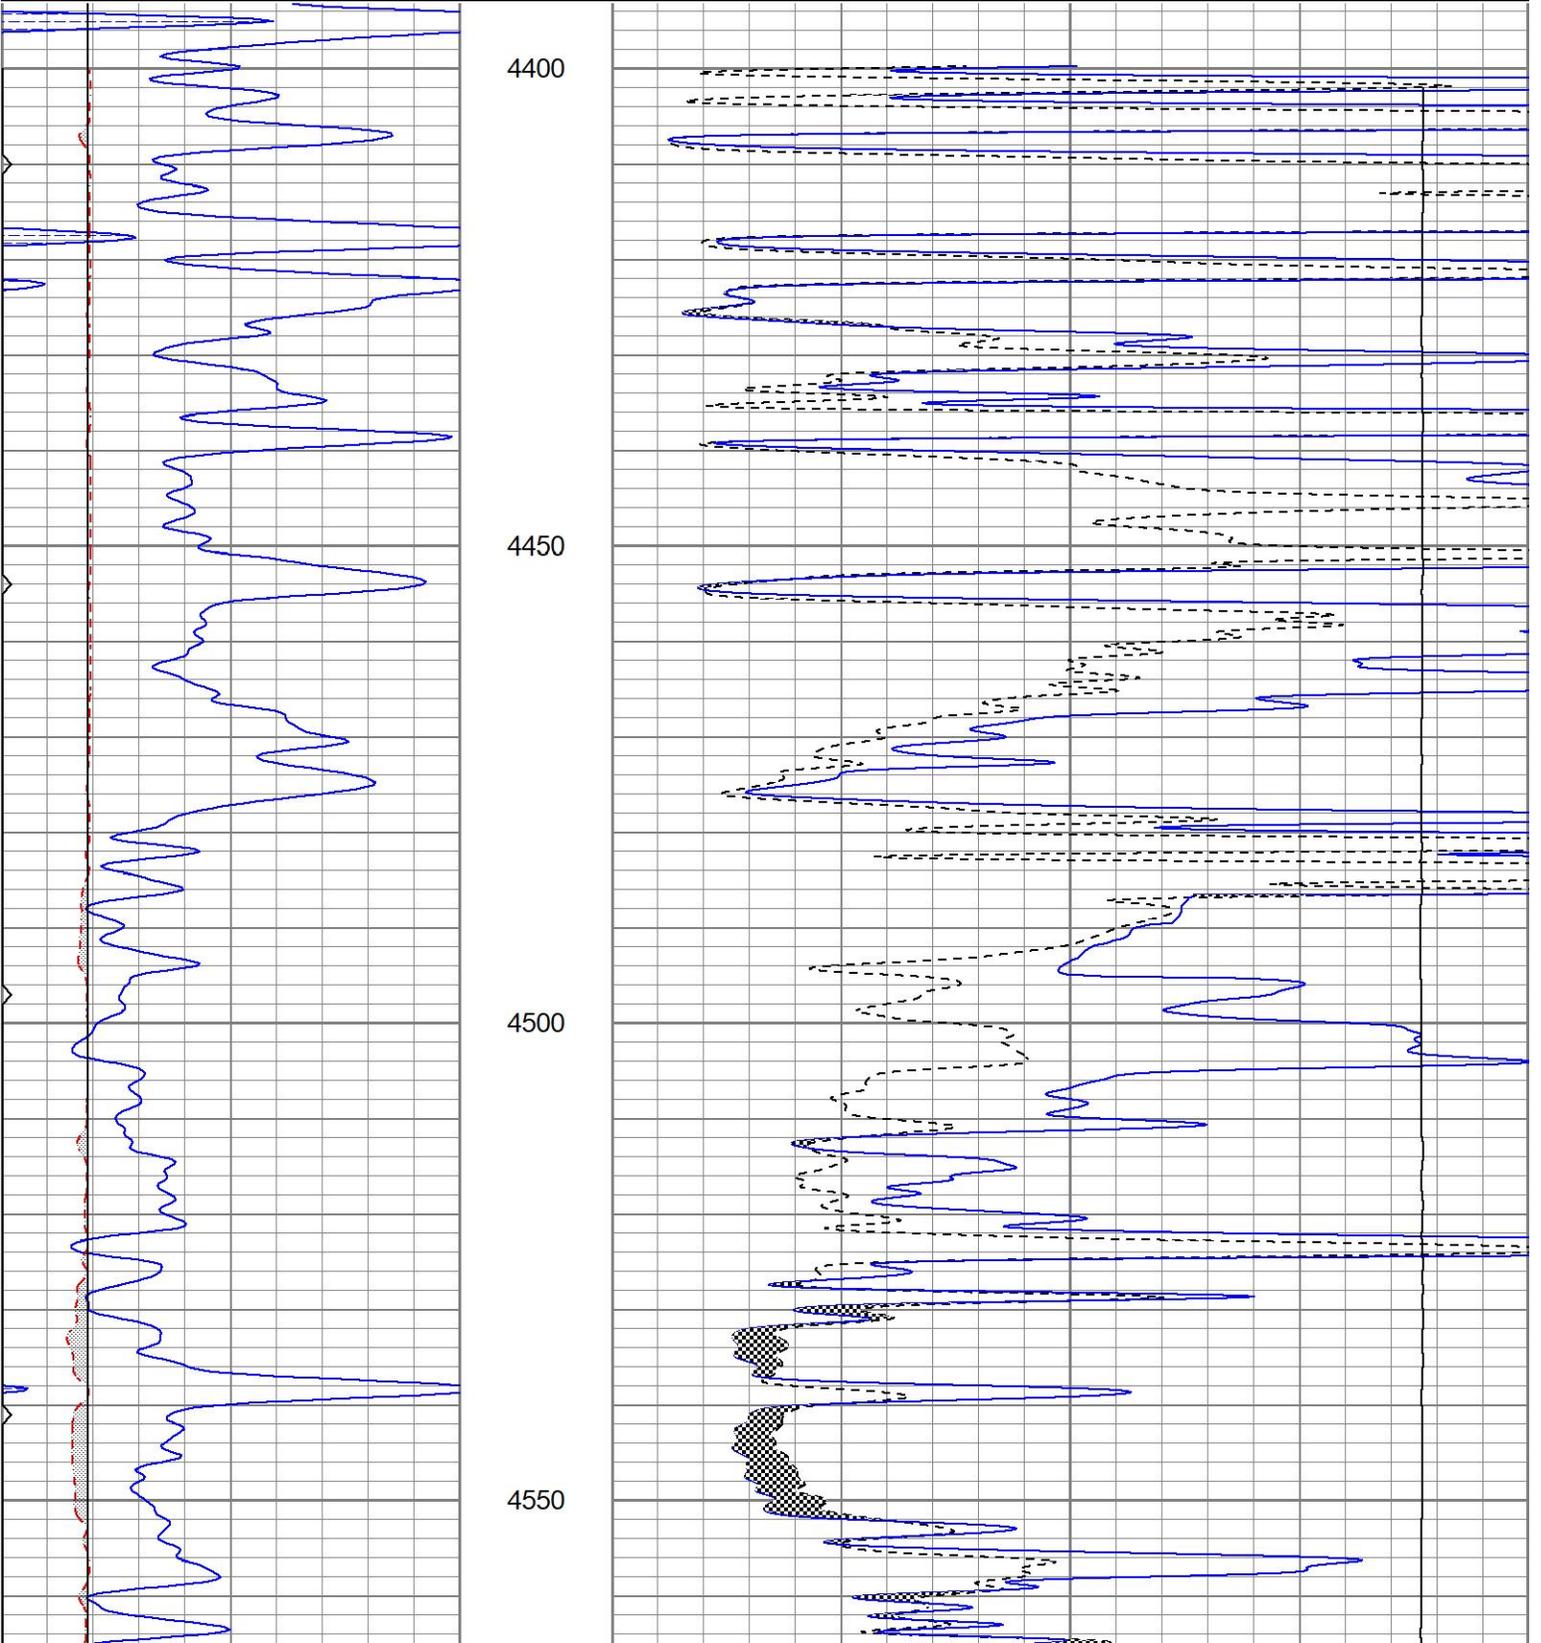

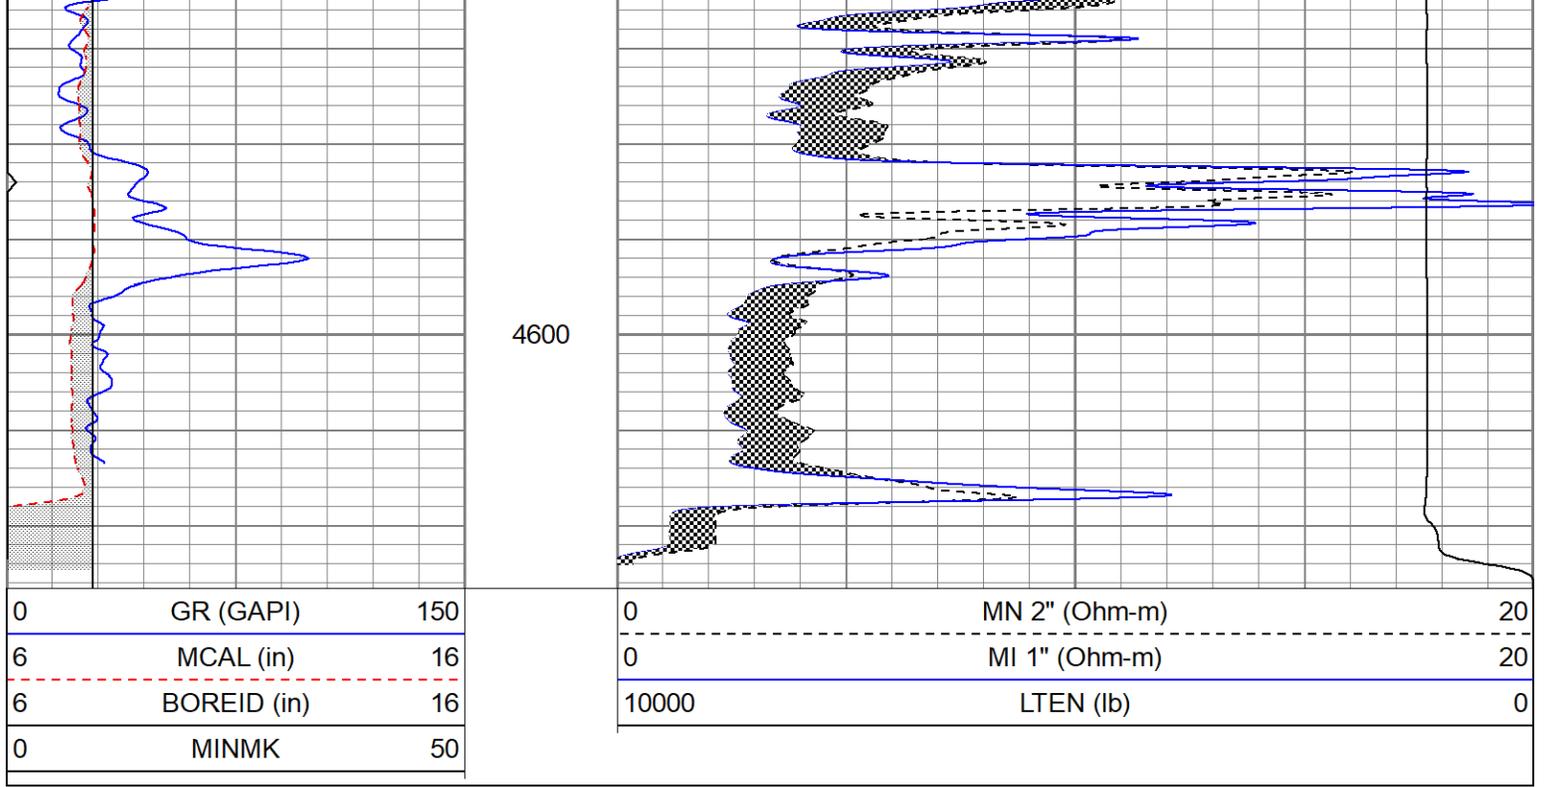

Calibration Report

Database File ppgimmeshelter#1oh.db
 Dataset Pathname pass4.1
 Dataset Creation Sun Jun 05 06:33:03 2022

Microlog Calibration Report

Serial-Model: 1600-Pengo
 Performed: Sun Jun 5 06:17:51 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	-0.0183	0.4881	V	0.0000	10.0000	Ohm-m	19.7469	0.3611
Inverse	0.0032	0.6340	V	0.0000	10.0000	Ohm-m	15.8525	-0.0503
Caliper	3.2319	6.4483	V	8.0000	15.0000	in	2.1364	0.9662

Gamma Ray Calibration Report

Serial Number: 2001
 Tool Model: OH
 Performed: Sat Sep 4 22:48:39 2021

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 0.7600 GAPI/cps