

Company PALOMINO PERTOLEUM
 Well GIMME SHELTER No.1
 Field
 County TREGO State KANSAS

Company PALOMINO PERTOLEUM
 Well GIMME SHELTER No.1
 Field
 County TREGO
 State KANSAS

Location: 1361' FNL & 1629' FEL
 API # : 15-195-23137
 Other Services
 SEC 25 TWP 15s RGE 25w
 Permanent Datum GROUND LEVEL Elevation 2497
 Log Measured From K.B. 8' A.G.L.
 Drilling Measured From KELLY BUSHING
 Elevation
 K.B. 2505
 D.F. 2503
 G.L. 2497

Date	JUNE 16, 2022		
Run Number	ONE		
Depth Driller	4620		
Depth Logger	4531		
Bottom Logged Interval	4530		
Top Log Interval			
Open Hole Size	WATER		
Type Fluid			
Density / Viscosity			
Max. Recorded Temp.	115F		
Estimated Cement Top	2950		
Time Well Ready			
Time Logger on Bottom			
Equipment Number	PT-08		
Location	HAYS		
Recorded By	BRAD LEIKER		
Witnessed By	MR. RICK POPP		

Run Number	Borehole Record		Tubing Record	
	Bit From	To	Size	Weight From To
ONE	12.25	00	309	
TWO	7.875	00	4620	

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	8 5/8	23#	00	309
Prot. String				
Production String	5 1/2	14#	00	4619
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.




Comments




THANK YOU FOR USING
 PERF-TECH WIRELINE SERVICES, INC.
 (785) 623-3969


WAKEENEY KS, SOUTH TO CC RD,
 8 WEST, SOUTH INTO.

Database File: june162208.db
 Dataset Pathname: pass5
 Presentation Format: 3x5
 Dataset Creation: Thu Jun 16 09:18:21 2022 by Log SCH 120126
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150	0	3' AMPLITUDE (mV)	100	200	5' Variable Density	1100
			395	3' TRAVEL TIME (usec)	225			
			9	Collar Locator	-1			

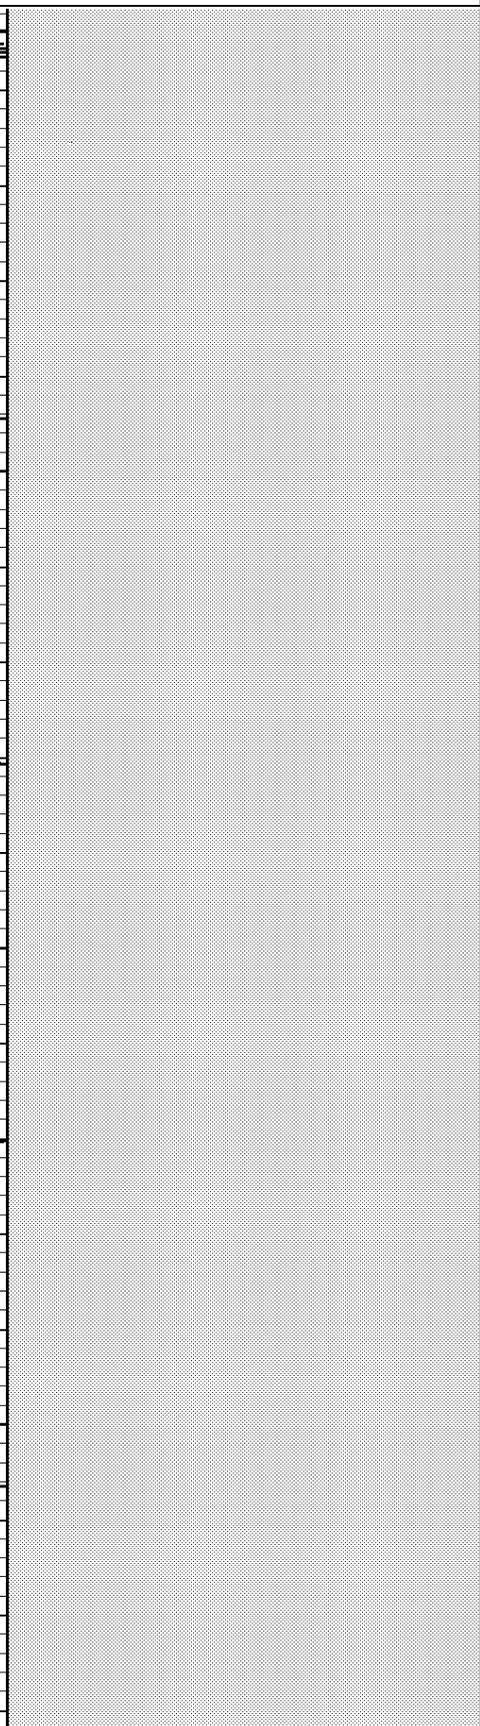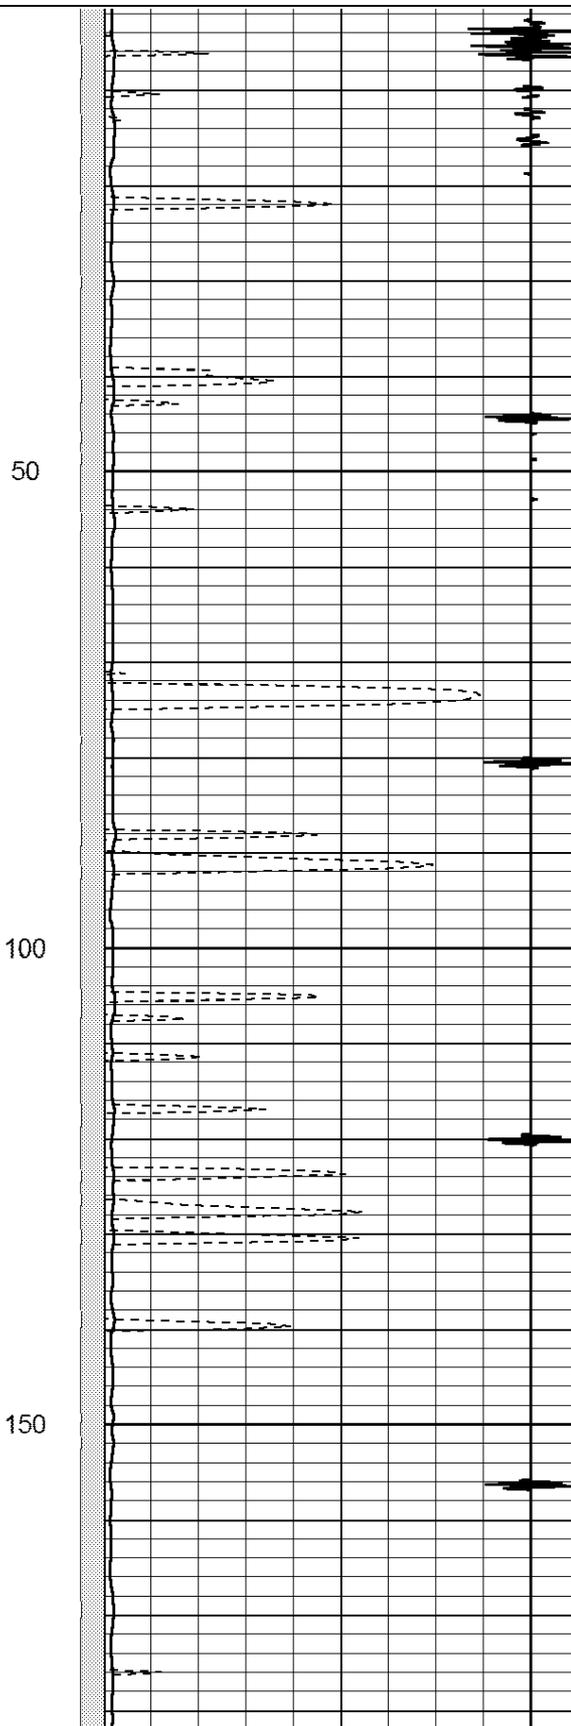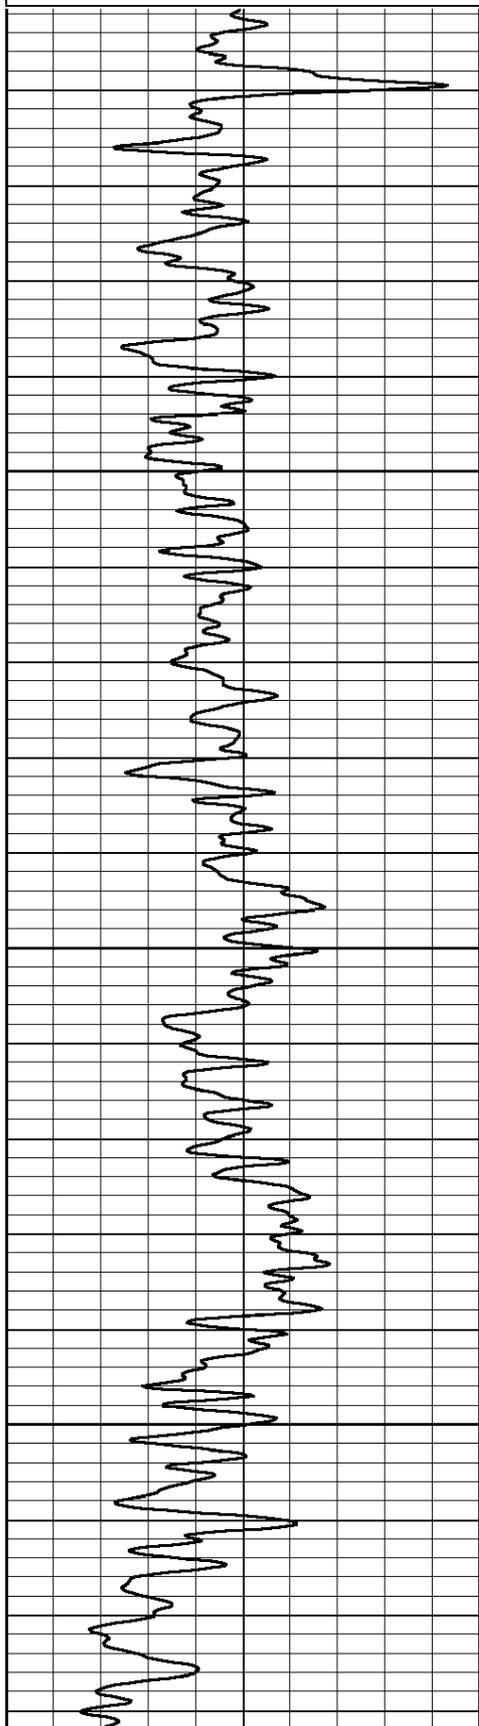

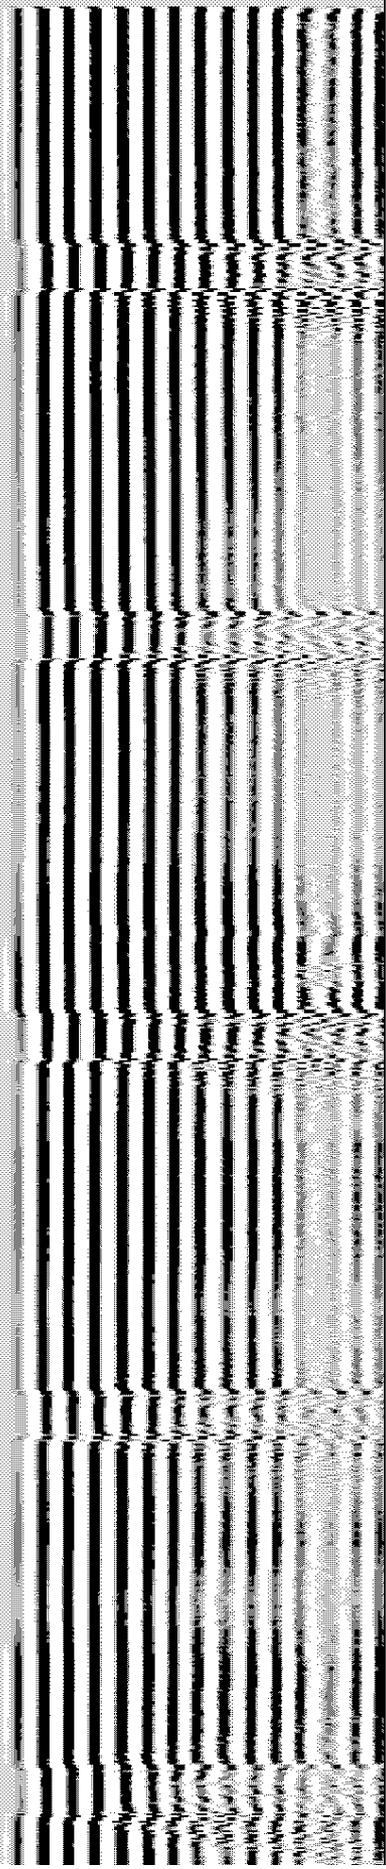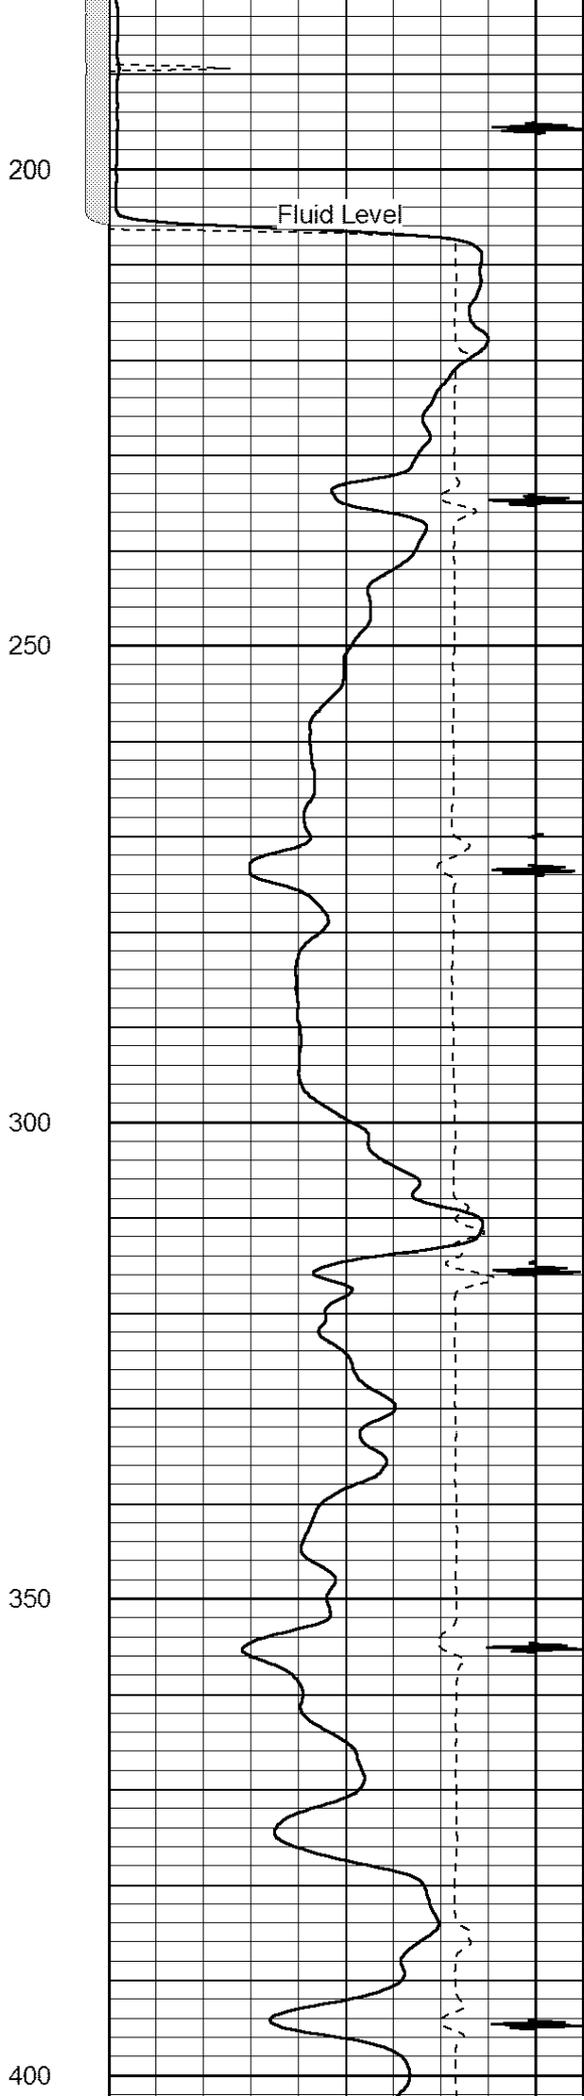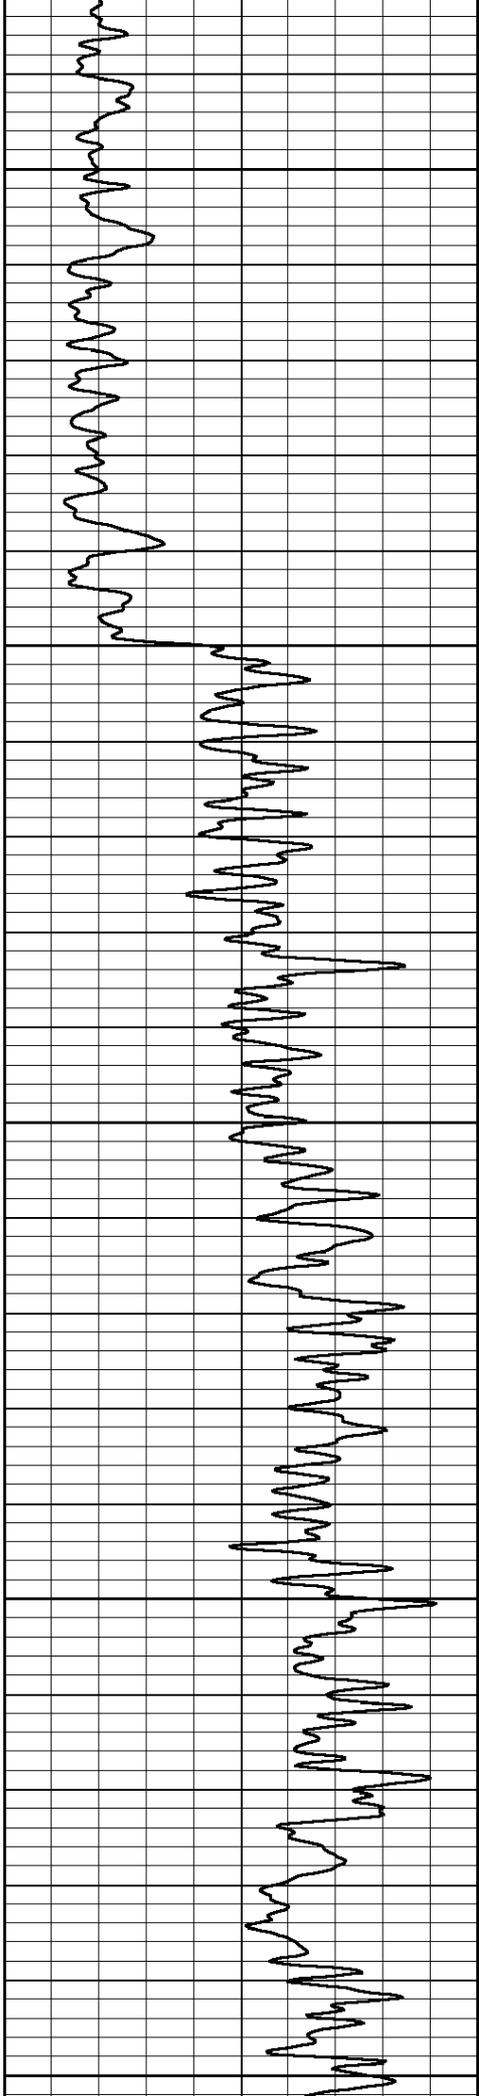


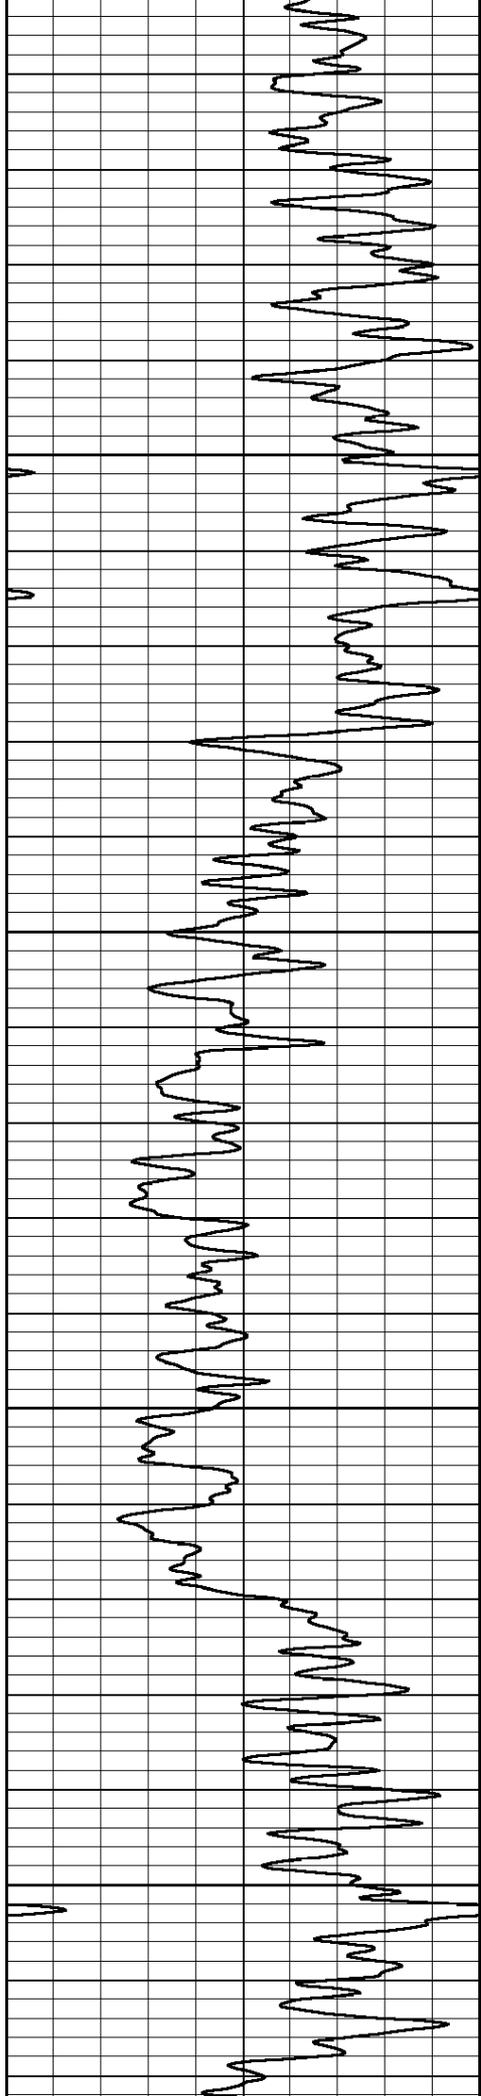



450

500

550

600

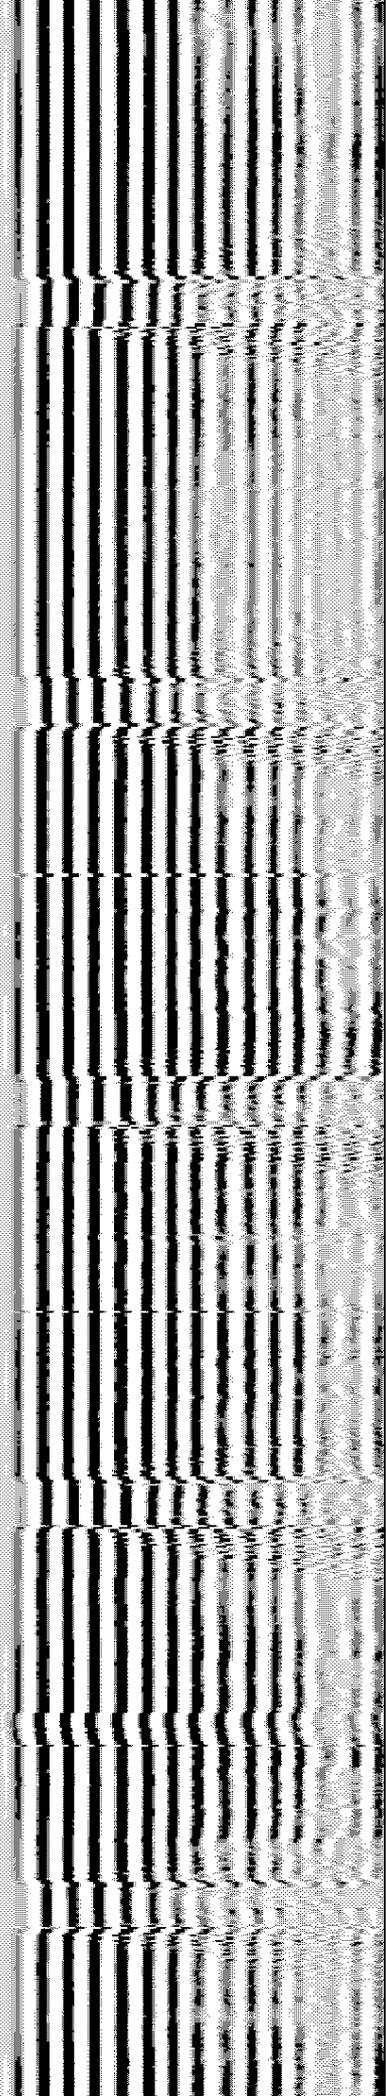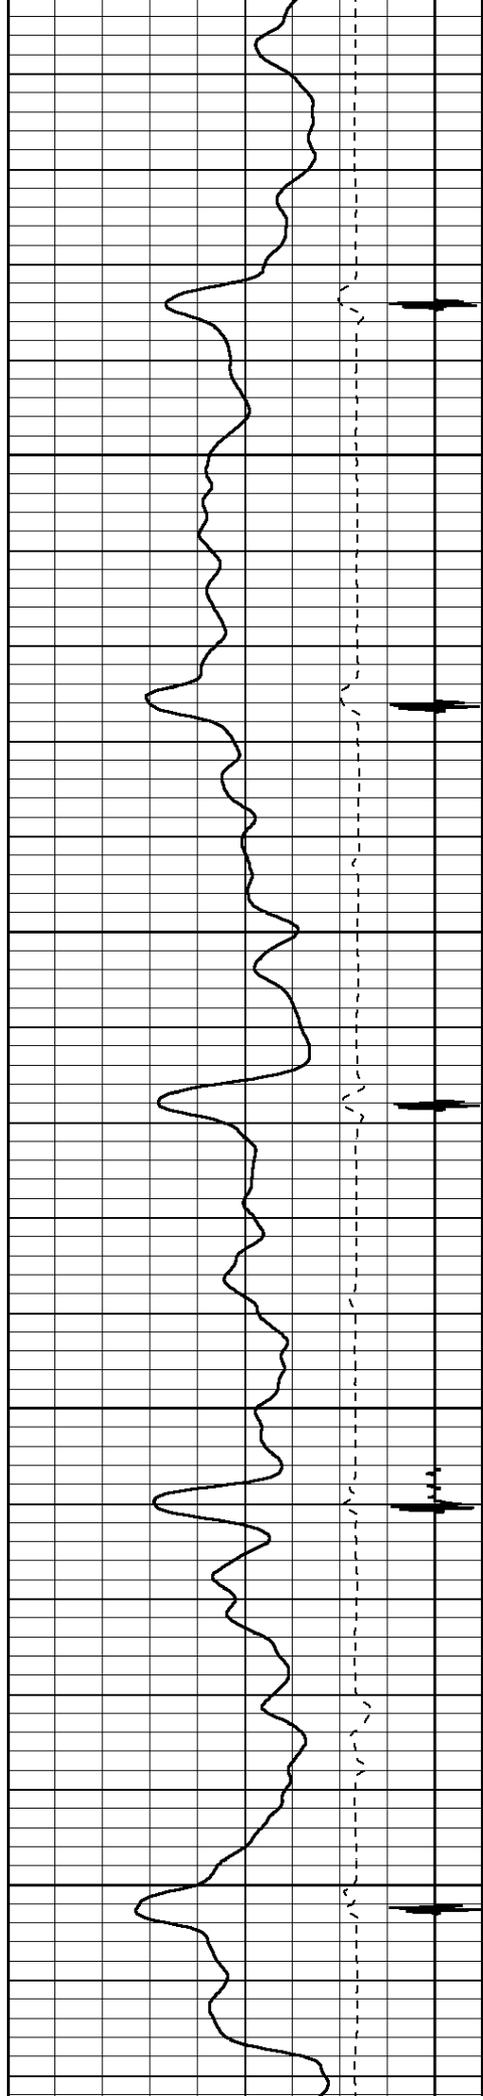


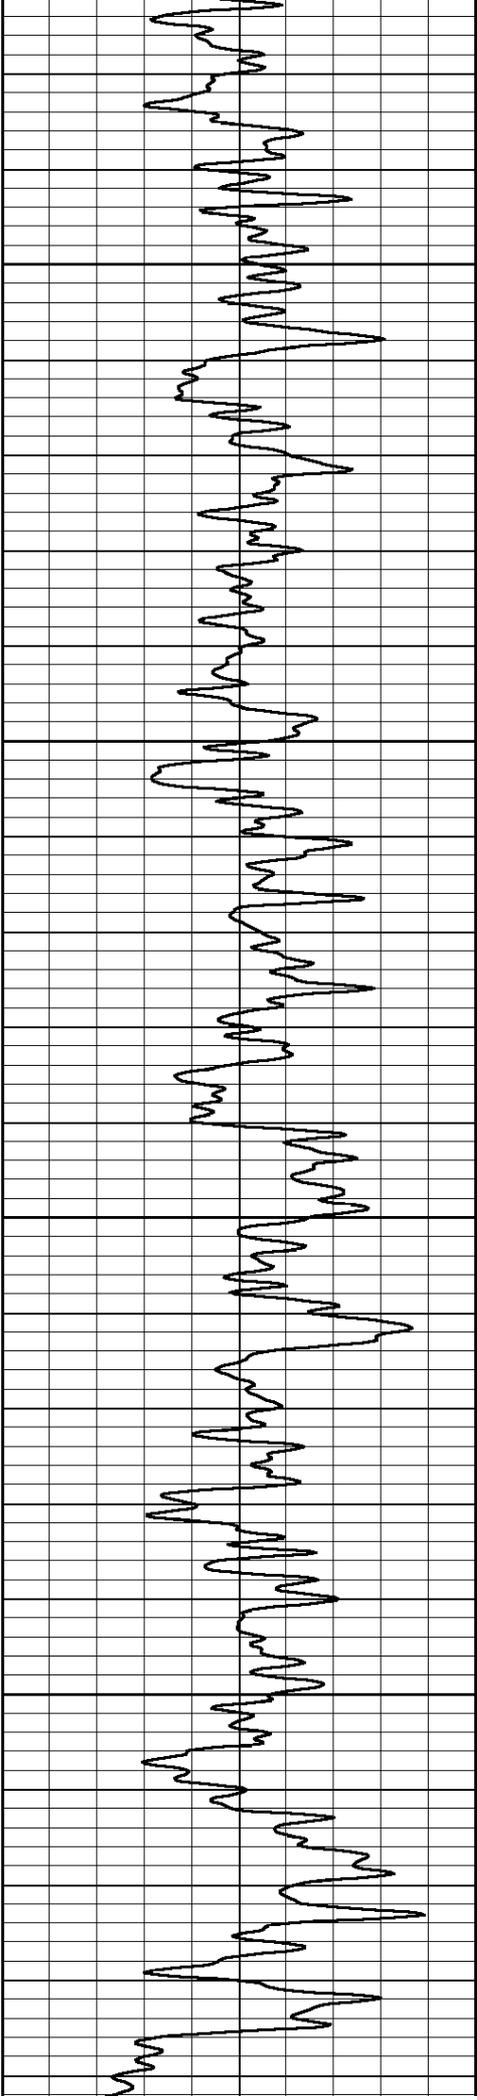



650

700

750

800

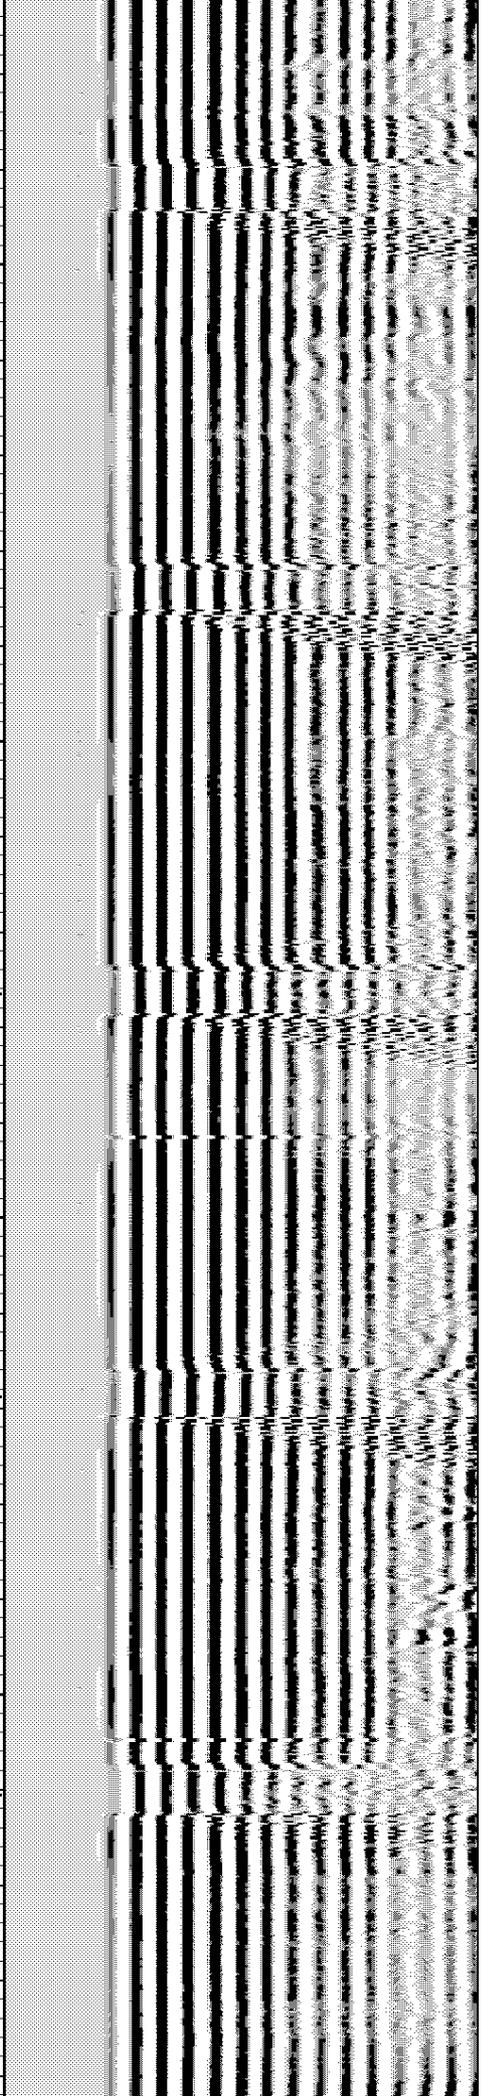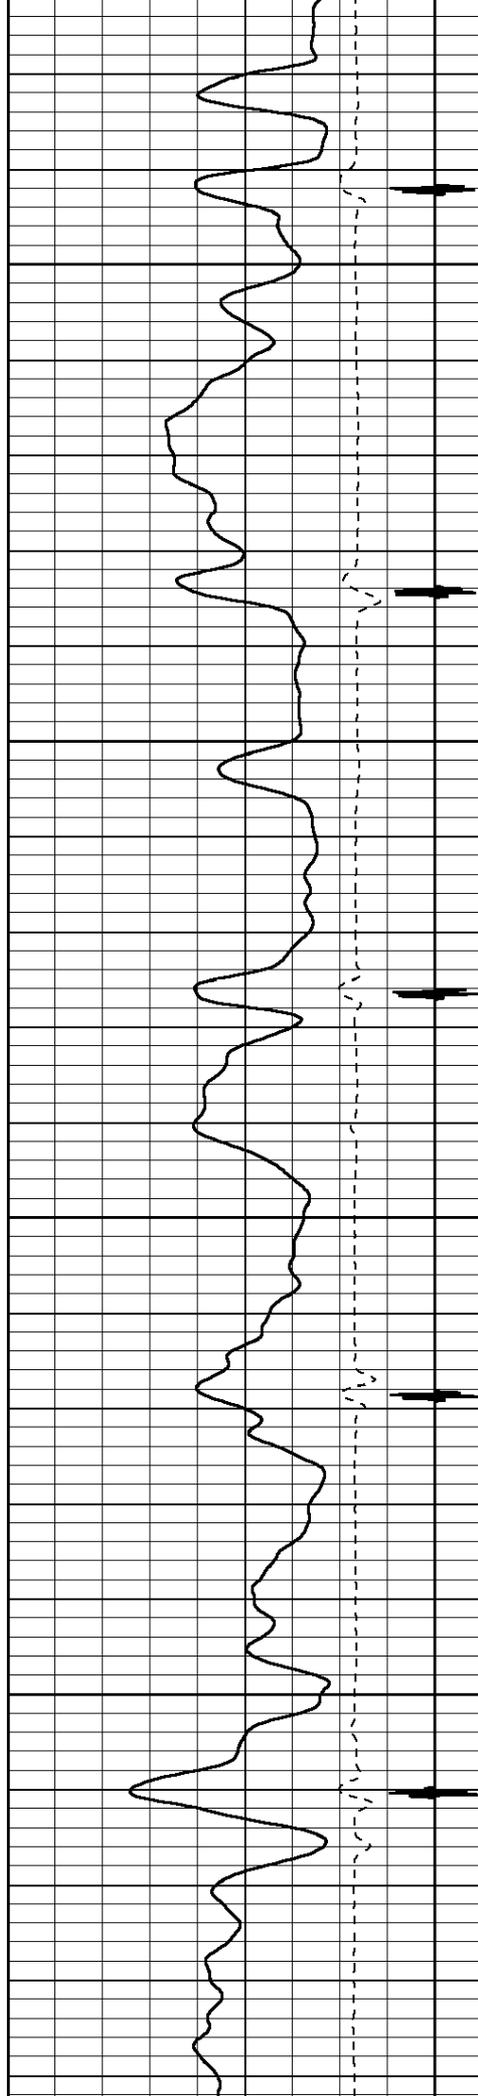

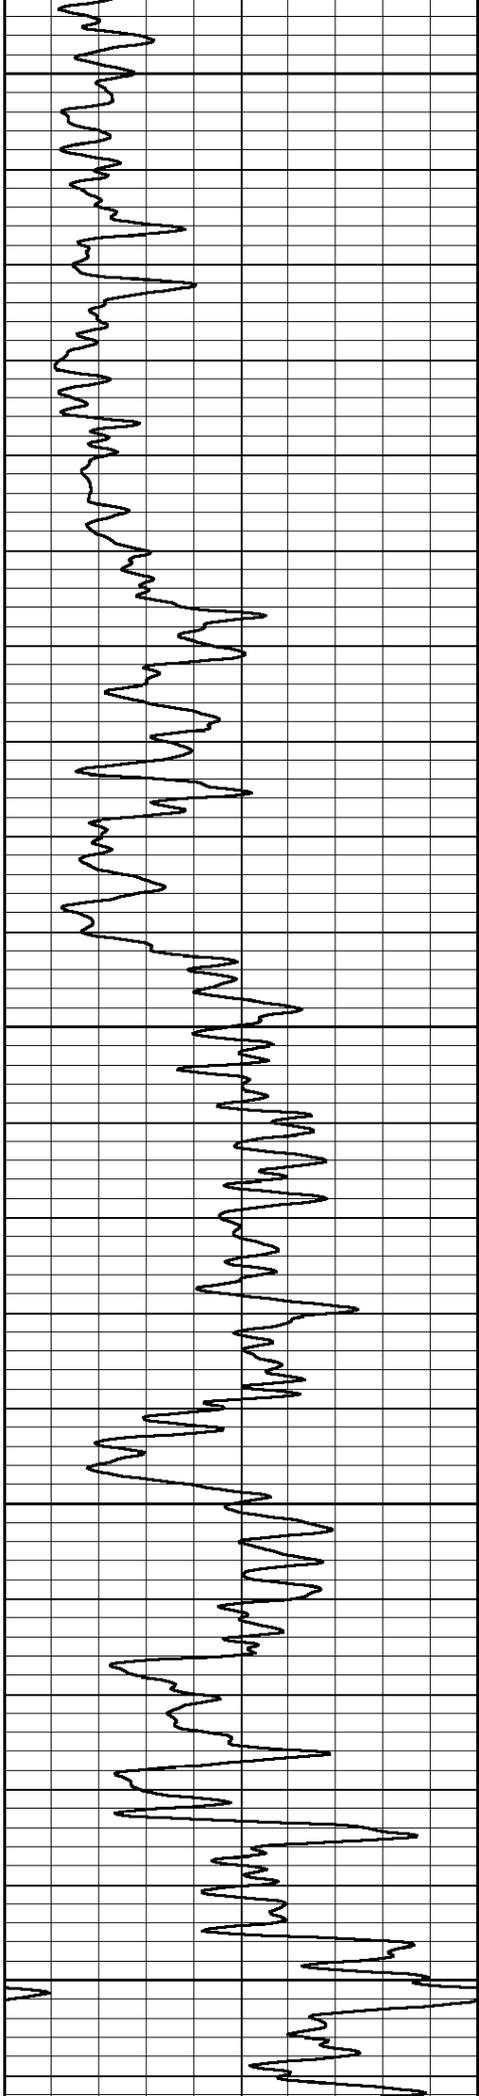



850


900

950

1000

1050

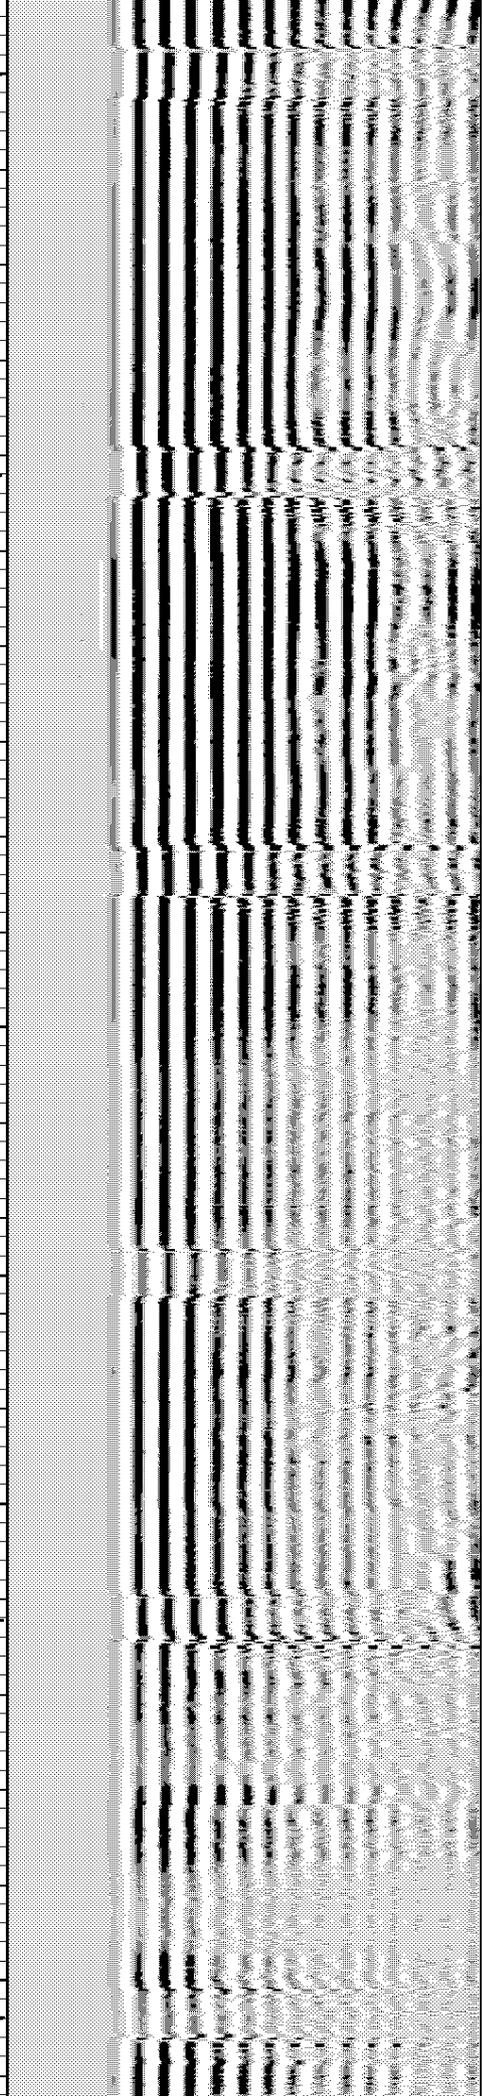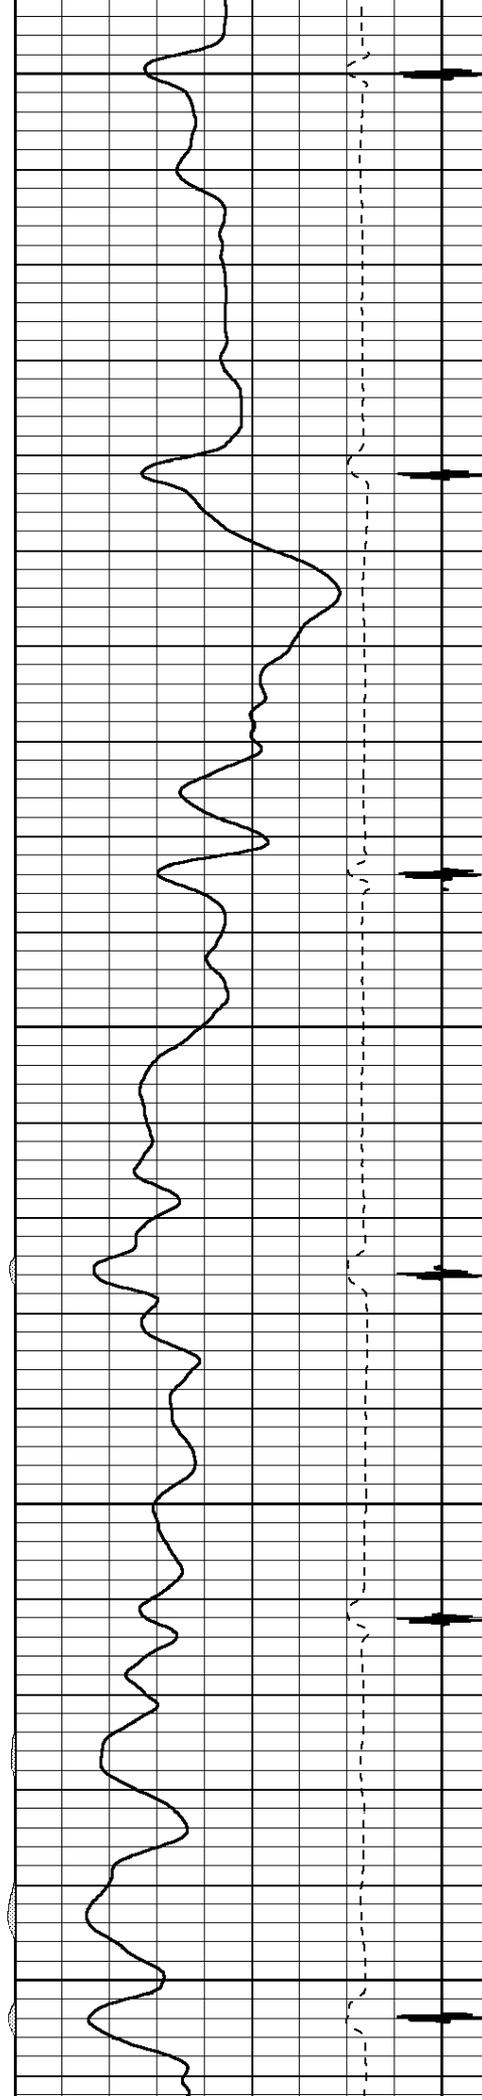


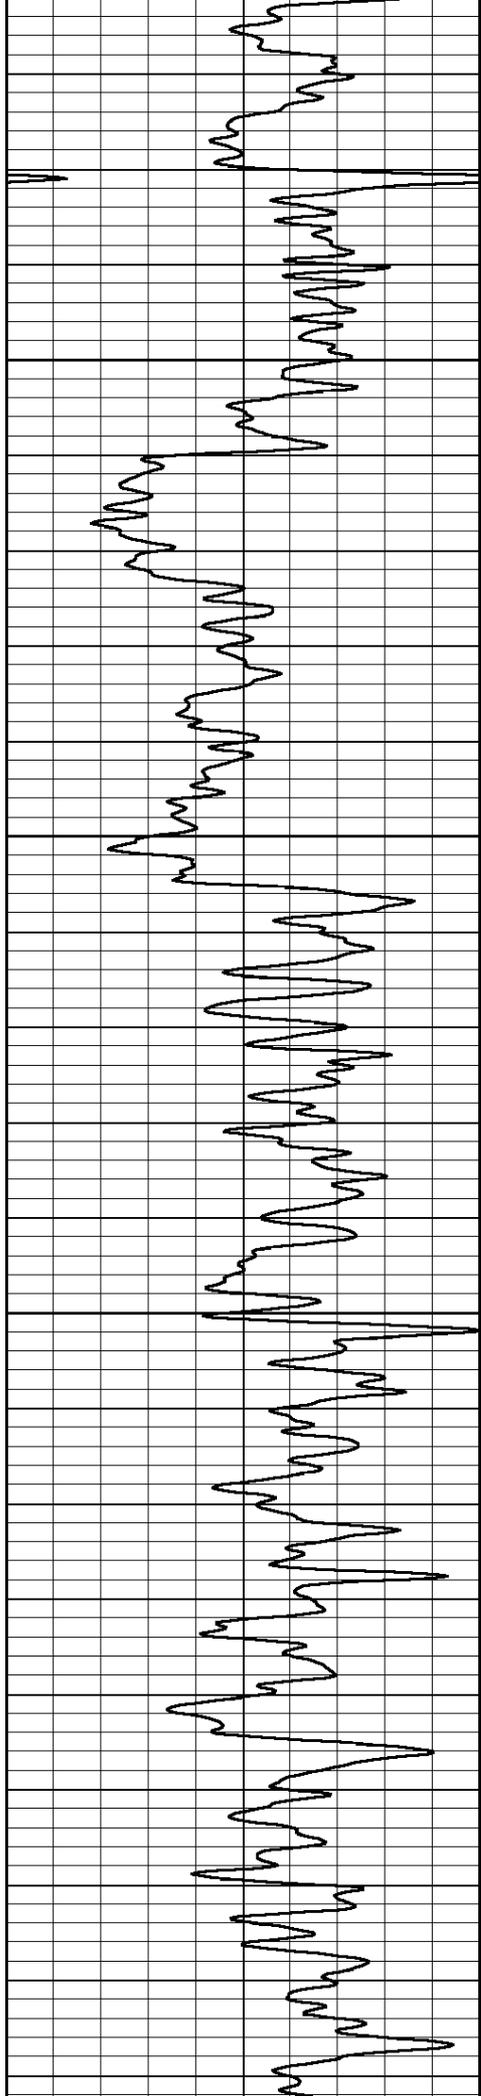



1100

1150

1200

1250

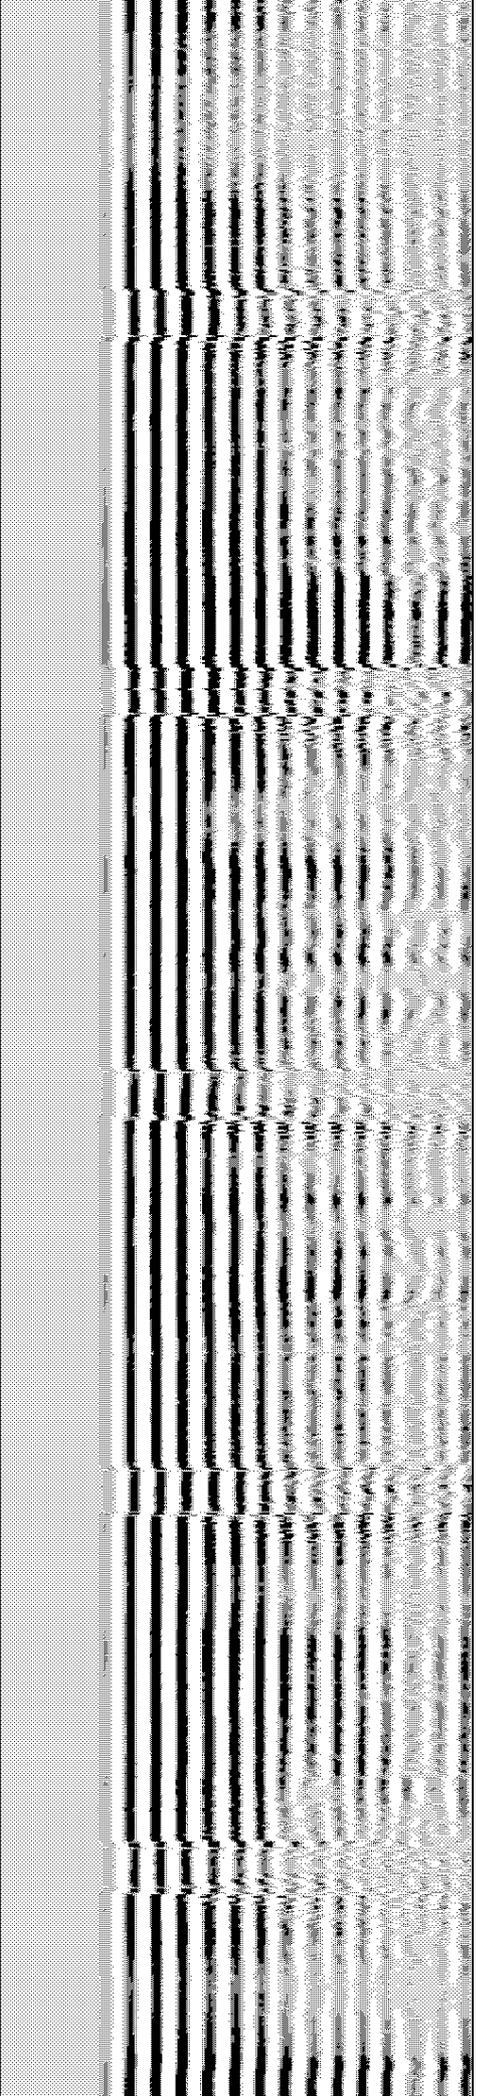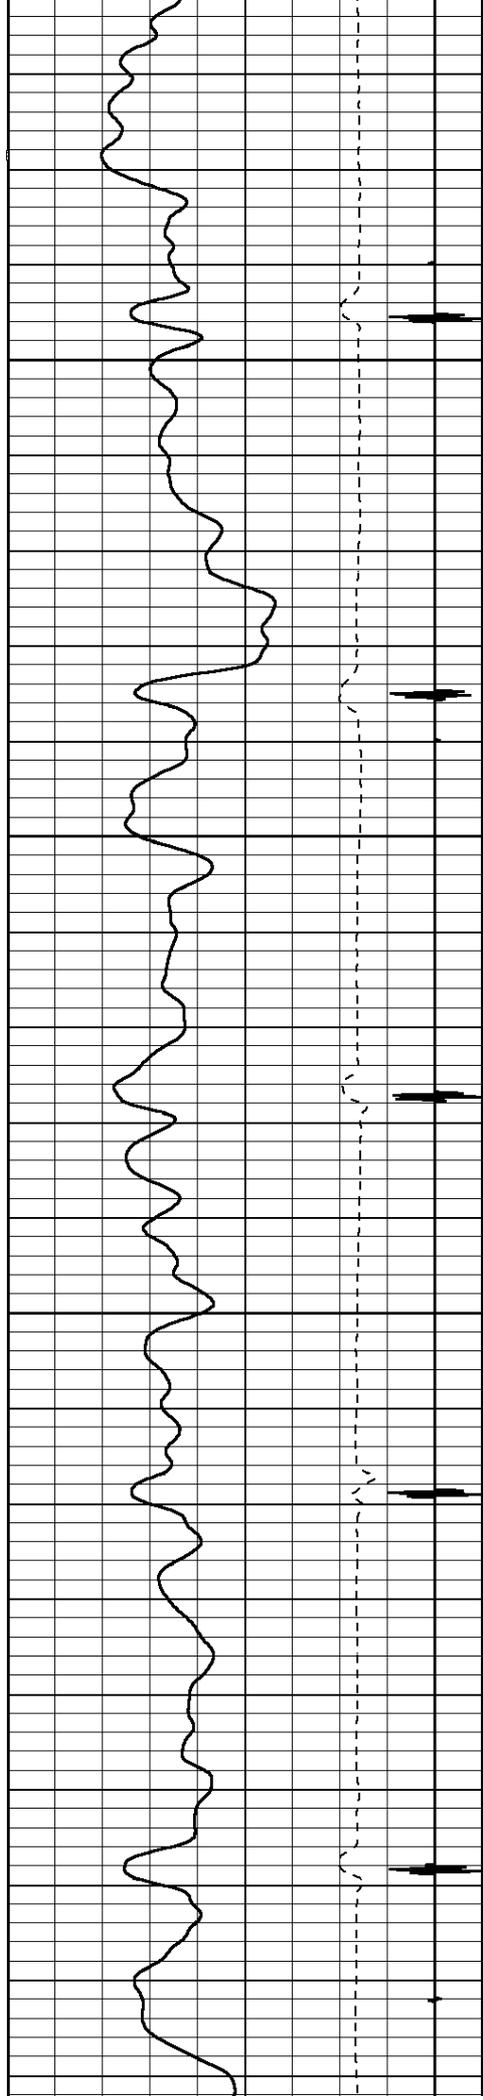

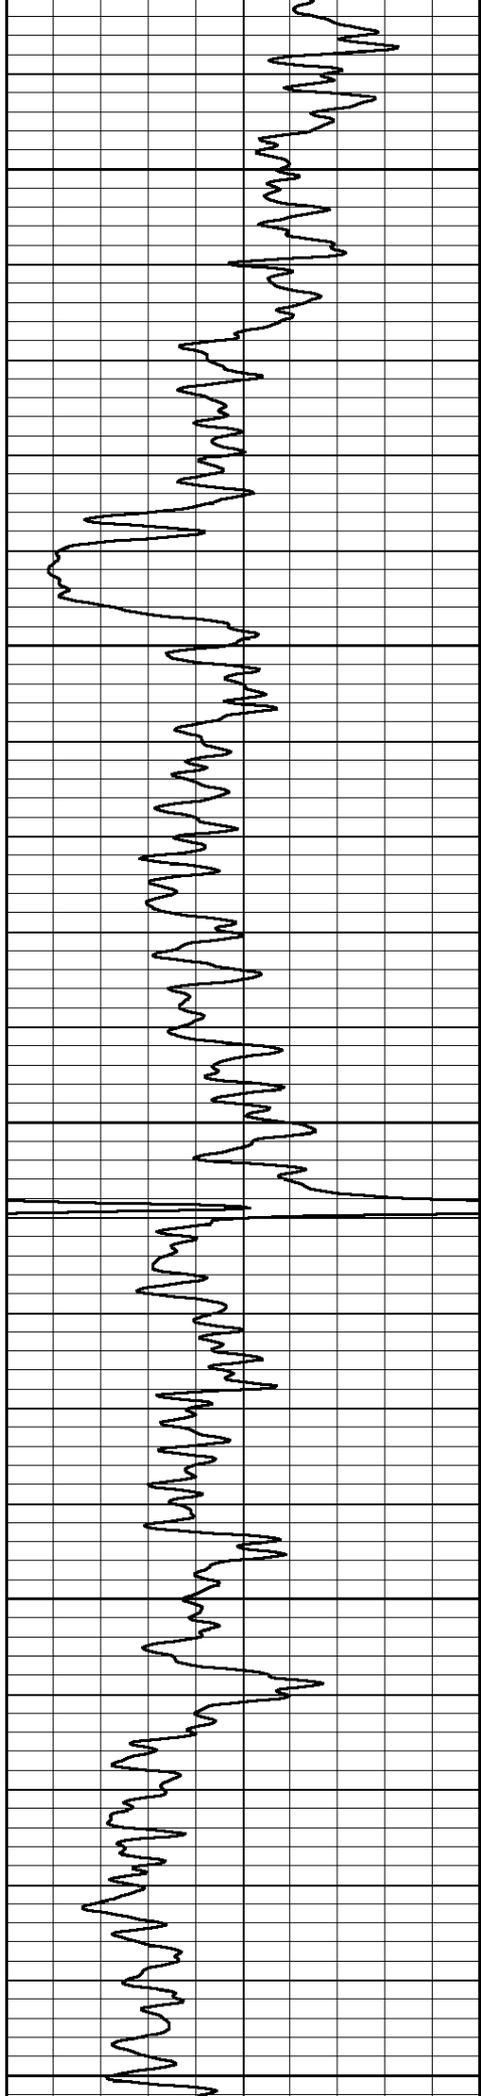



1300


1350

1400

1450

1500

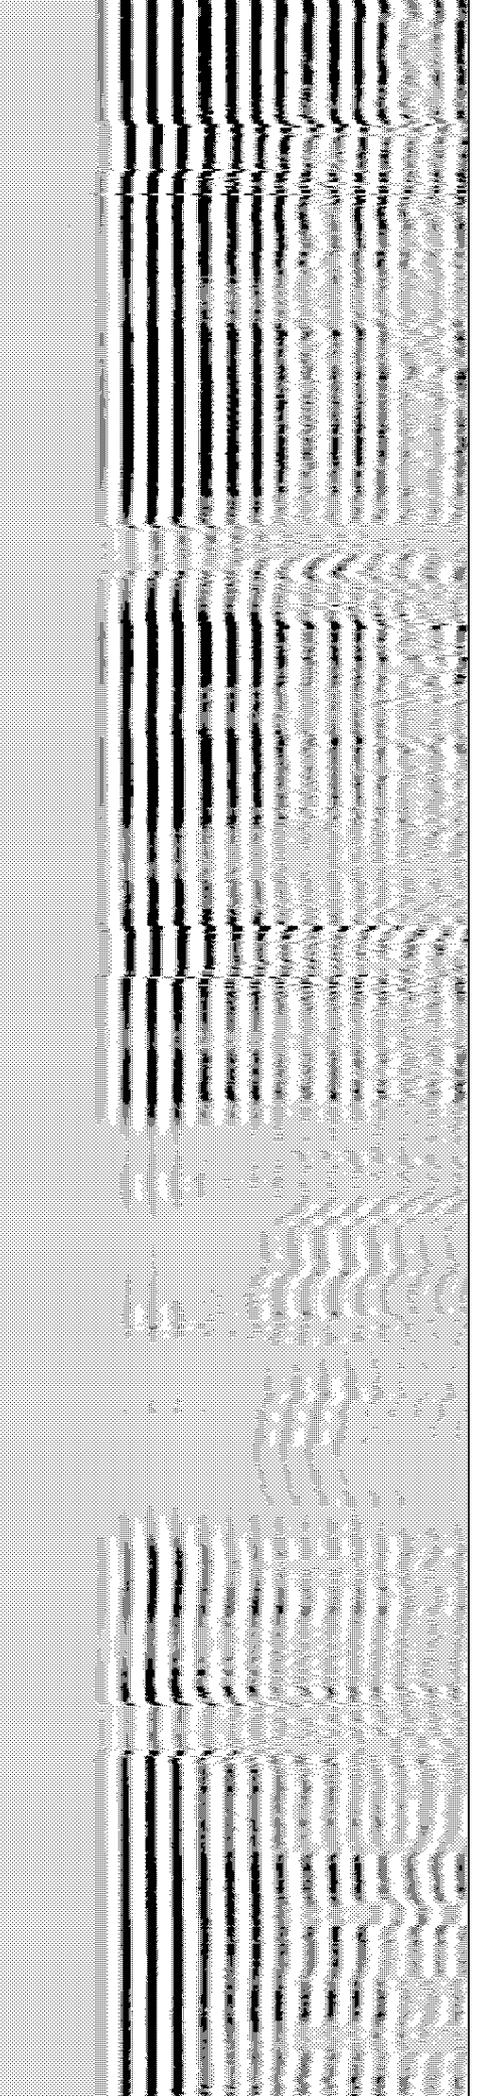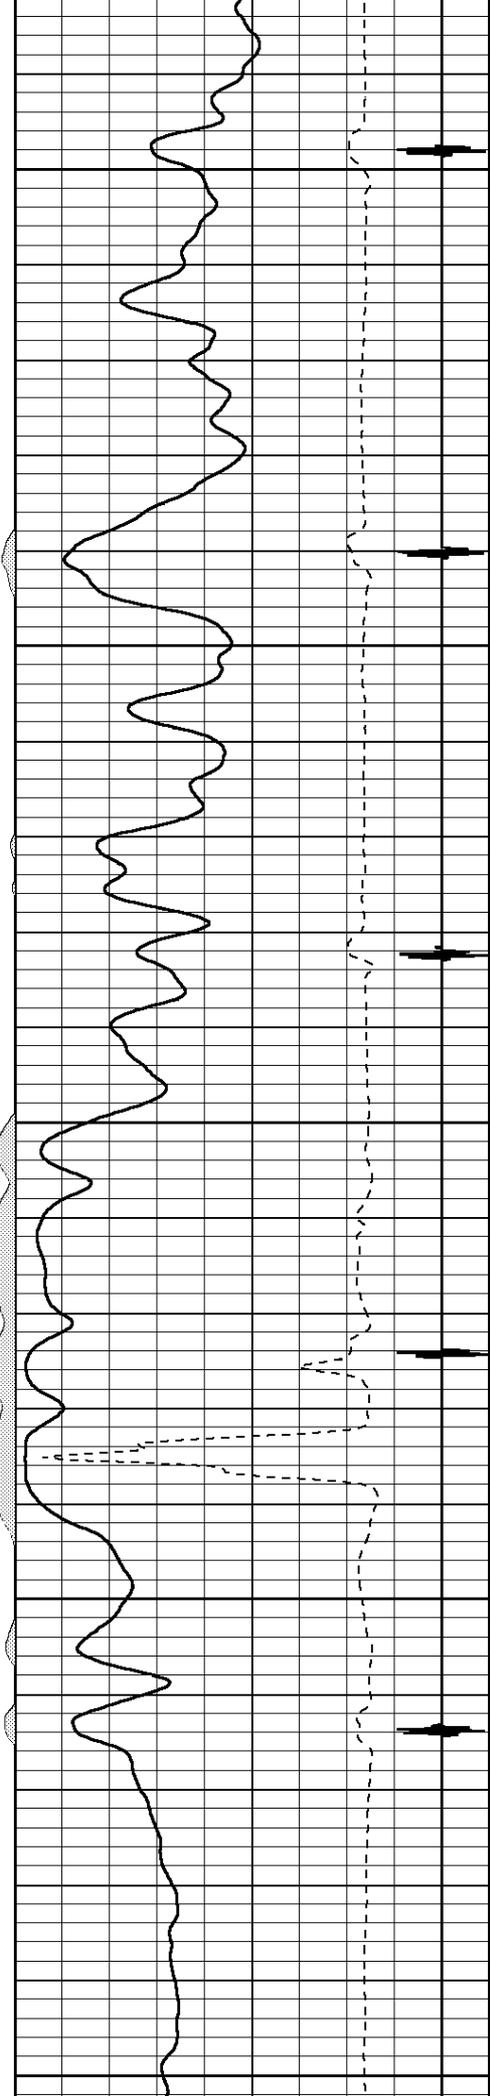


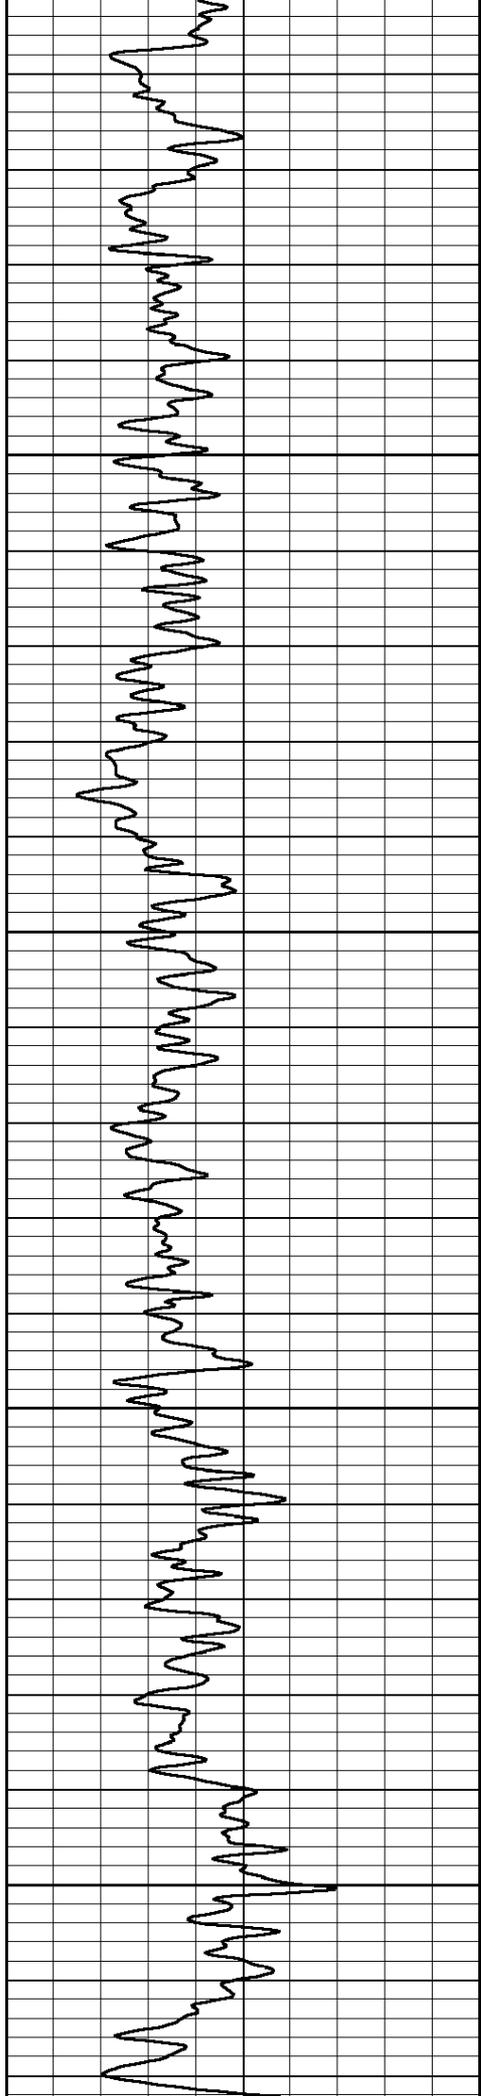



1550

1600

1650

1700

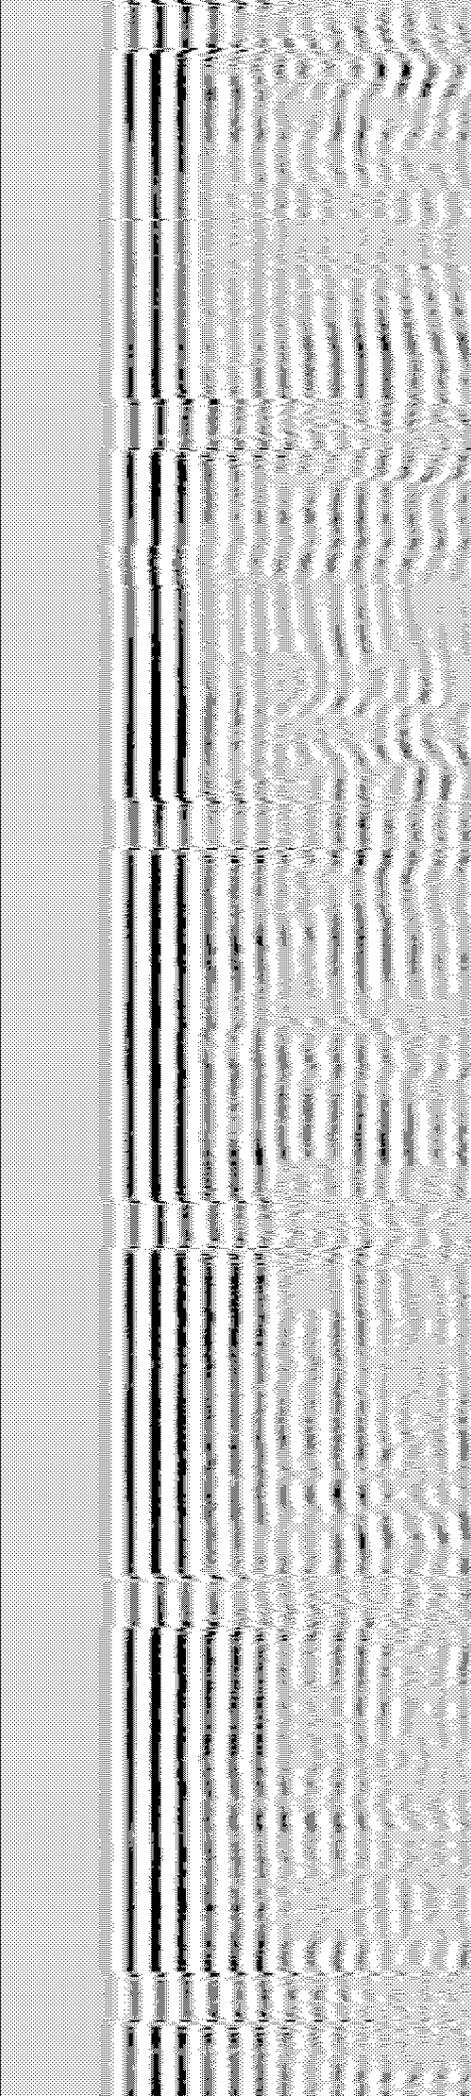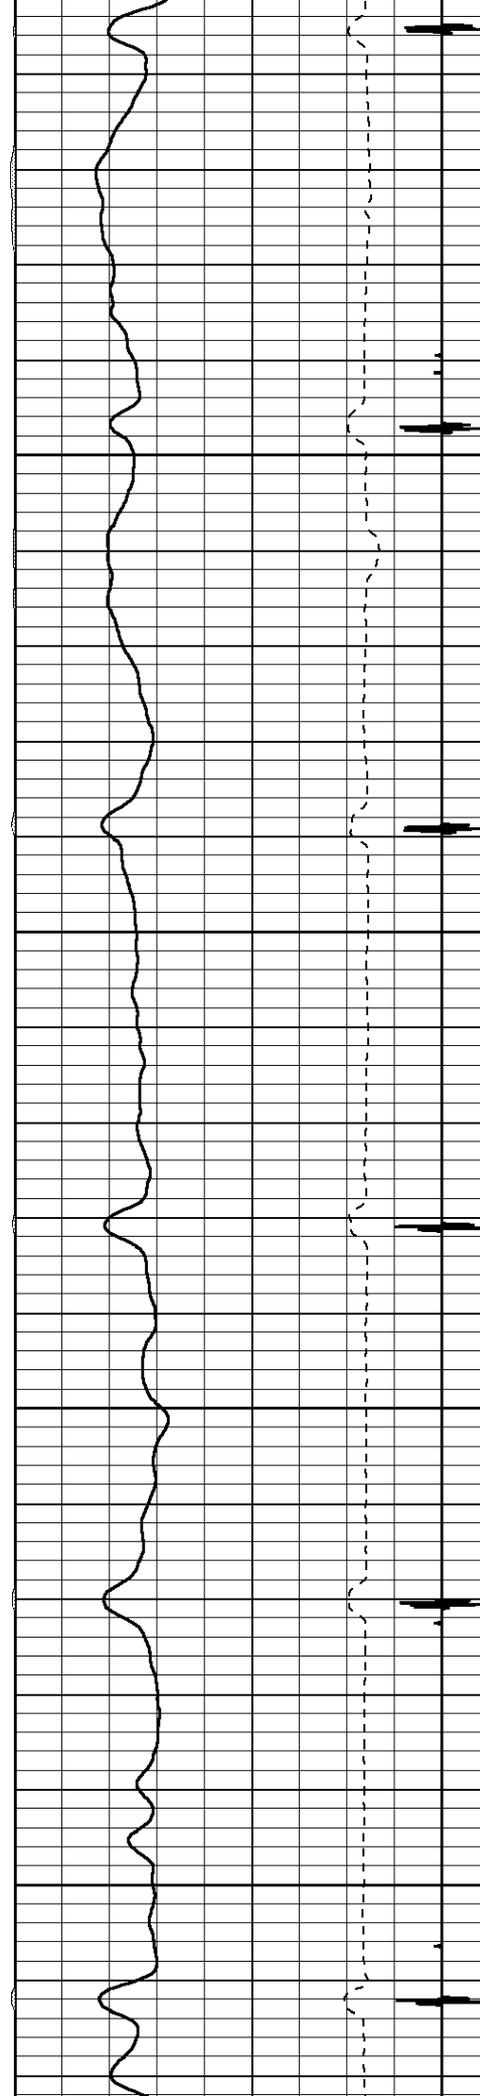


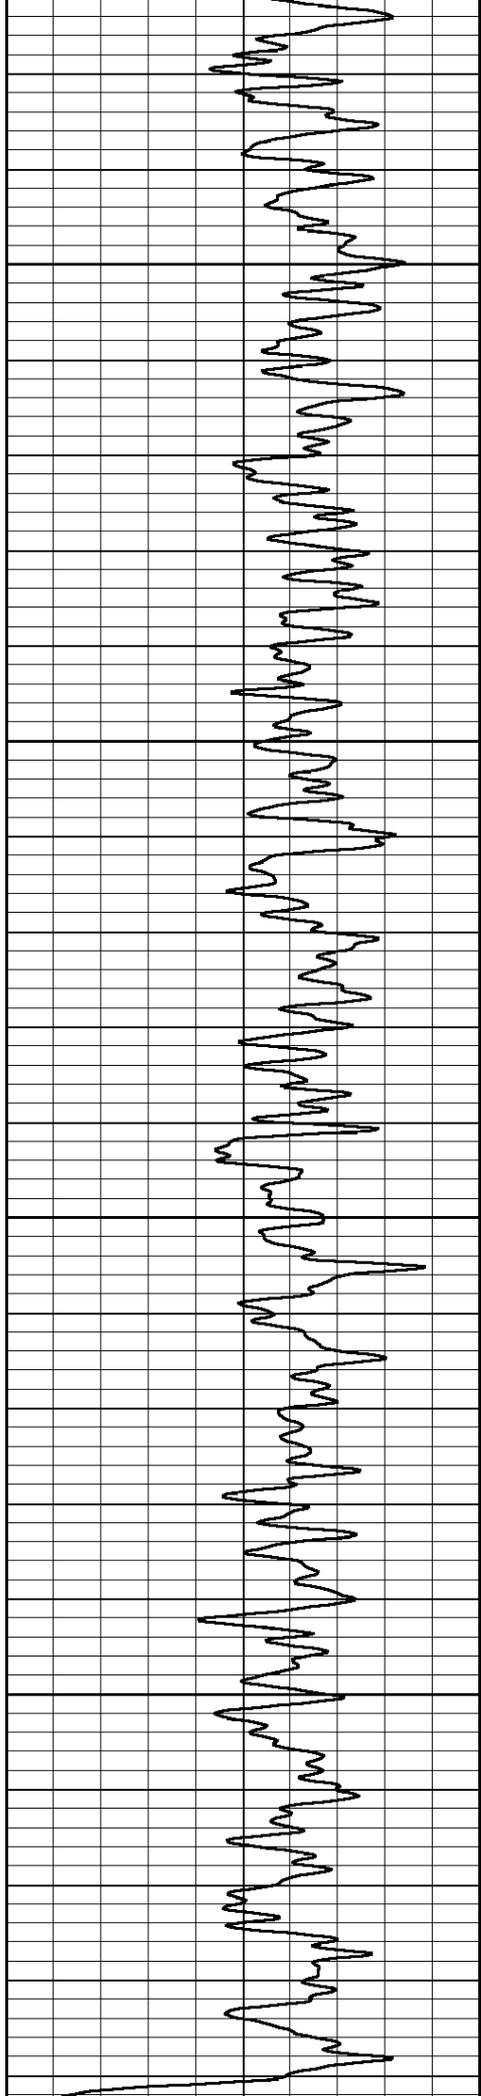



1750

1800

1850

1900

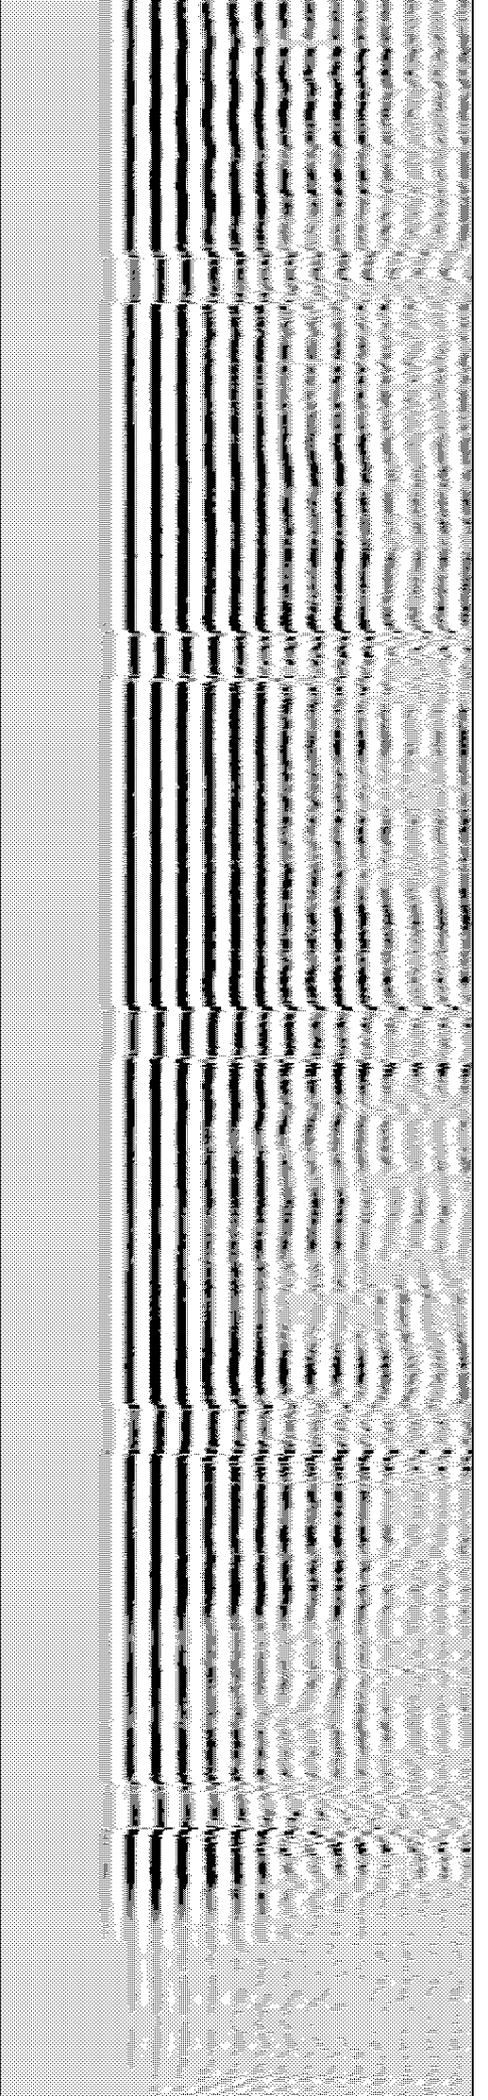
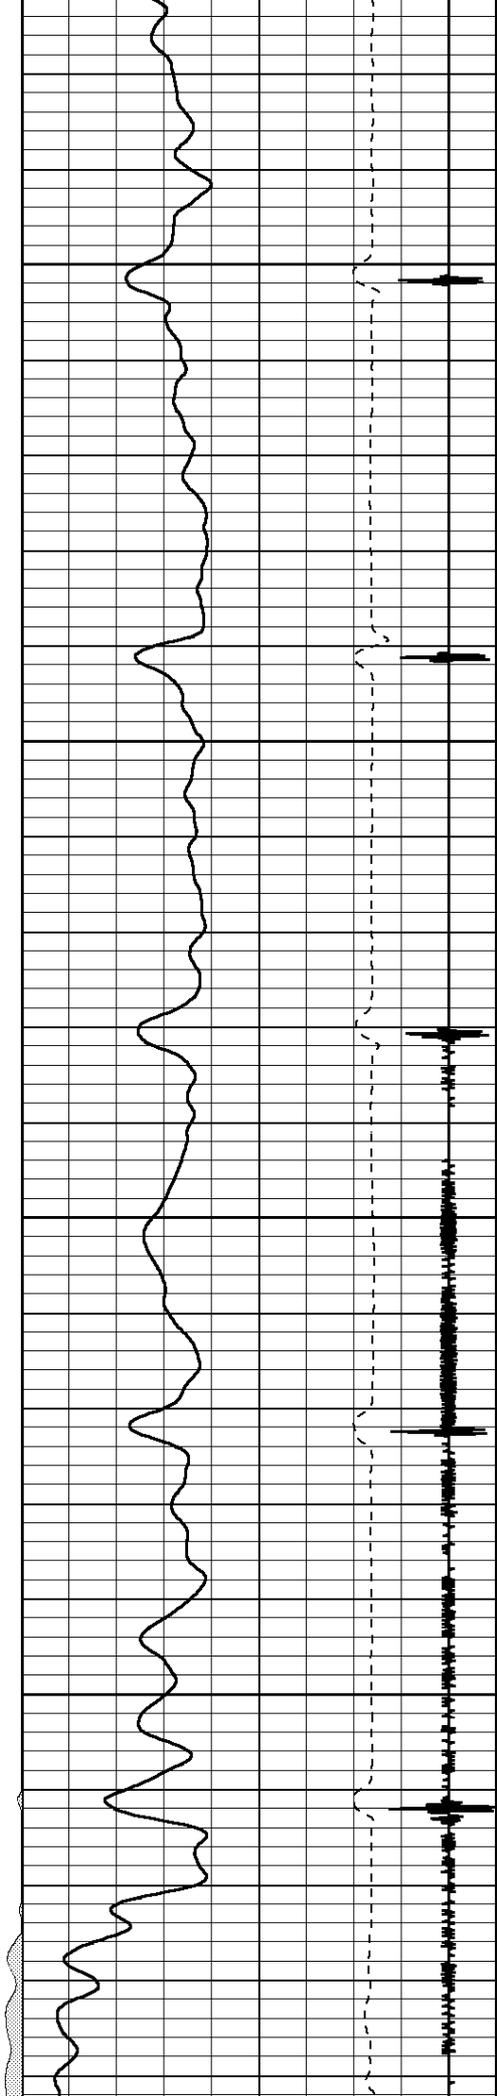


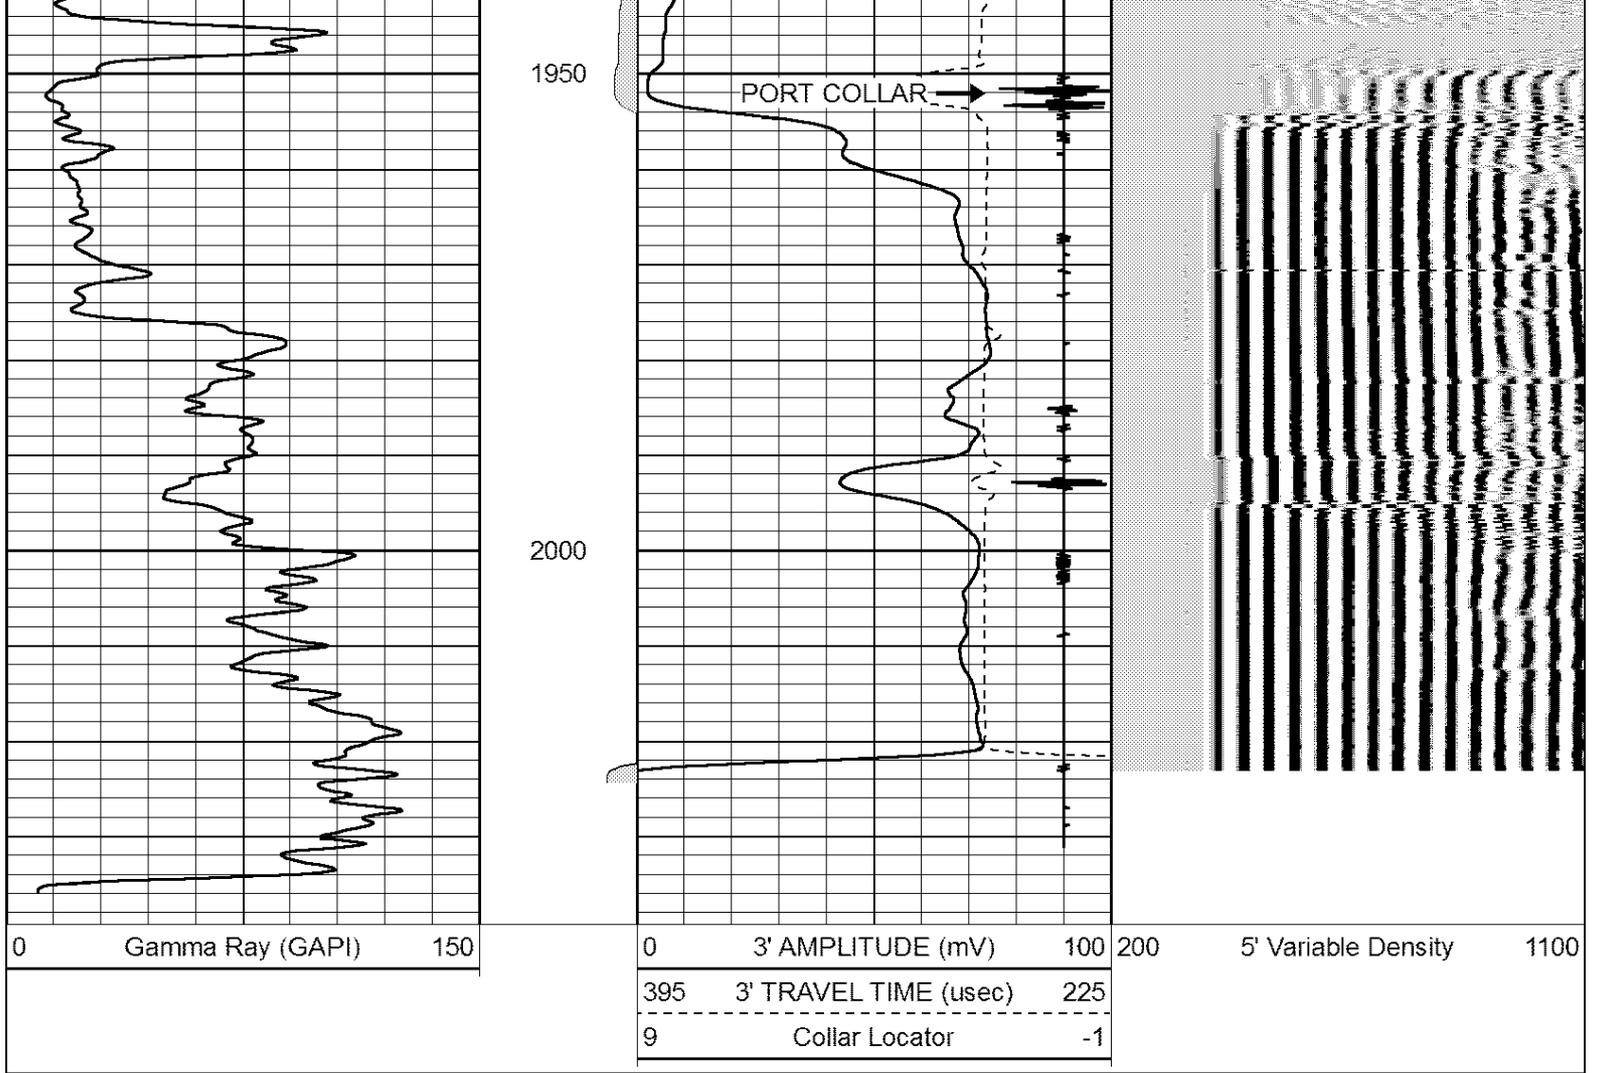


Perf-Tech
Wireline Services

MAIN PASS

Database File: june162208.db
 Dataset Pathname: pass4
 Presentation Format: 3x5
 Dataset Creation: Thu Jun 16 08:50:24 2022 by Log SCH 120126
 Charted by: Depth in Feet scaled 1:240

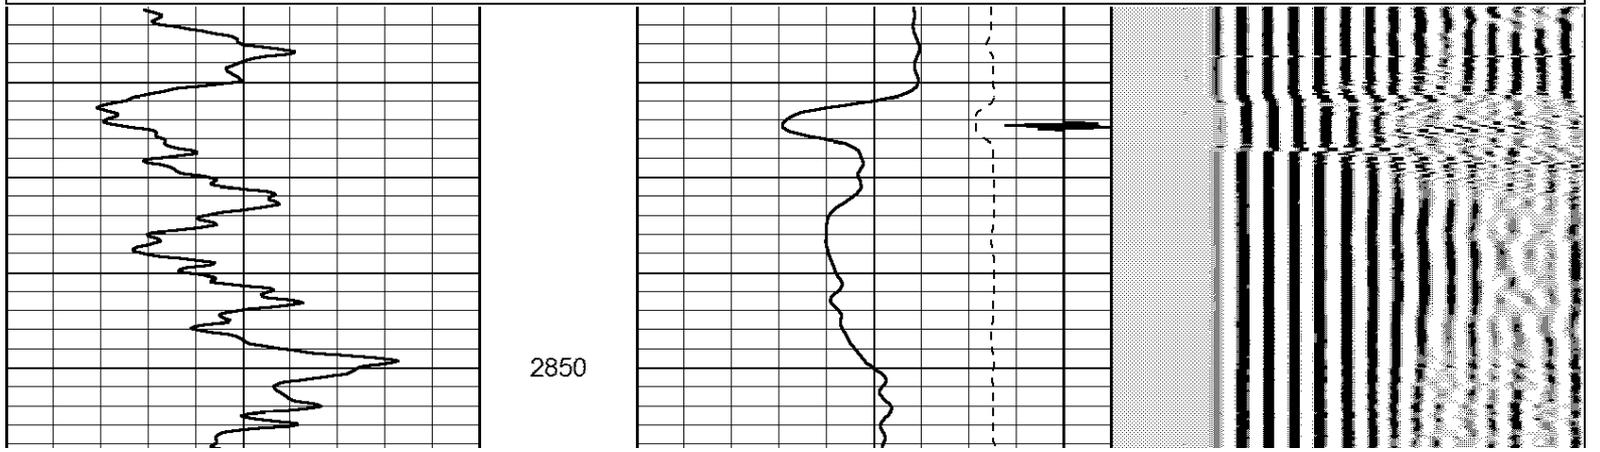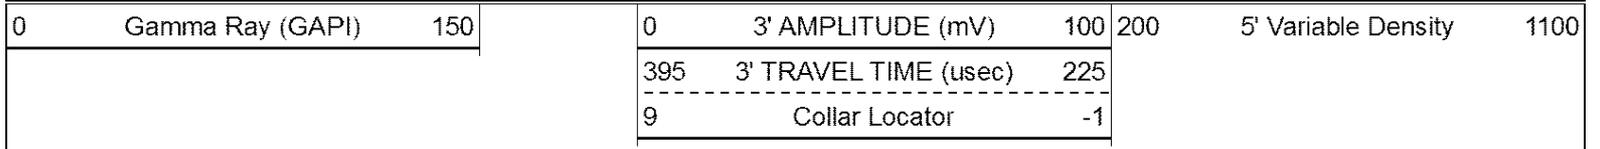

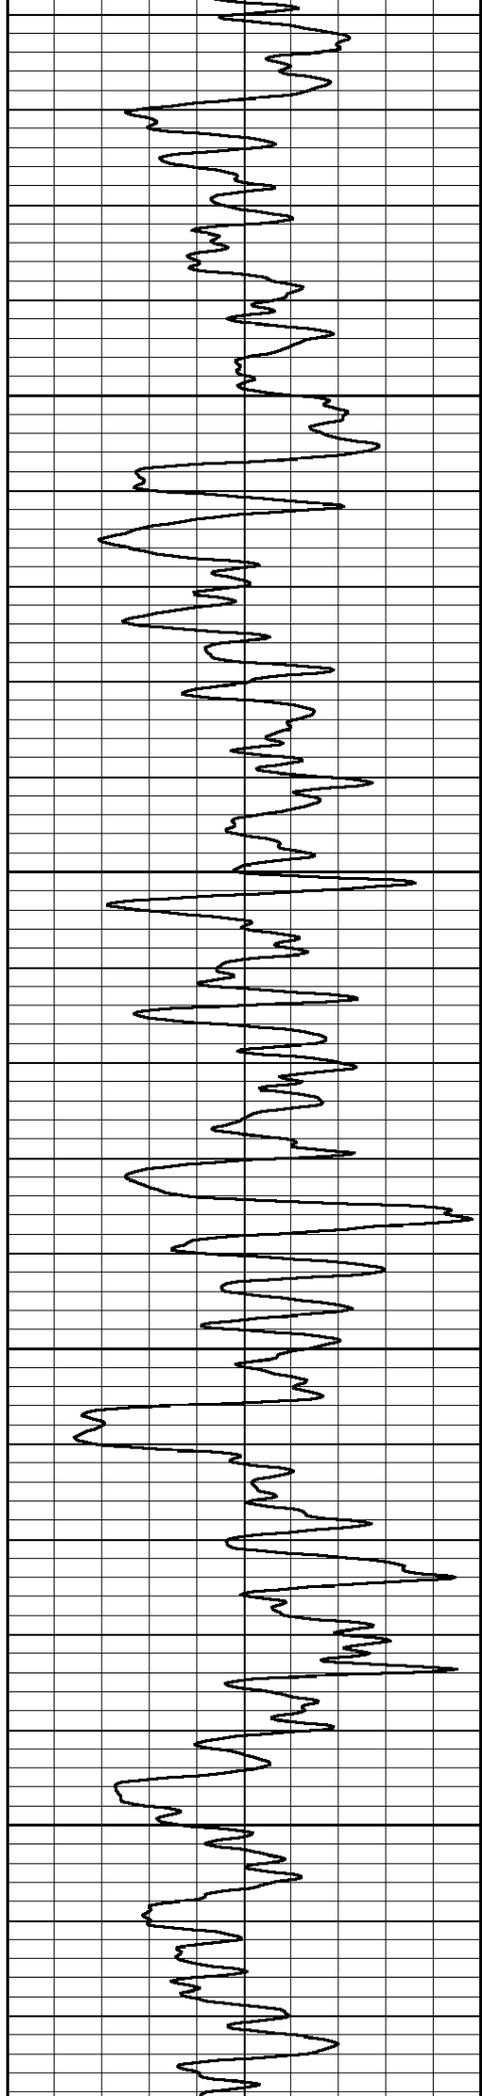



2900


2950

3000

3050

Top of Cement

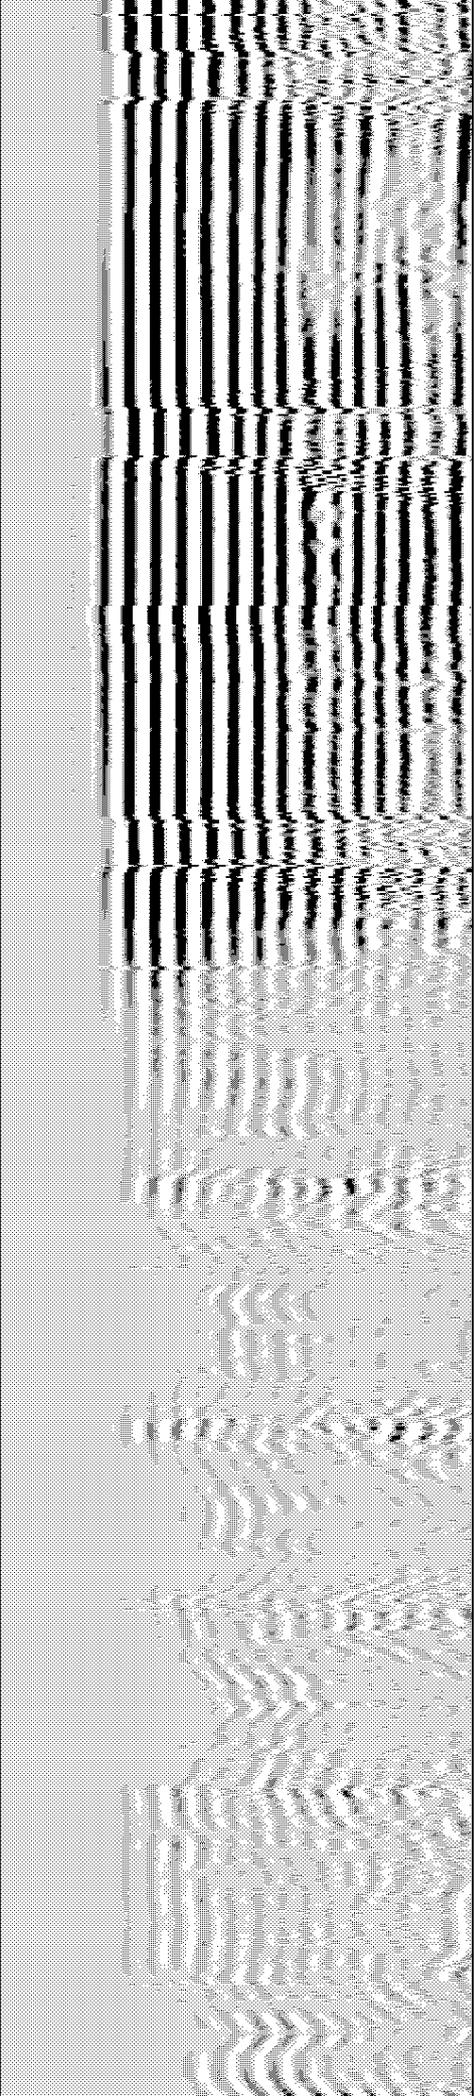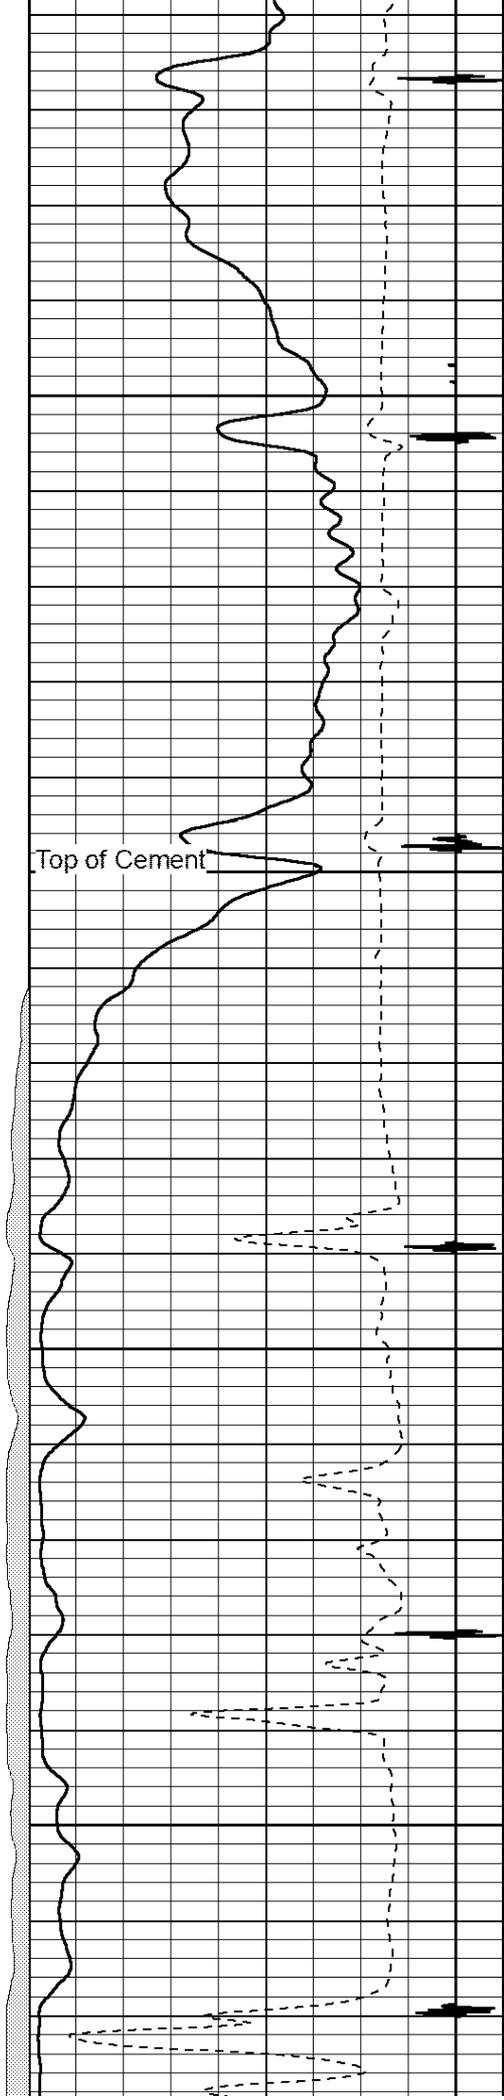


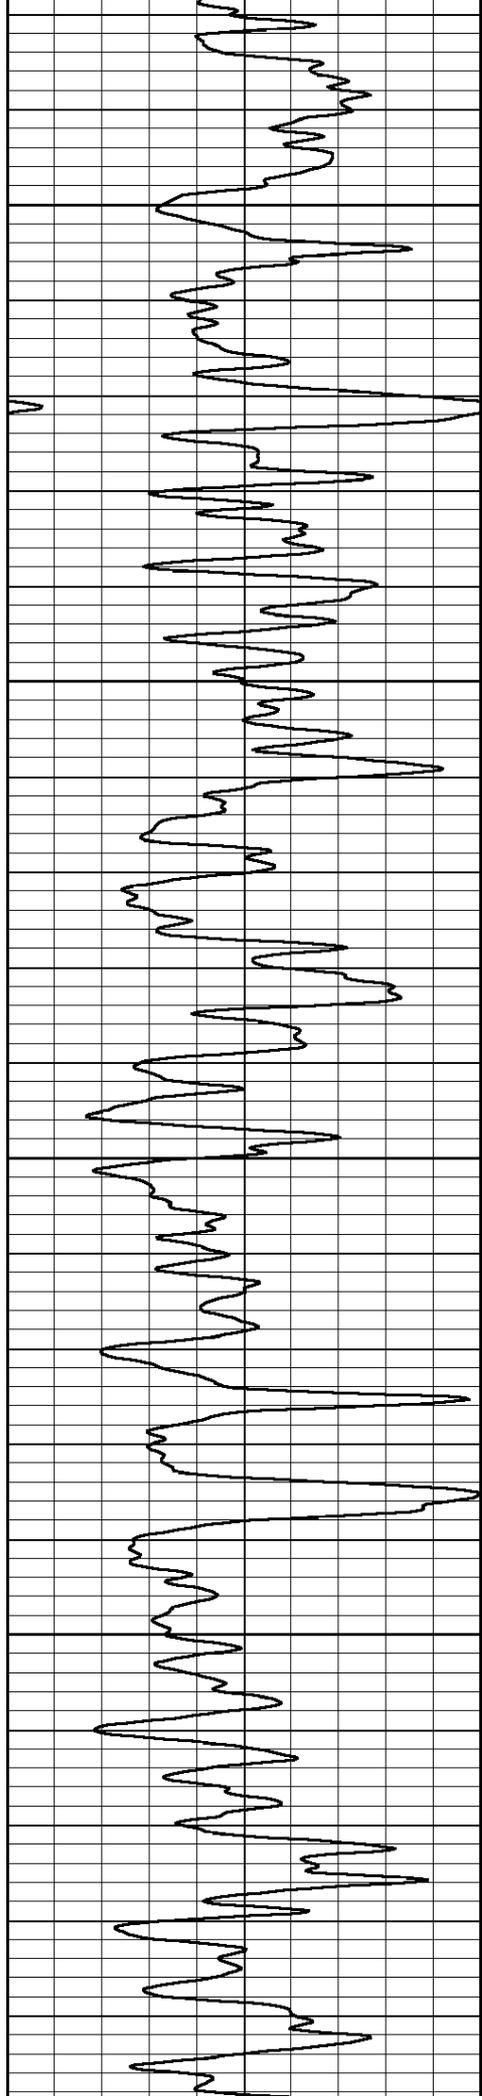



3100

3150

3200

3250

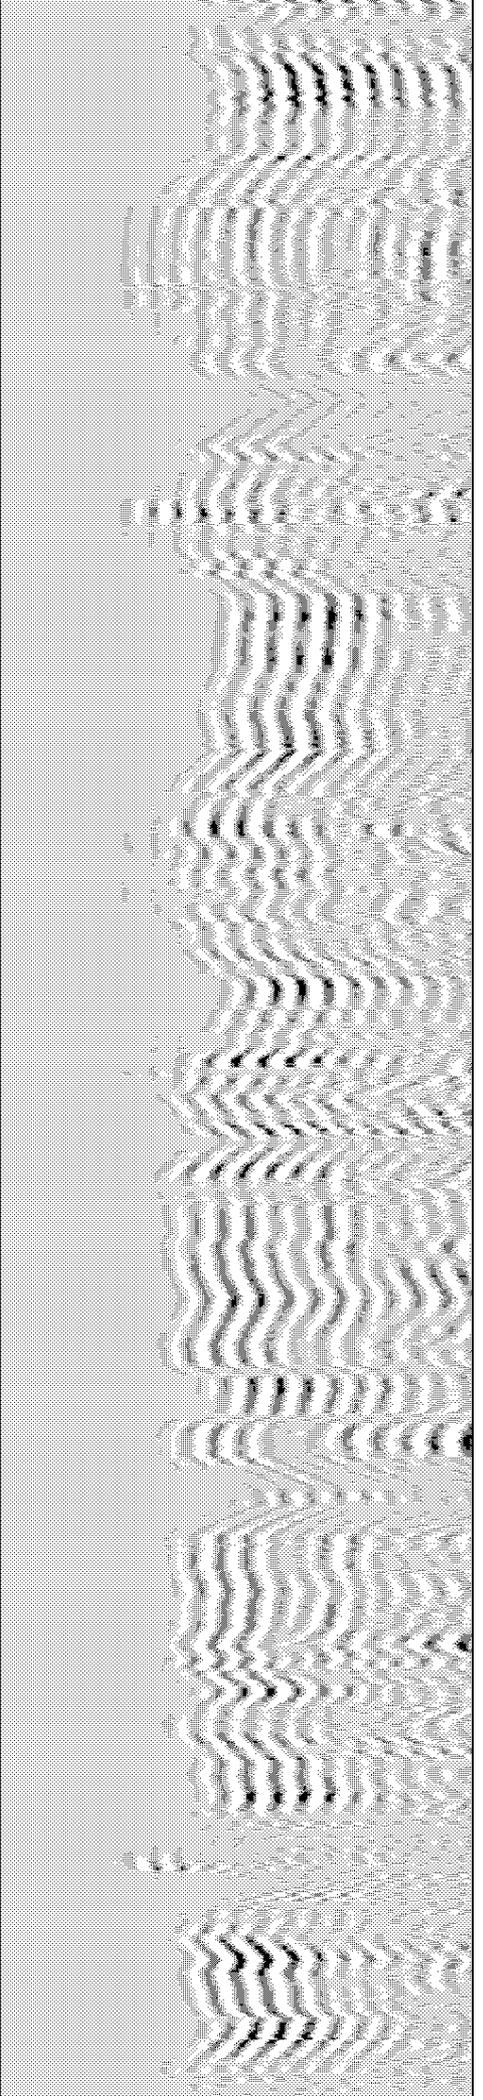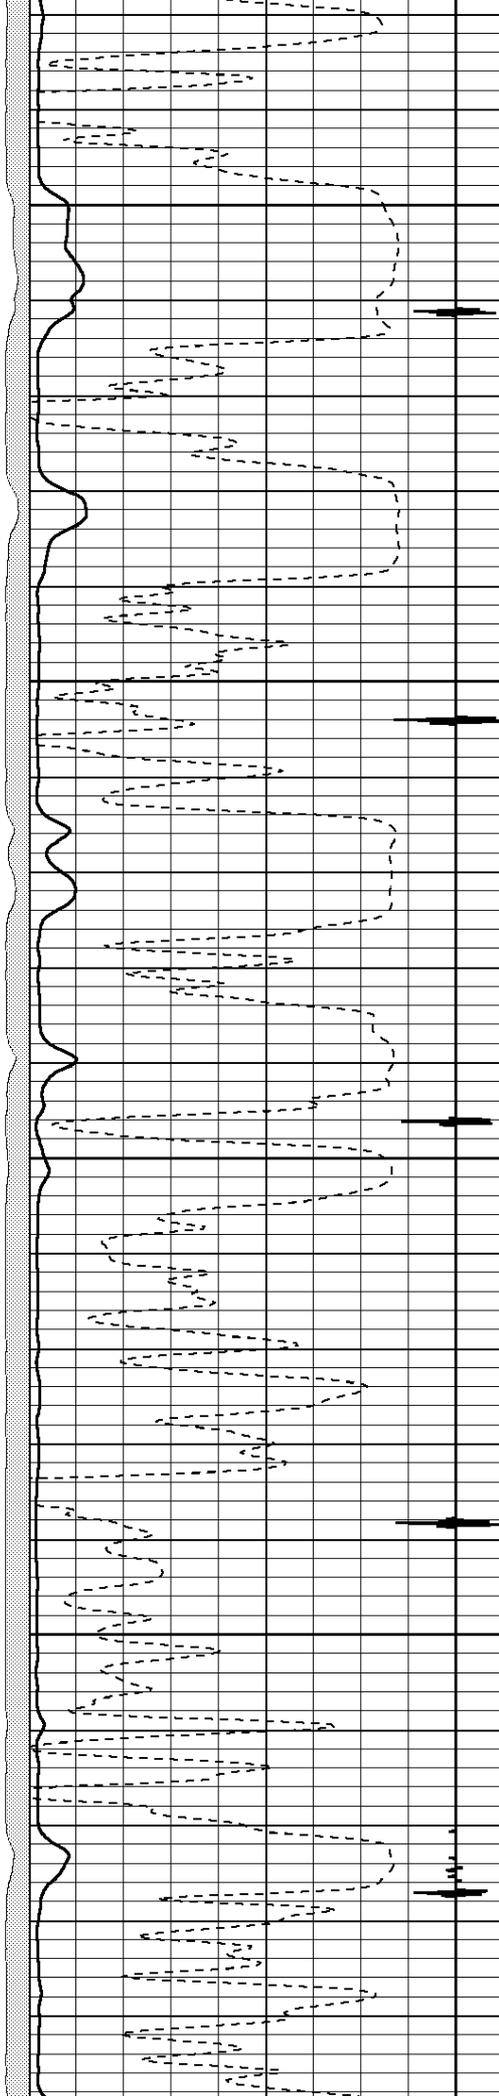

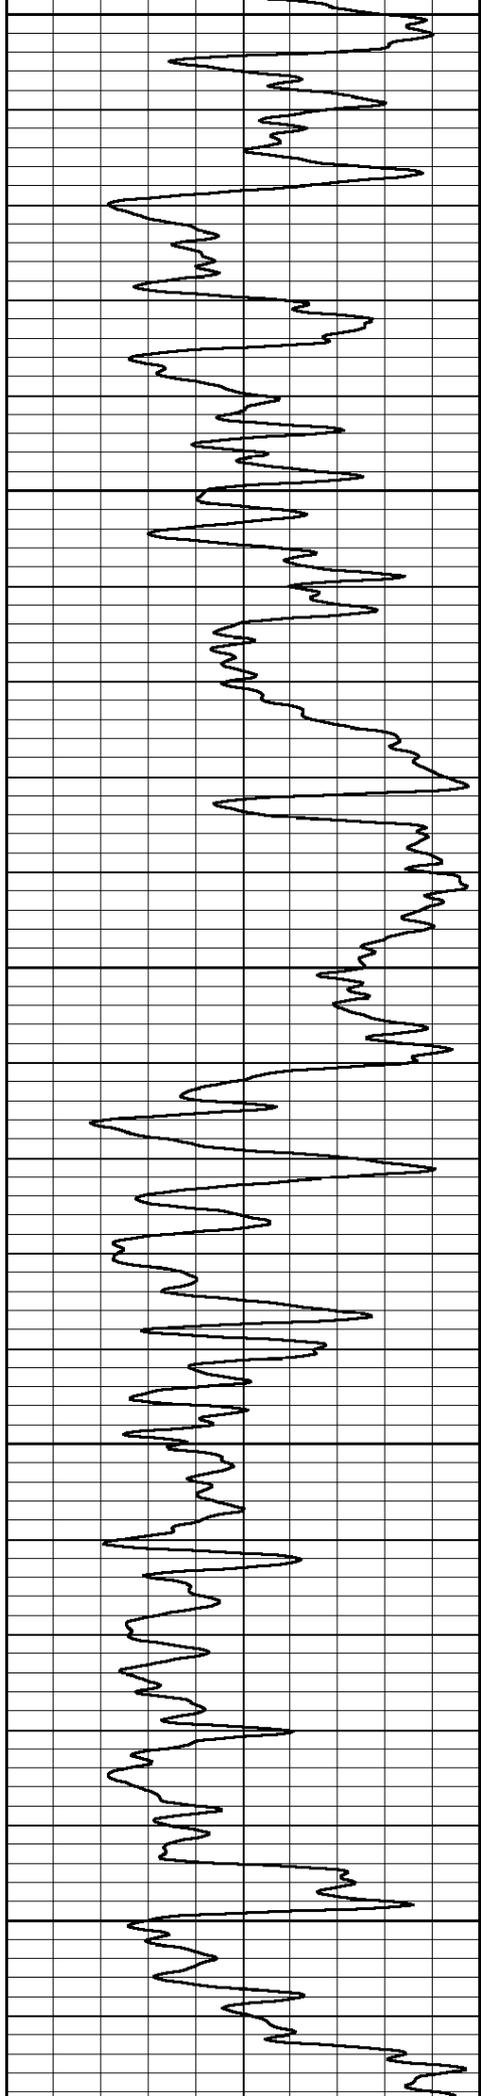



3300


3350

3400

3450

3500

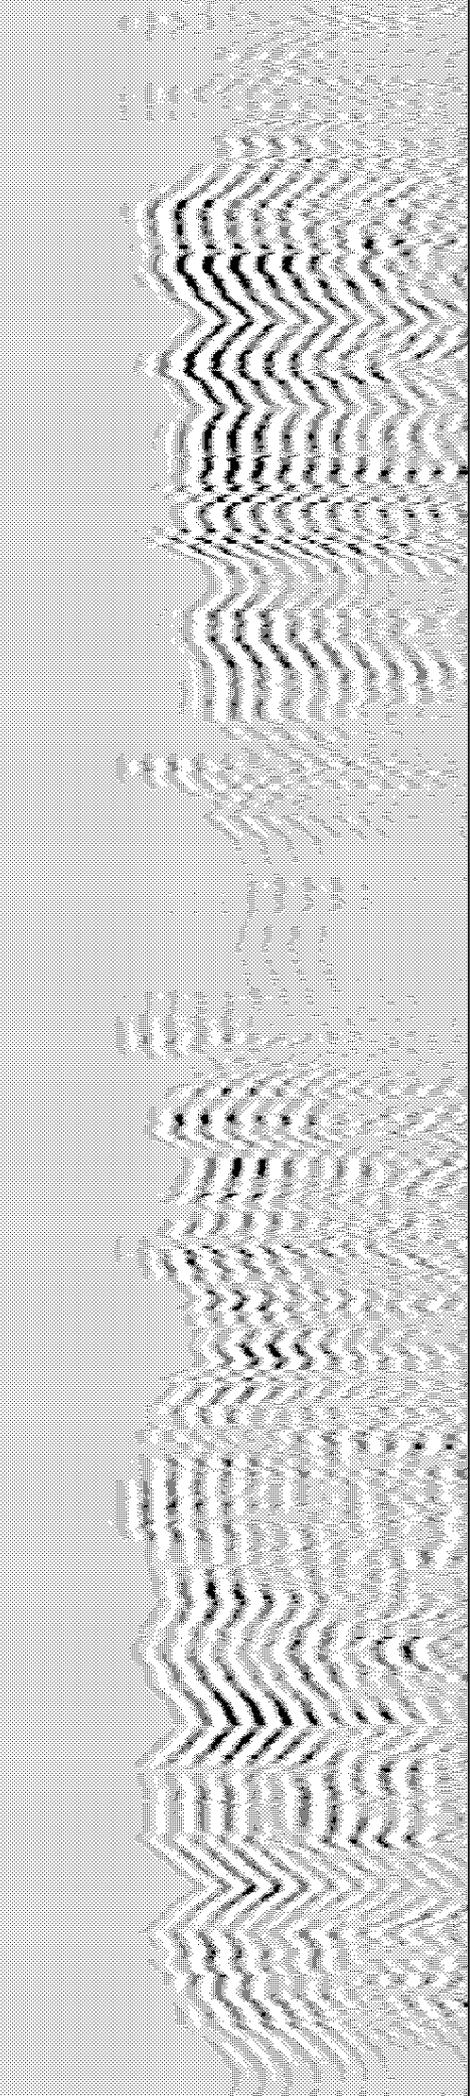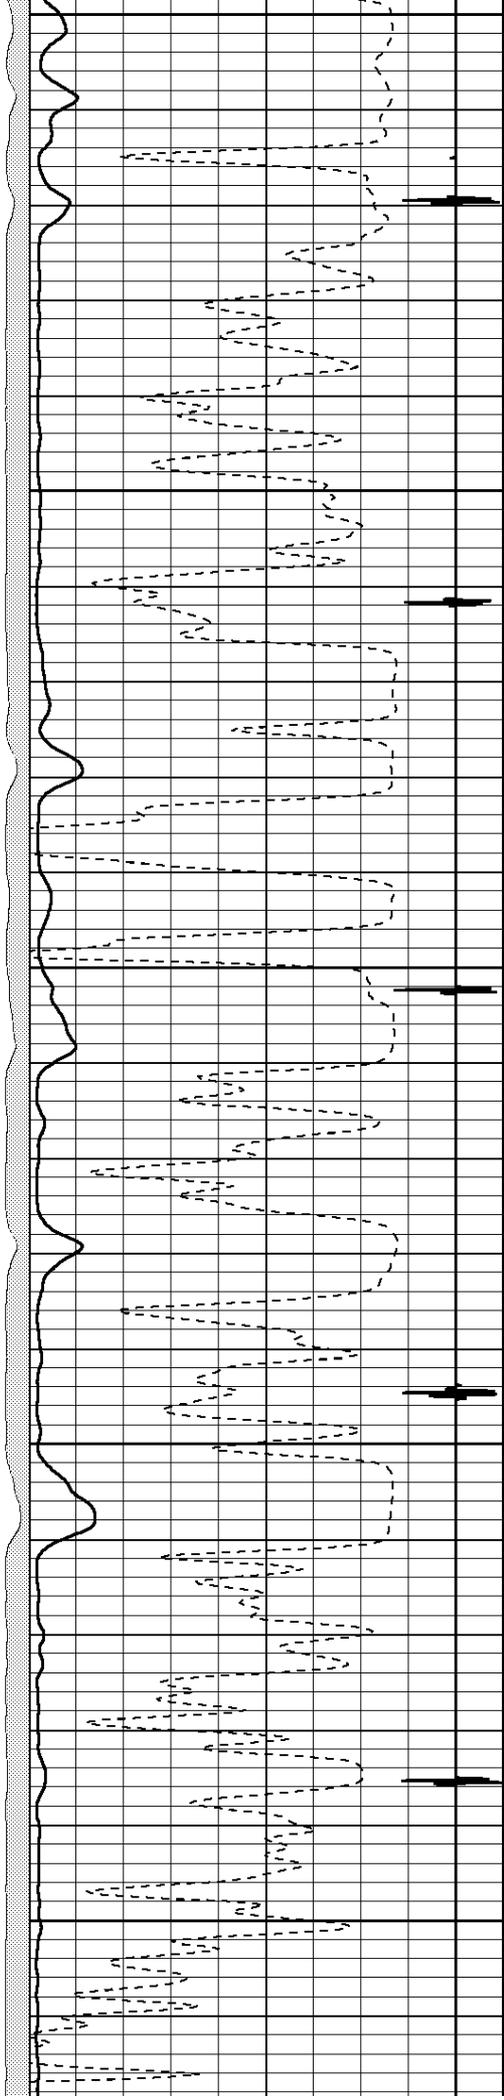


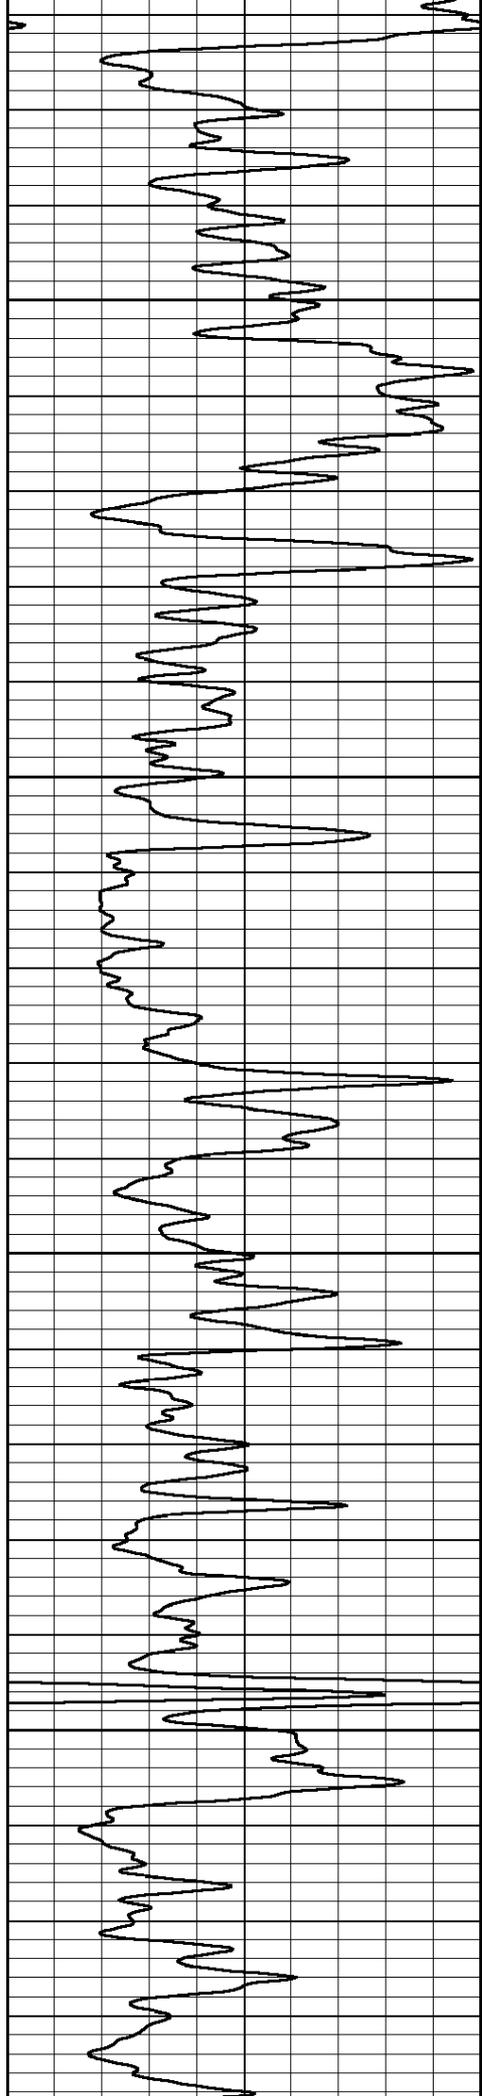



3550

3600

3650

3700

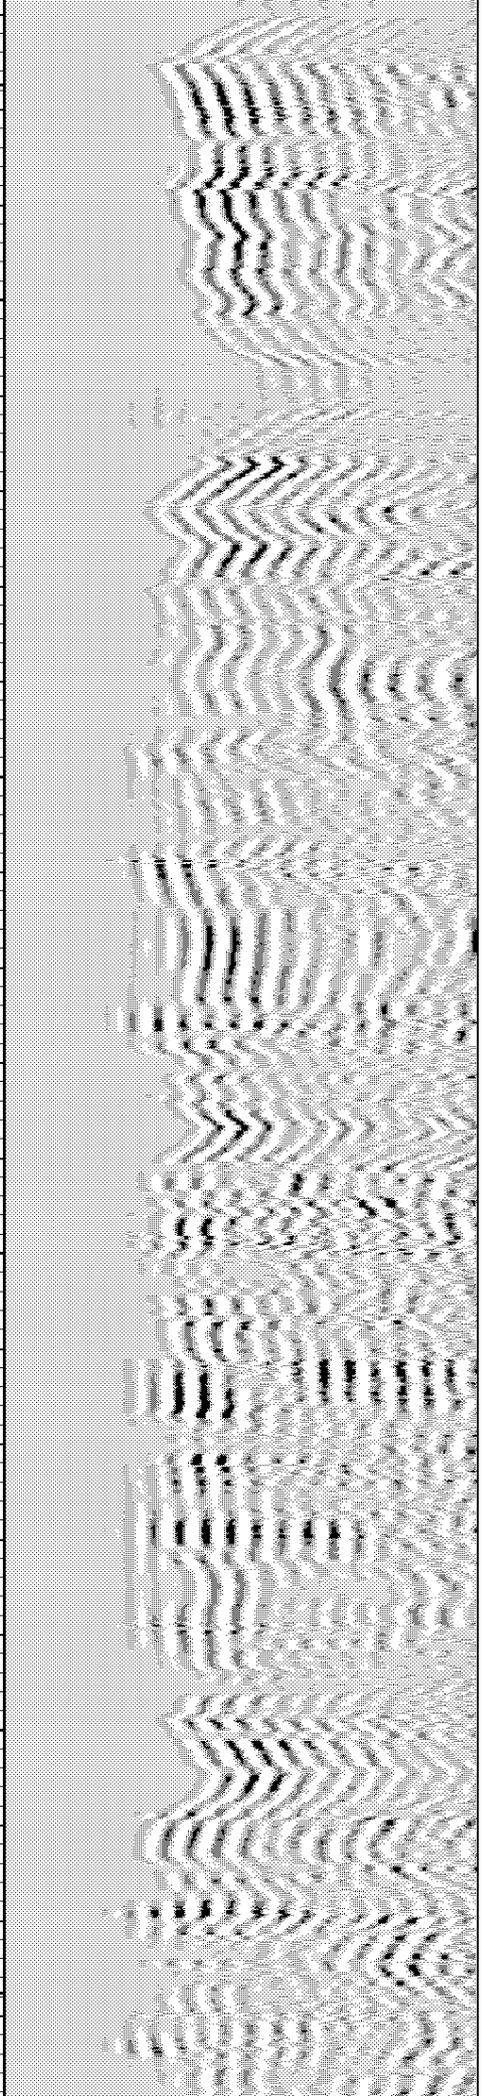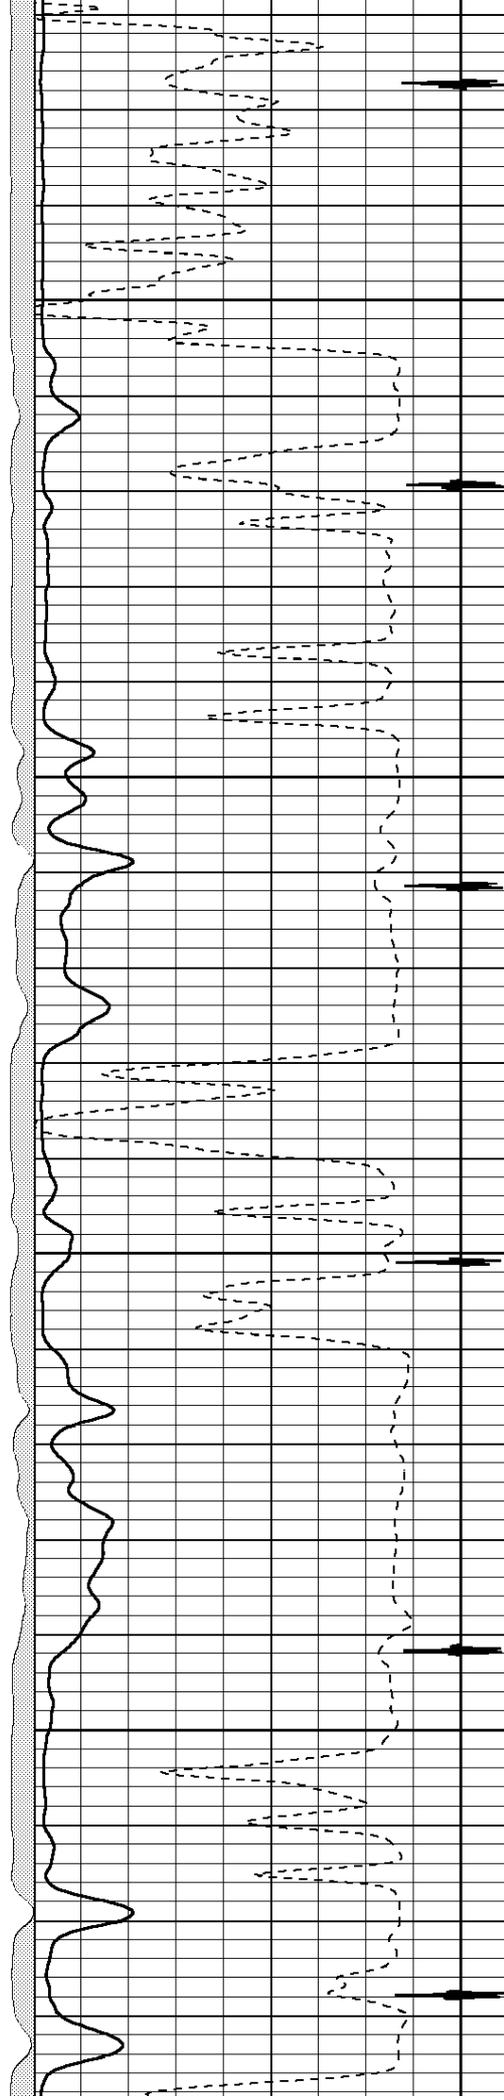

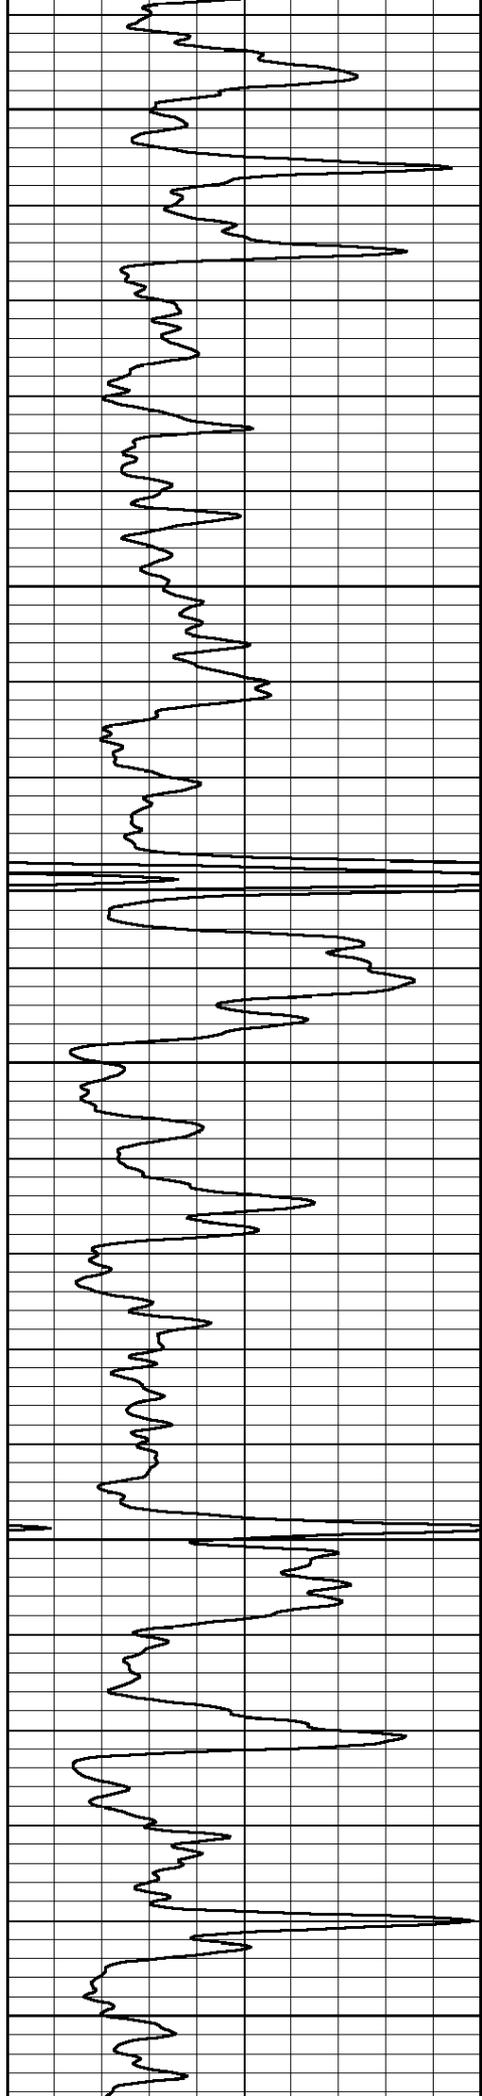



3750


3800




3850


3900

3950

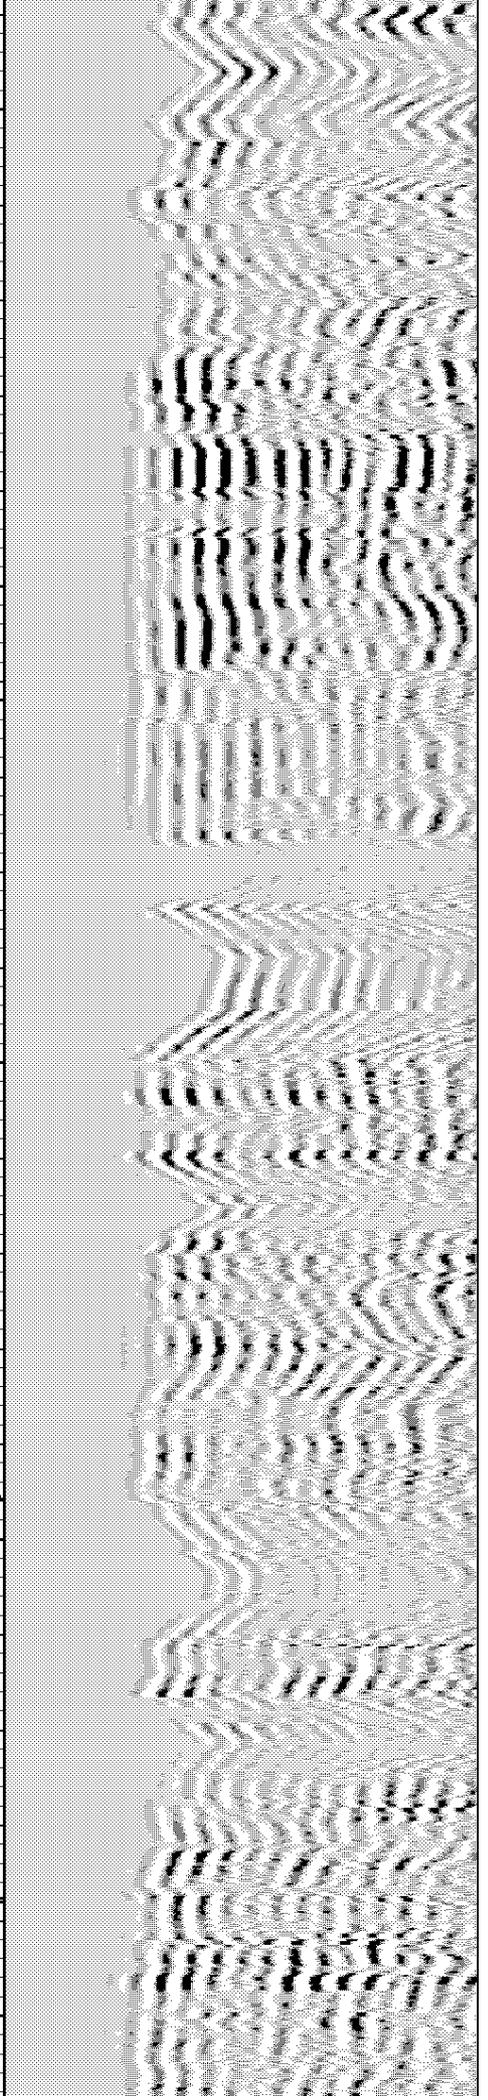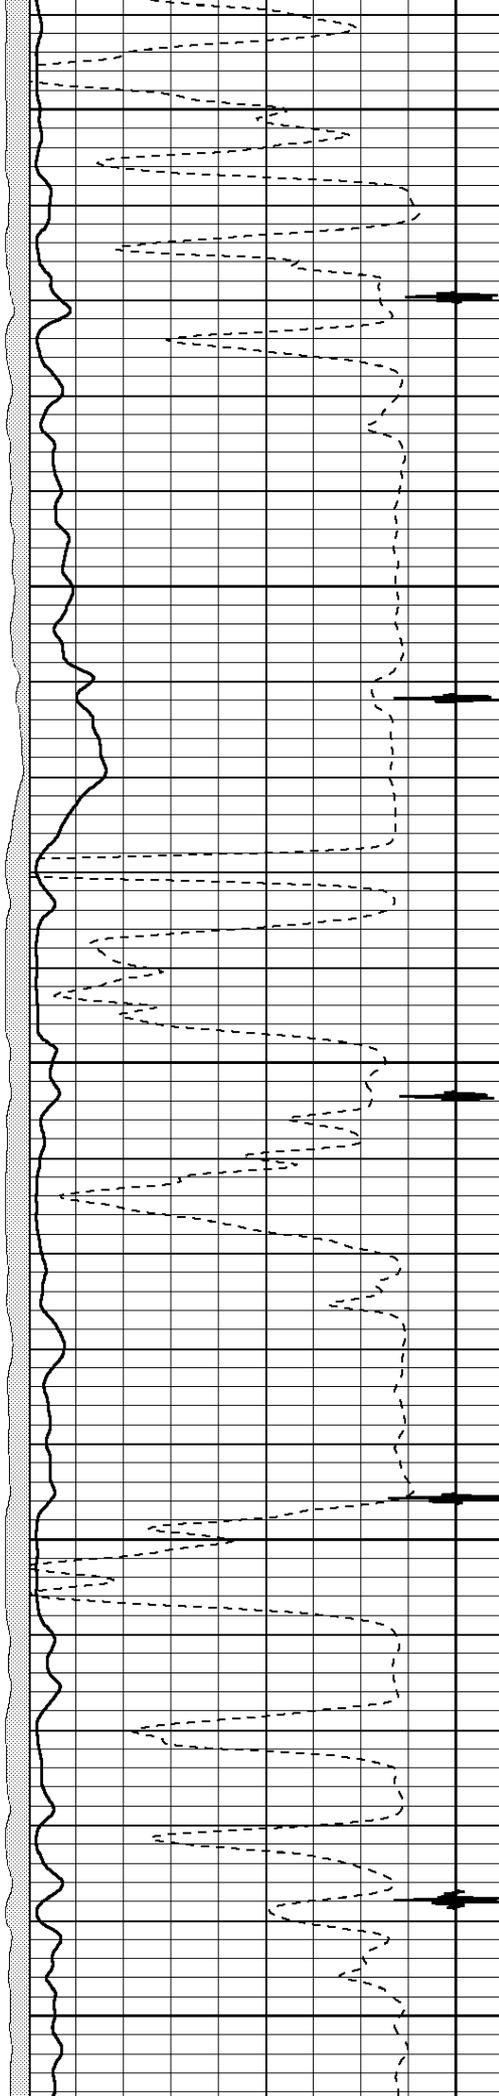

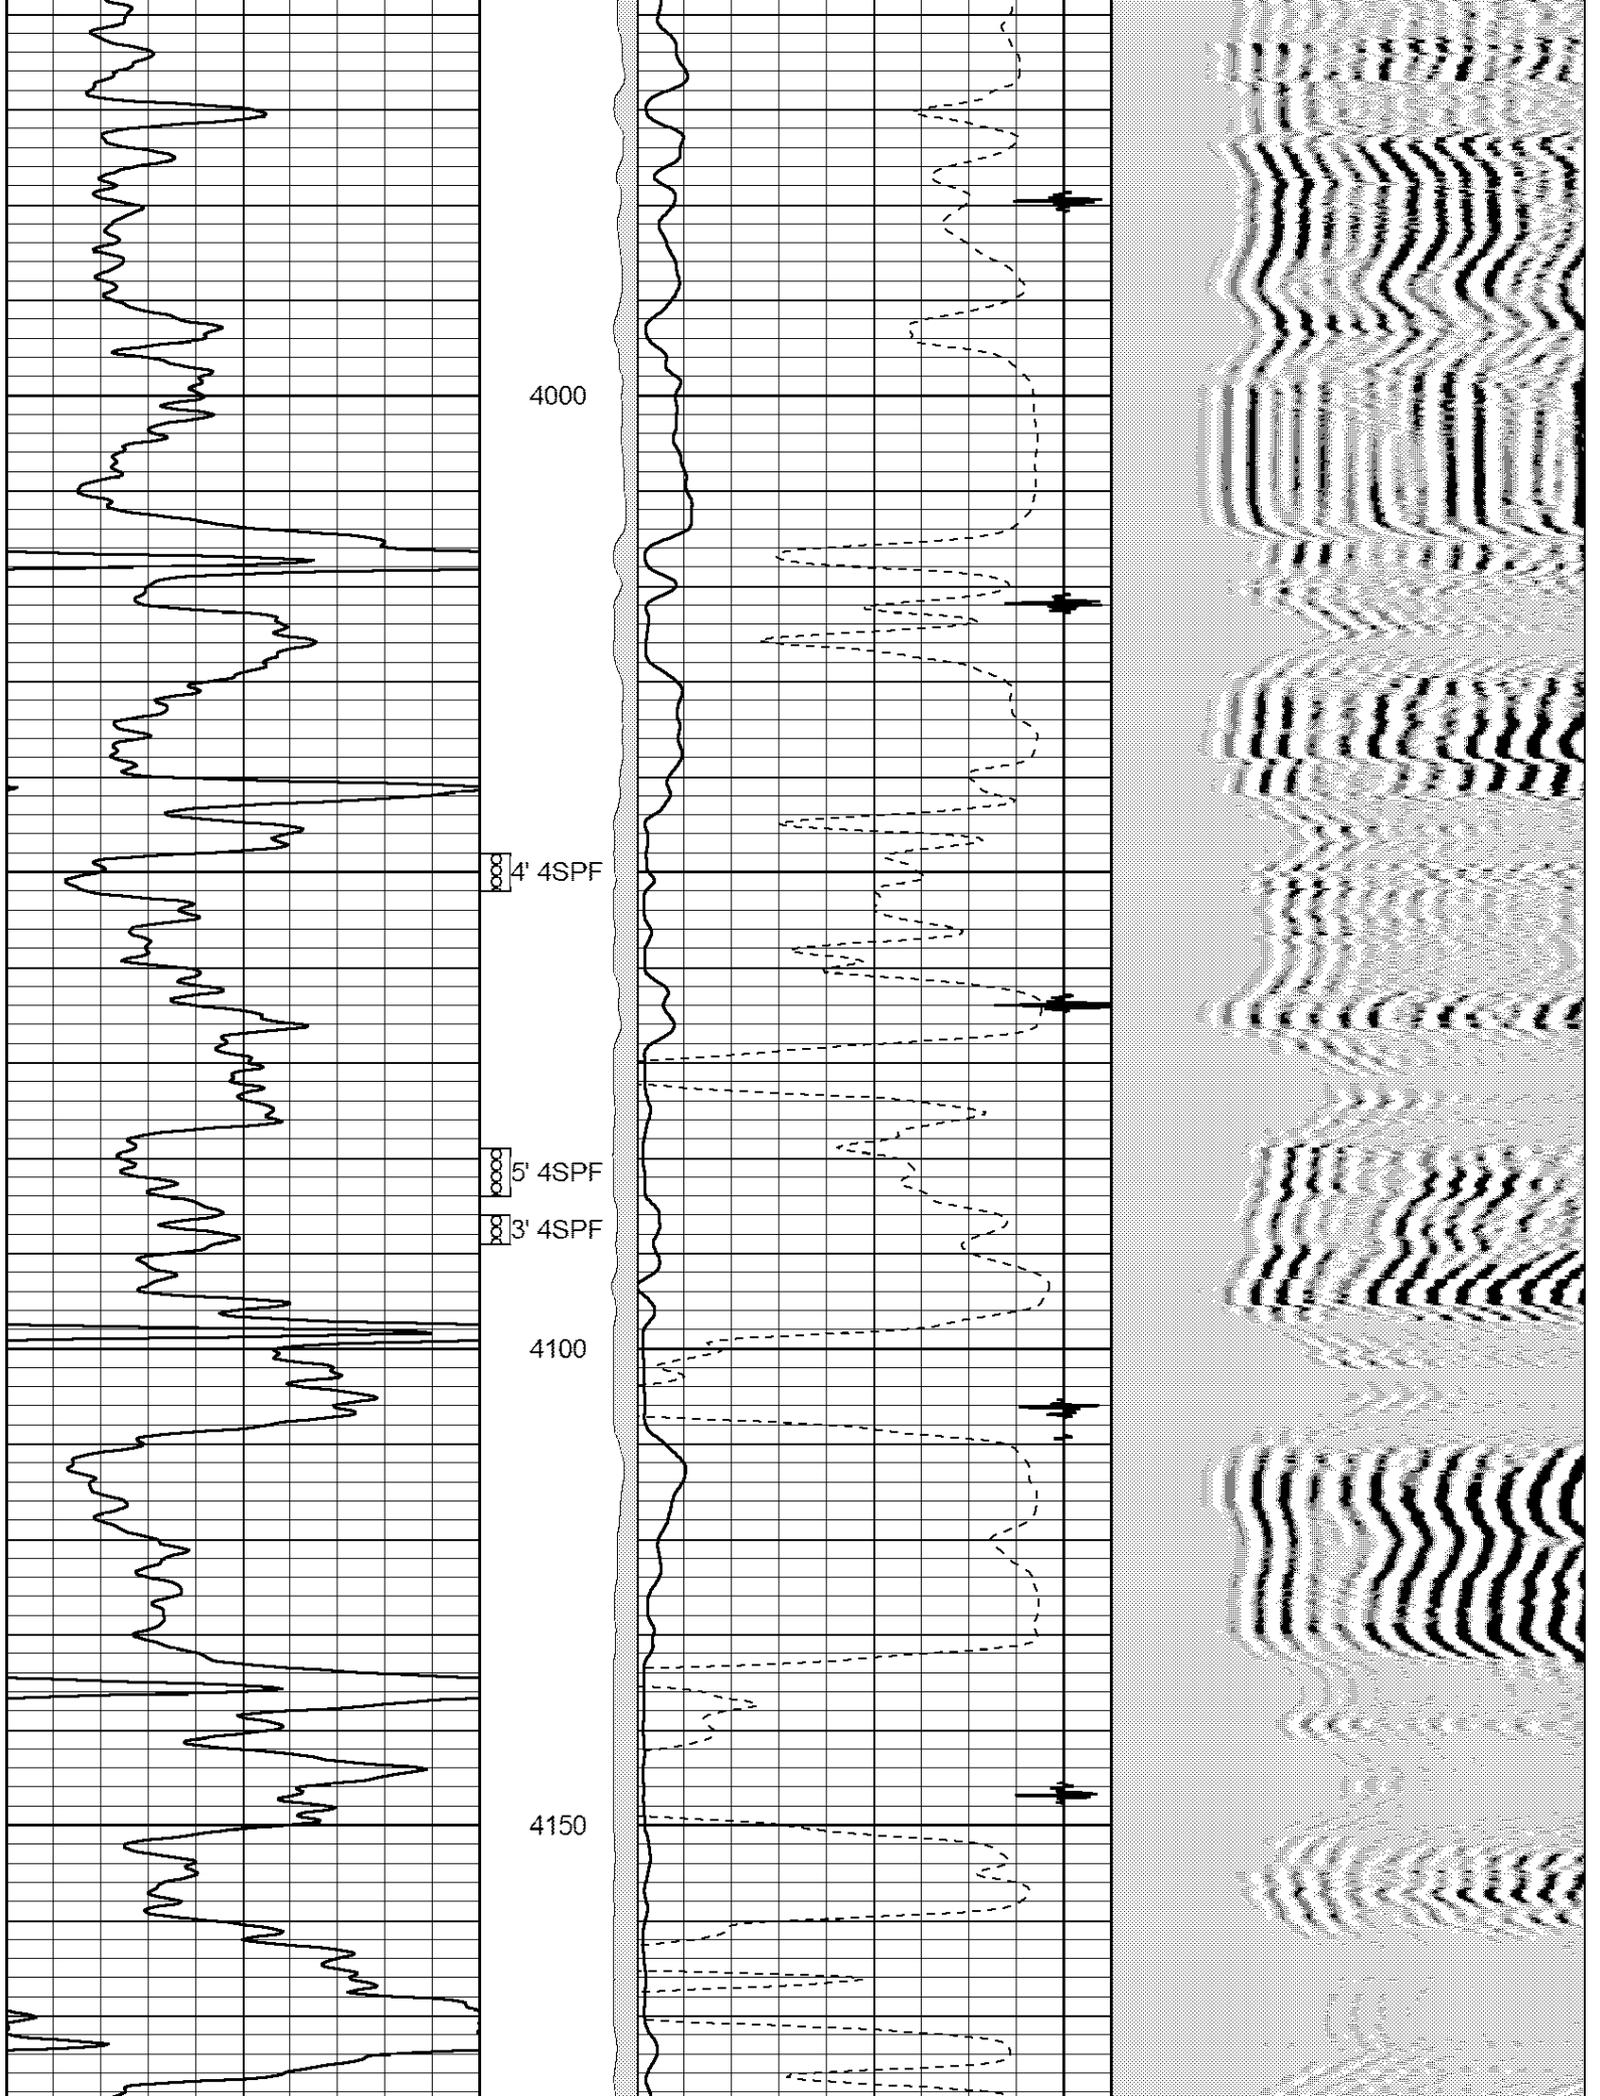

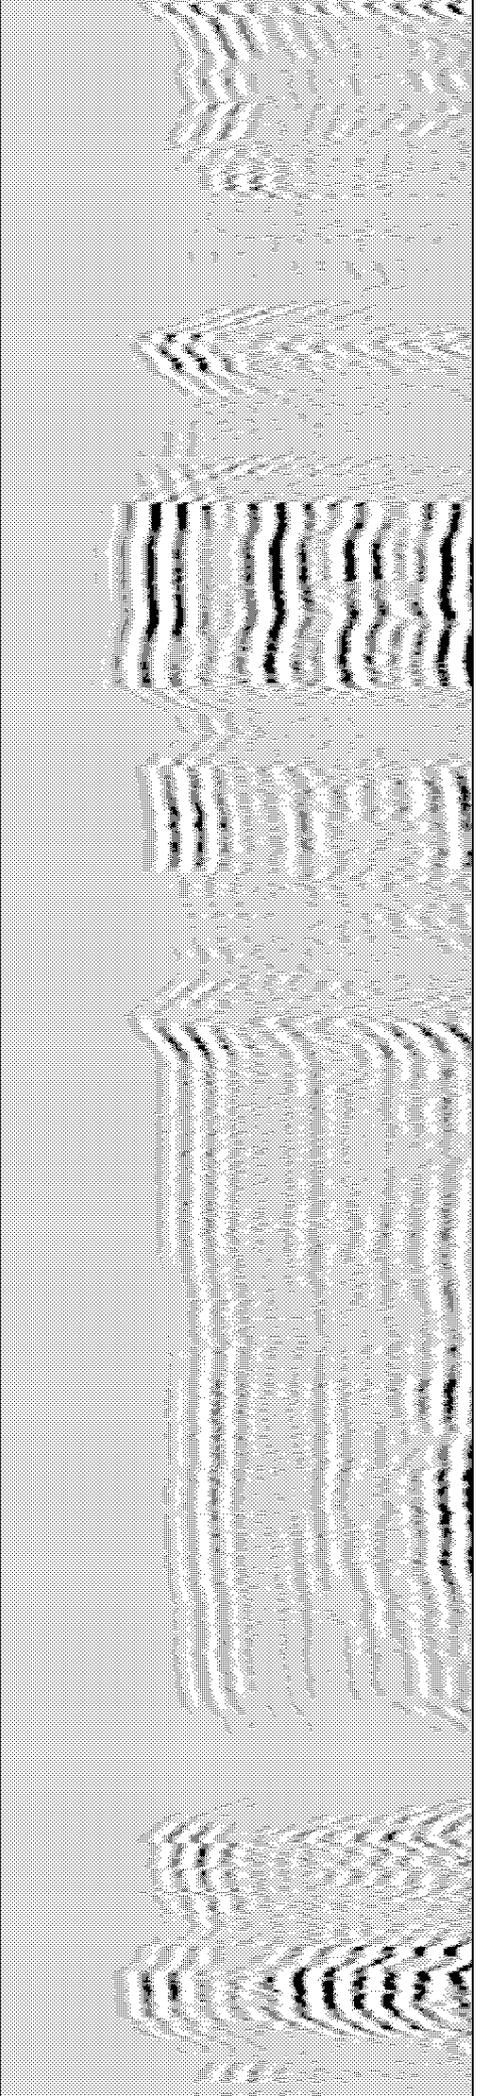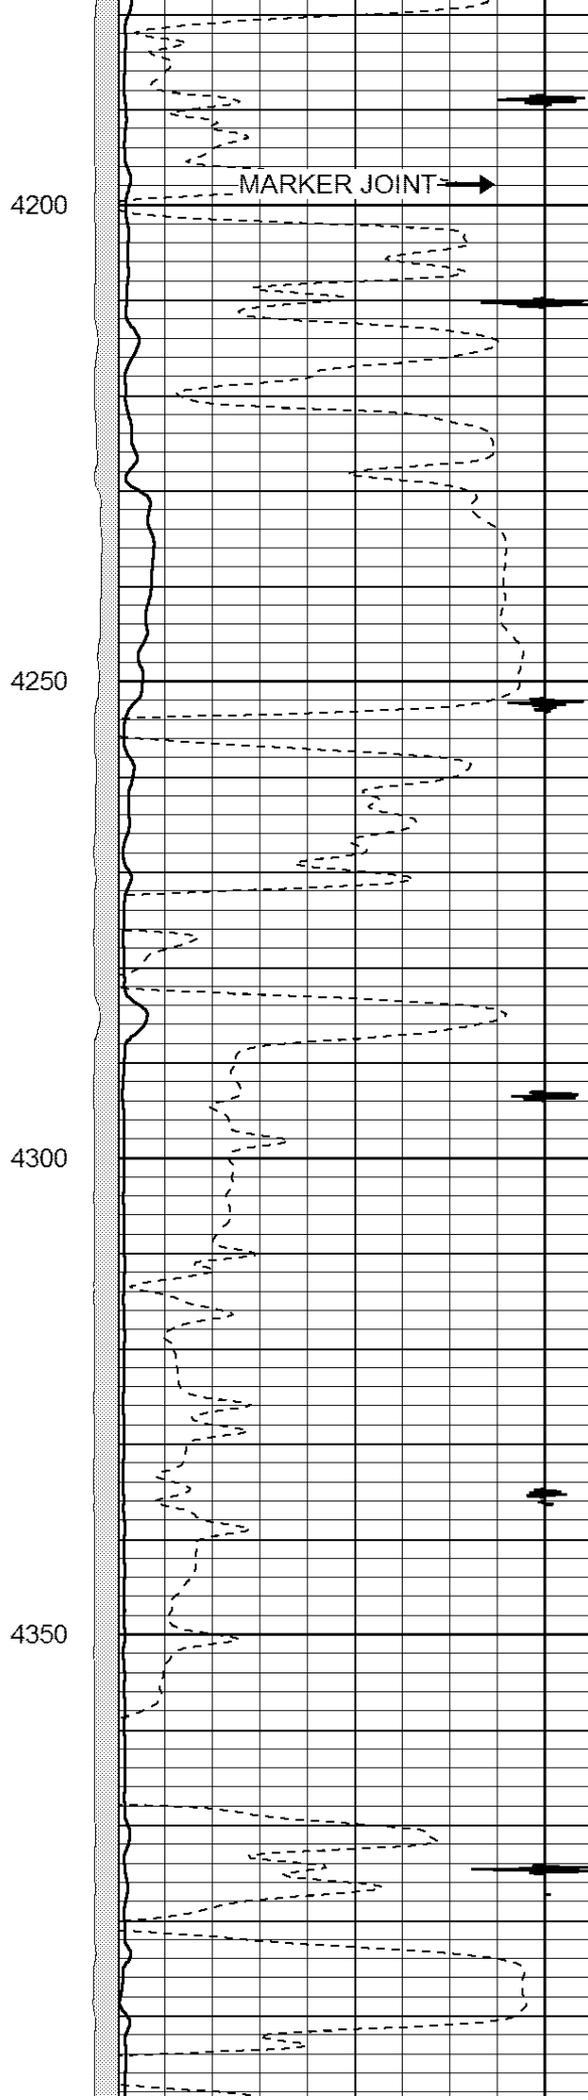
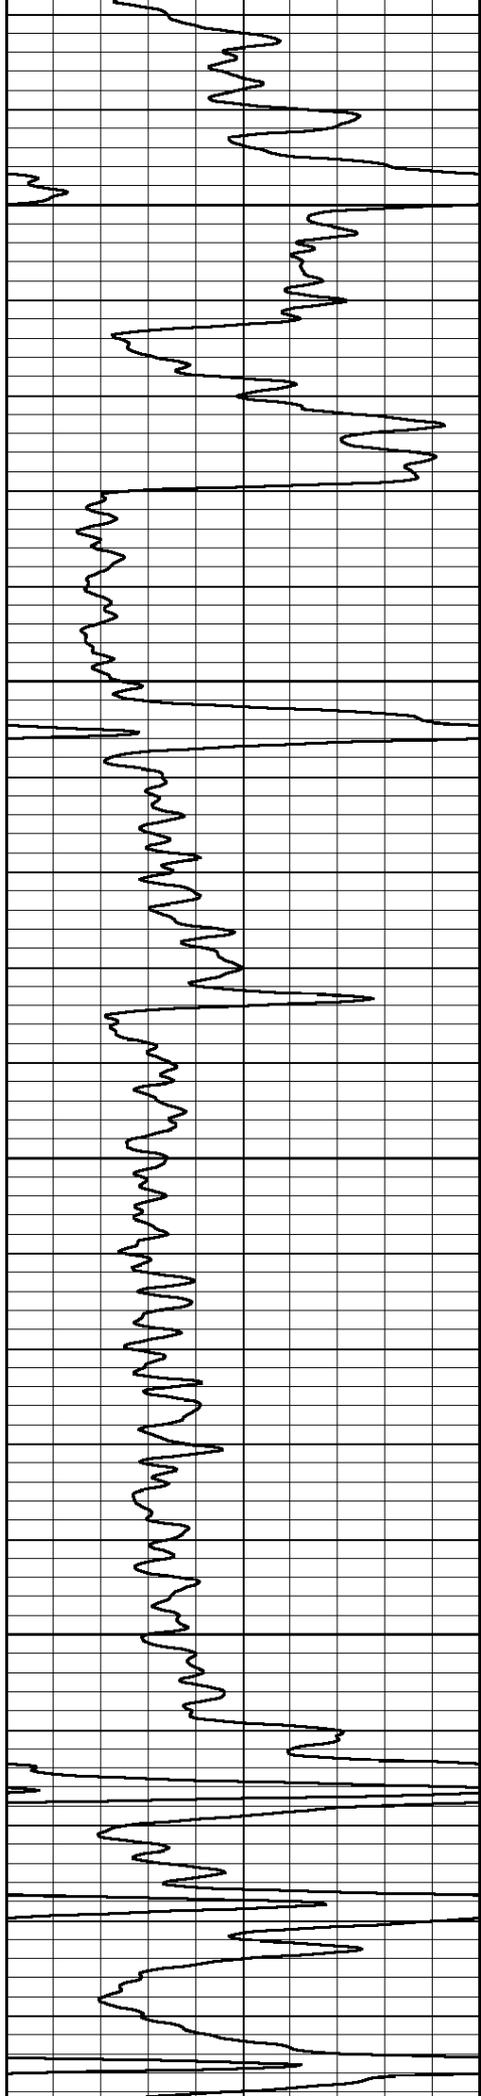


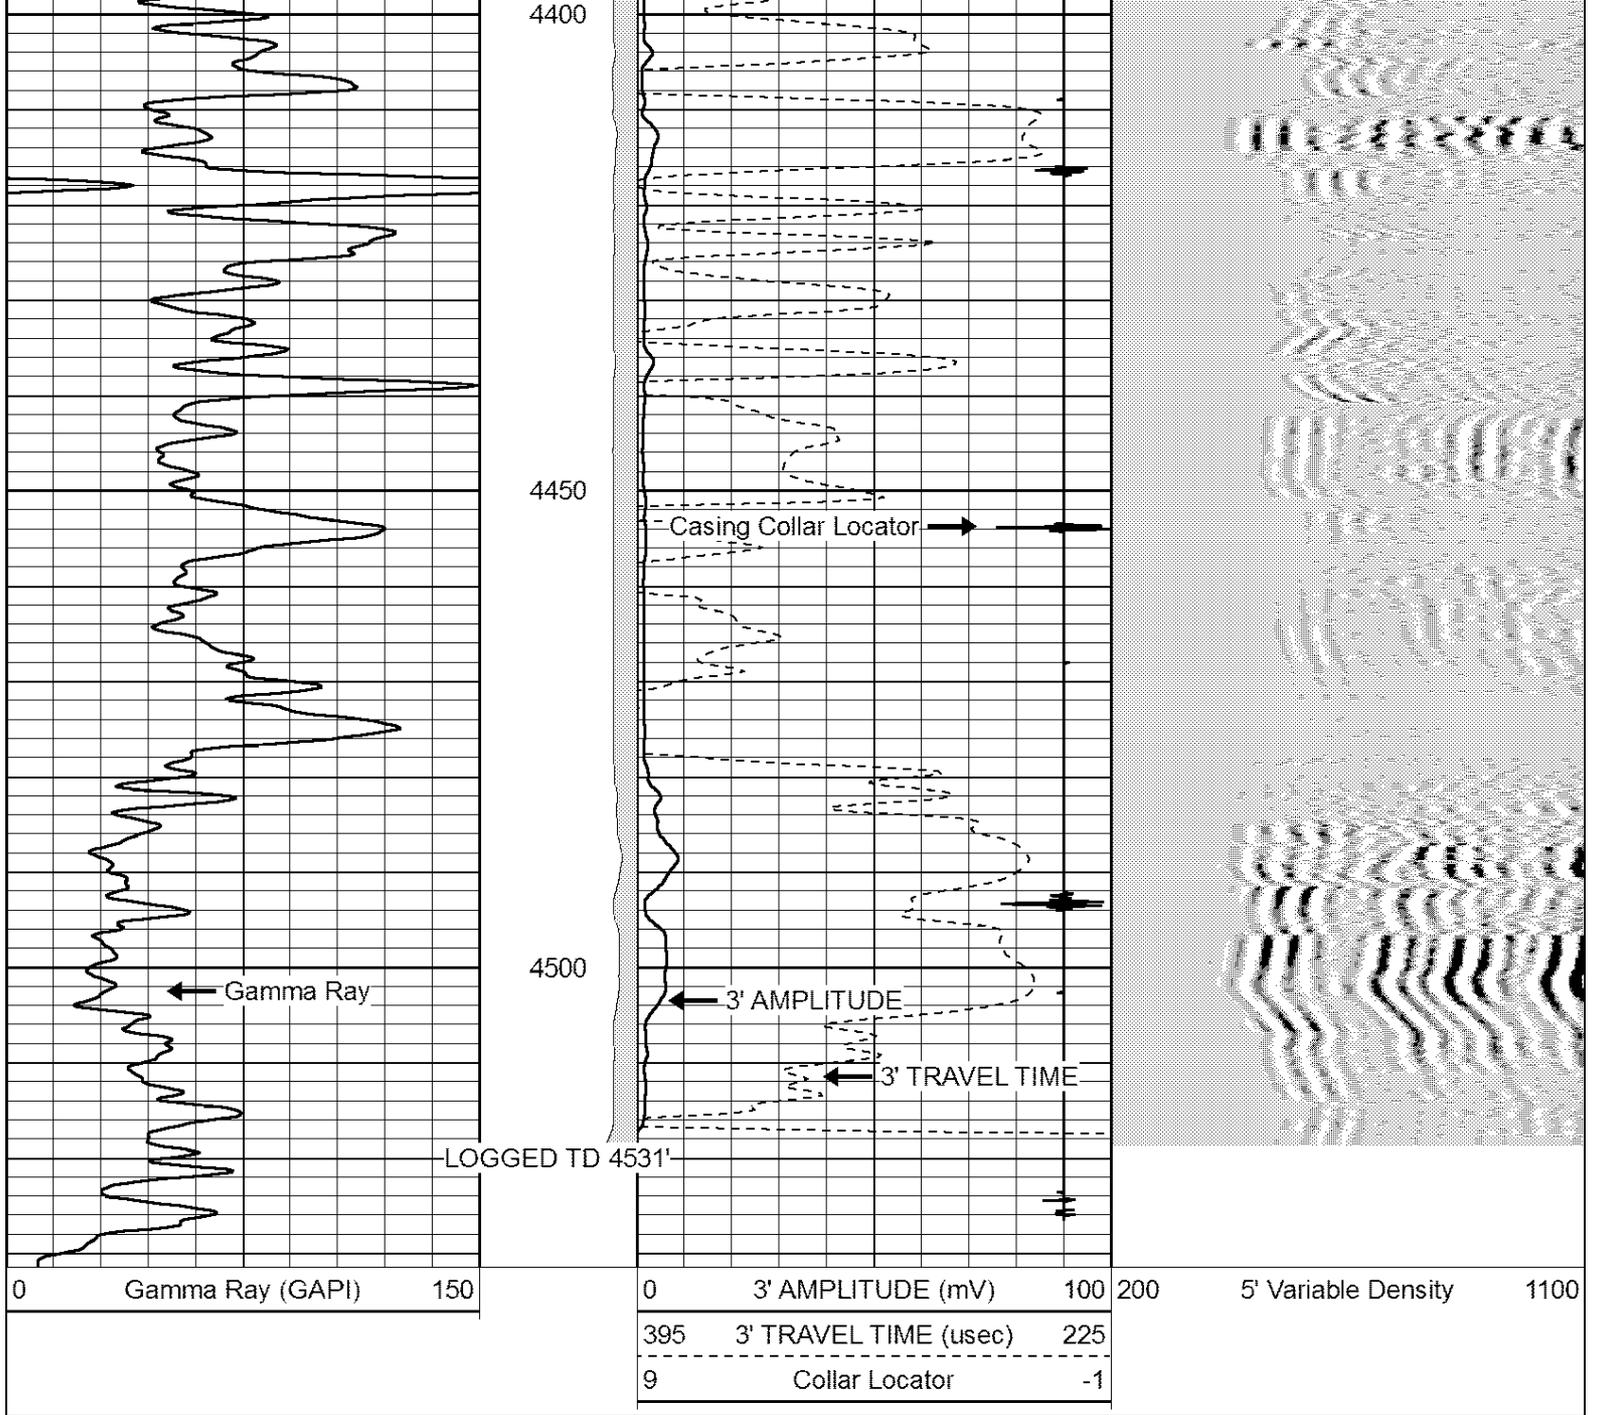


Perf-Tech
Wireline Services

REPEAT SECTION

Database File: june162208.db
 Dataset Pathname: pass3
 Presentation Format: 3x5
 Dataset Creation: Thu Jun 16 08:44:37 2022 by Log SCH 120126
 Charted by: Depth in Feet scaled 1:240

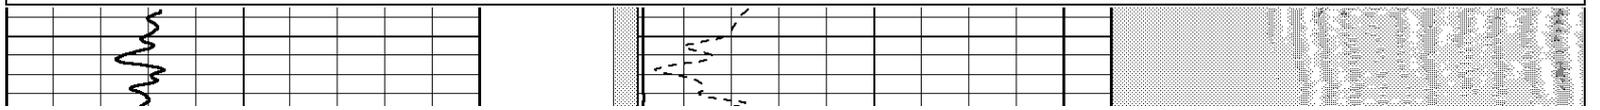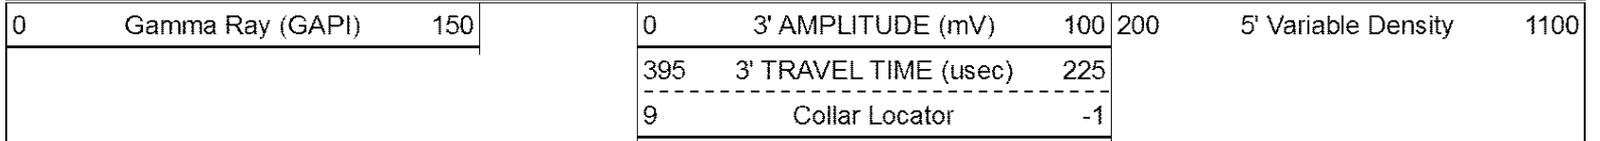

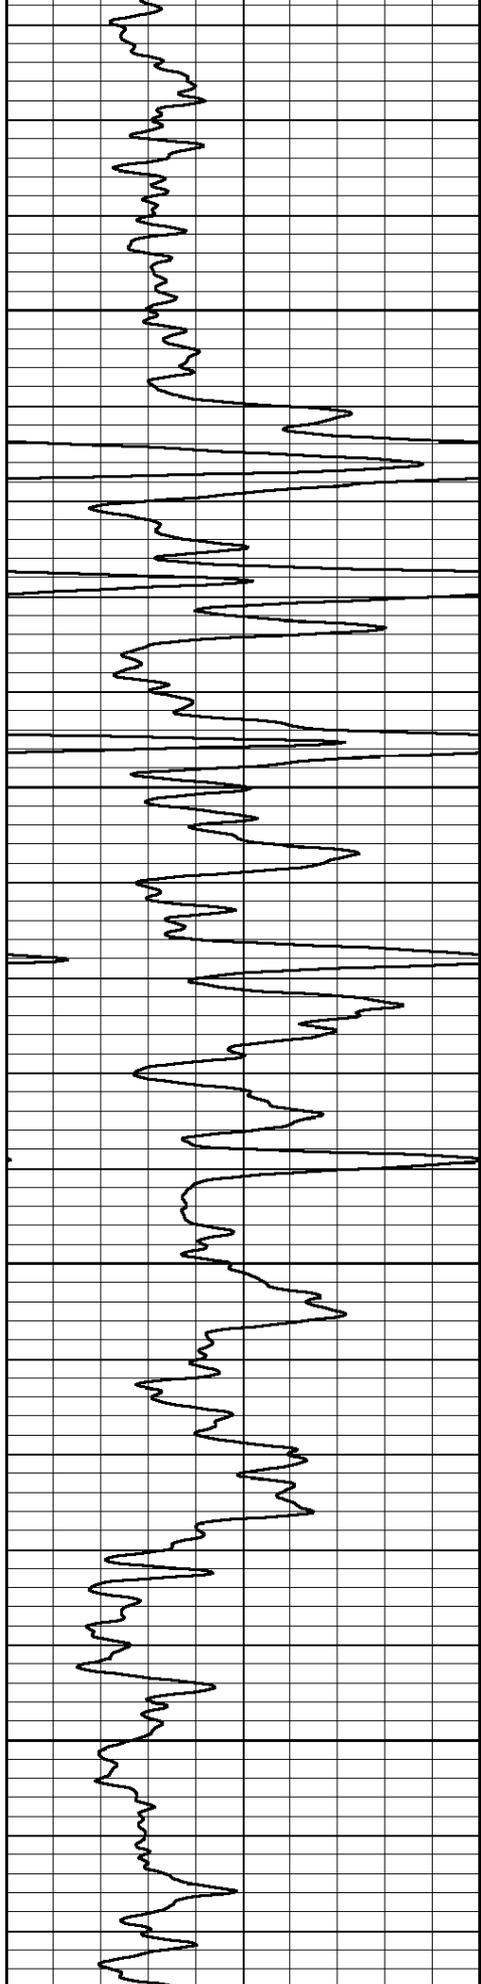


0 Gamma Ray (GAPI) 150

4350

4400


4450

4500

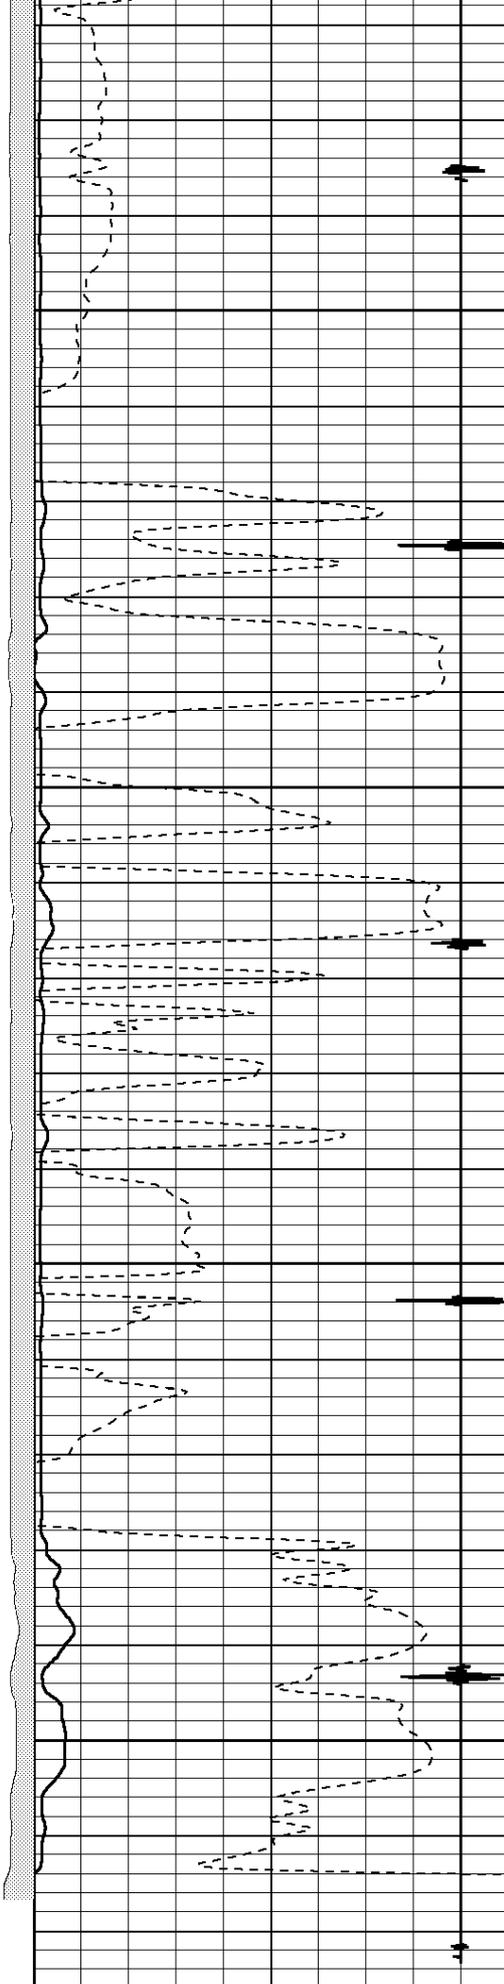

0 3' AMPLITUDE (mV) 100

395 3' TRAVEL TIME (usec) 225

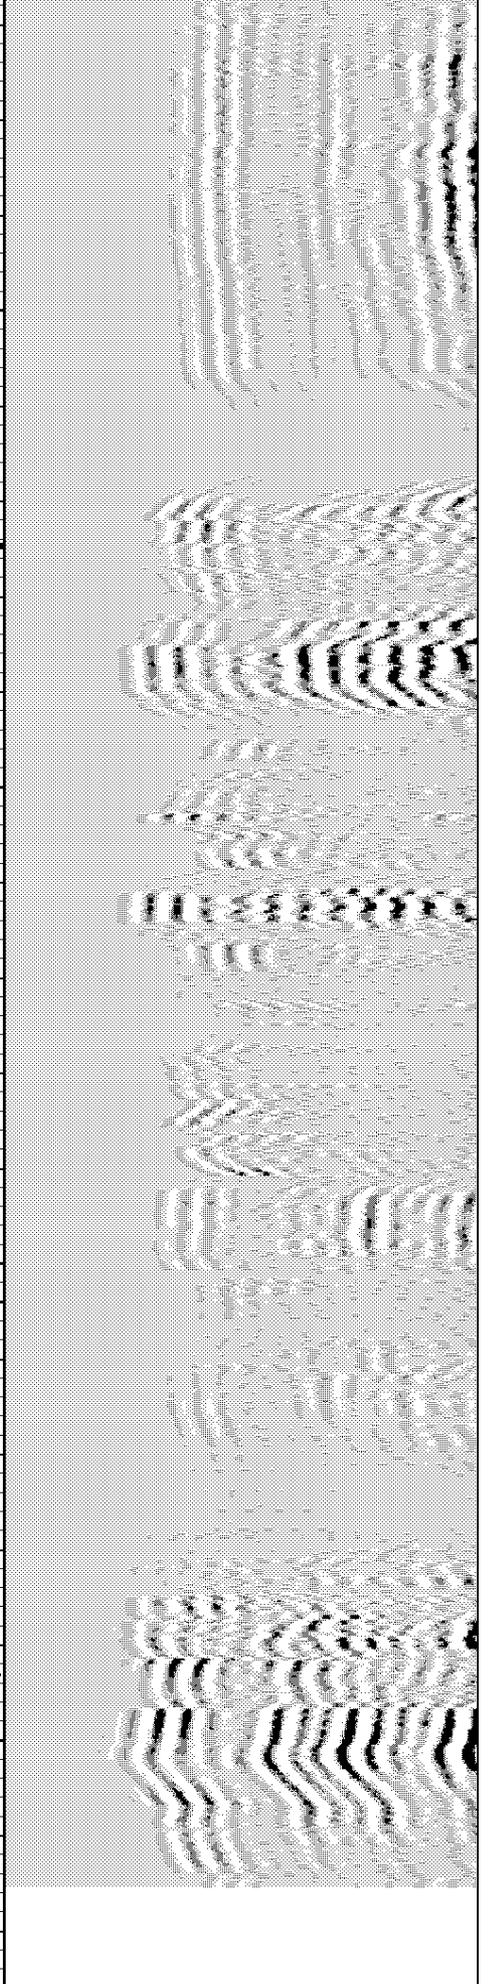

200 5' Variable Density 1100

9

Collar Locator

-1