



MICRO LOG

Company CHARTER ENERGY, INC.

Well MILLER #1

Field CHEYENNE VIEW

County BARTON State KANSAS

Location: 660' FSL & 660' FWL
SW - SW

SEC 24 TWP 19S RGE 12W

Permanent Datum GROUND LEVEL Elevation 1800

Log Measured From KELLY BUSHING 10' A.G.L.

Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL
DIL

Elevation

K.B. 1810
D.F. 1808
G.L. 1800

Date 5/24/22

Run Number TWO

Depth Driller 3455

Depth Logger 3456

Bottom Logged Interval 3454

Top Log Interval 2700

Casing Driller 8 5/8" @ 362'

Casing Logger 362

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.2/59

pH / Fluid Loss 10.0/5.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .420 @ 74F

Rmf @ Meas. Temp .315 @ 74F

Rmc @ Meas. Temp .504 @ 74F

Source of Rmf / Rmc MEASURED

Rm @ BHT .280 @ 111F

Time Circulation Stopped 3.5 HOURS

Time Logger on Bottom 5.15 A.M.

Maximum Recorded Temperature 111F

Equipment Number 8916

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By JOSH AUSTIN

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
ELLINWOOD, KS., E. TO "SOUTHWINDS YARD", 1 1/4N., E. INTO




MAIN SECTION

Database File	6554ddn.db
Dataset Pathname	pass6.4
Presentation Format	_micro
Dataset Creation	Tue May 24 06:46:57 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

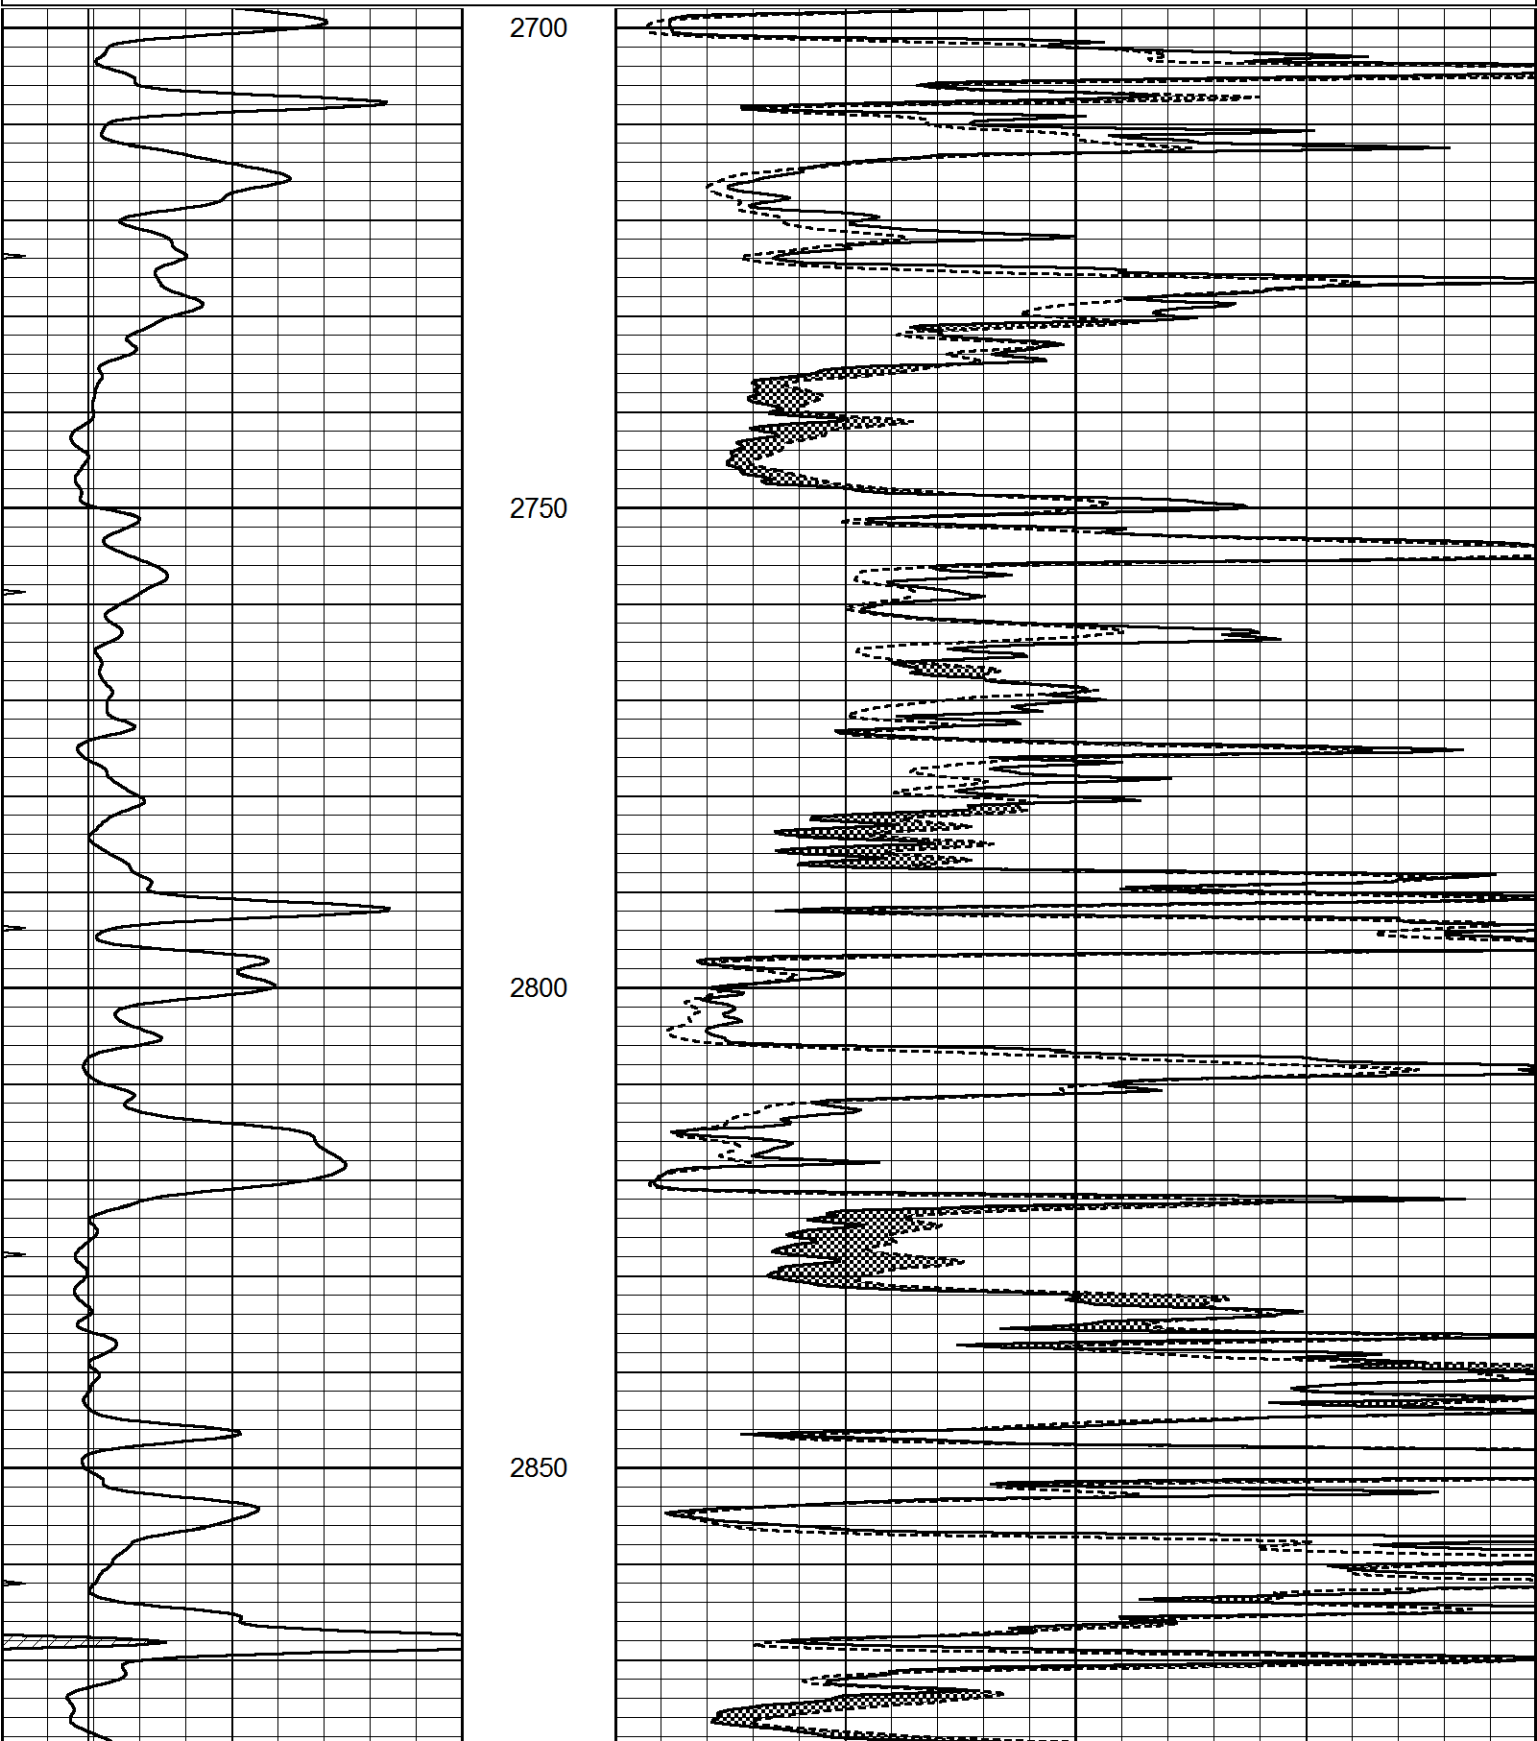

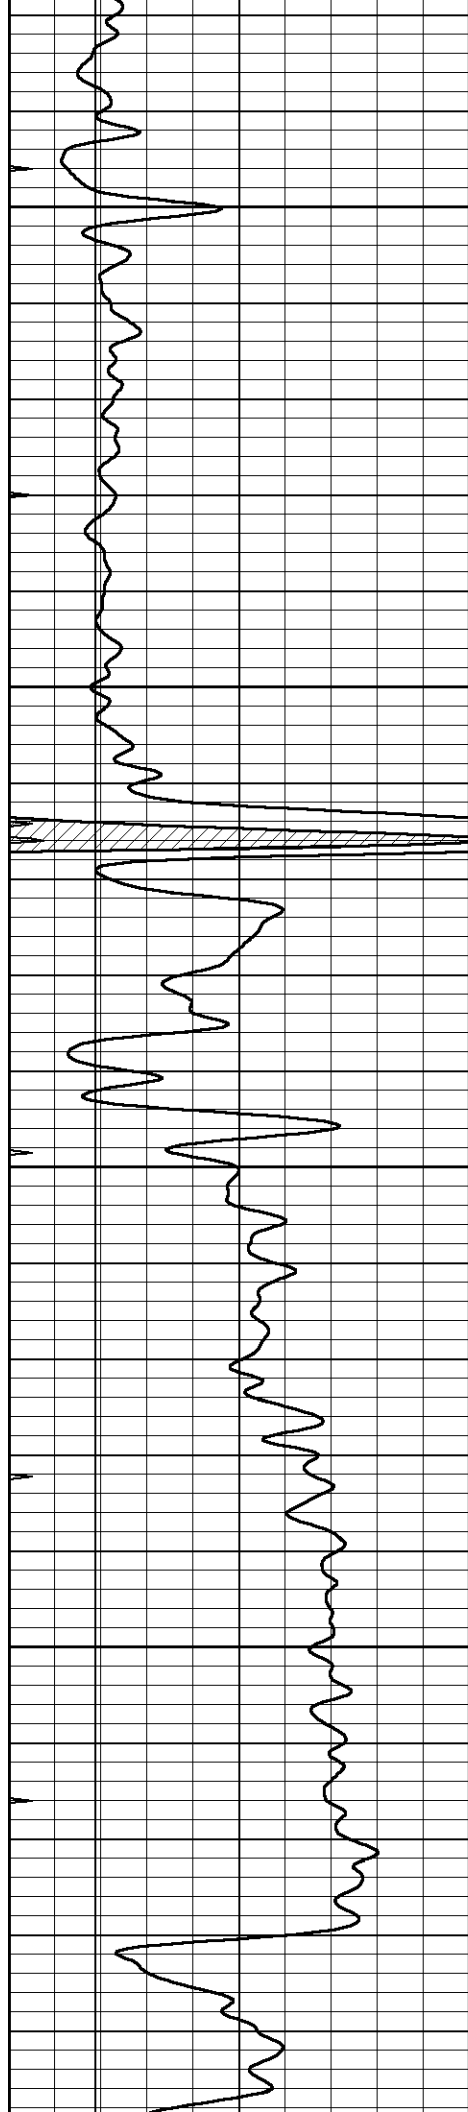



2900

2950

3000

3050

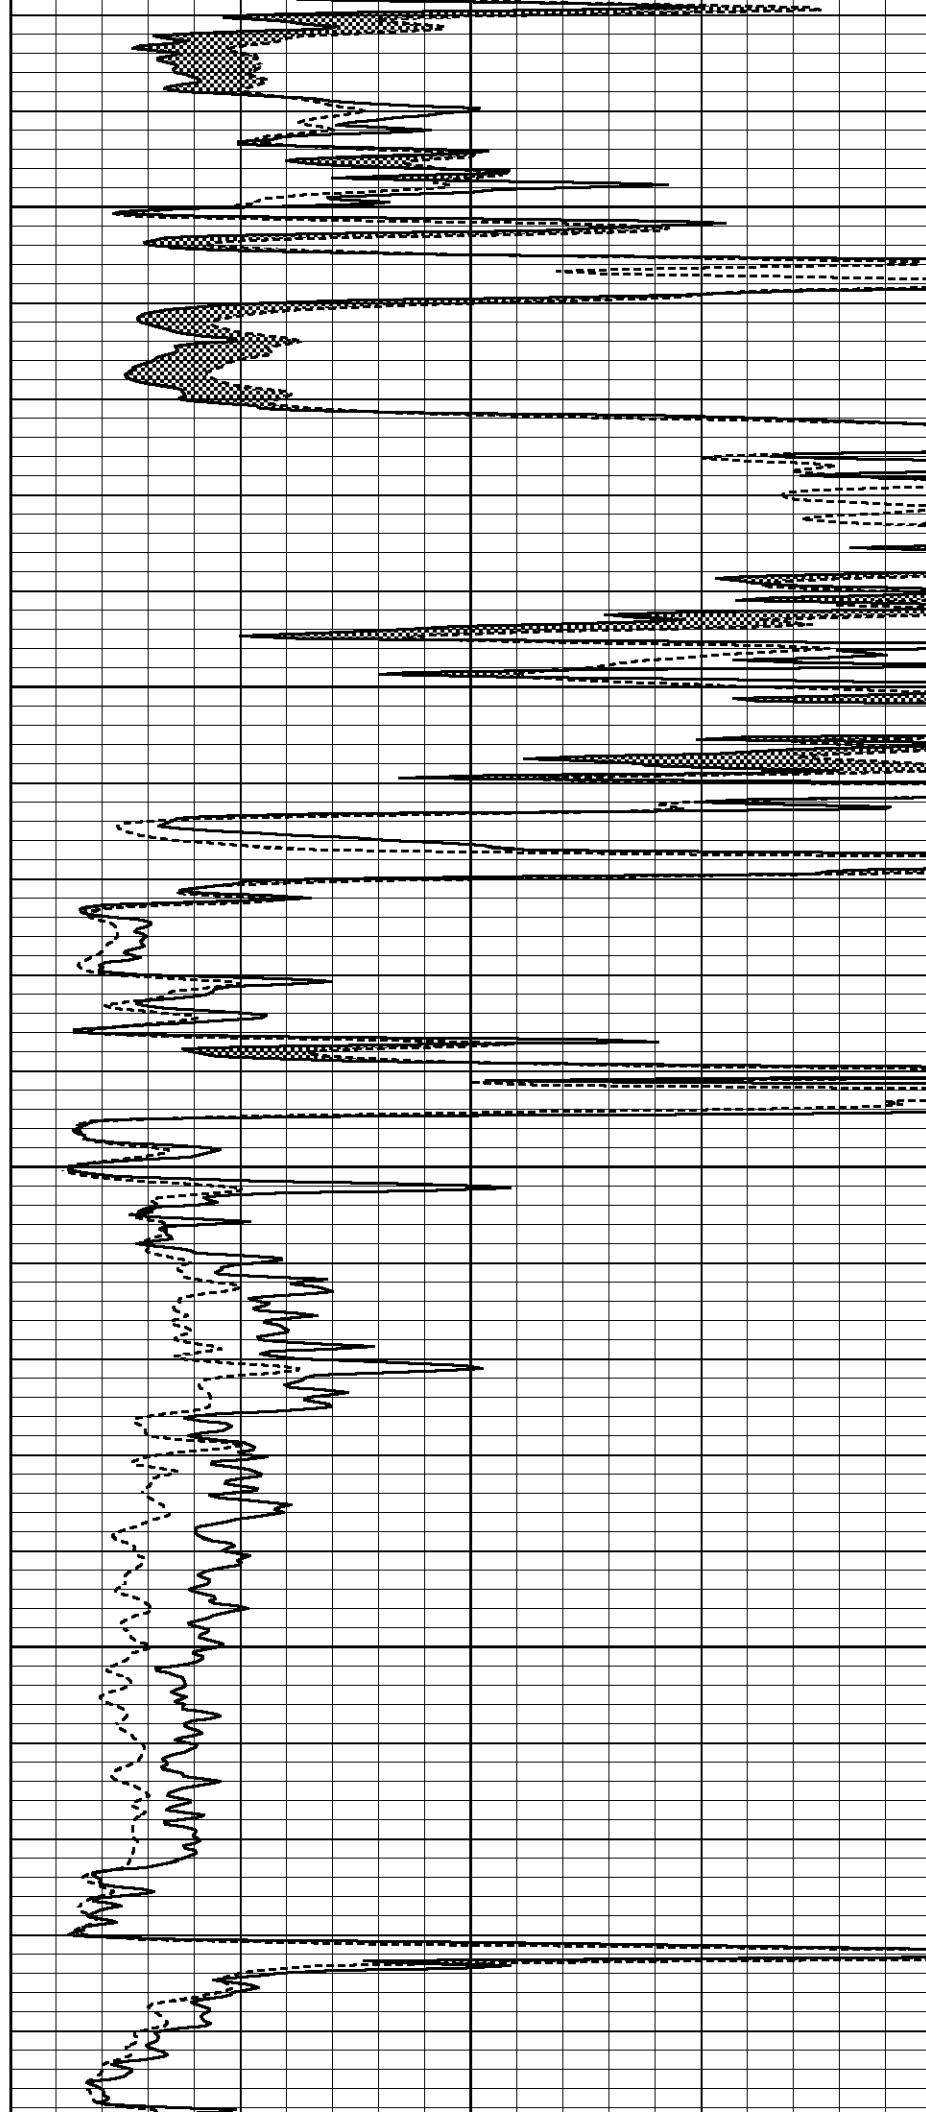

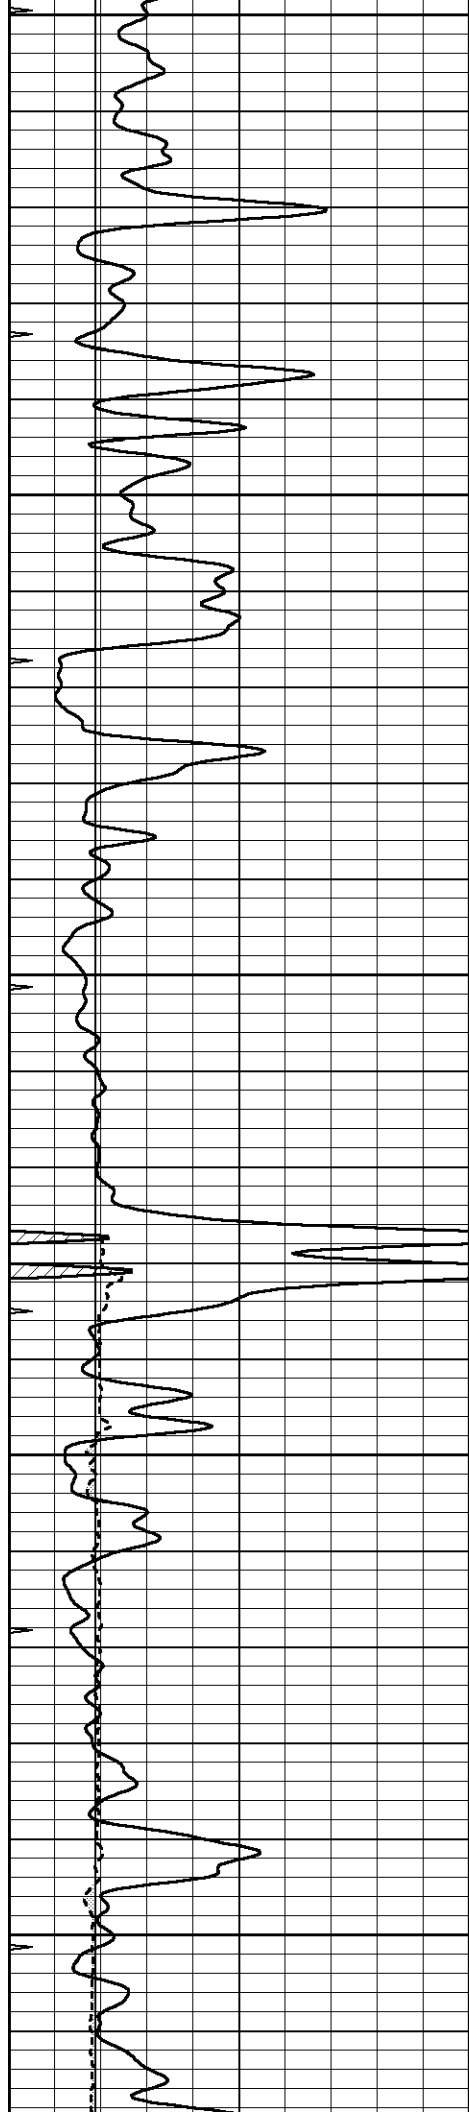


3100


3150

3200

3250

3300

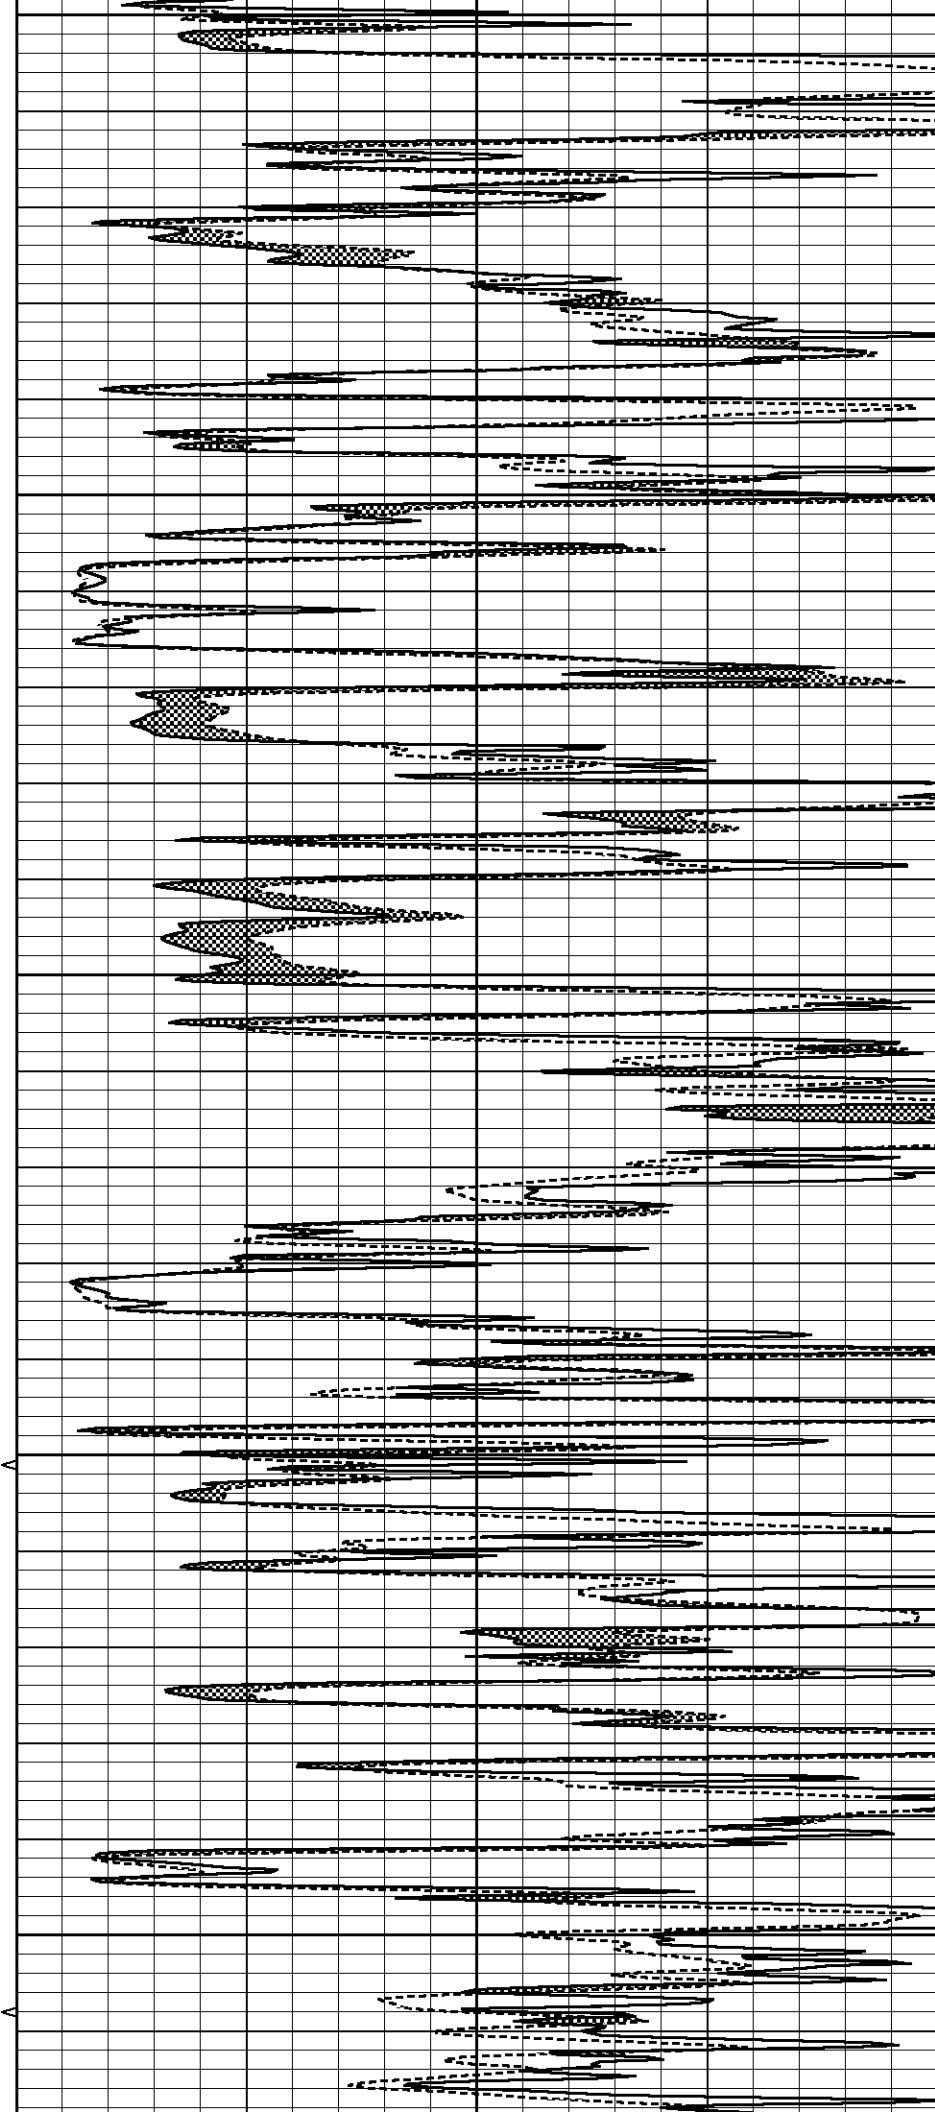


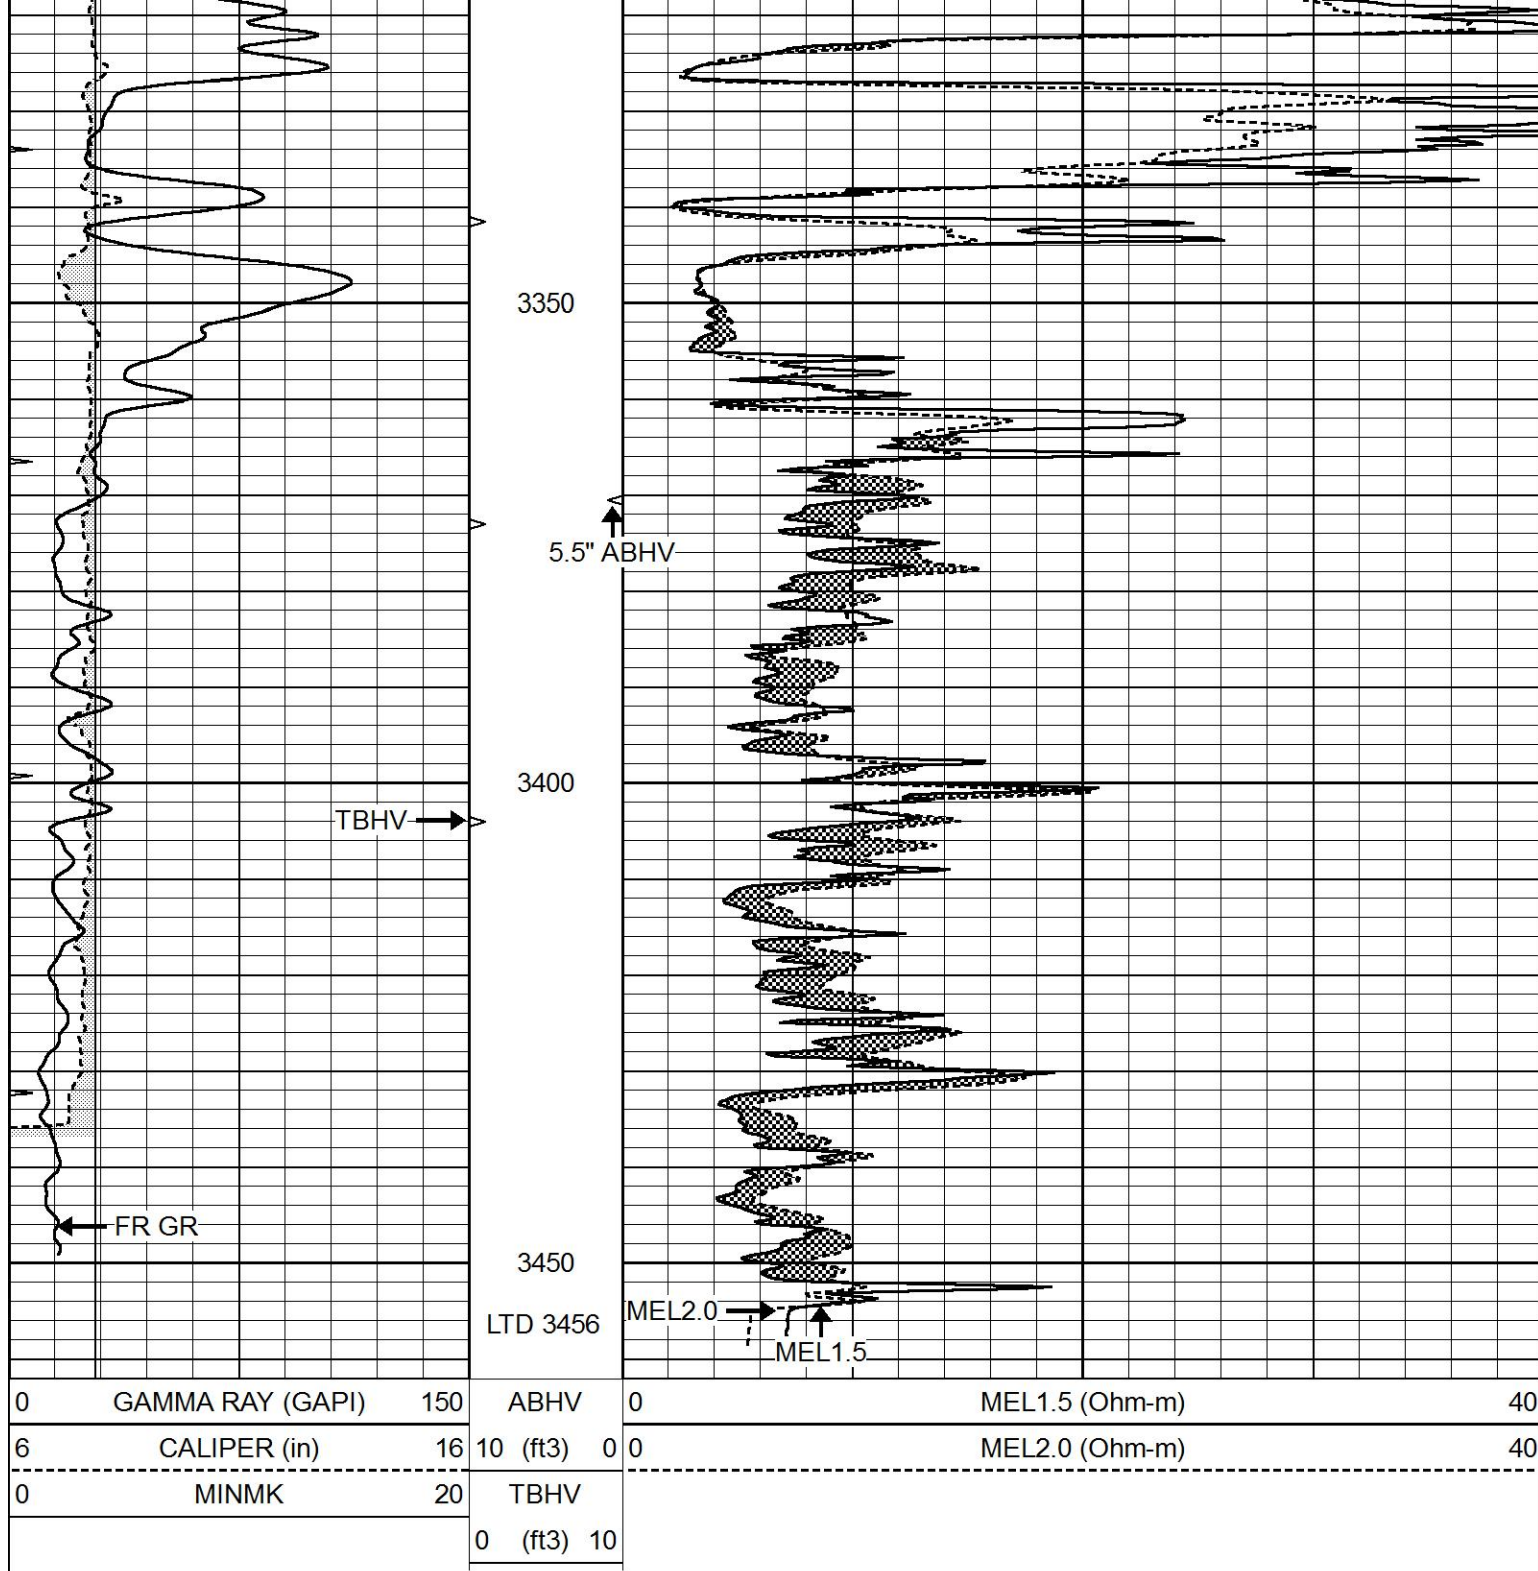

REPEAT SECTION

Database File 6554ddn.db
 Dataset Pathname pass5.1R
 Presentation Format _micro
 Dataset Creation Tue May 24 06:16:53 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40

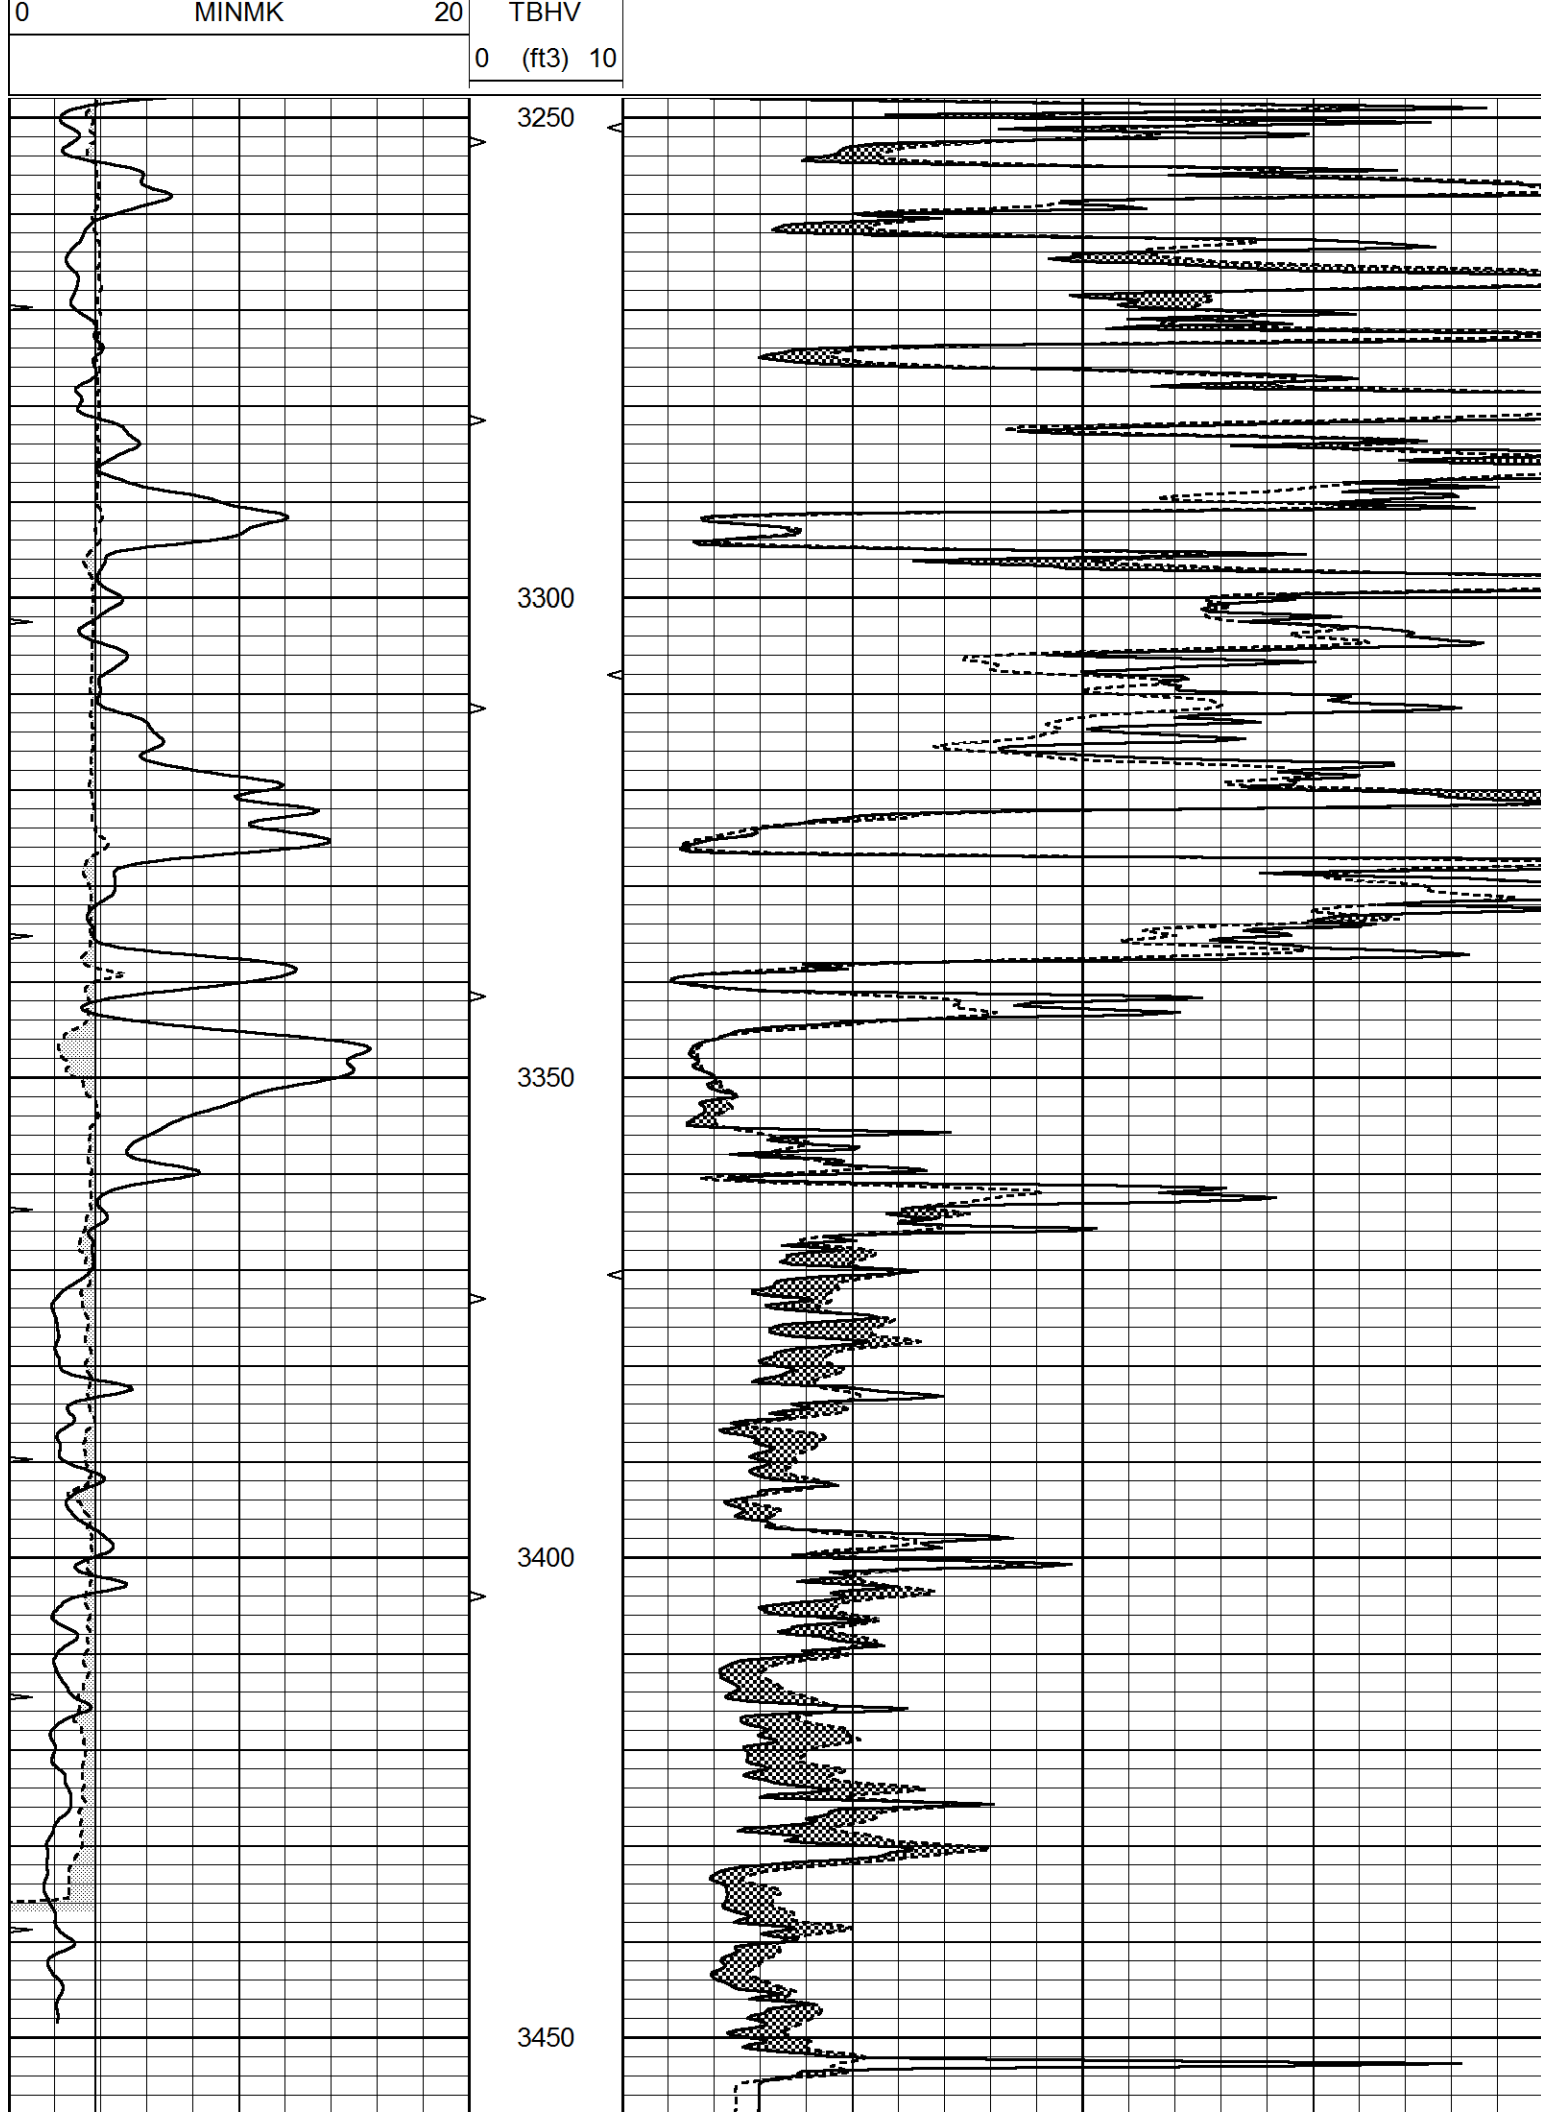

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

Calibration Report					
Database File	6554ddn.db				
Dataset Pathname	pass6.4				
Dataset Creation	Tue May 24 06:46:57 2022				
MICRO Calibration Report					
Serial Number:	MICRO5				
Tool Model:	PROBE				
Performed:	Tue May 24 05:57:09 2022				
Caliper Calibration:	Gain=3.604	Offset=-9.658			
References	Low Cal	High Cal			
Readings	8.000	16.000			
	4.900	7.120			
1.5" Calibration:	Gain=40.000	Offset=0.000			
References	Low Cal	High Cal			
Readings	0.000	20.000			
	0.015	1.007			
2" Calibration:	Gain=70.000	Offset=-1.000			
References	Low Cal	High Cal			
Readings	0.000	20.000			
	0.008	0.908			
Gamma Ray Calibration Report					
Serial Number:	GR5				
Tool Model:	OPEN				
Performed:	Sat May 21 22:06:54 2022				
Calibrator Value:	1.0	GAPI			
Background Reading:	0.0	cps			
Calibrator Reading:	1.0	cps			
Sensitivity:	0.5800	GAPI/cps			