

MICRO LOG

Company	Company NEC OPERATING - KANSAS, LLC.		
Well	MARIE ANTOINETTE #A-1		
Field	GARFIELD		
County	PAWNEE	State	KANSAS
Location:	API # : 15-145-21893-0000		Other Services CDL/CNL/PE DIL
2300' FSL & 1000' FEL SW - NW - NE - SE		Elevation	
SEC 7 TWP 23S RGE 17W		K.B. 2077	
Permanent Datum	GROUND LEVEL	Elevation	2069
Log Measured From	KELLY BUSHING 8' A.G.L	D.F. 2075	
Drilling Measured From	KELLY BUSHING	G.L. 2069	
Date	2/16/24		
Run Number	TWO		
Depth Driller	4625		
Depth Logger	4618		
Bottom Logged Interval	4616		
Top Log Interval	3000		
Casing Driller	8.675@809		
Casing Logger	809		
Bit Size	7.785		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 7,100 PPM	
Density / Viscosity	9.2/61		
pH / Fluid Loss	11.0/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.600@72F		
Rmf @ Meas. Temp	.450@72F		
Rmc @ Meas. Temp	.648@72F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.354@122F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	1:00 A.M.		
Maximum Recorded Temperature	122F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS	JEREMEY PASEK	
Witnessed By	KEATON JONES		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-145-21893-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS
GARFIELD, KS. 1 1/2S., E. INTO





MAIN SECTION


Database File	8411pe.db
Dataset Pathname	pass8.2
Presentation Format	micro
Dataset Creation	Fri Feb 16 02:36:45 2024
Charted by	Depth in Feet scaled 1:240


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

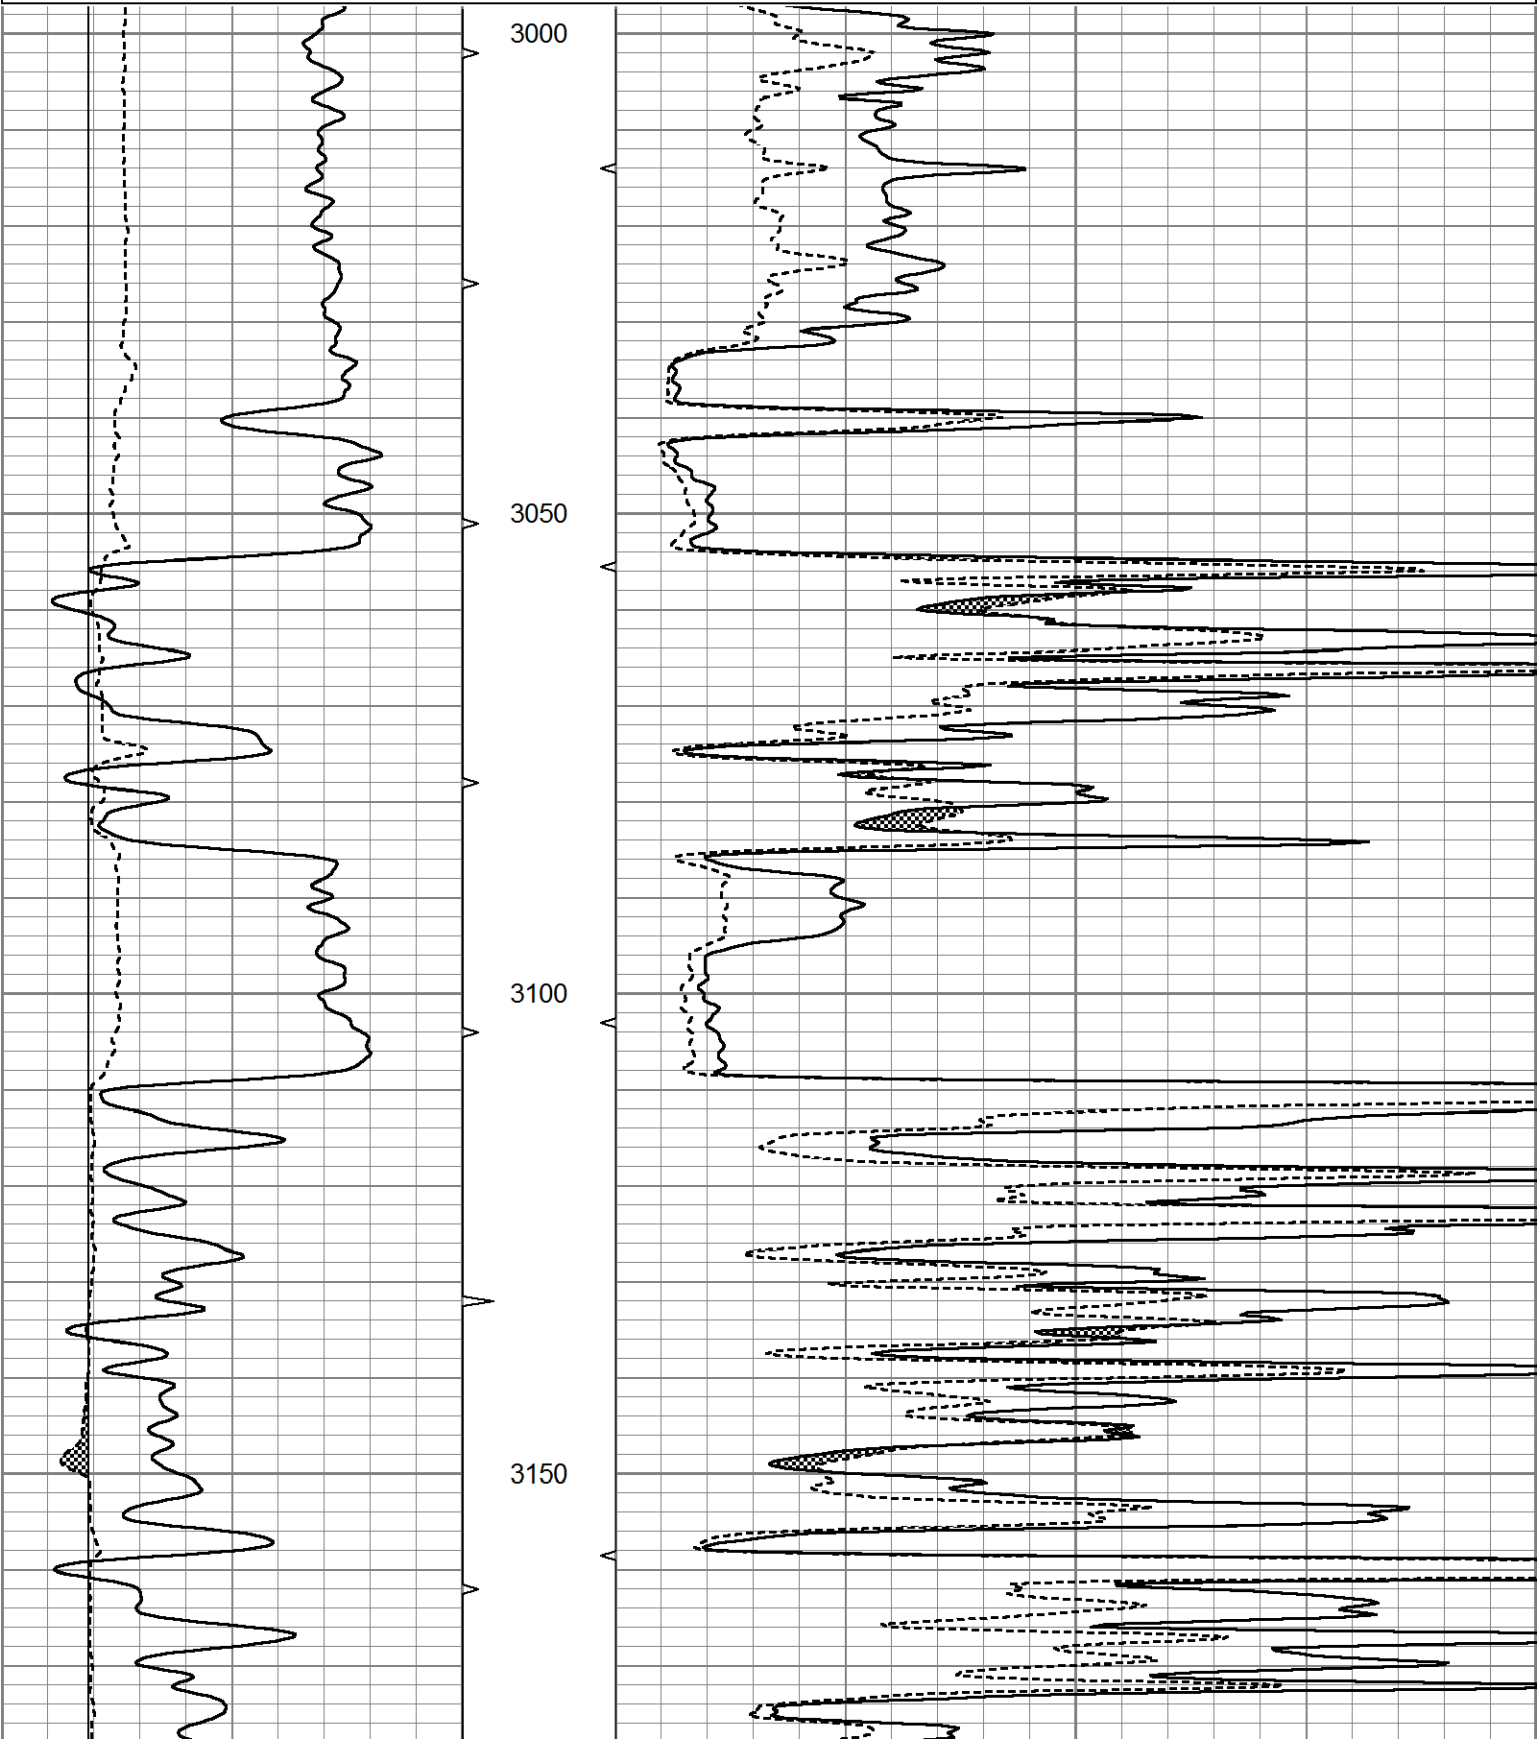


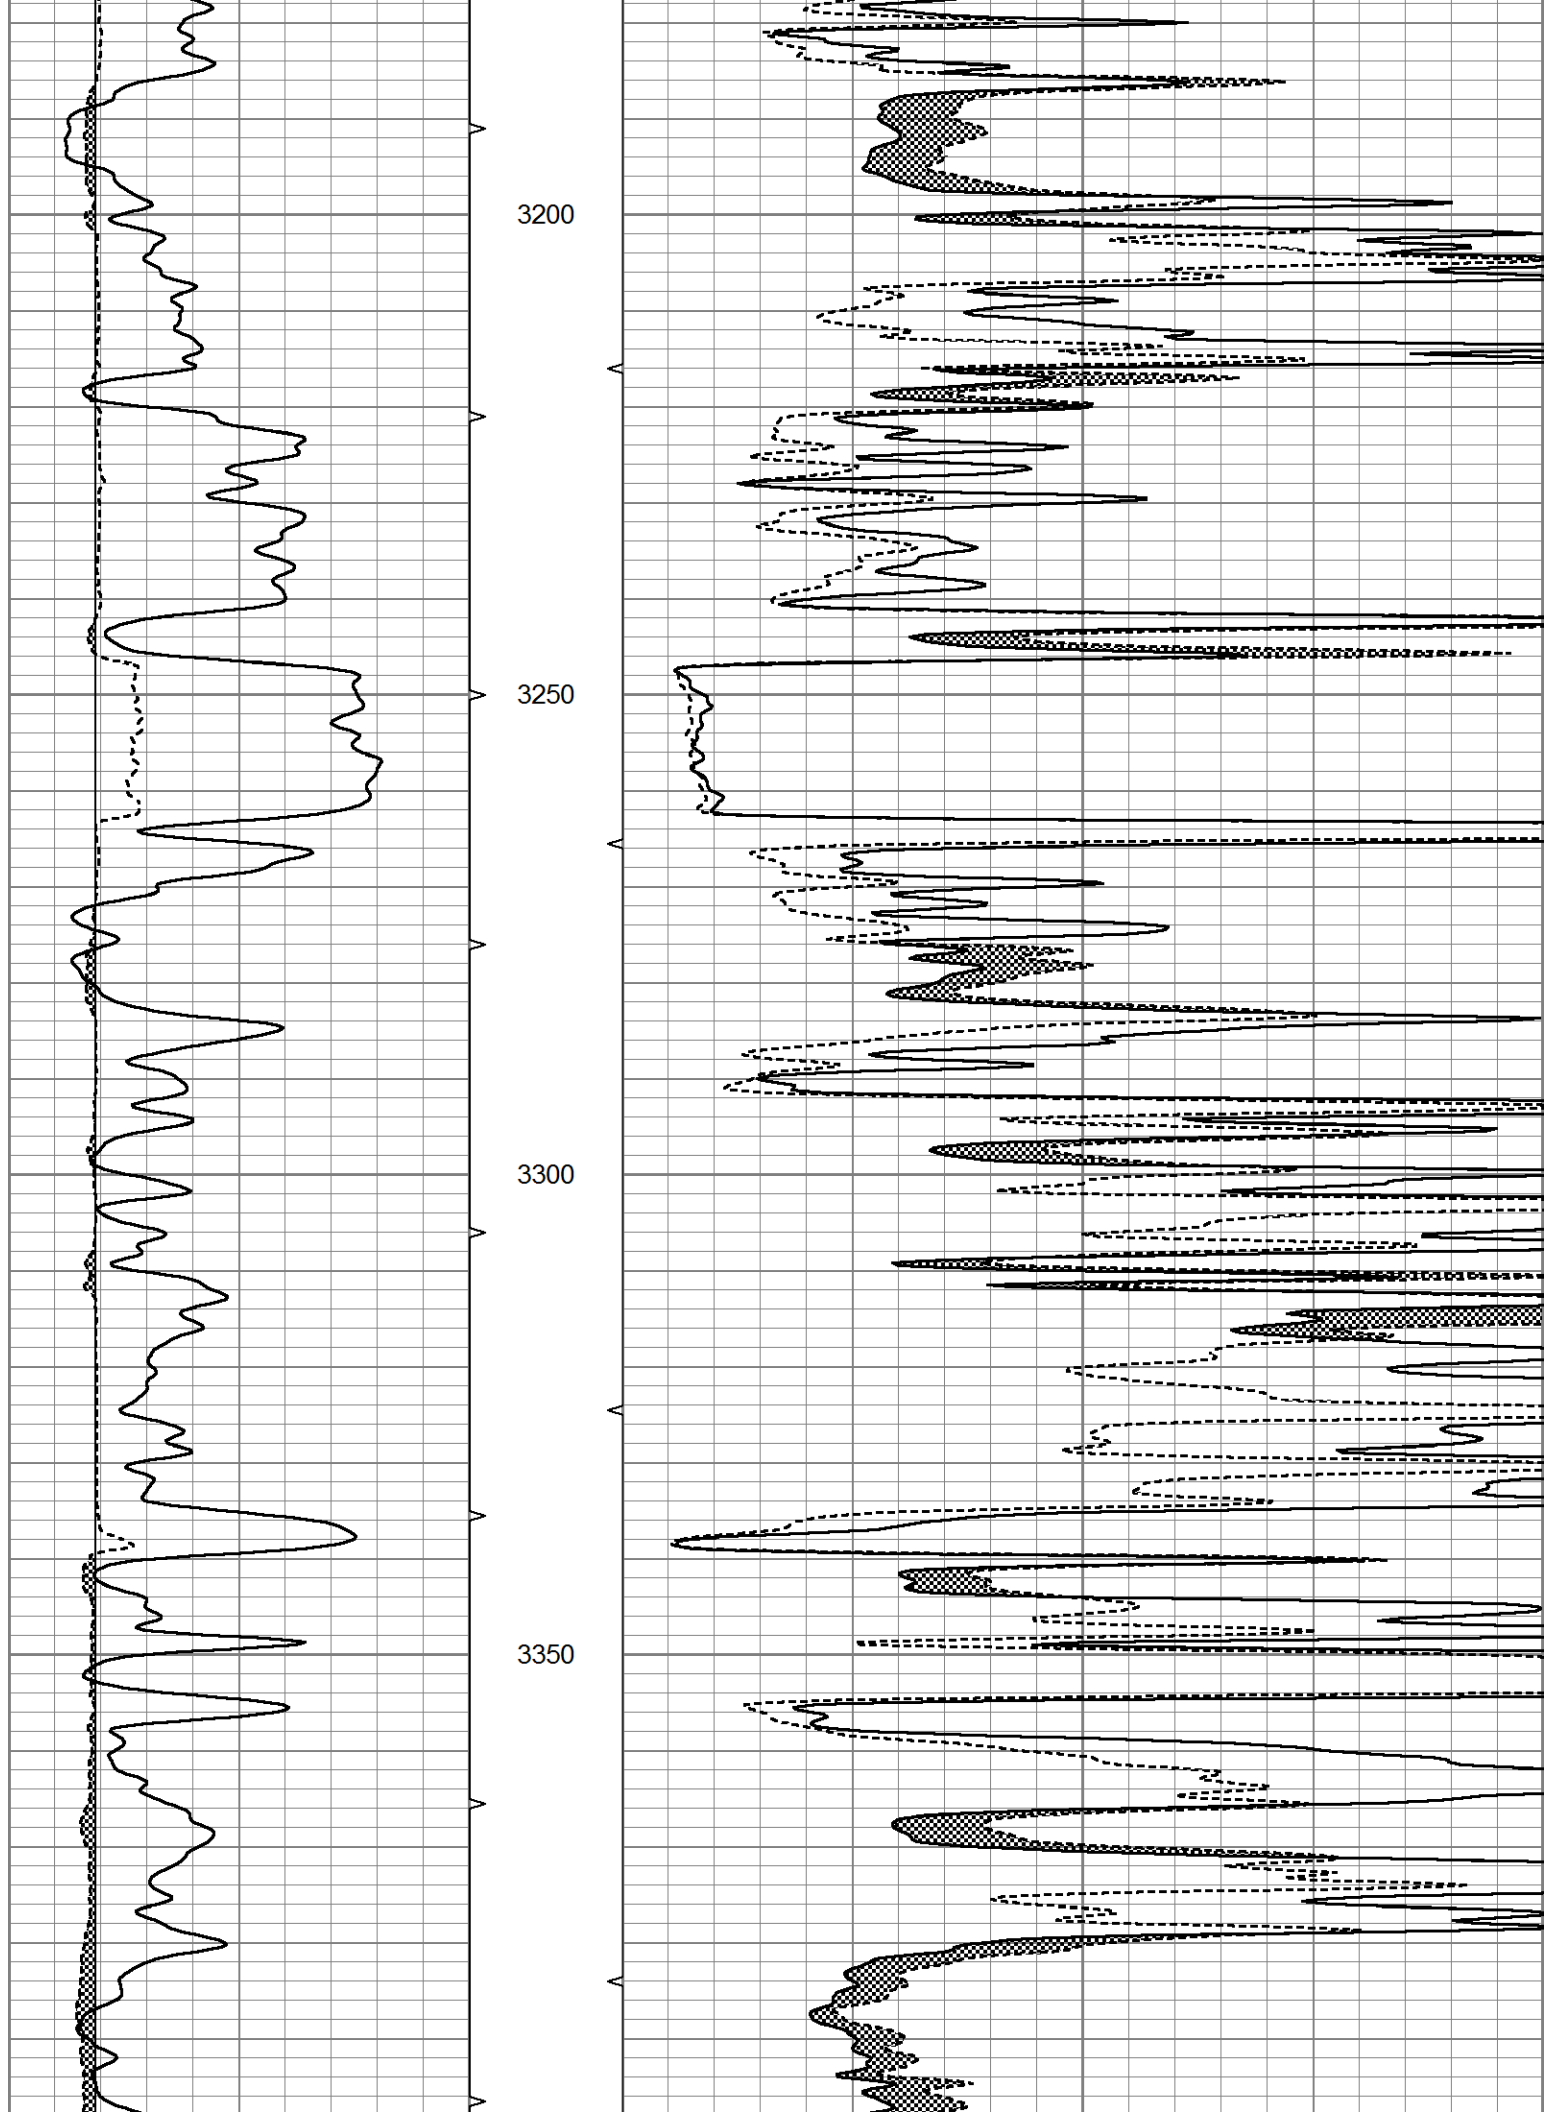


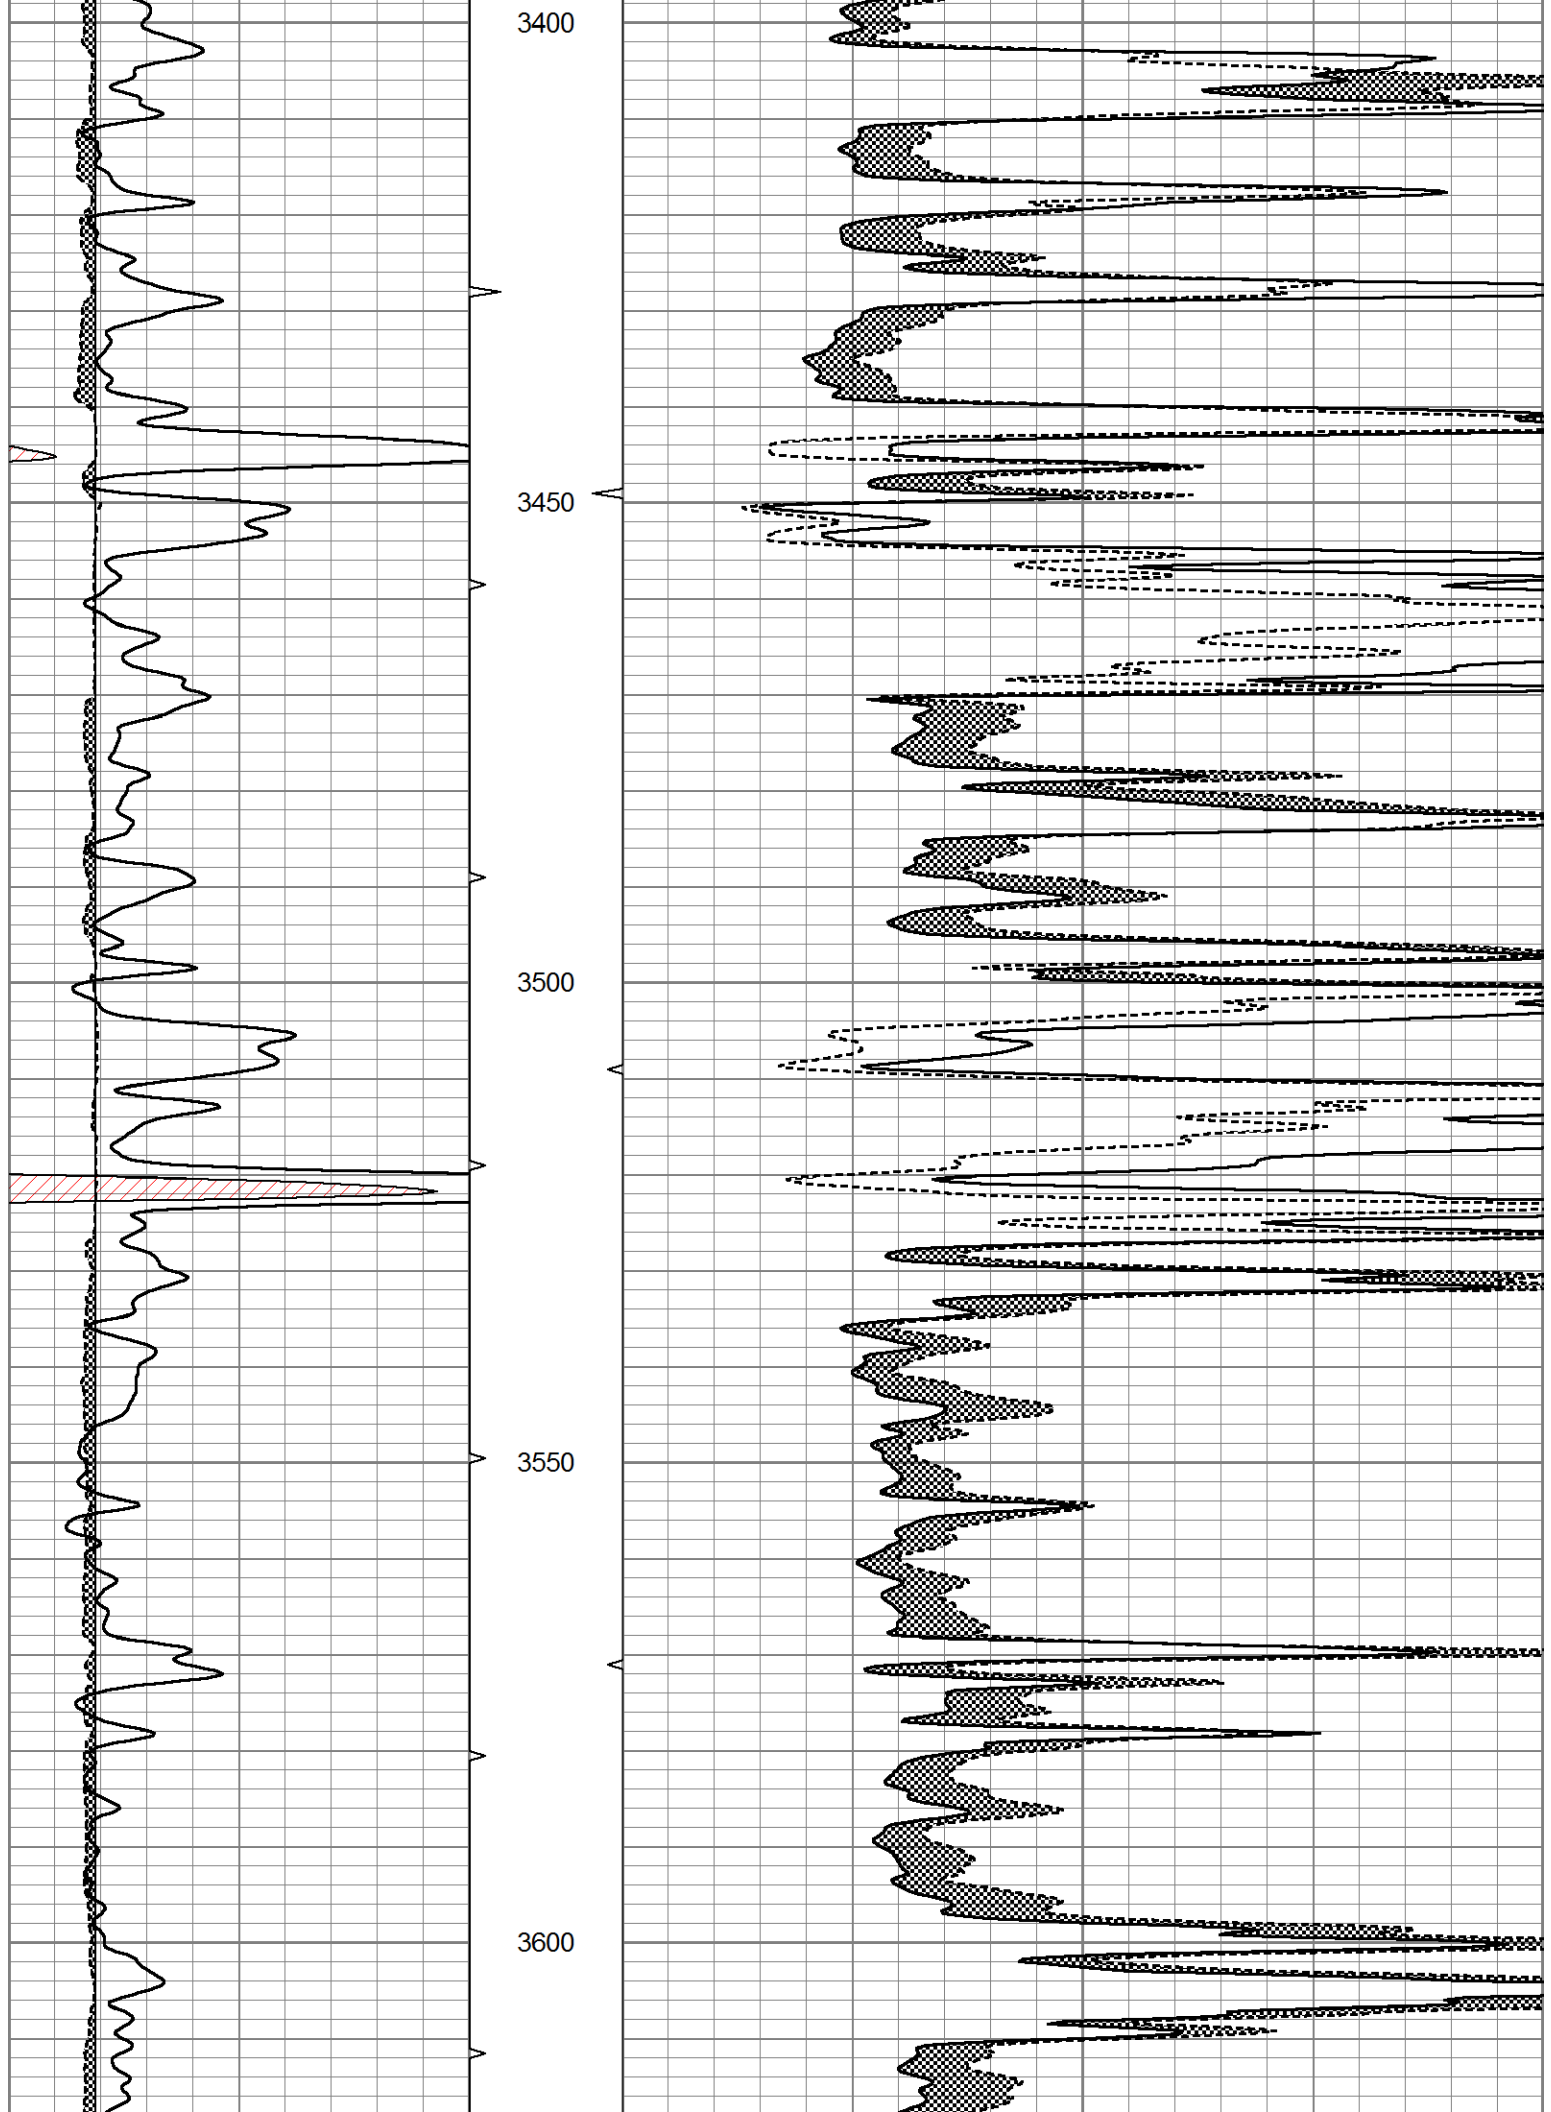


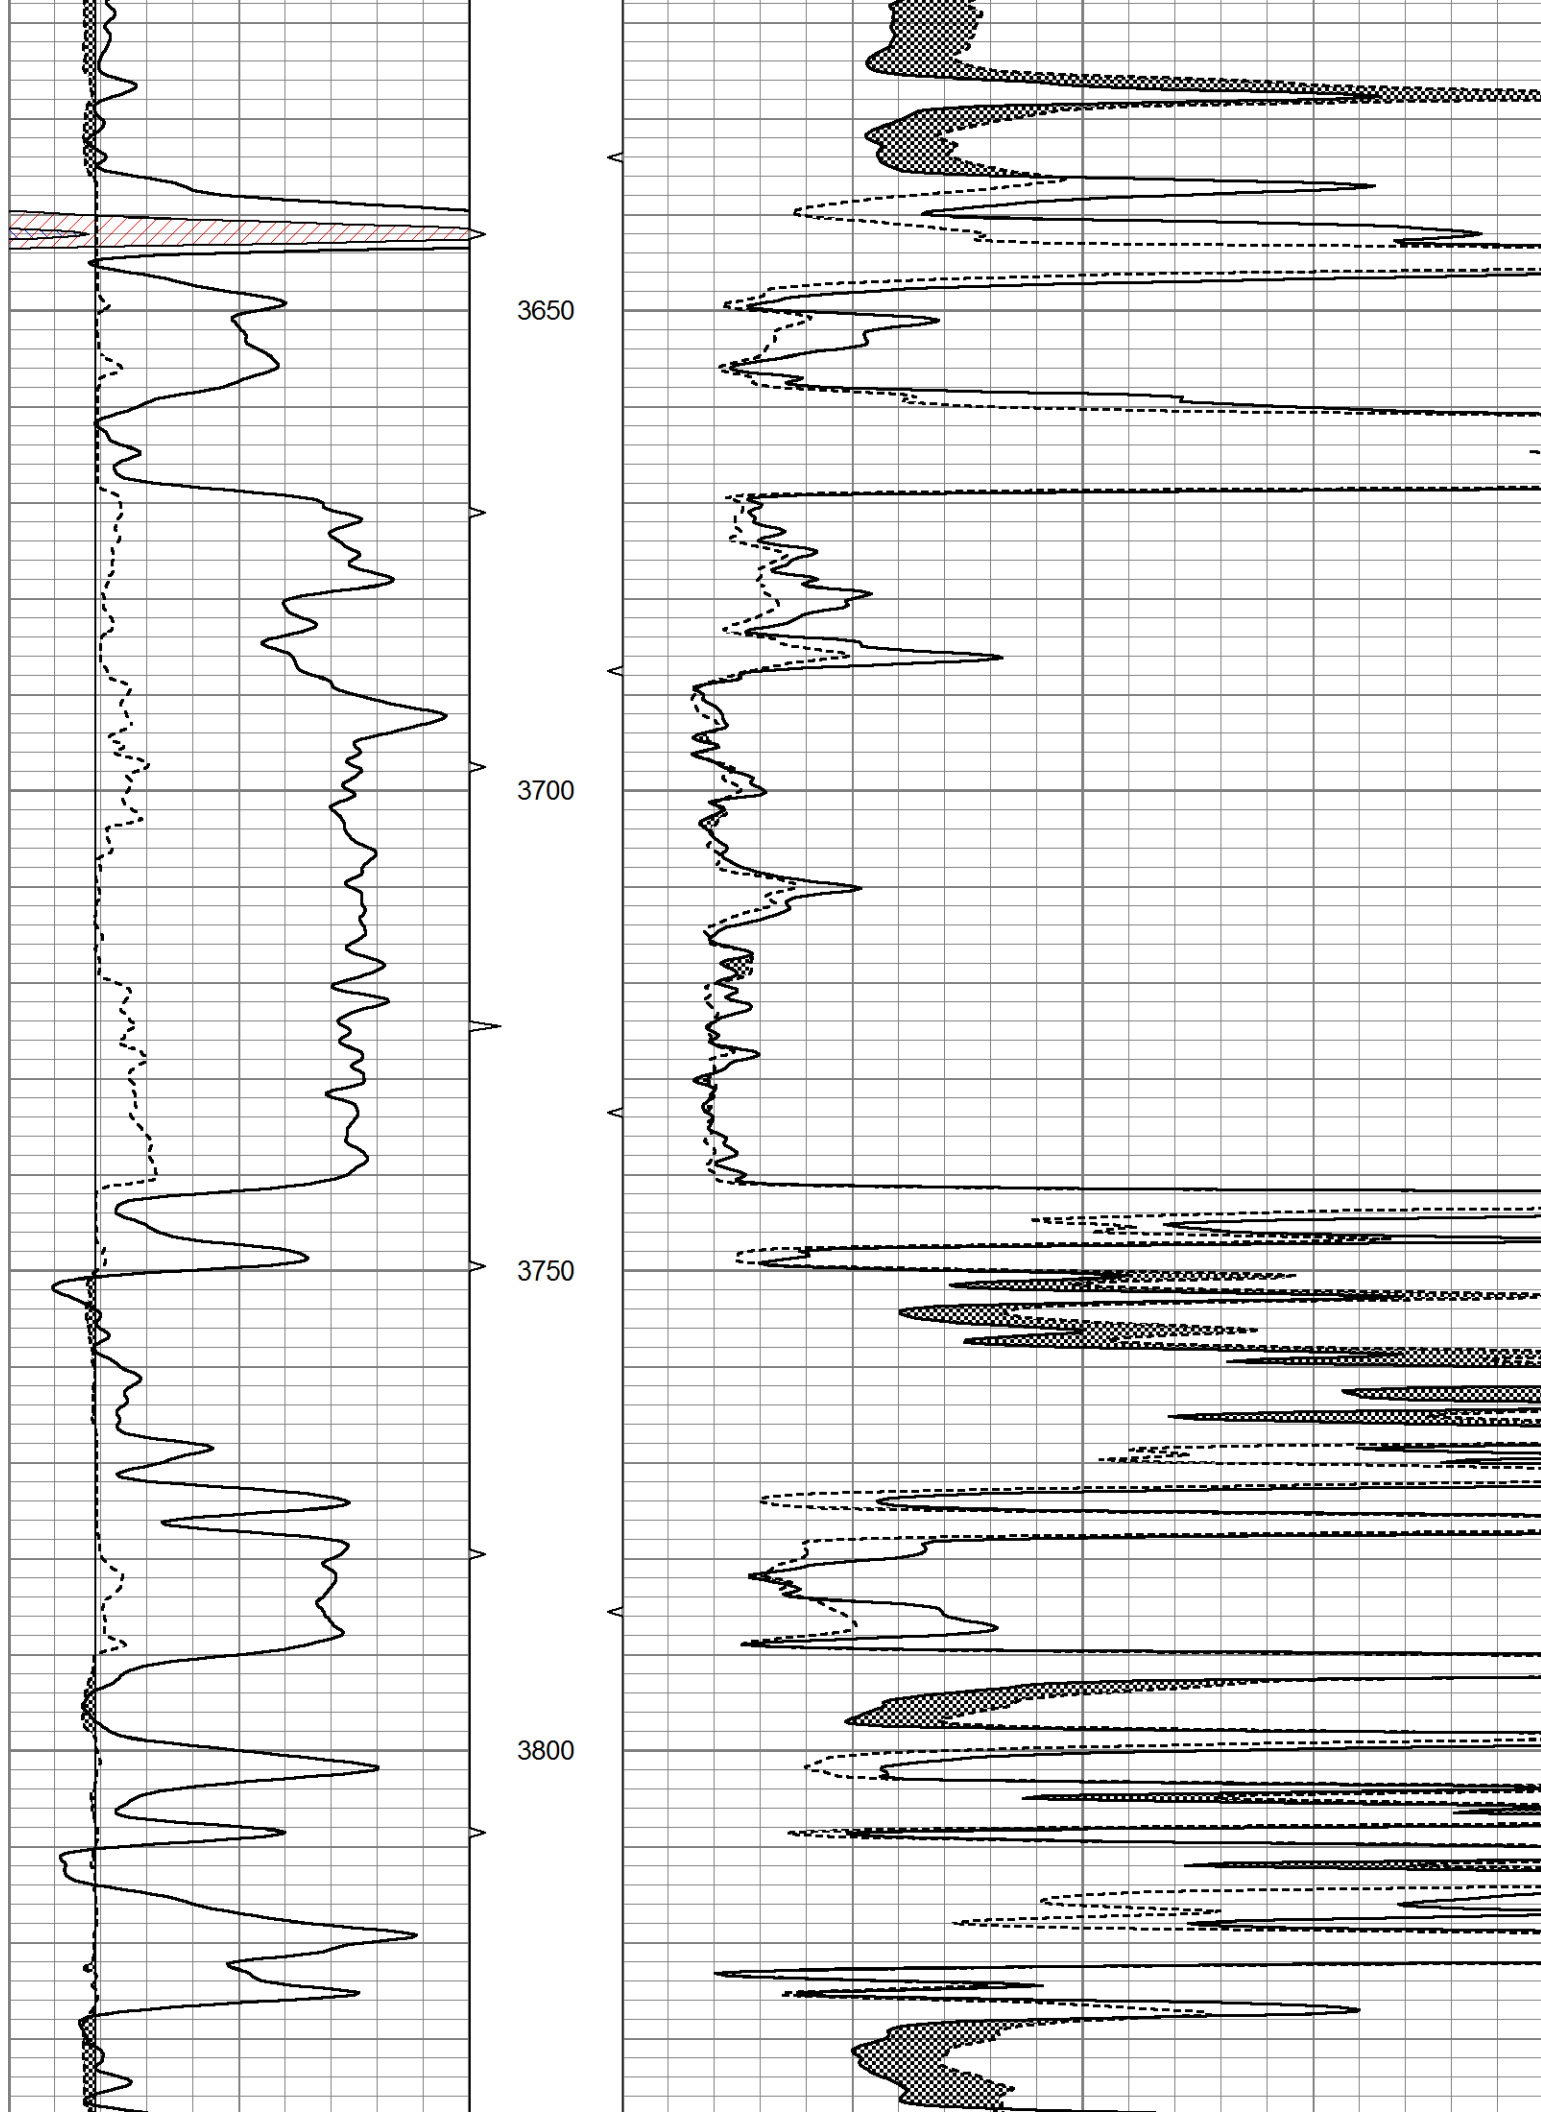

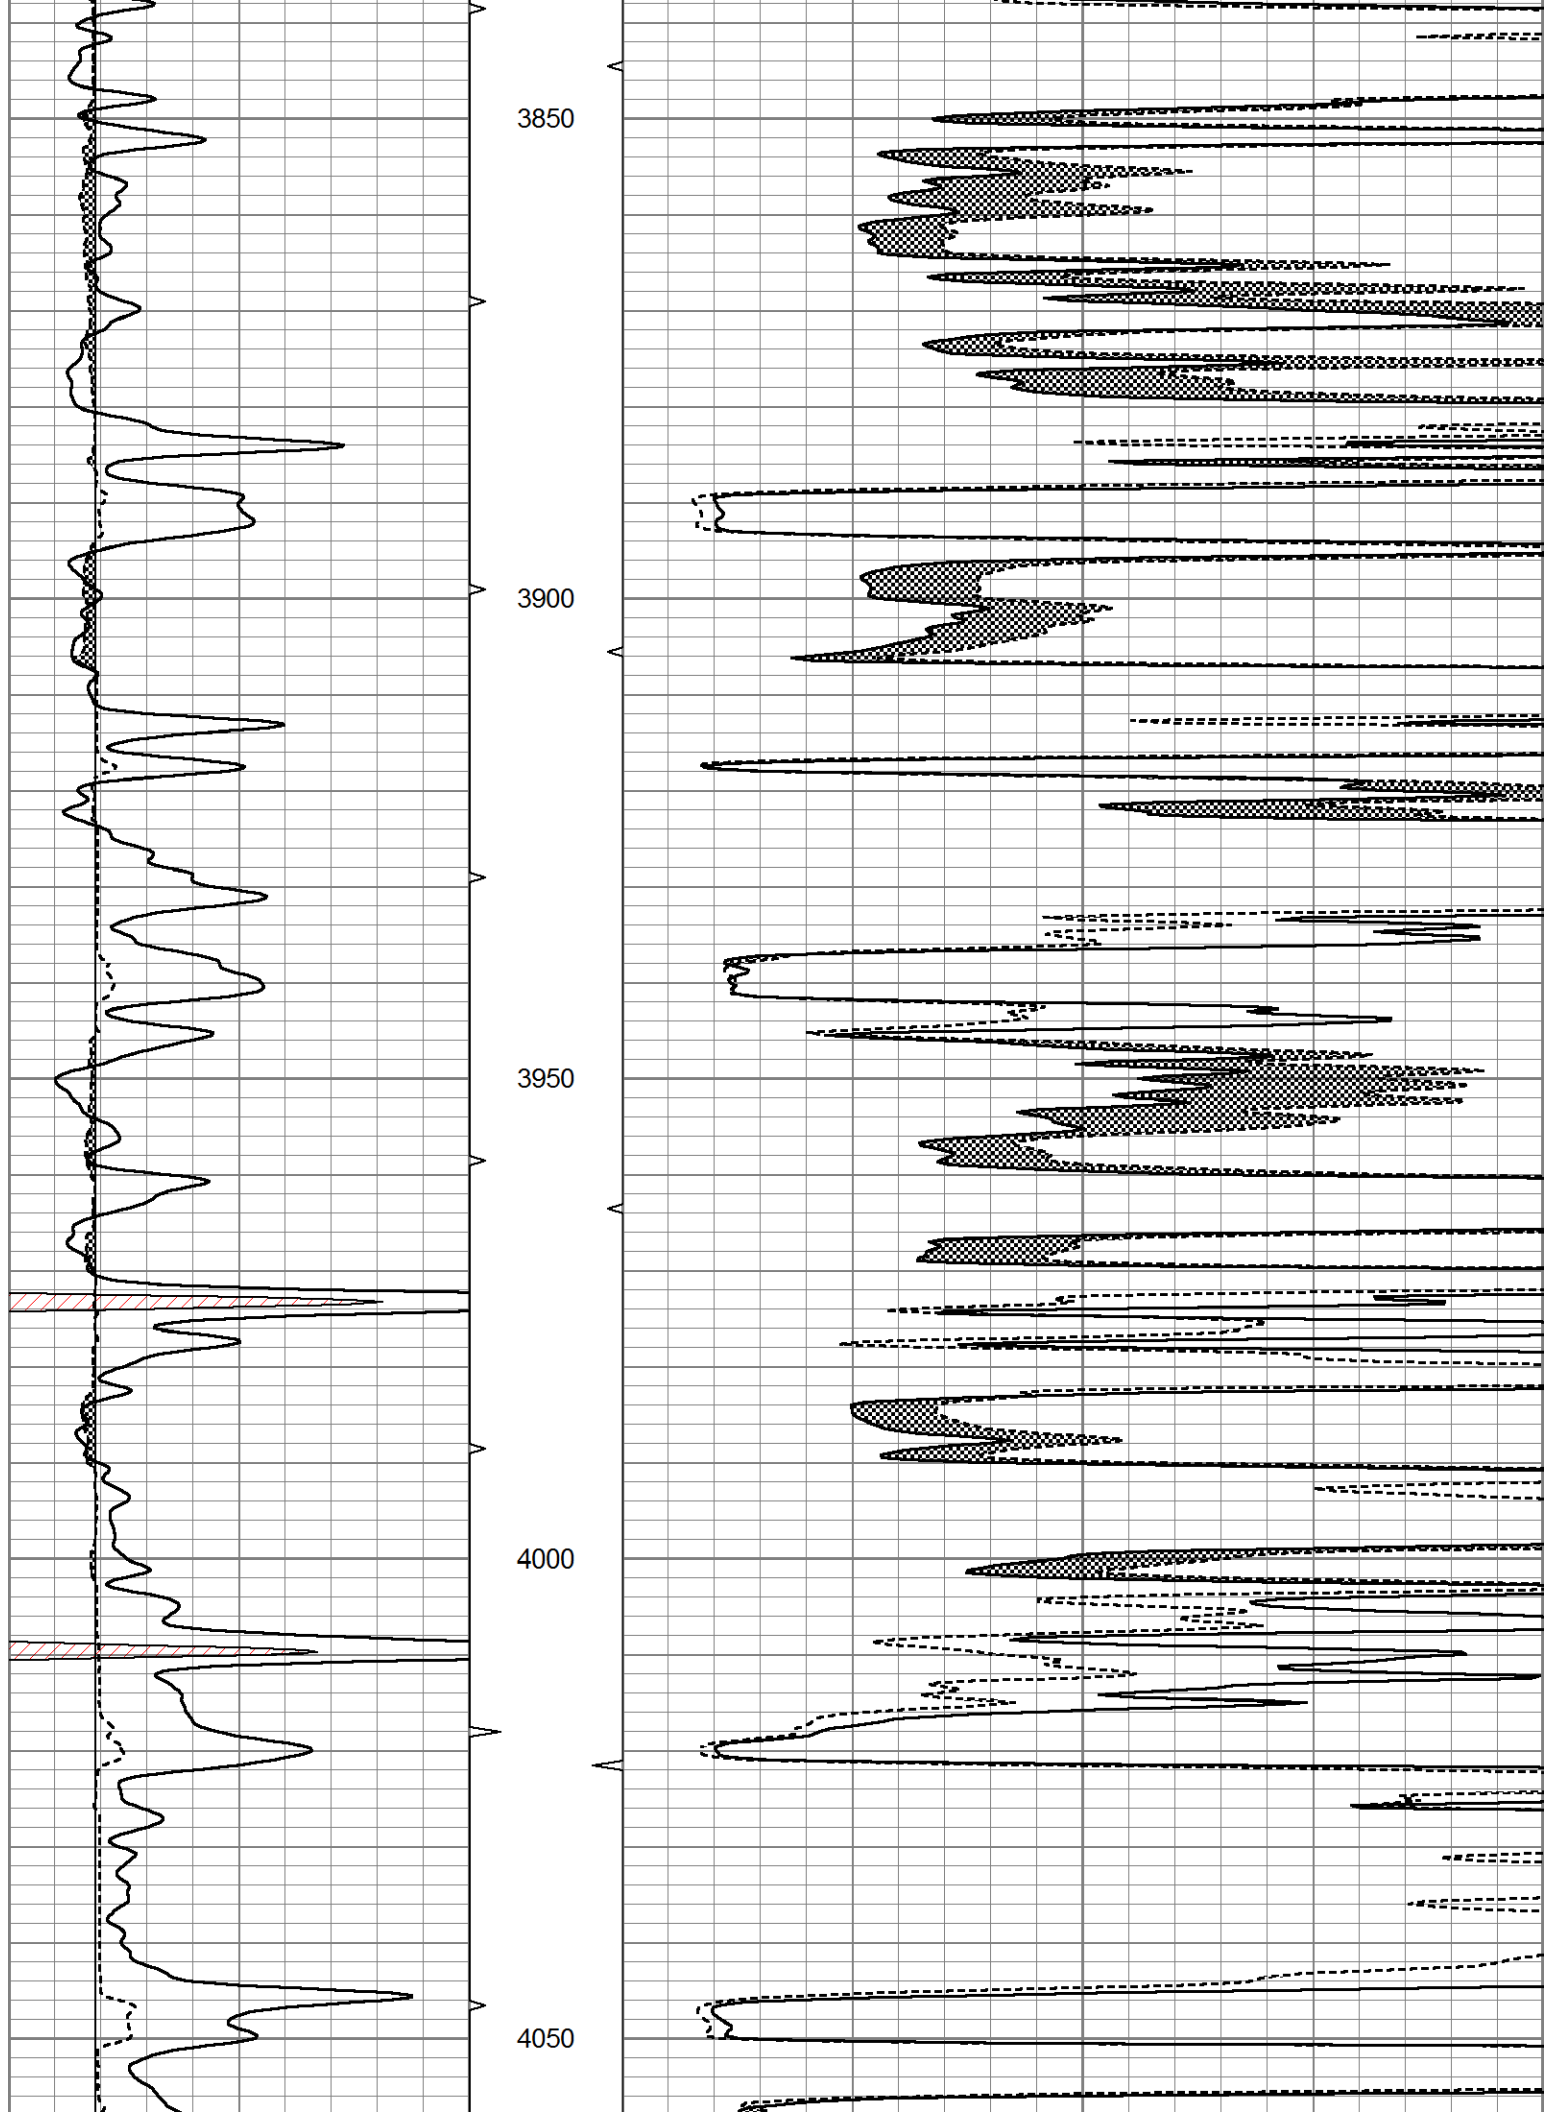

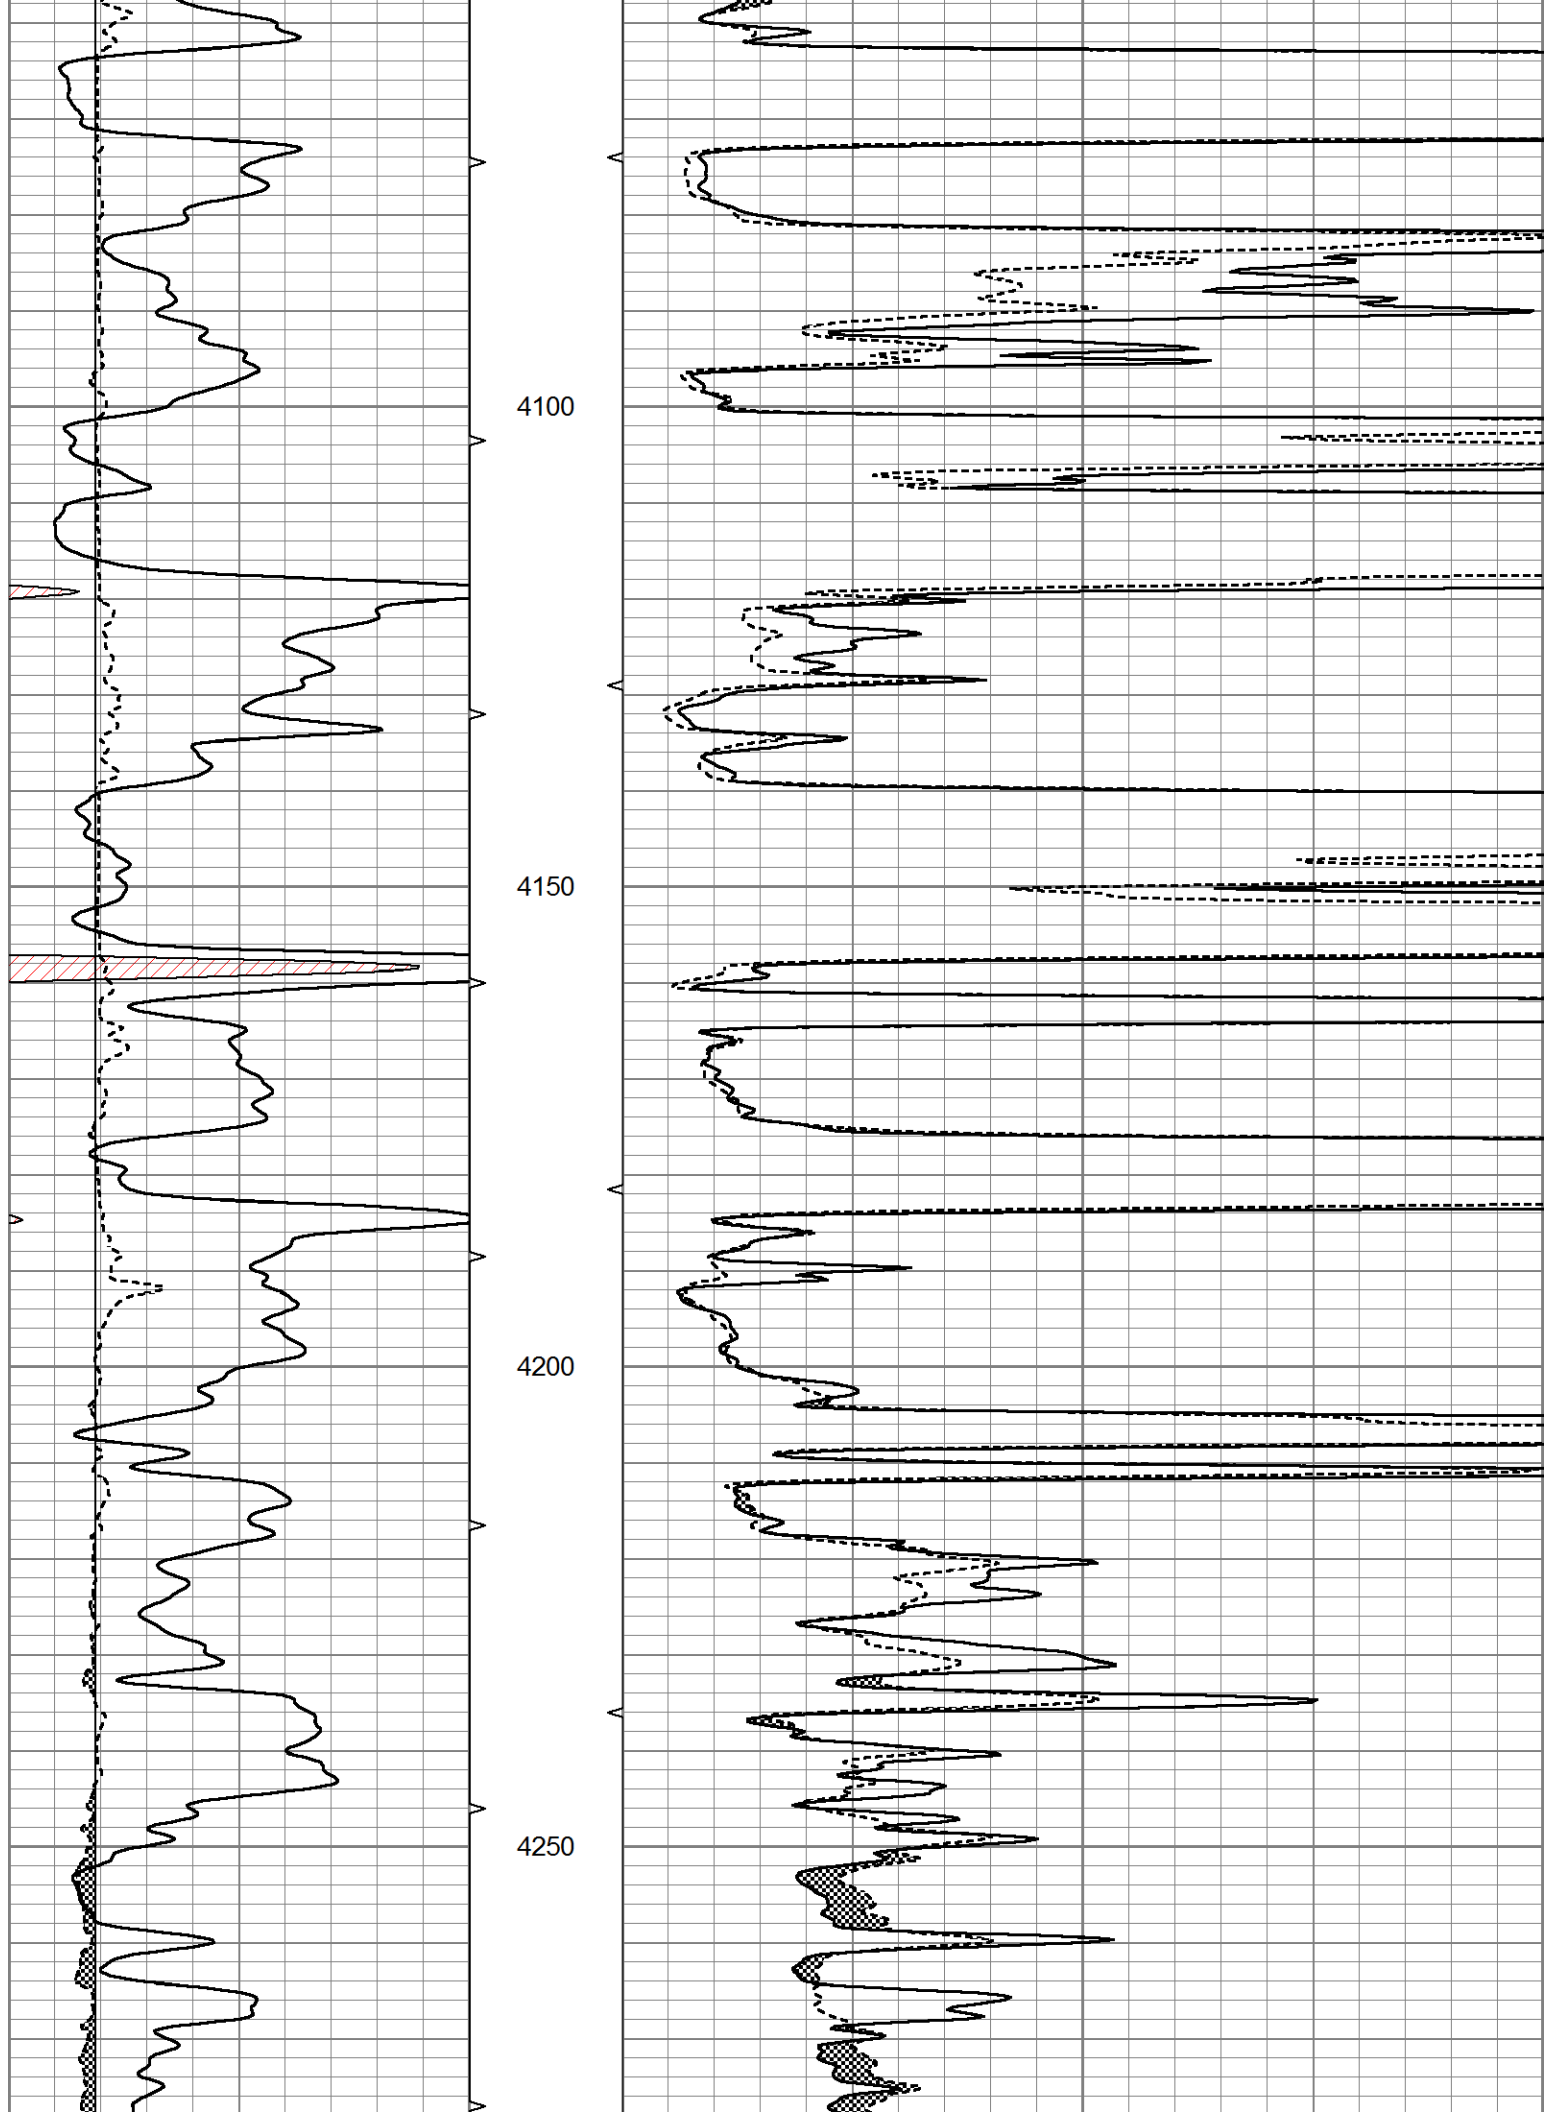

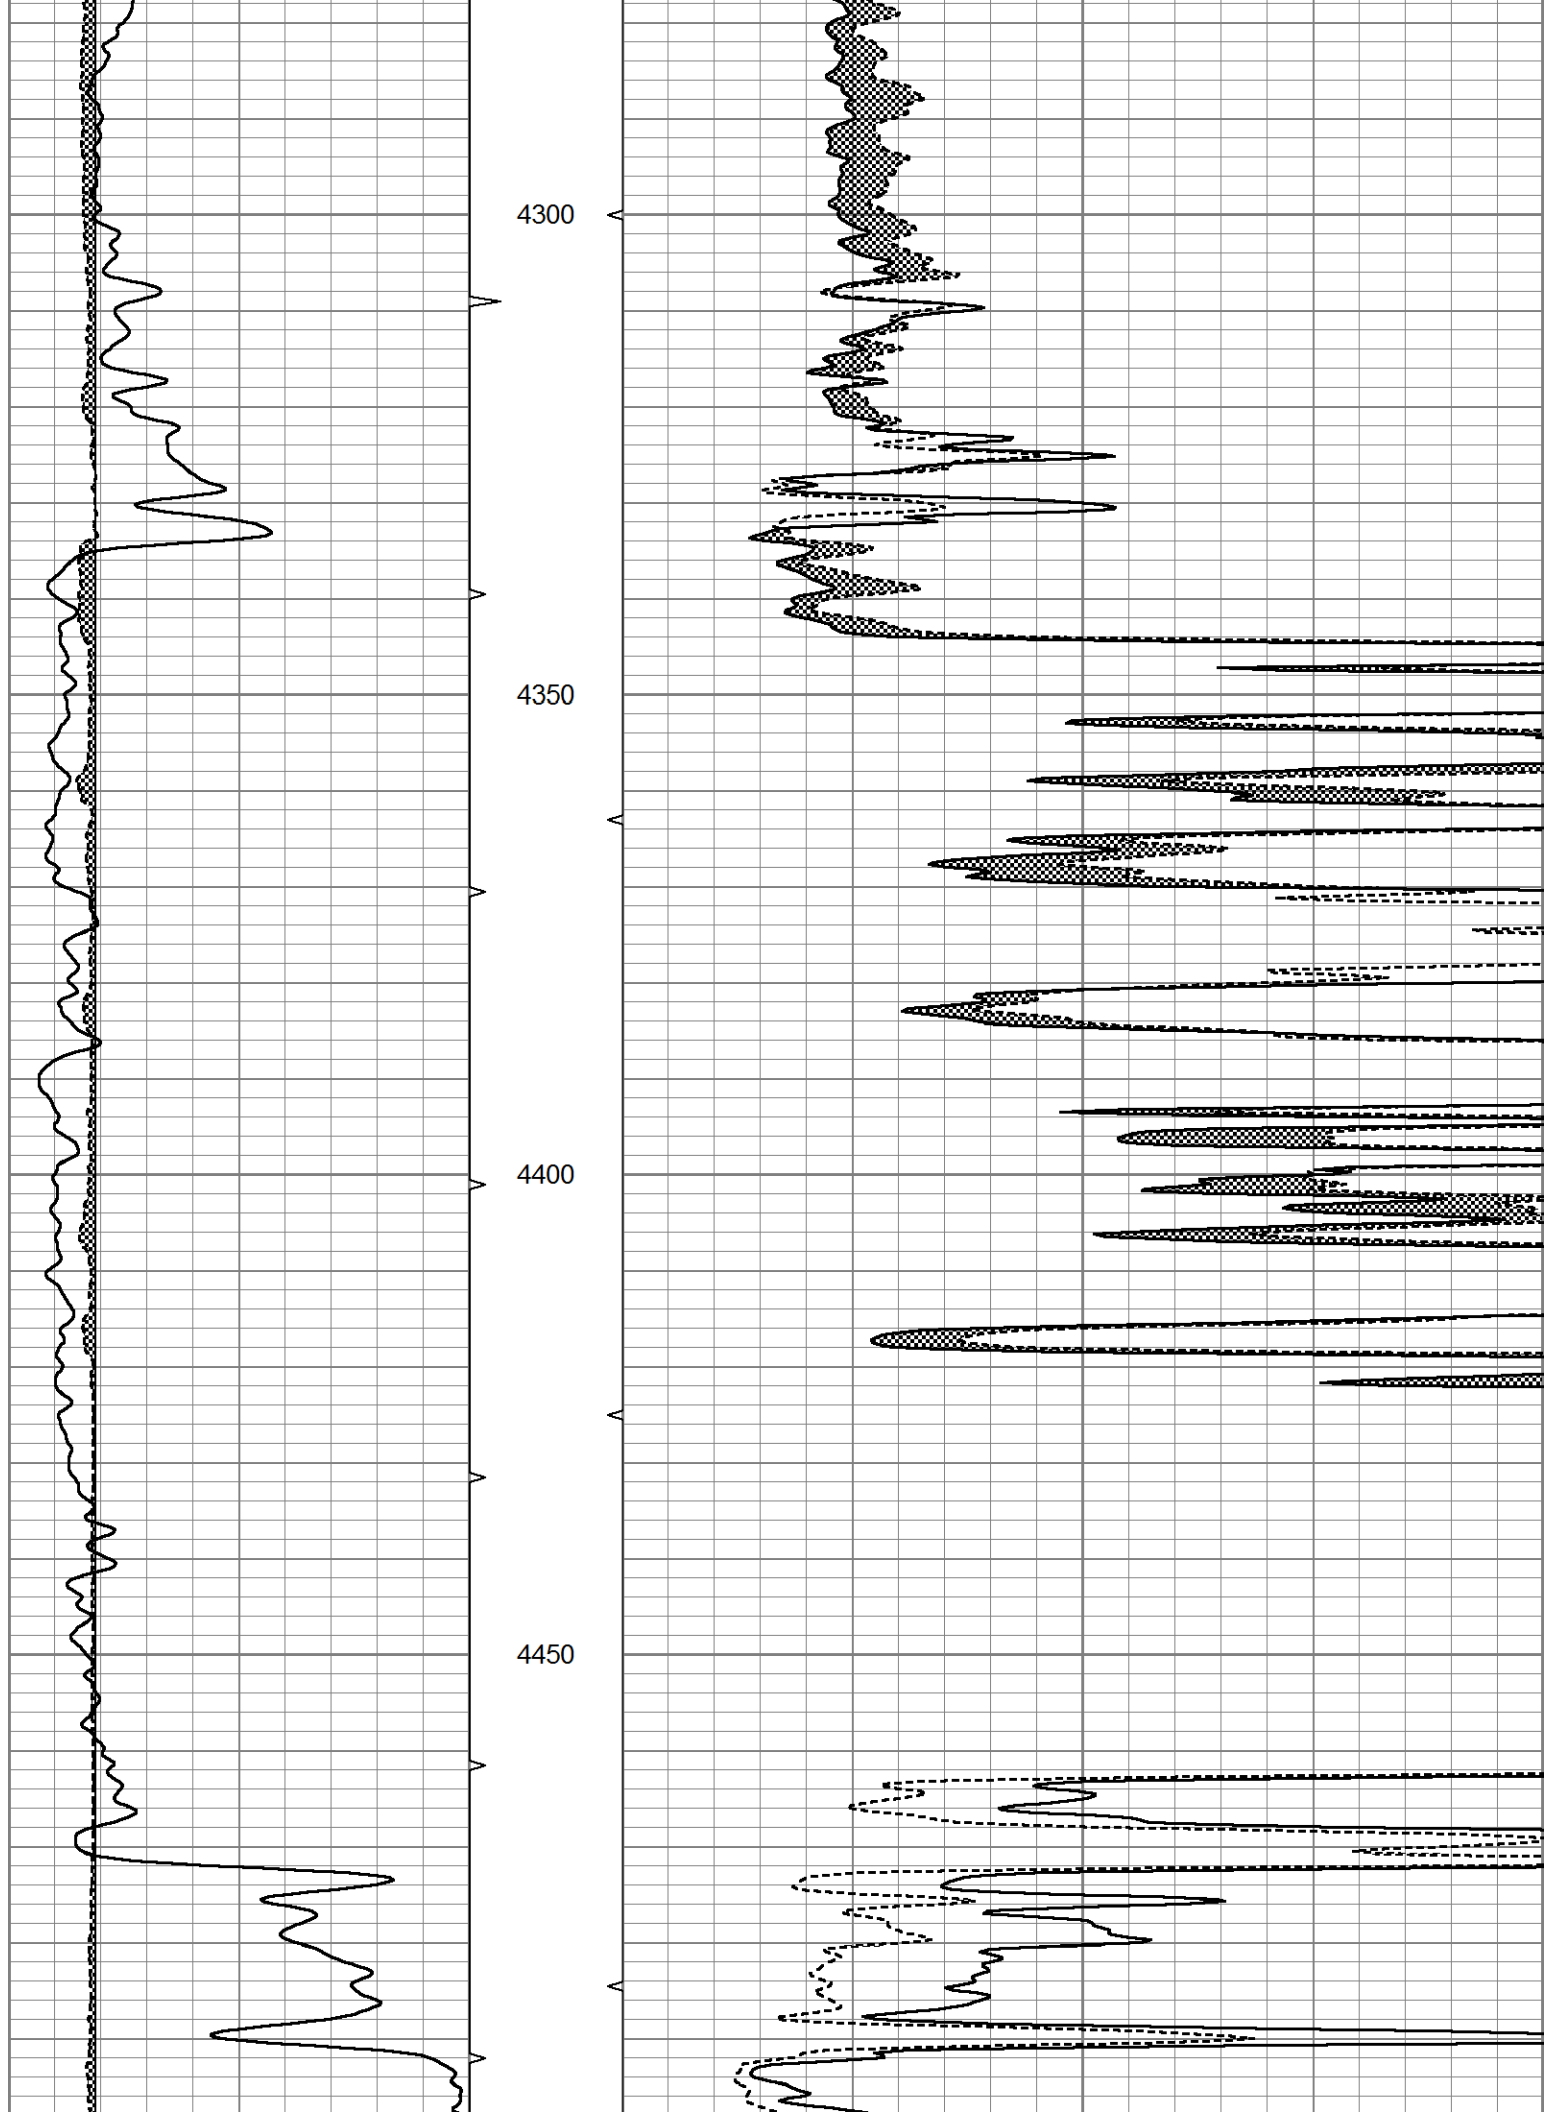


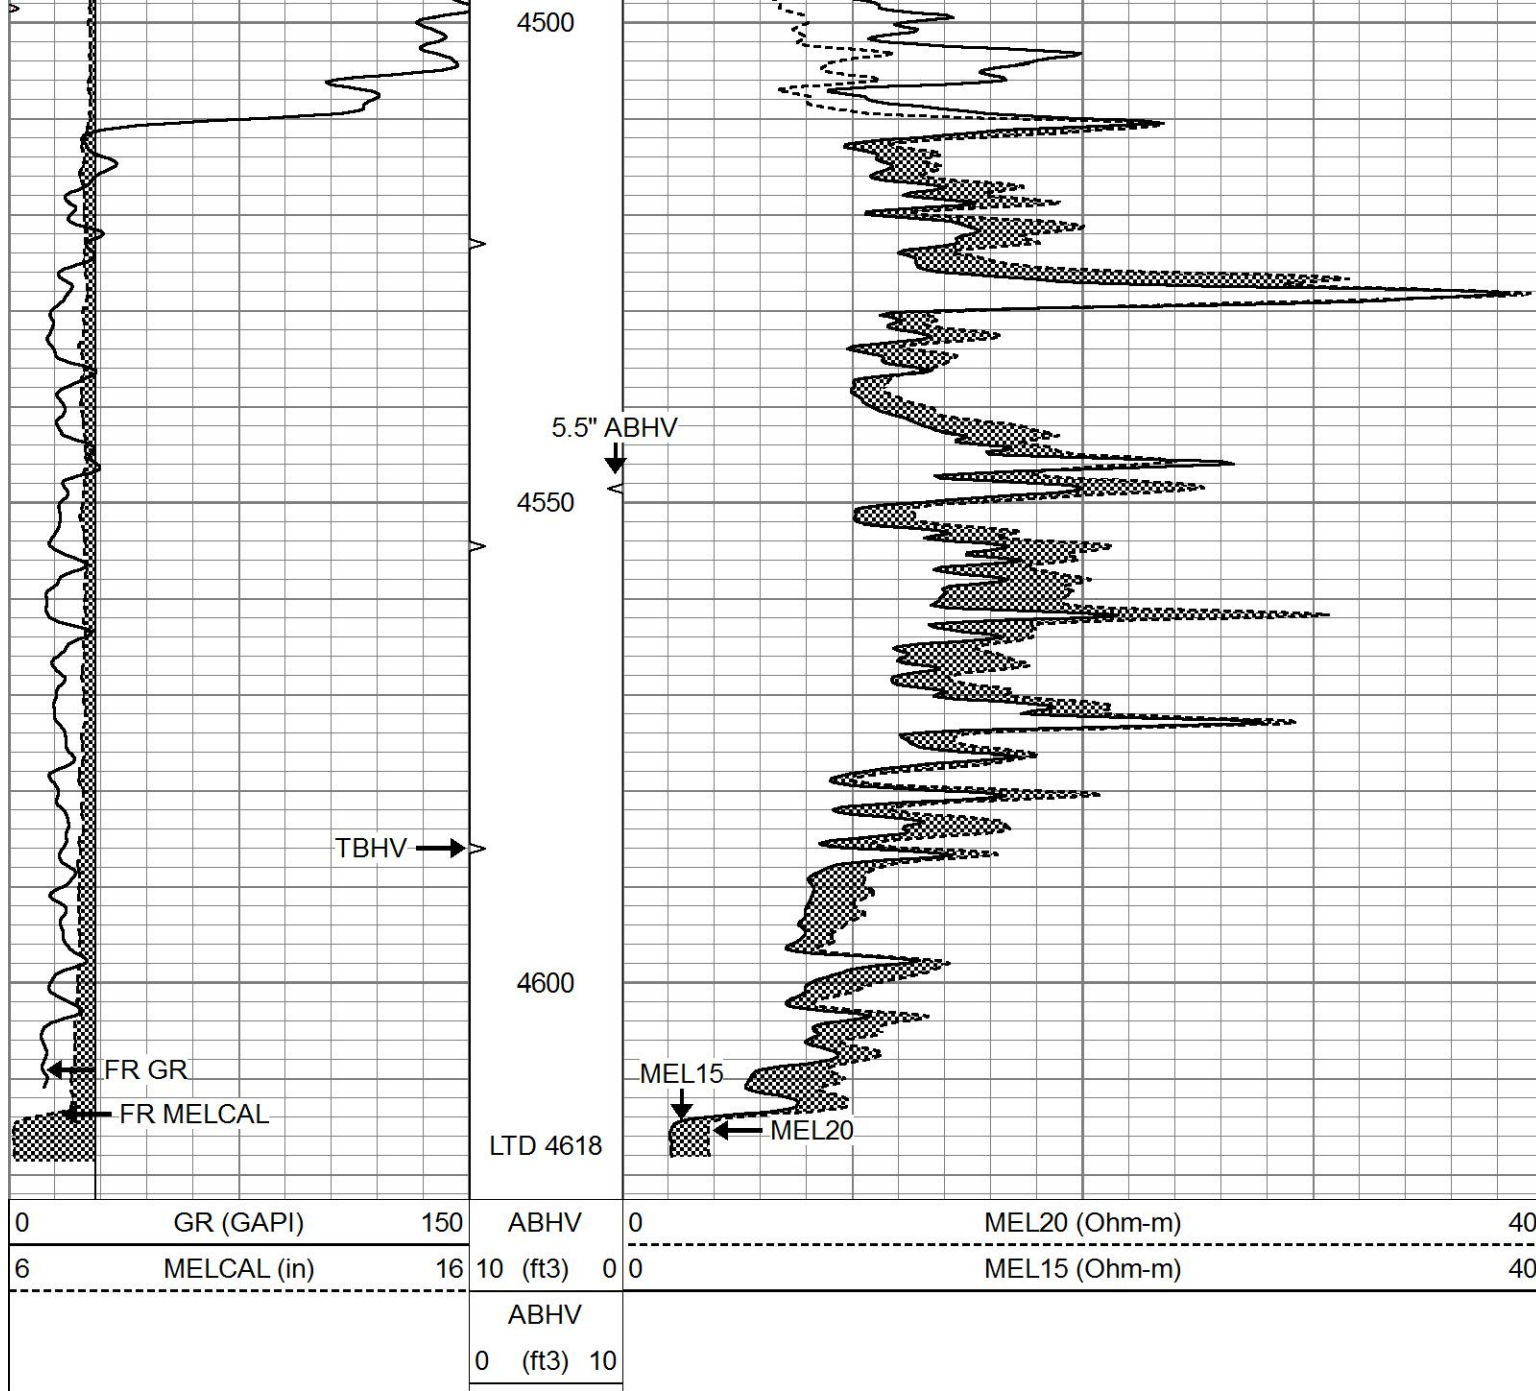


REPEAT SECTION

Database File 8411pe.db
 Dataset Pathname pass7.2
 Presentation Format micro
 Dataset Creation Fri Feb 16 02:05:19 2024
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			



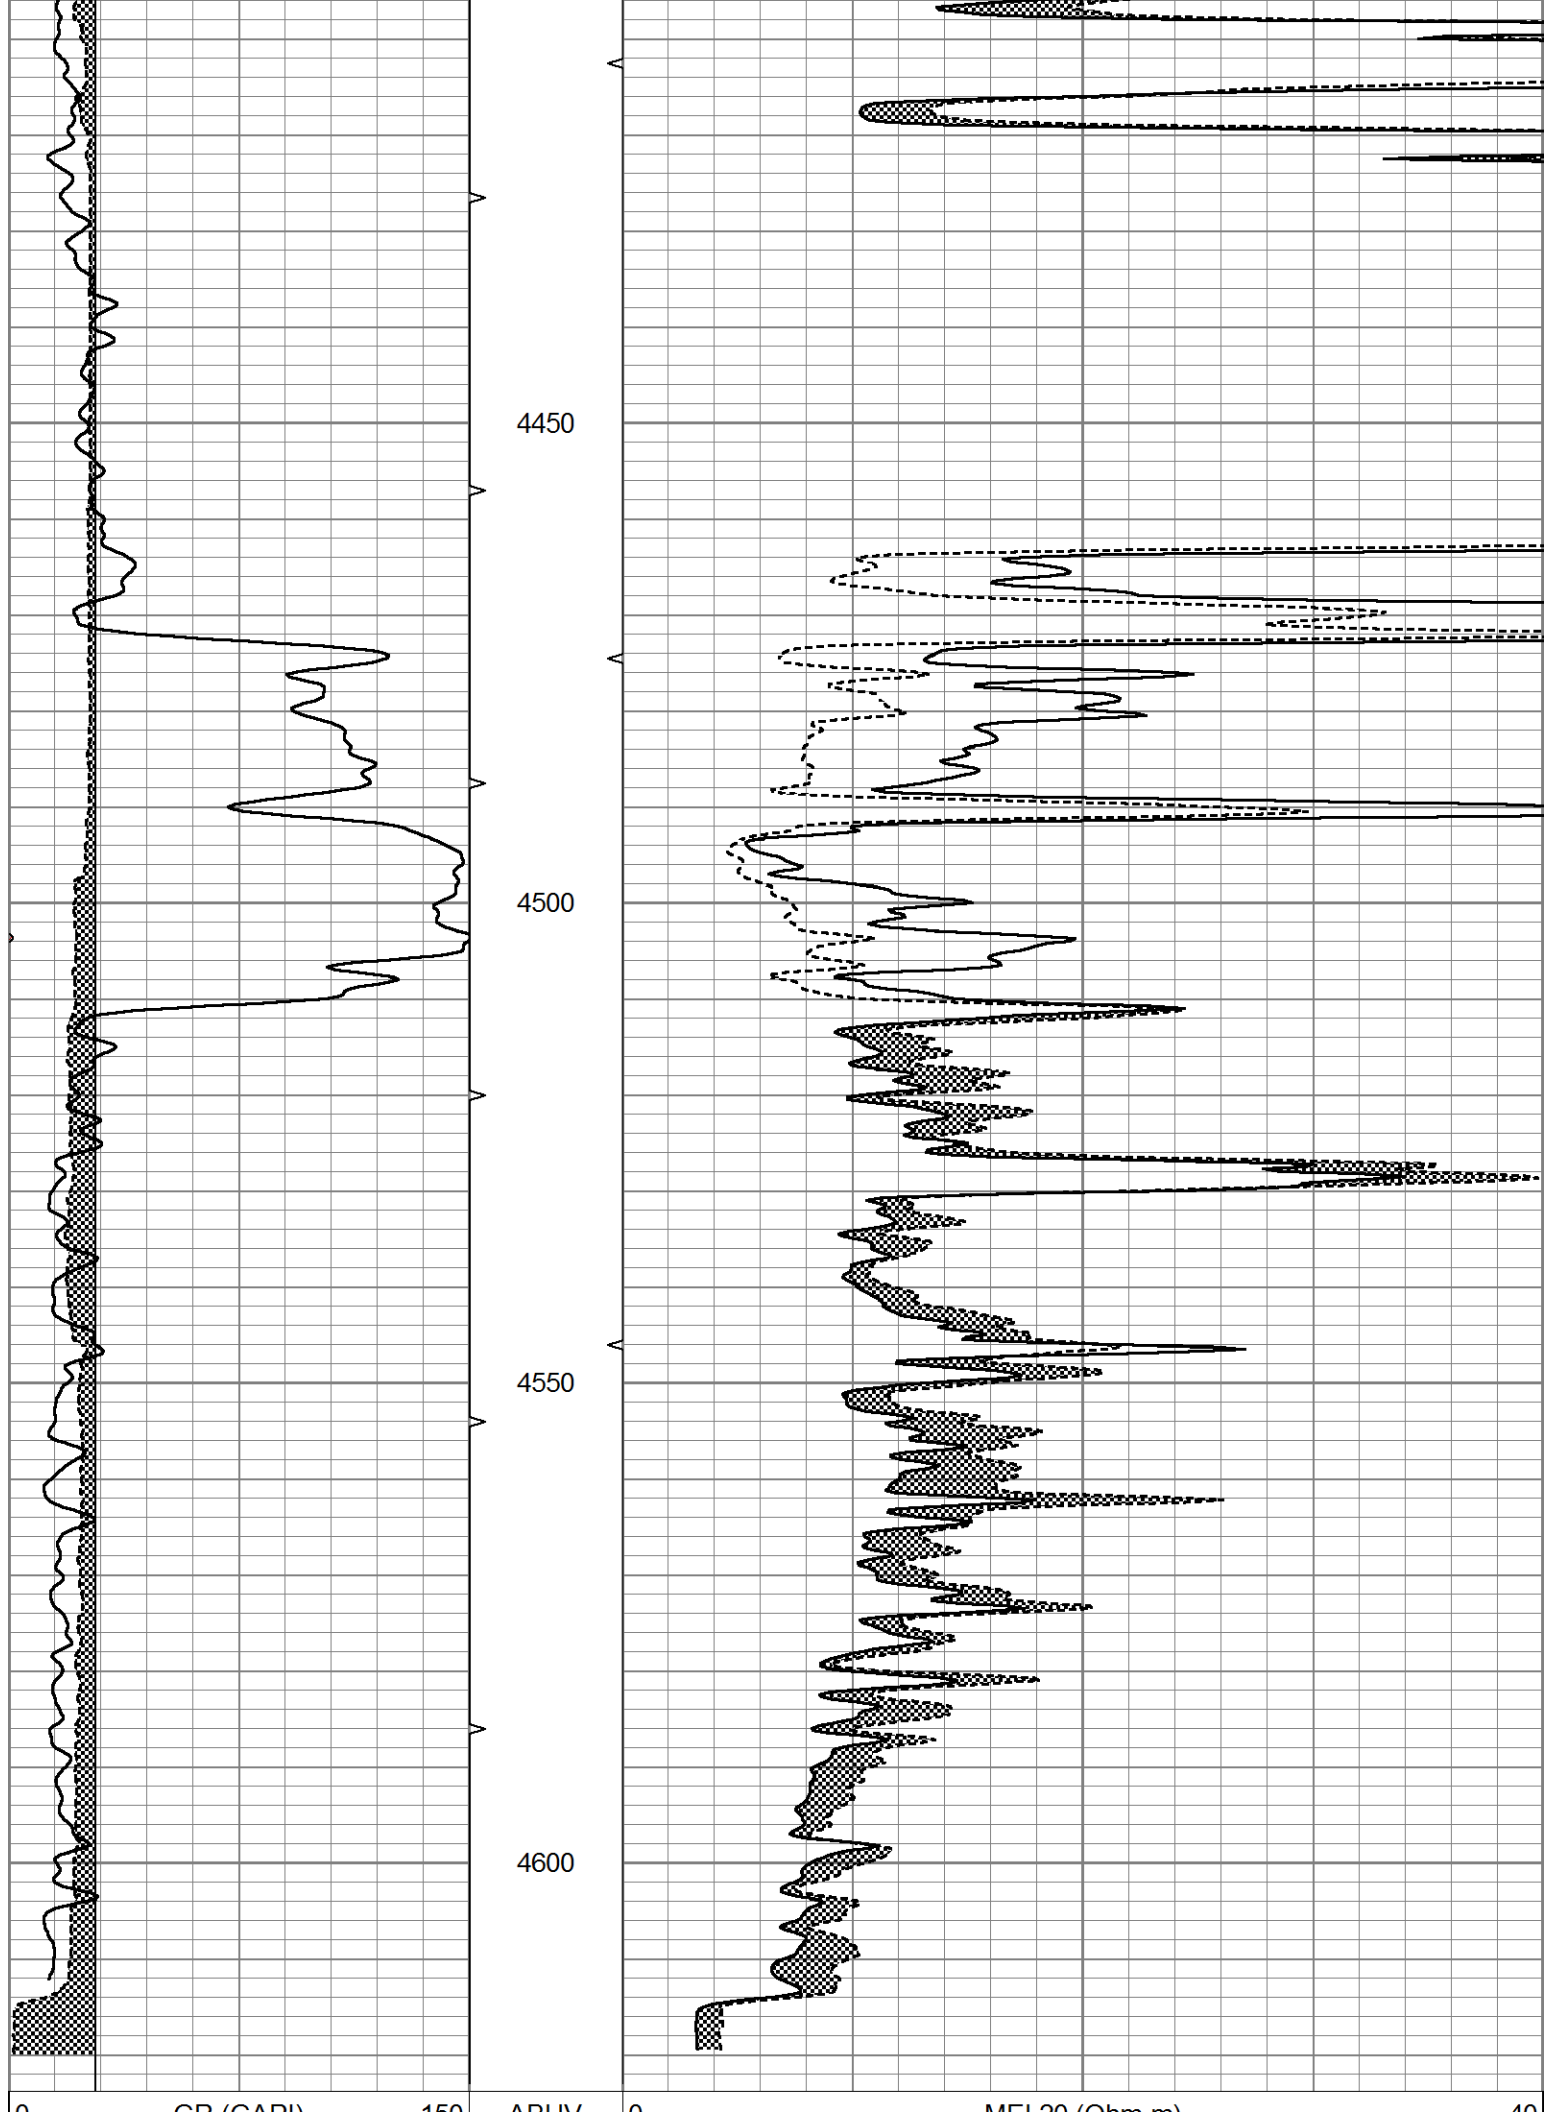

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

Calibration Report			
Database File	8411pe.db		
Dataset Pathname	pass8.2		
Dataset Creation	Fri Feb 16 02:36:45 2024		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Fri Feb 16 01:50:57 2024		
Caliper Calibration:	Gain=3.509	Offset=1.965	
	Low Cal	High Cal	
References	8.000	16.000	
Readings	1.720	4.000	
1.5" Calibration:	Gain=58.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.000	1.216	
2" Calibration:	Gain=68.000	Offset=-0.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	1.053	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Sun Jan 07 11:06:36 2024		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.3000	GAPI/cps	