

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-21176-00-00
Spot: SENW Sec/Twnshp/Rge: 35-31S-27W
1980 feet from N Section Line, 1980 feet from W Section Line
Lease Name: RAZORHAWK Well #: 35 1
County: MEADE Total Vertical Depth: 5800 feet

Operator License No.: 33392

Op Name: KEITH F. WALKER OIL & GAS CO., LLC

Address: P.O. BOX 1725 219 STANLEY STREET
ARDMORE, OK 73402

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	1450		

\$ 188.50

Well Type: DH

UIC Docket No:

Date/Time to Plug: 02/11/2007 2:00 AM

Plug Co. License No.: 33630

Plug Co. Name: TITAN DRILLING LLC

Proposal Rcvd. from:

Company:

Phone:

Proposed Plugging Method: 1ST PLUG AT 1470' WITH 50 SX CMT. 2ND PLUG AT 630' WITH 40 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCUALTE RAT HOLE WITH 15 SX CMT. 5TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT

WitnessType: NONE

Date/Time Plugging Completed: 02/11/2007 4:30 AM

KCC Agent: STEVE DURRANT

Actual Plugging Report:

Perfs:


1ST PLUG AT 1473' WITH 50 SX CMT. 2ND PLUG AT 637' WITH 40 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCUALTE RAT HOLE WITH 20 SX CMT. 5TH PLUG TO CIRCULATE MOUSE HOLE WITH 20 SX CMT.

INVOICED
DATE 2-23-07
INV. NO. 2007061382

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: DP

District: 01

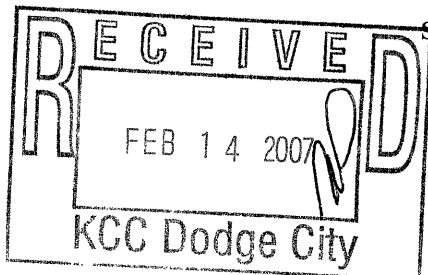

Signed

Steve Durrant

(TECHNICIAN)

RECEIVED

FEB 20 2007

KCC WICHITA

Form CP-2/3

PST