

MICRO LOG

Company	STAAB OIL COMPANY
Well	DINKEL #3
Field	FLAX
County	TREGO
State	KANSAS
Location:	API # : 15-195-23171-0000 2310 FSL & 1650 FWL NW - NE - SW
Permanent Datum	SEC 25 TWP 13S RGE 21W
Log Measured From	GROUND LEVEL Elevation 2330 KELLY BUSHING 8' A.G.L
Drilling Measured From	KELLY BUSHING
Other Services	CDL/CNL DIL
Elevation	K.B. 2338 D.F. 2336 G.L. 2330
Date	4/18/24
Run Number	THREE
Depth Driller	4055
Depth Logger	4056
Bottom Logged Interval	4054
Top Log Interval	3200
Casing Driller	8.625 @ 232
Casing Logger	232
Bit Size	7.875
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.2/54
pH / Fluid Loss	10.5/6.0
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.780 @ 72F
Rmf @ Meas. Temp	.585 @ 72F
Rmc @ Meas. Temp	.936 @ 72F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	.484 @ 116F
Time Circulation Stopped	4 HOURS
Time Logger on Bottom	7.45 P.M.
Maximum Recorded Temperature	116F
Equipment Number	3802
Location	HAYS, KANSAS
Recorded By	COLE ROBBEN
Witnessed By	JANEL STAAB
	FRANK STAAB
	KURT STAAB

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


FROM ELLIS BLACKTOP/OLD 40 INTERSECTION IN ELLIS, KANSAS GO SOUTH 3.5 MILES TO
AIRBASE ROAD, WEST 2.8 MILES, NORTH INTO AT TANK BATTERIES




MAIN SECTION

Database File	8668ddn.db
Dataset Pathname	pass11MEL
Presentation Format	_micro
Dataset Creation	Thu Apr 18 22:09:28 2024
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)		40		
6	CALIPER (in)	16	10 (ft3)	0	0	MEL2.0 (Ohm-m)		40	
0	MINMK	20	TBHV				0	LTEN (lb)	5000
			0 (ft3)	10					

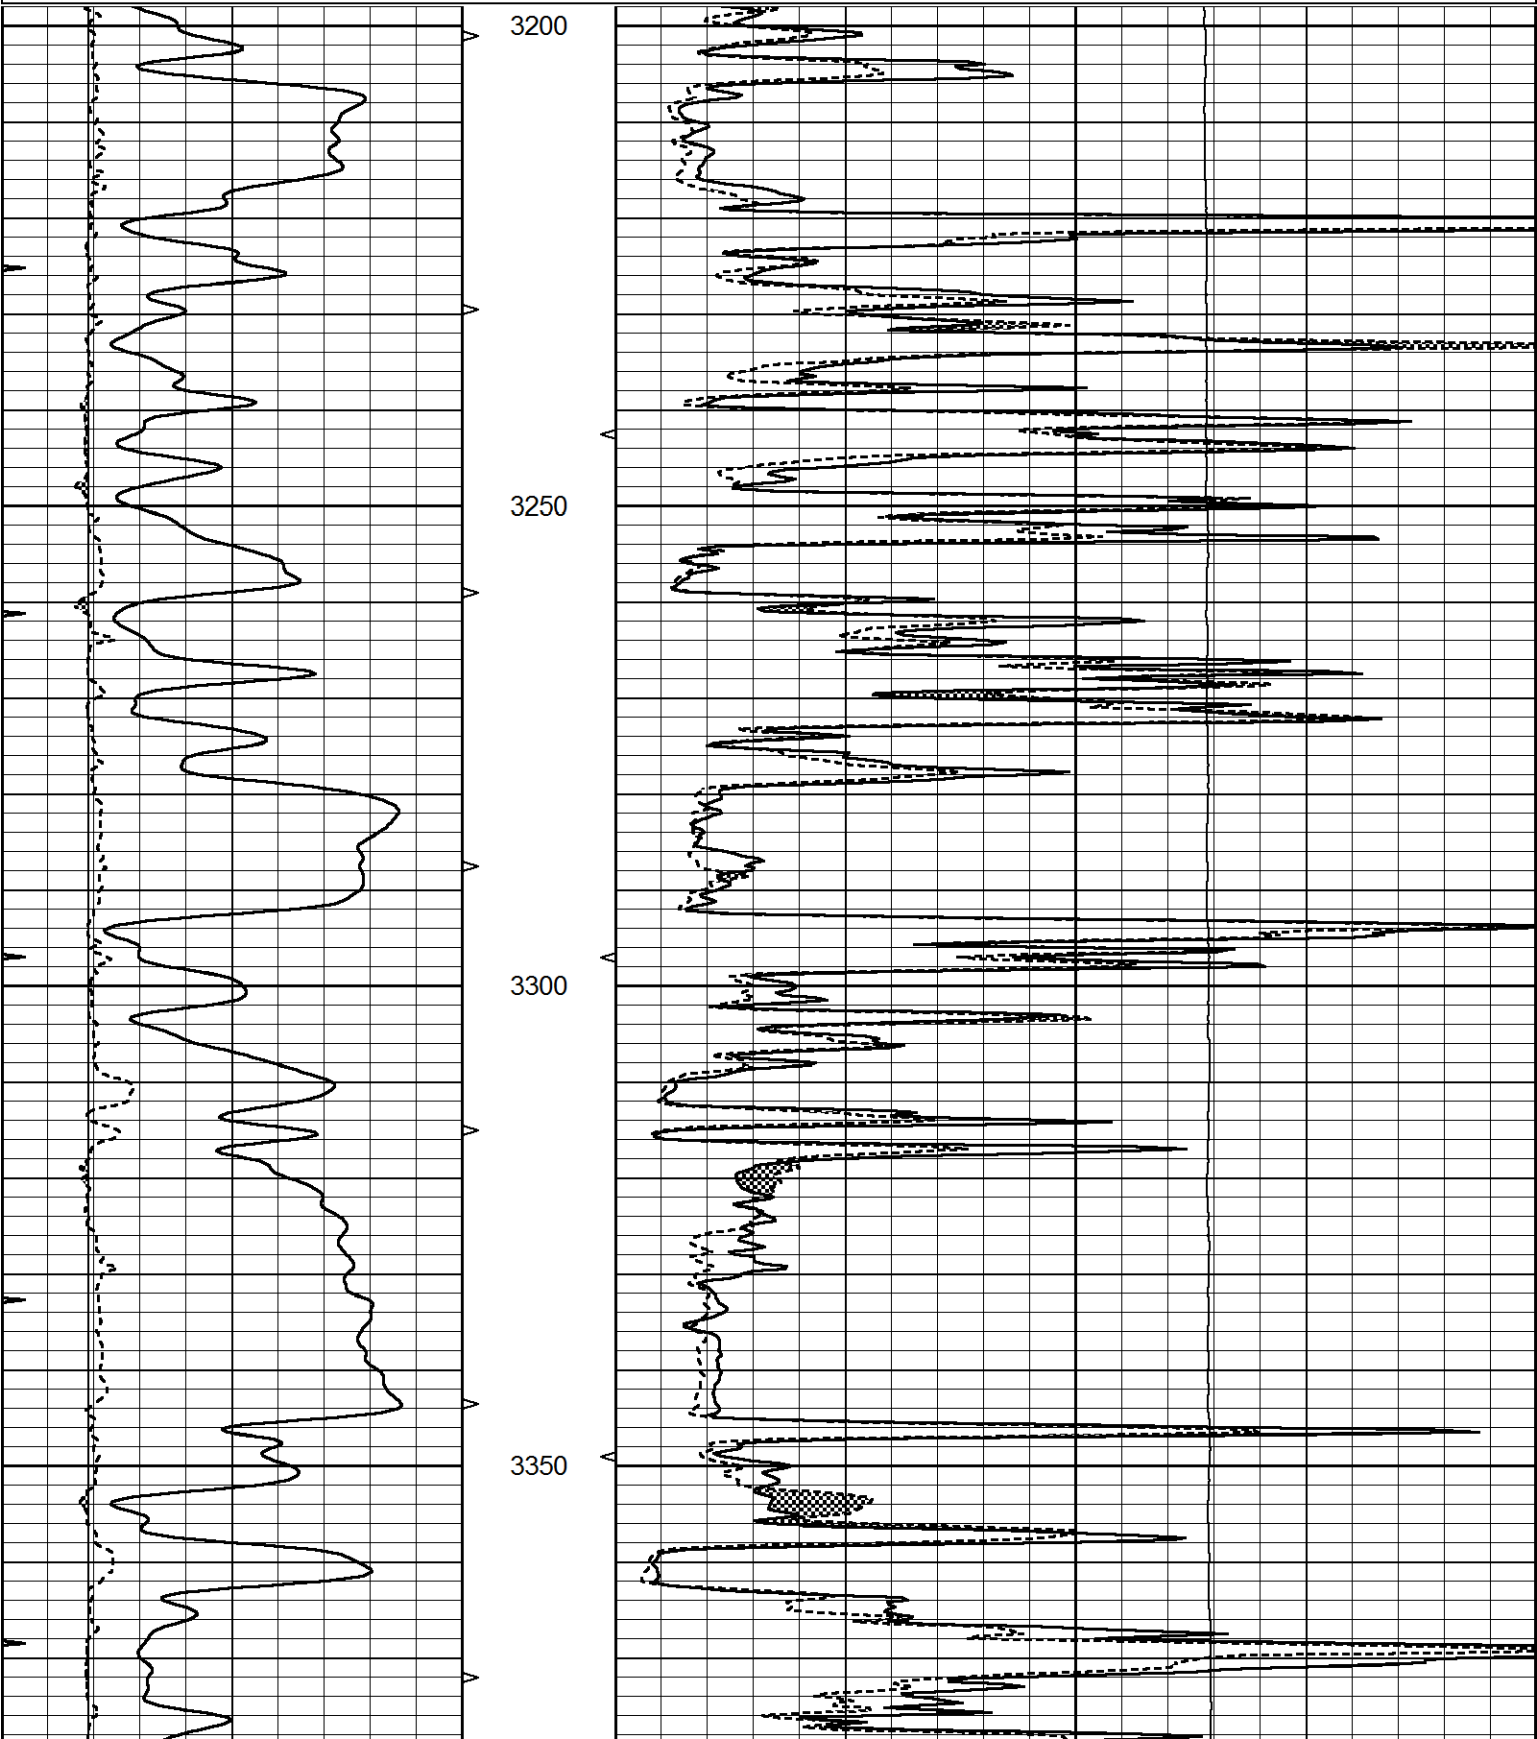

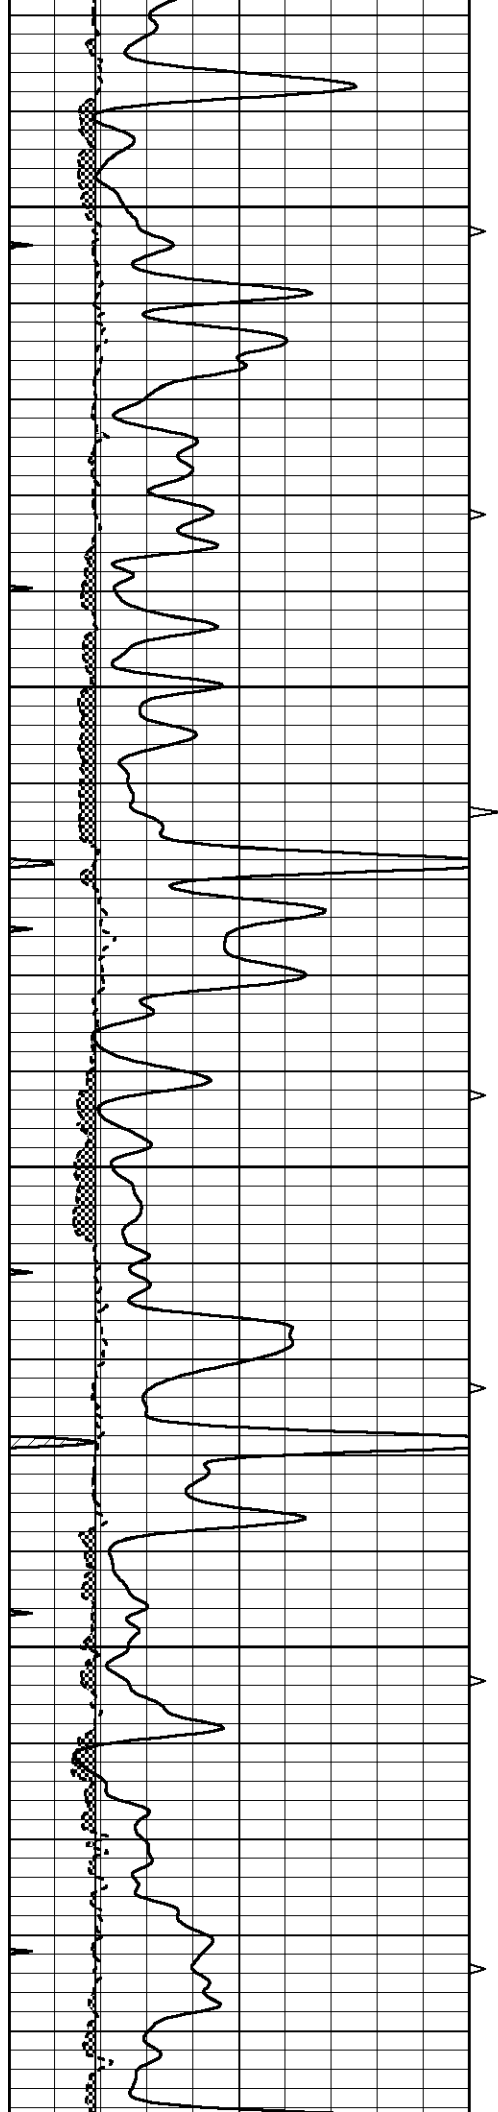



3400

3450

3500

3550

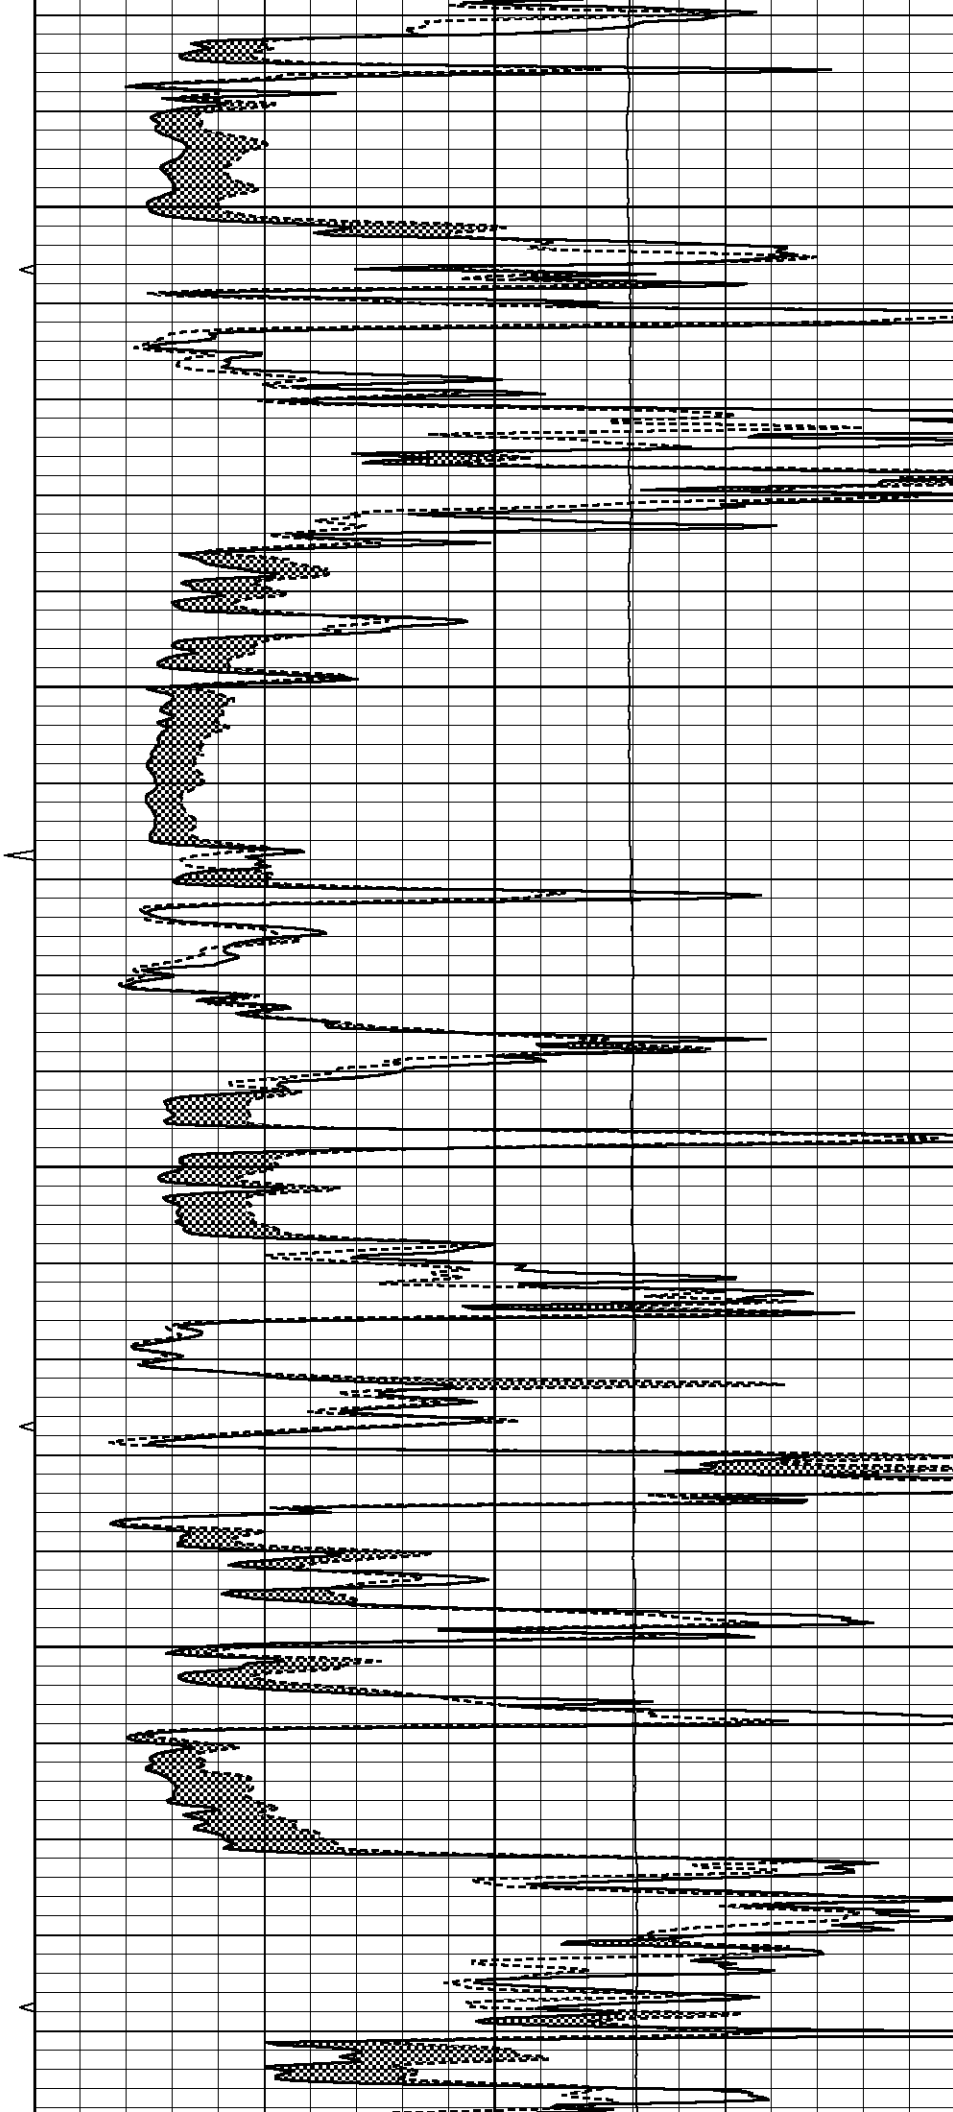

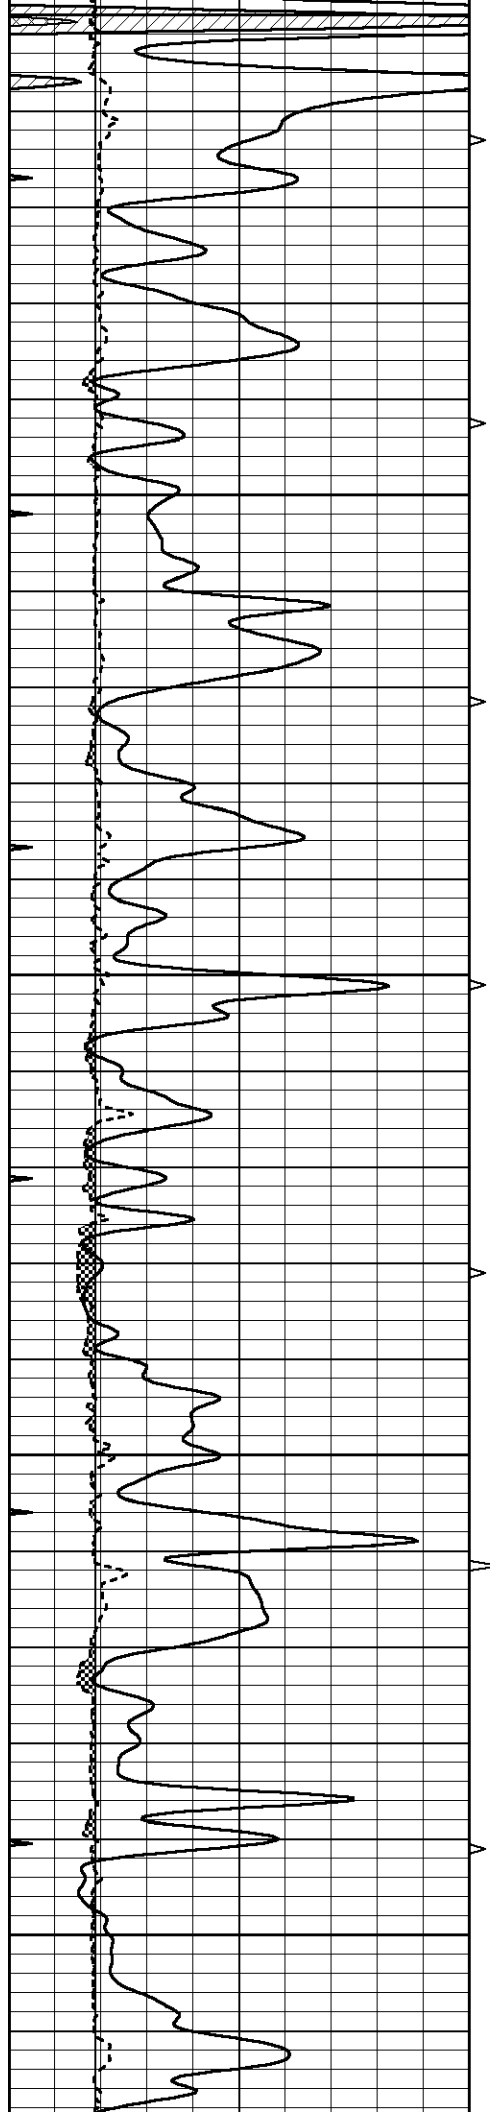


3600


3650


3700

3750

3800


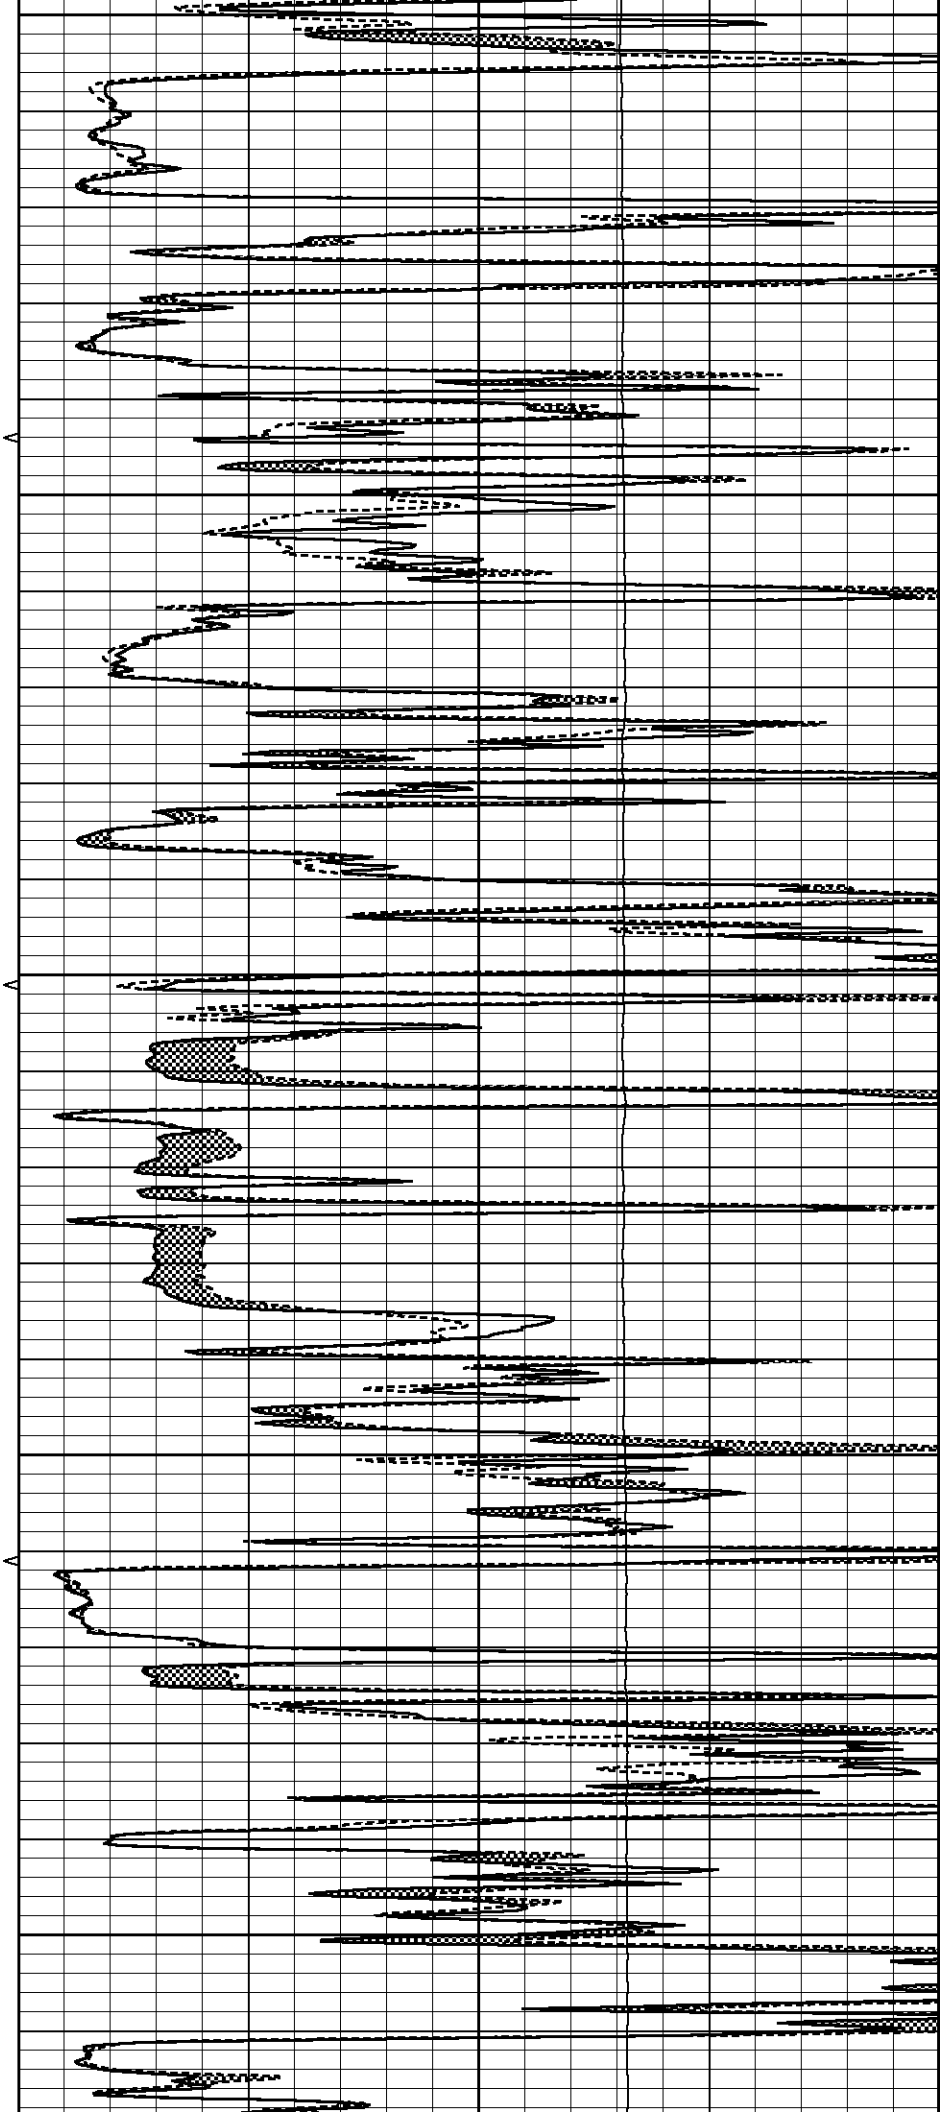


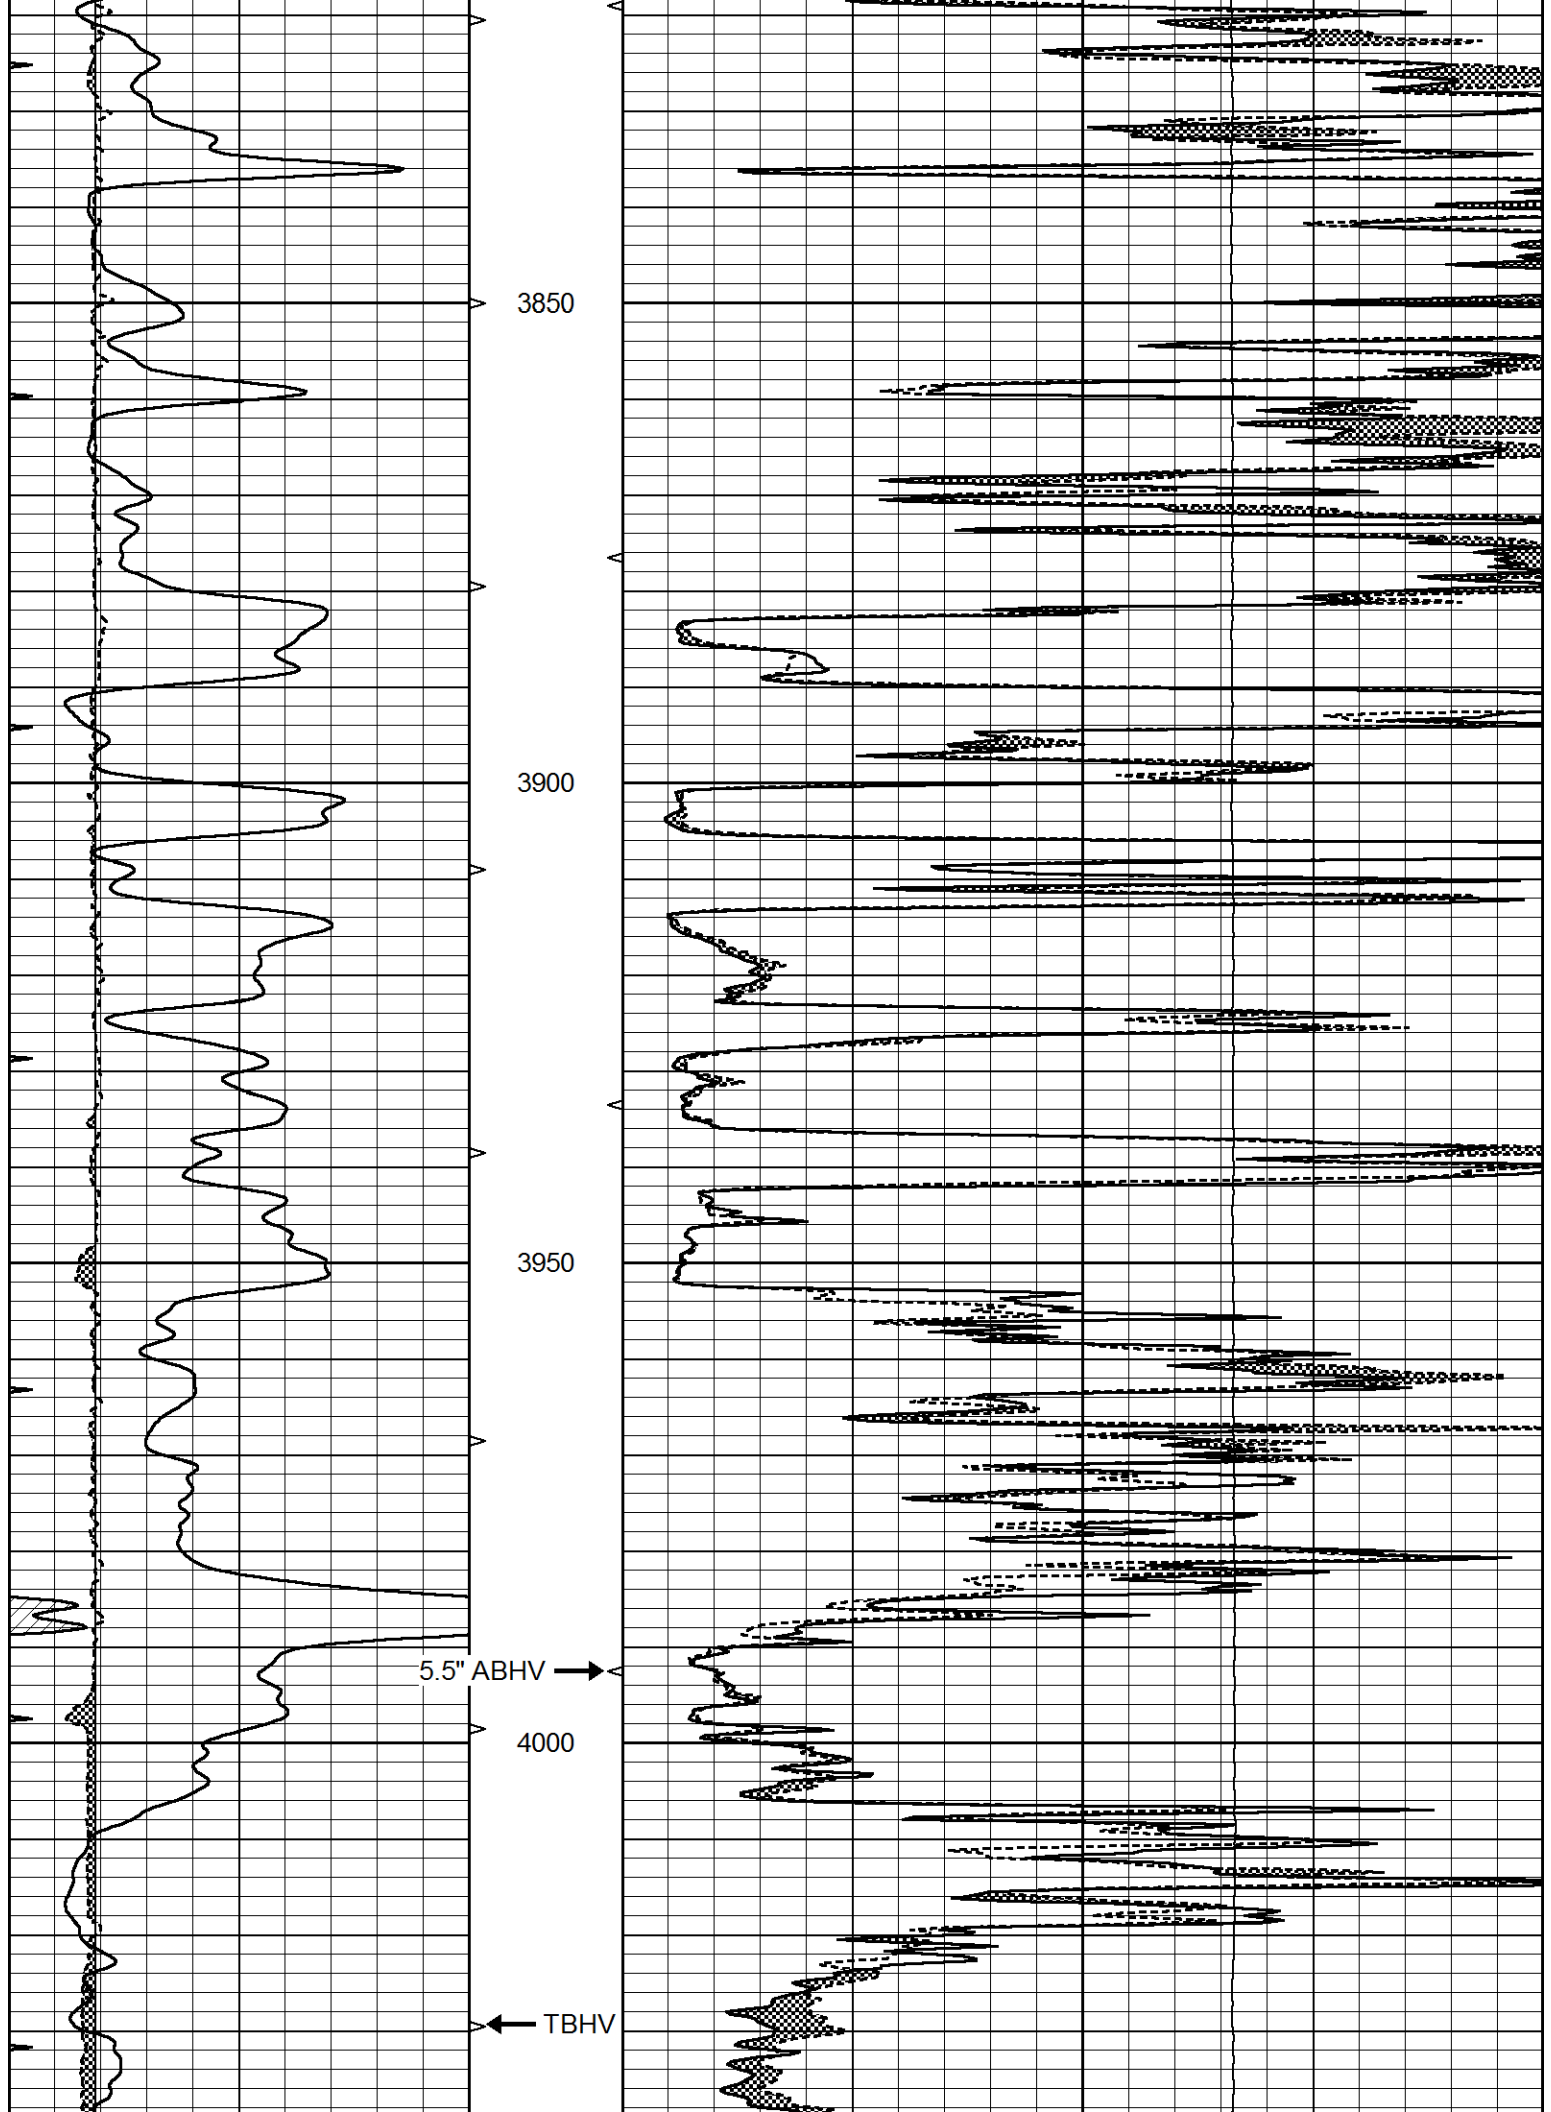


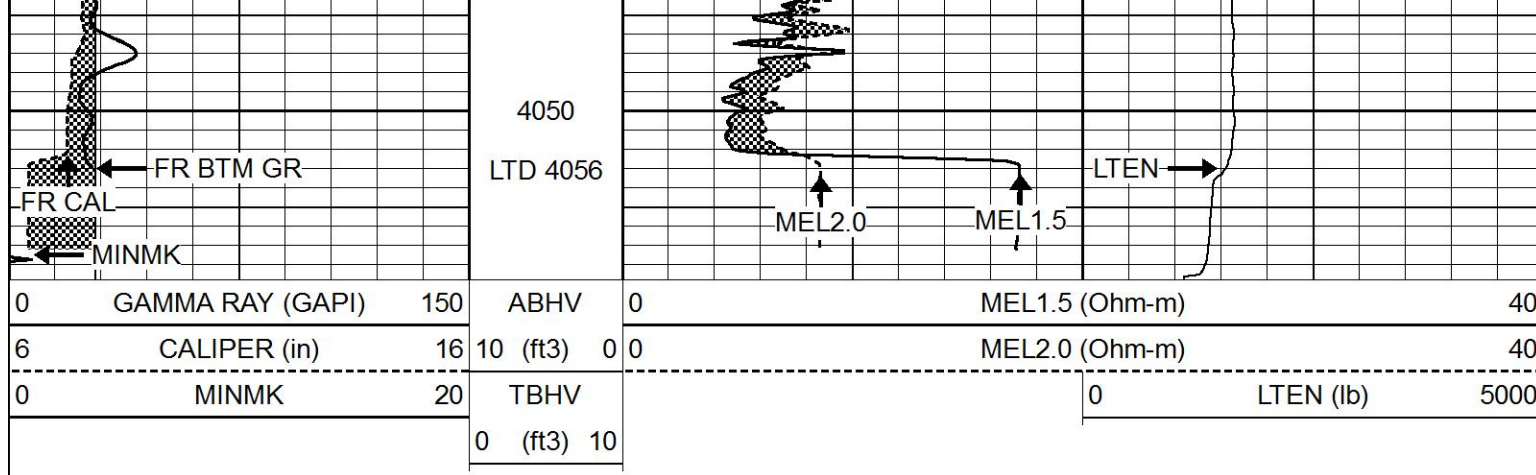

REPEAT SECTION

Database File 8668ddn.db
 Dataset Pathname pass10R
 Presentation Format _micro
 Dataset Creation Thu Apr 18 22:04:24 2024
 Charted by Depth in Feet scaled 1:240

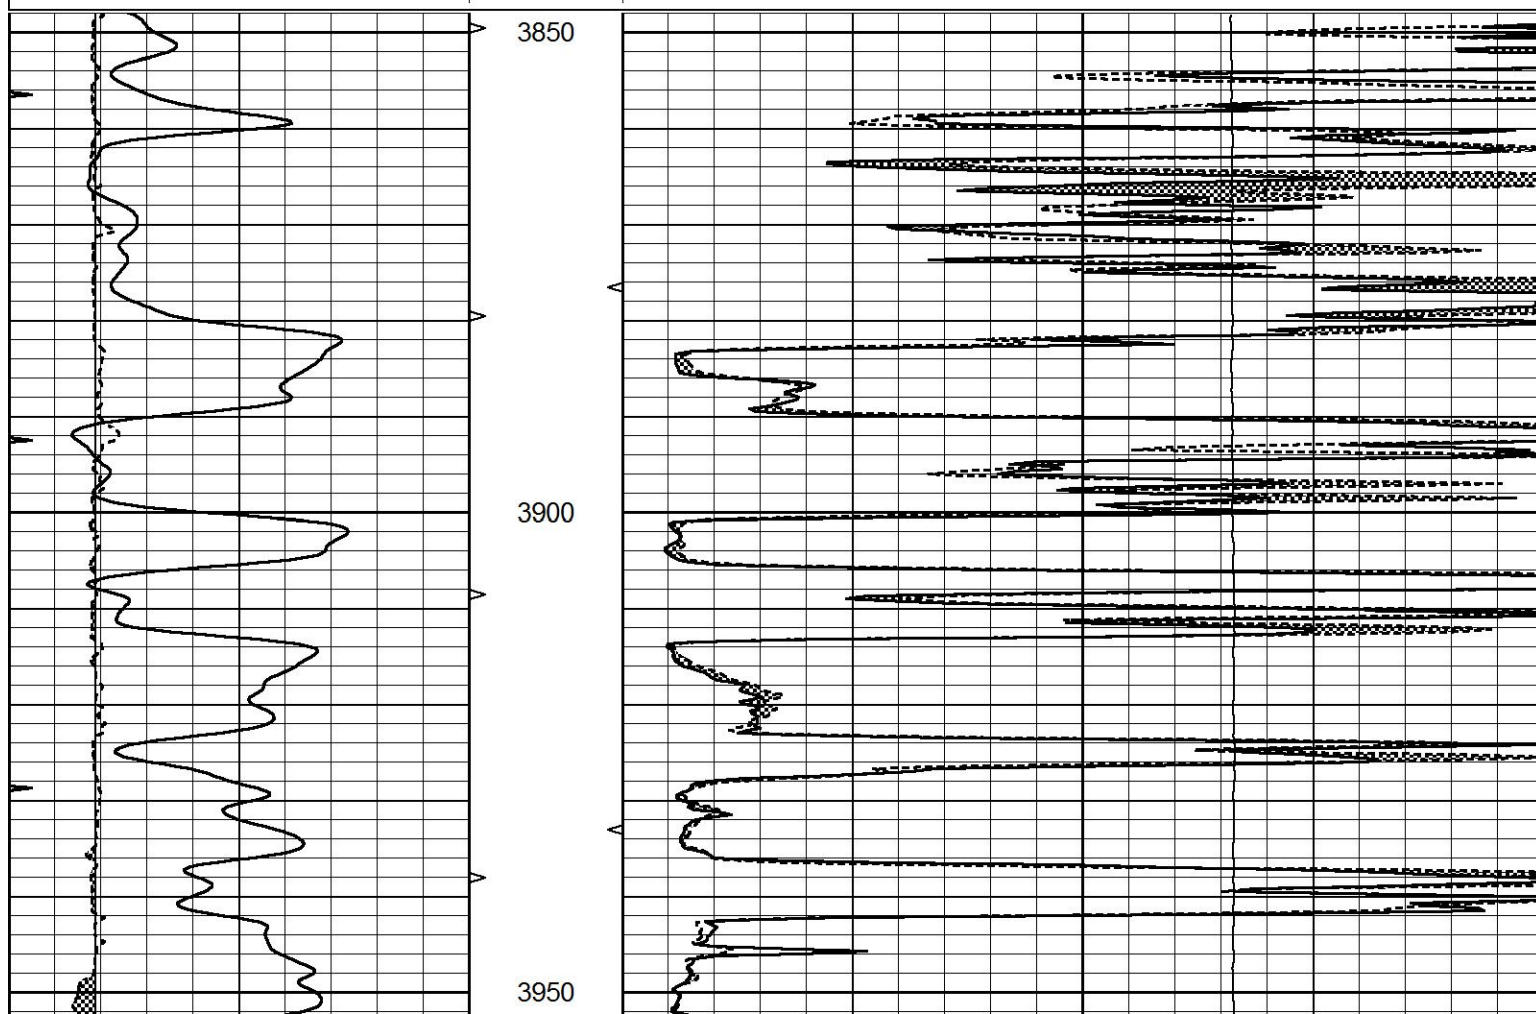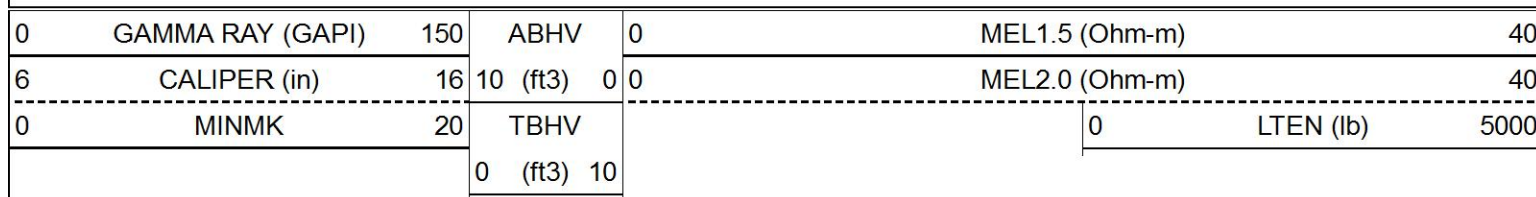

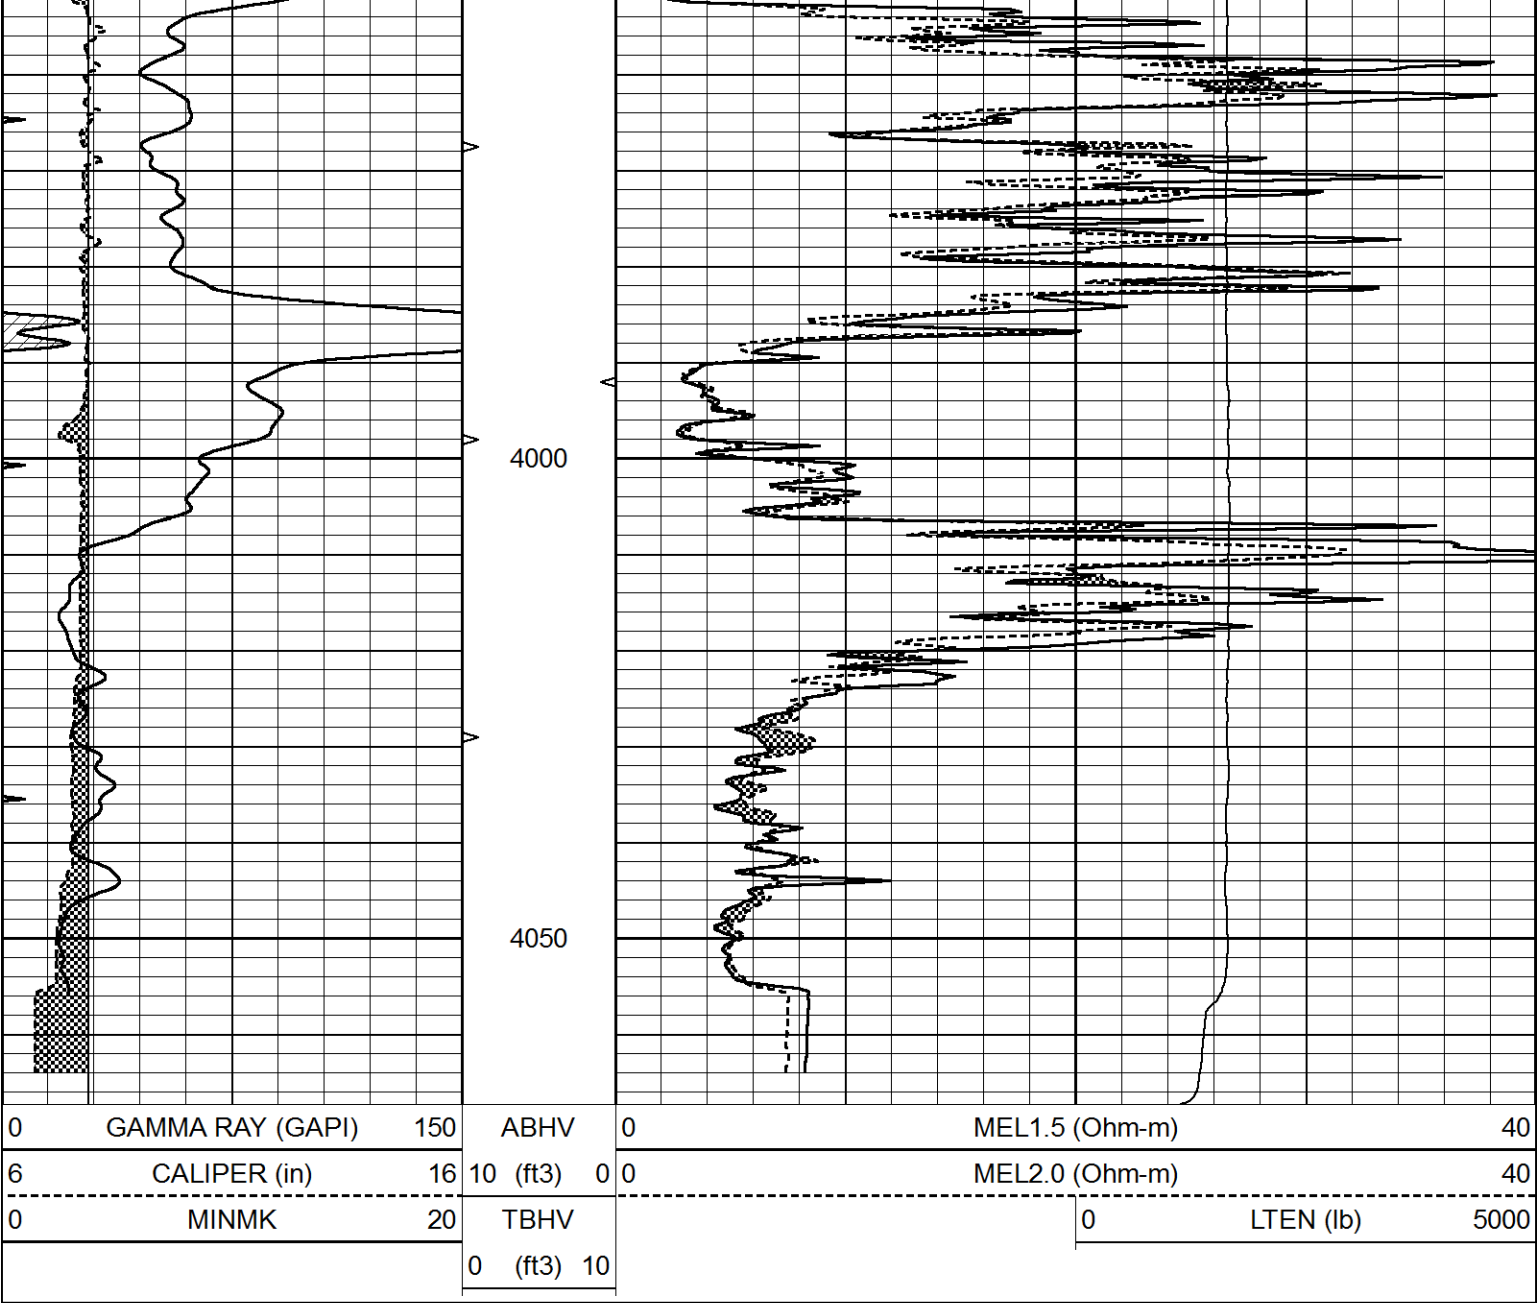

Calibration Report			
Database File	8668ddn.db		
Dataset Pathname	pass11MEL		
Dataset Creation	Thu Apr 18 22:09:28 2024		
MICRO_USR Calibration Report			
Serial Number:	070911		
Tool Model:	Probel		
Performed:	Wed Mar 20 18:45:44 2024		
Caliper Calibration:	Gain=4.259	Offset=2.170	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	1.427	2.836	
1.5" Calibration:	Gain=36.000	Offset=-0.079	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.005	1.240	
2" Calibration:	Gain=61.000	Offset=-0.700	

References			Low Cal		High Cal			
Readings			0.000		20.000			
			0.004		1.075			
Microlog Calibration Report								
Serial-Model:			070911-ProbeL					
Performed:			Sat May 14 04:48:25 2022					
Readings			References				Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Gamma Ray Calibration Report								
Serial Number:			070558					
Tool Model:			Probe1					
Performed:			Sat Sep 30 18:38:35 2023					
Calibrator Value:			1.0		GAPI			
Background Reading:			0.0		cps			
Calibrator Reading:			1.0		cps			
Sensitivity:			0.2700		GAPI/cps			